

1/18

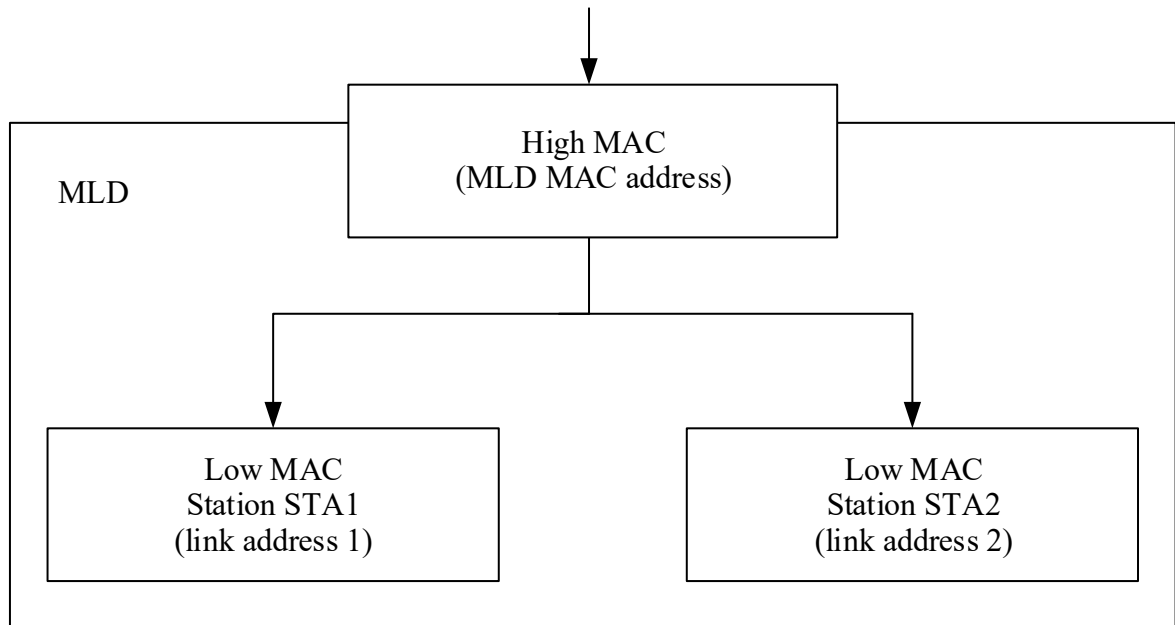


FIG. 1

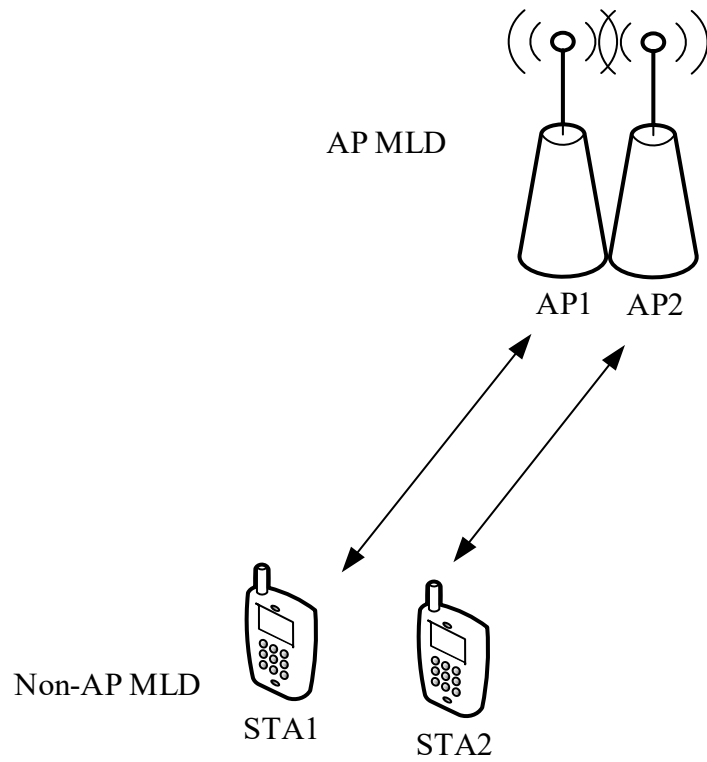


FIG. 2

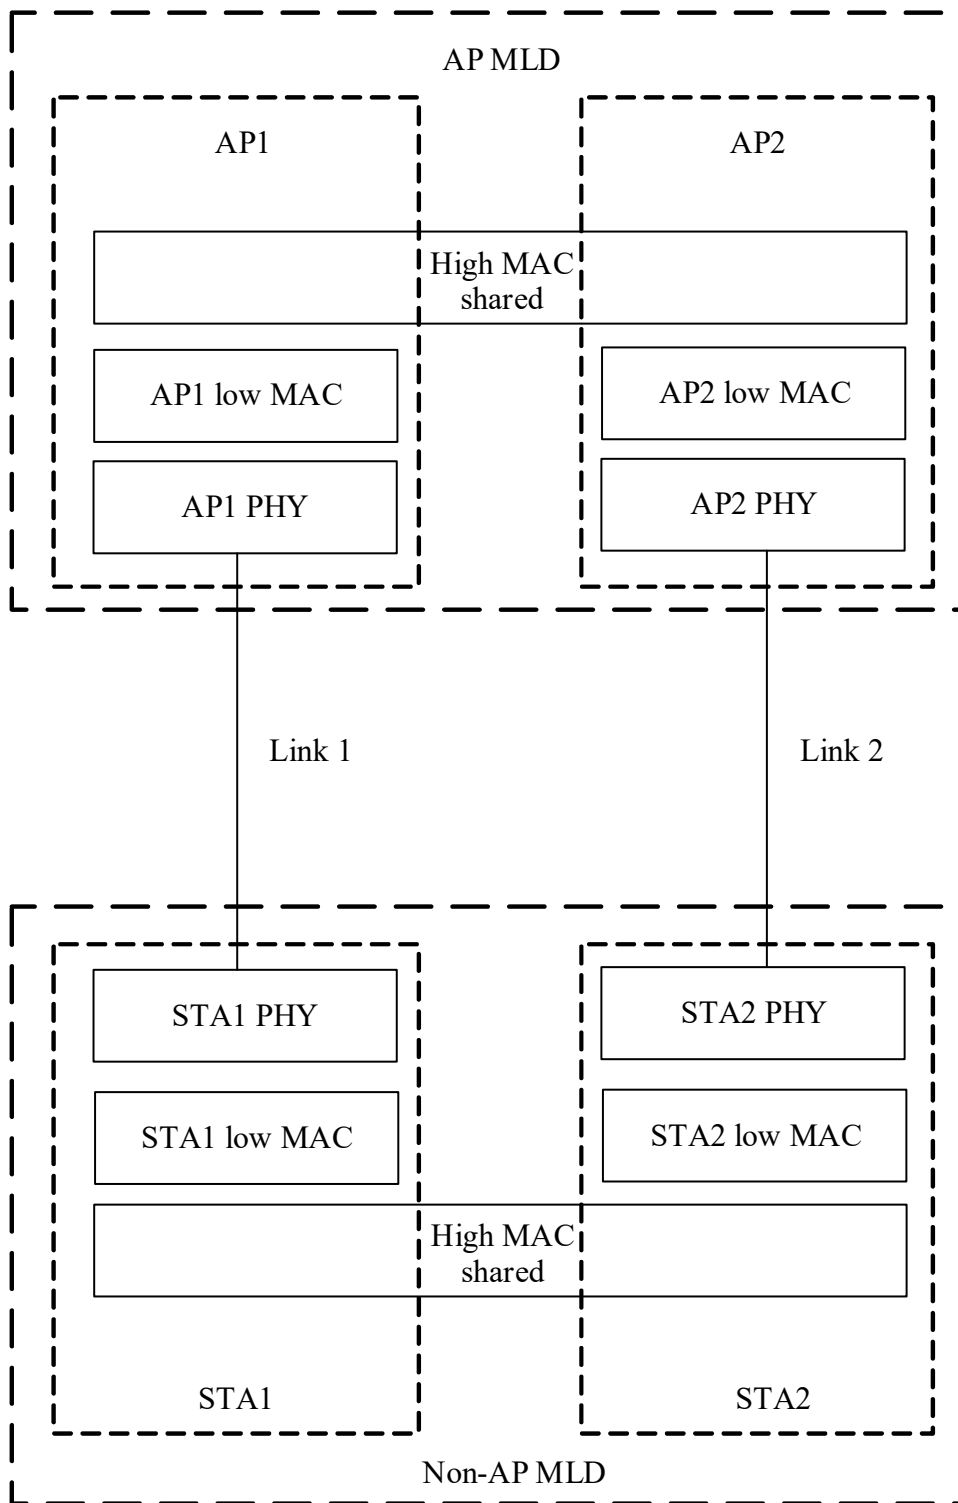


FIG. 3

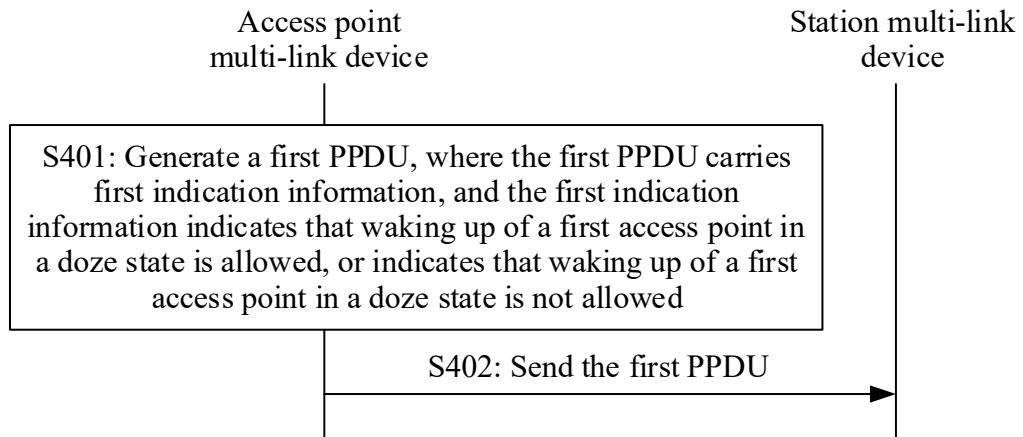


FIG. 4

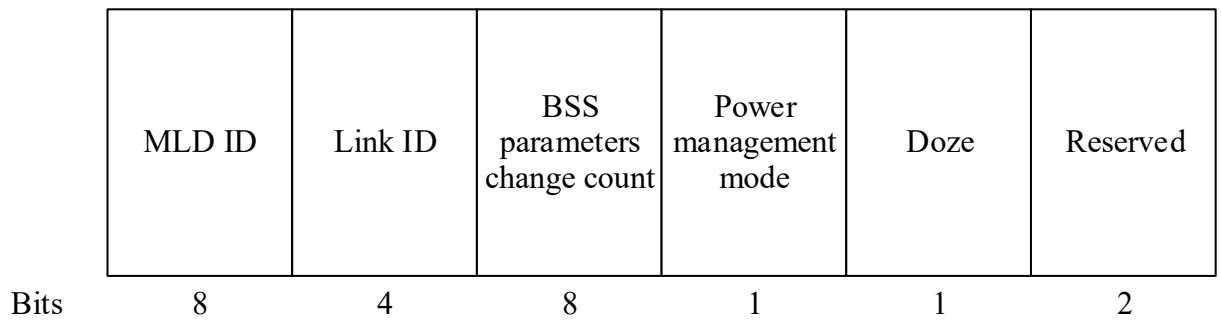


FIG. 5

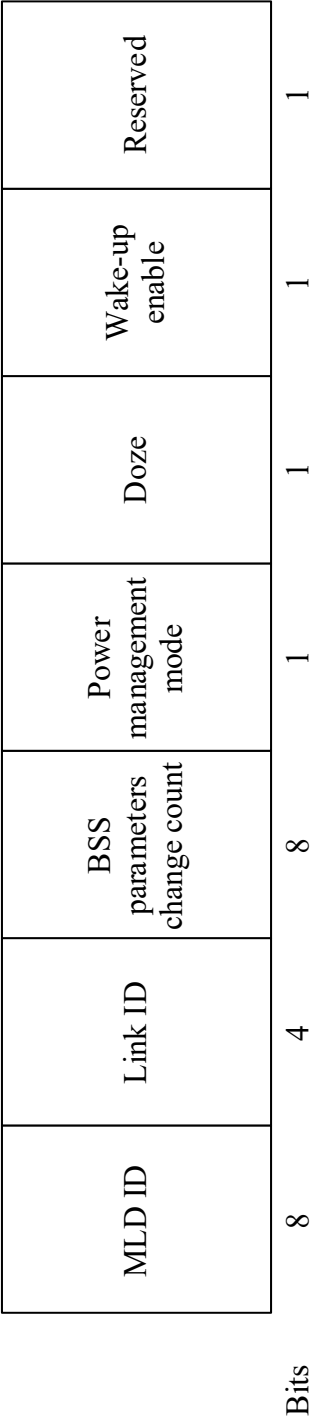


FIG. 6

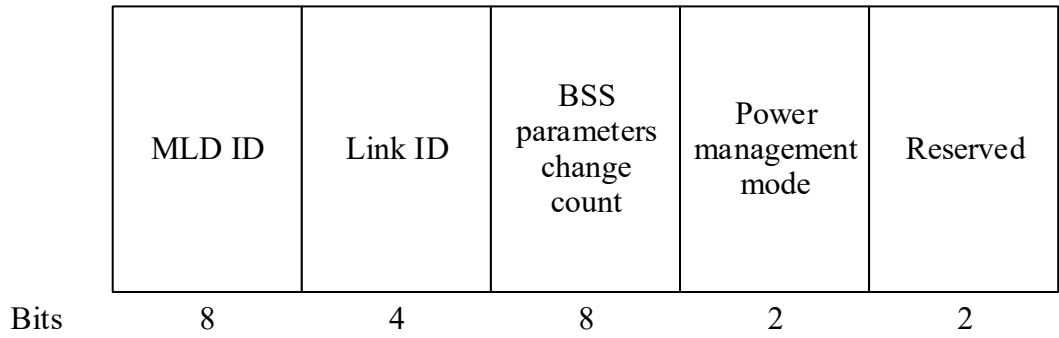


FIG. 7A

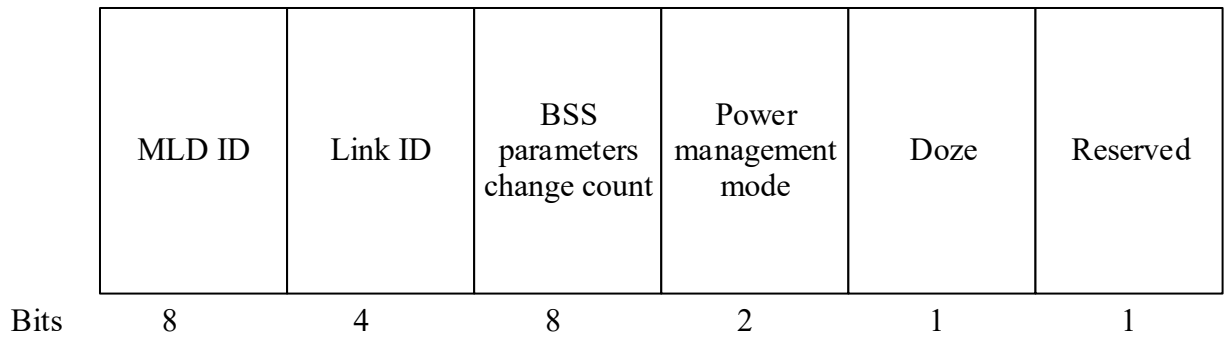


FIG. 7B

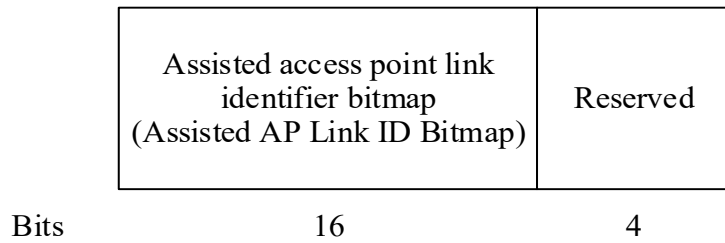


FIG. 8

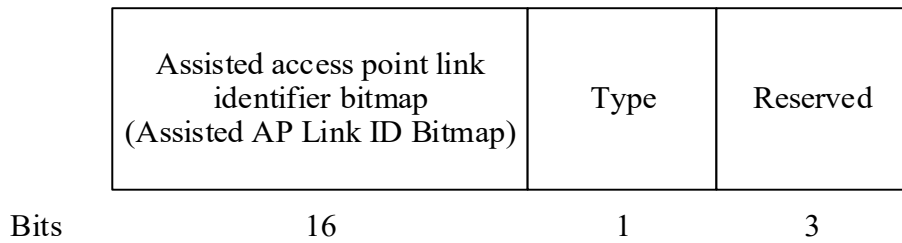


FIG. 9

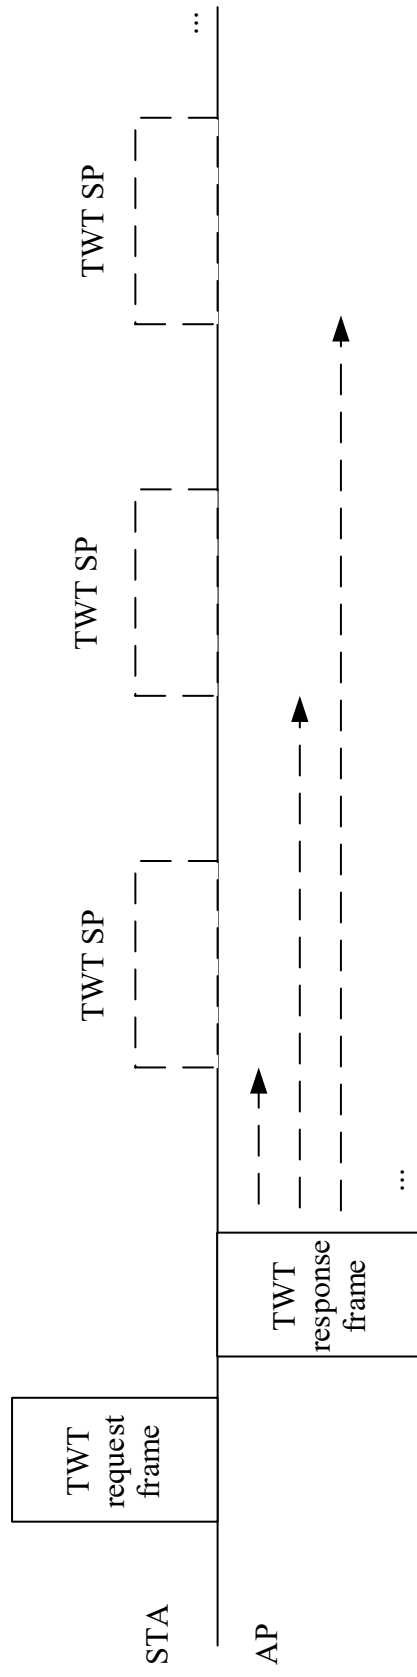


FIG. 10

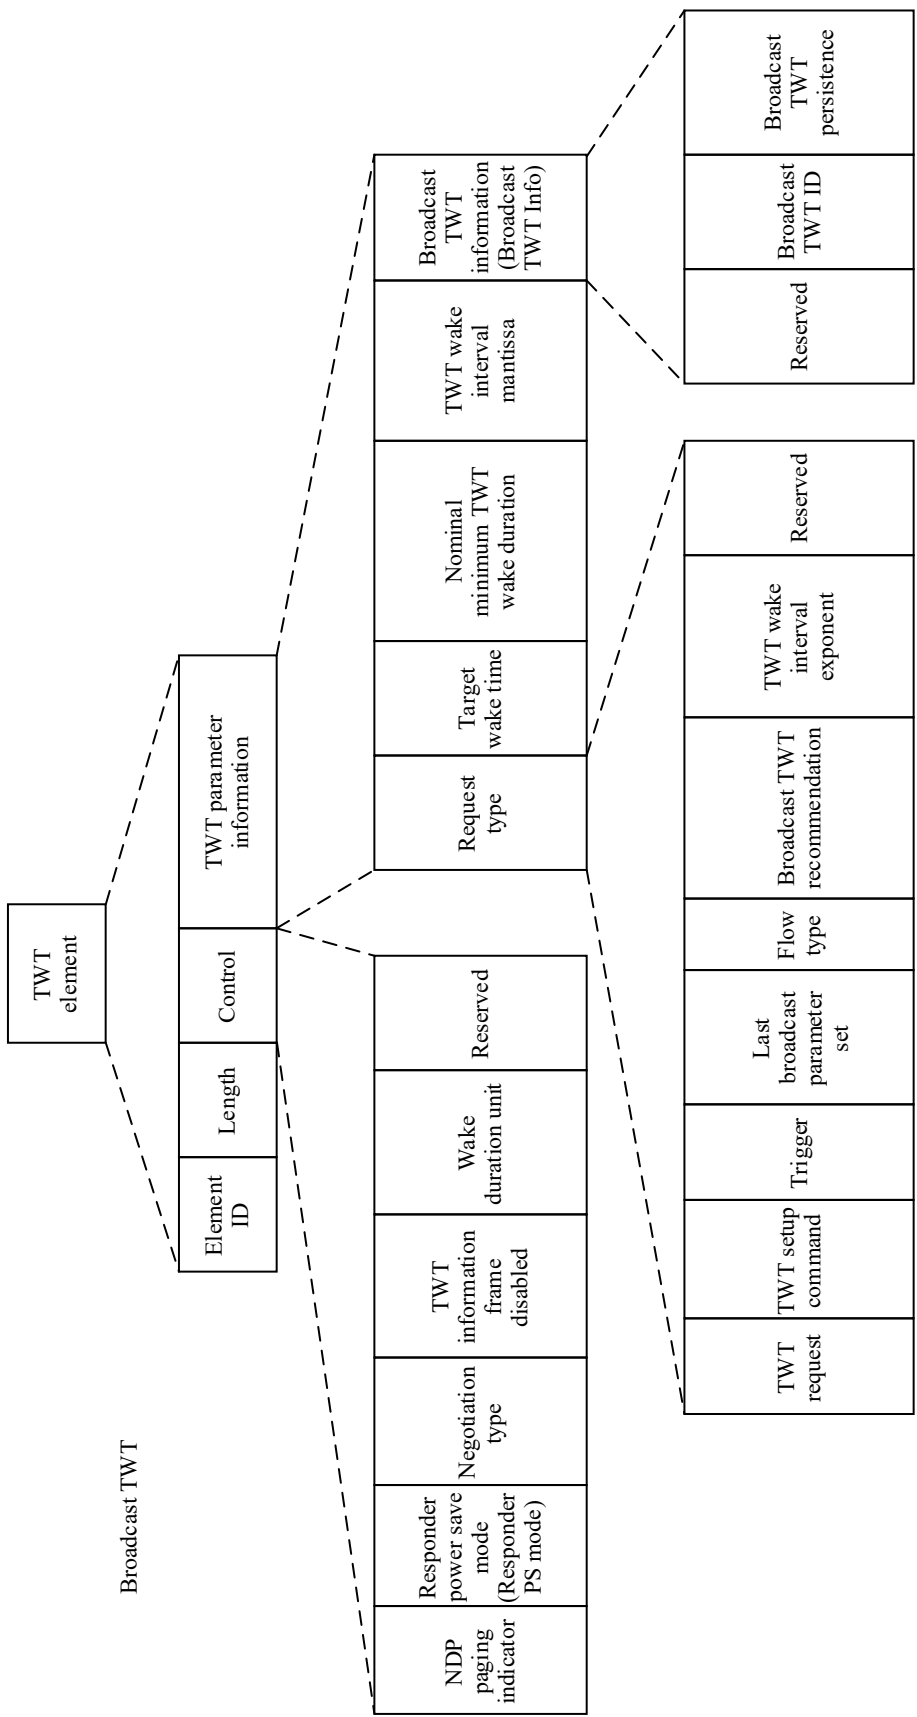


FIG. 11

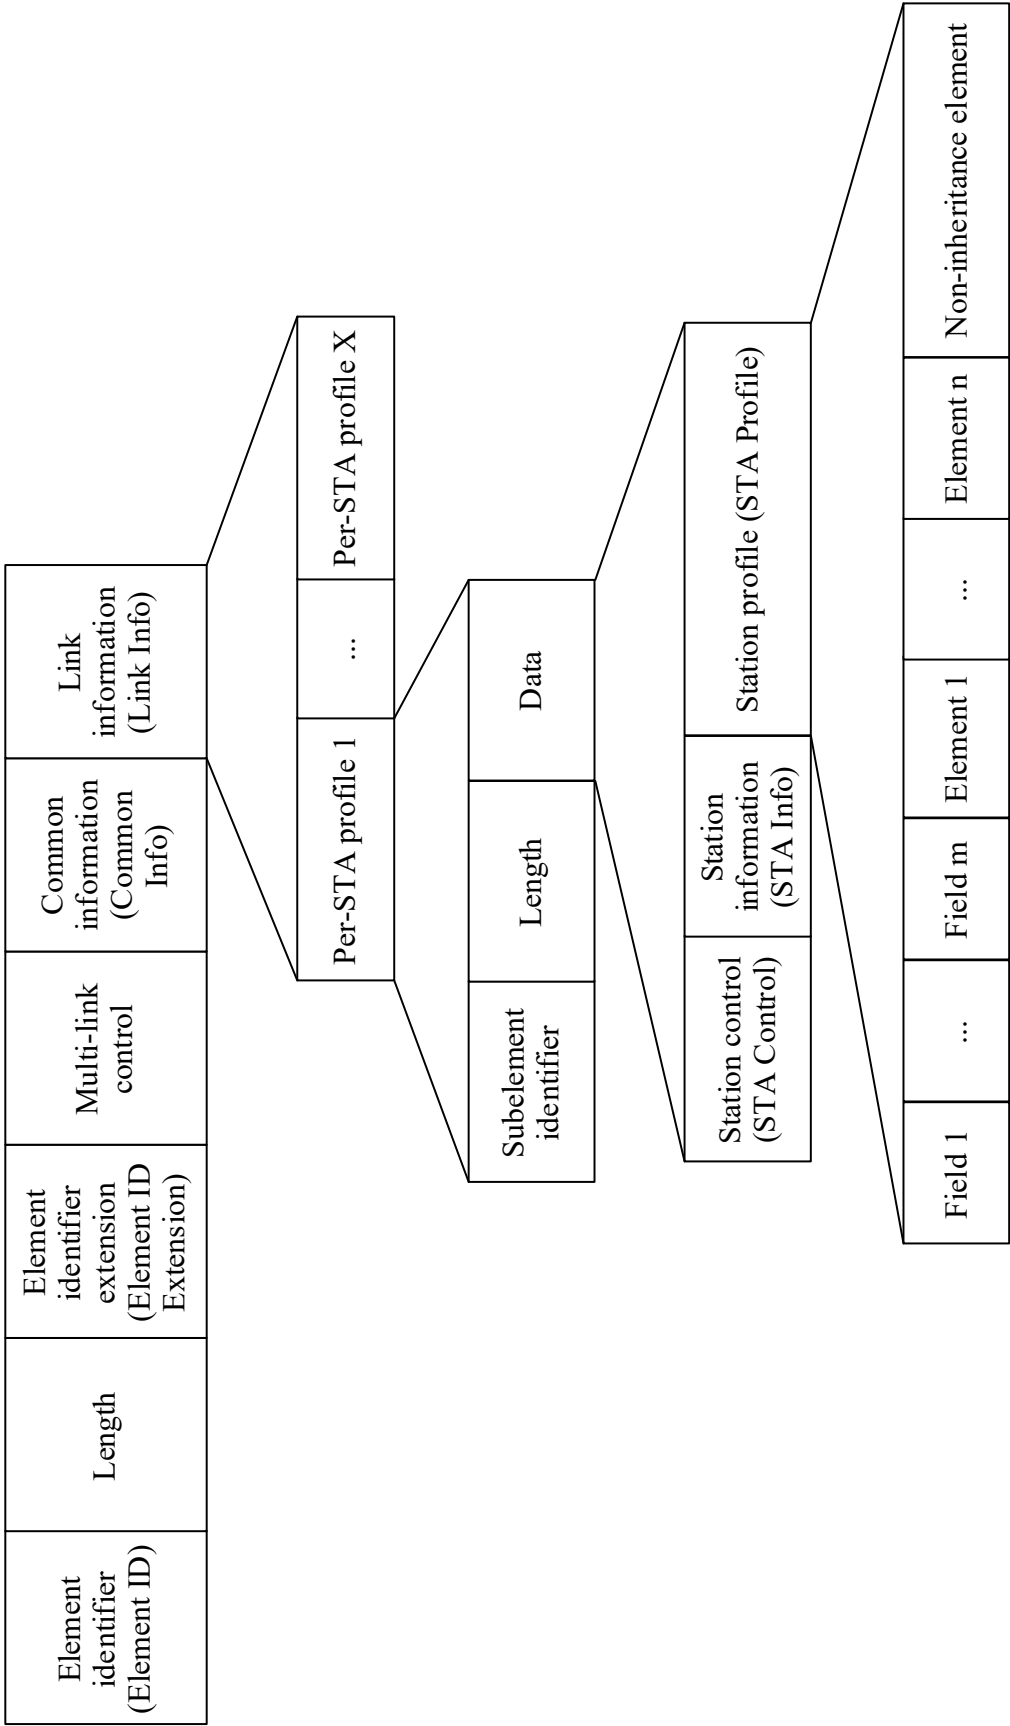


FIG. 12

MLD MAC address present	Link identifier information present (Link ID Info Present)	BSS parameters change count present	Medium synchronization delay information present	EML capabilities present	MLD capabilities present	Reserved
1	1	1	1	1	1	6
Bits						

FIG. 13A

Maximum number of simultaneous links	SRS support	TID-to-link mapping negotiation supported	Frequency separation for STR	AAR support	Power save operation support	Wakeup delay
4	1	2	5	1	1	2
Bits						

FIG. 13B

11/18

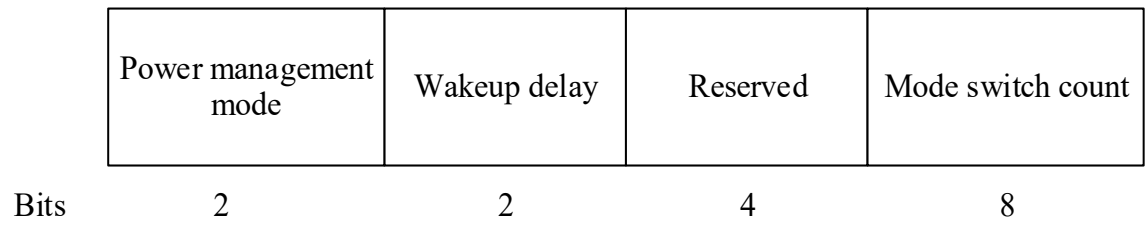


FIG. 13C

Common information length (Common Info Length)	MLD MAC address	Link identifier information (Link ID Info)	BSS parameters change count	Medium synchronization delay information	EML capabilities	MLD capabilities	Power management information
Octets	1	6	0 or 1	0 or 2	0 or 2	0 or 2	0 or 2

FIG. 13D

	STA information length (Info Length)	STA MAC address	Beacon interval	DTIM information (Info)	NSTR indication bitmap	BSS parameters change count	Power management information
Octets	1	0 or 6	0 or 2	0 or 2	0 or 1 or 2	0 or 1	0 or 2

FIG. 13E

Link identifier (Link ID)	Complete profile	STA MAC address present	Beacon interval present	DTIM information present (Info Present)	NSTR link pair present	NSTR bitmap size	BSS parameters change count present	Power management information present	Reserved
Bits	4	1	1	1	1	1	1	1	4

FIG. 13F

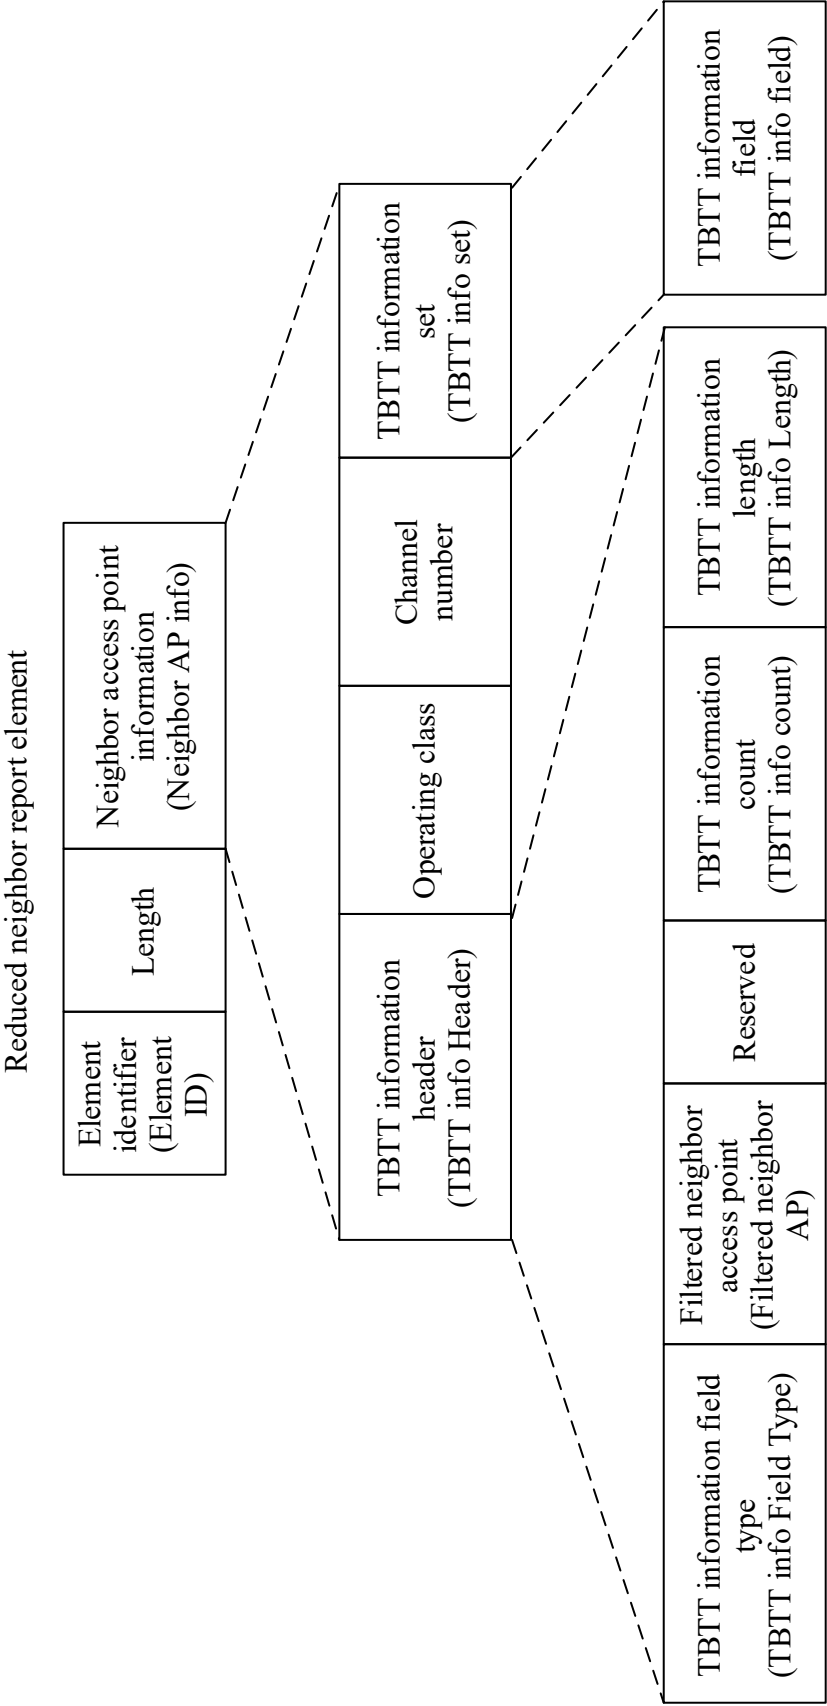


FIG. 14

Neighbor AP TBTT offset	BSSID	Short service set identifier (Short SSID)	BSS parameter	20 MHz PSD	MLD parameters
0 or 1	0 or 6	0 or 4	0 or 1	0 or 1	0 or 3
Octets					

FIG. 15

OCT recommended	Same SSID	Multiple BSSID	Transmitted BSSID	Member of extended service set with 2.4/5 GHz co-located AP (Member Of ESS With 2.4/ 5 GHz Co-Located AP)	Unsolicited probe response active	Co-located AP	Reserved
--------------------	-----------	-------------------	----------------------	---	--------------------------------------	------------------	----------

FIG. 16

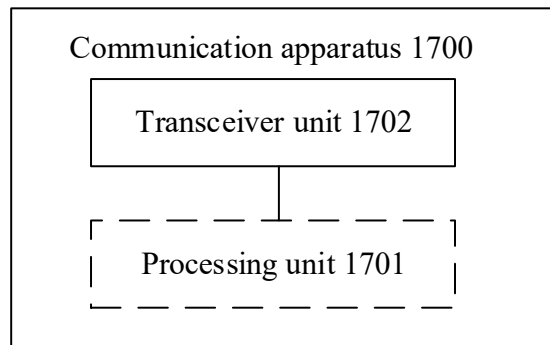


FIG. 17

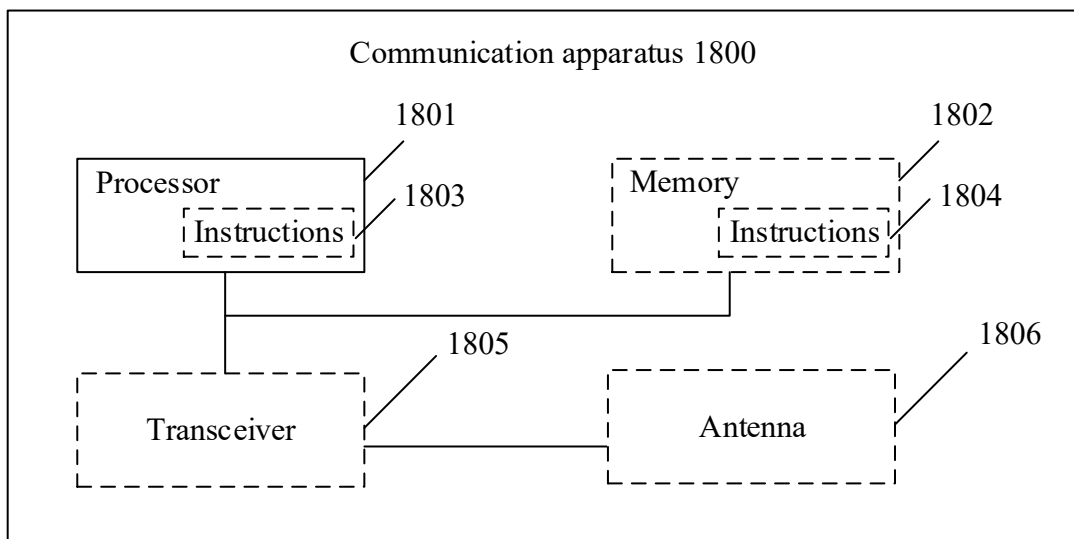


FIG. 18

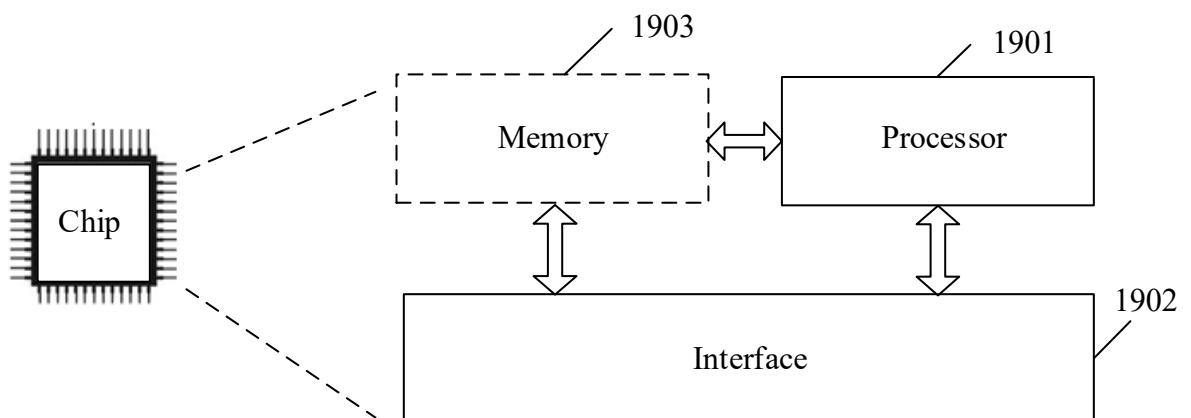


FIG. 19