

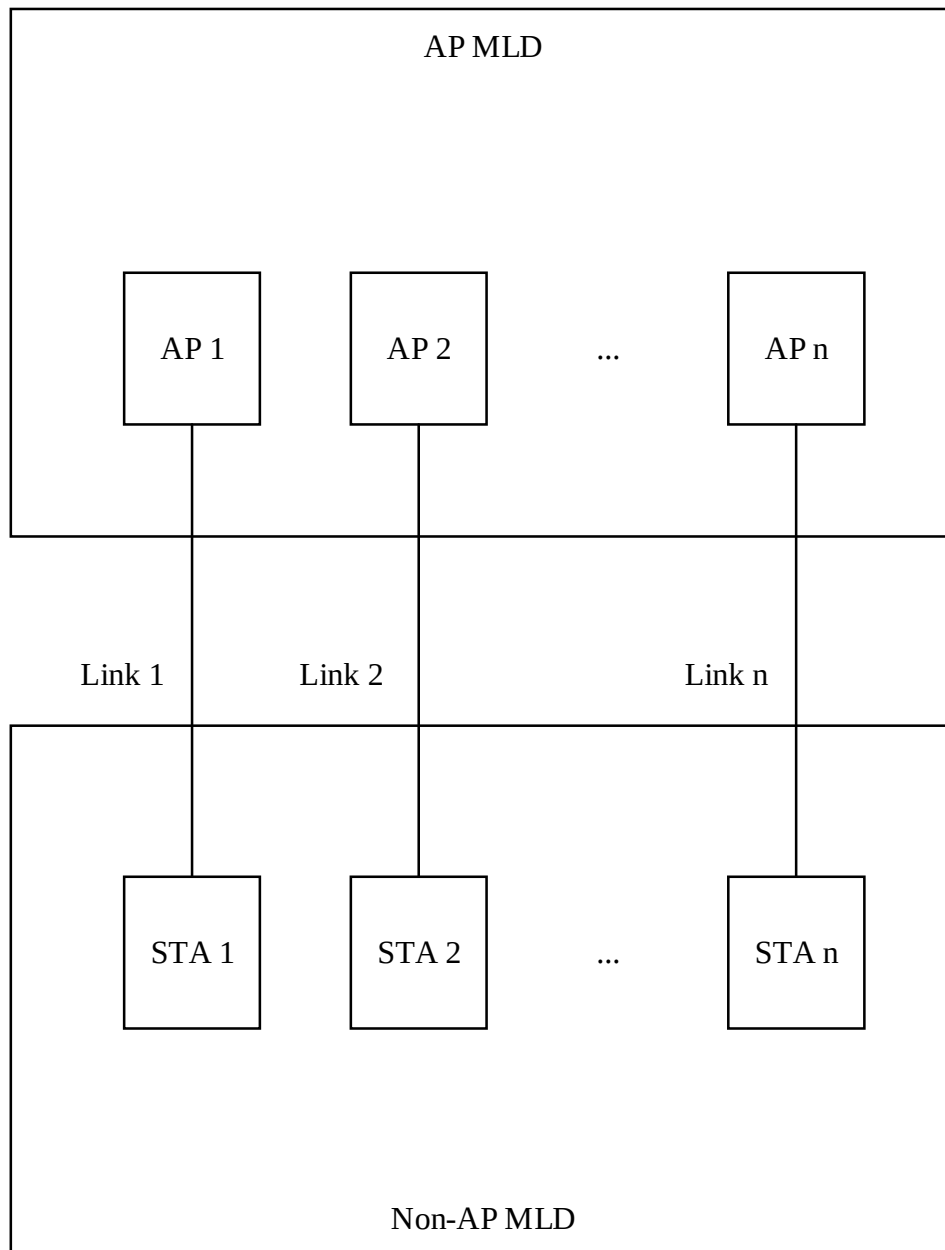


FIG. 1

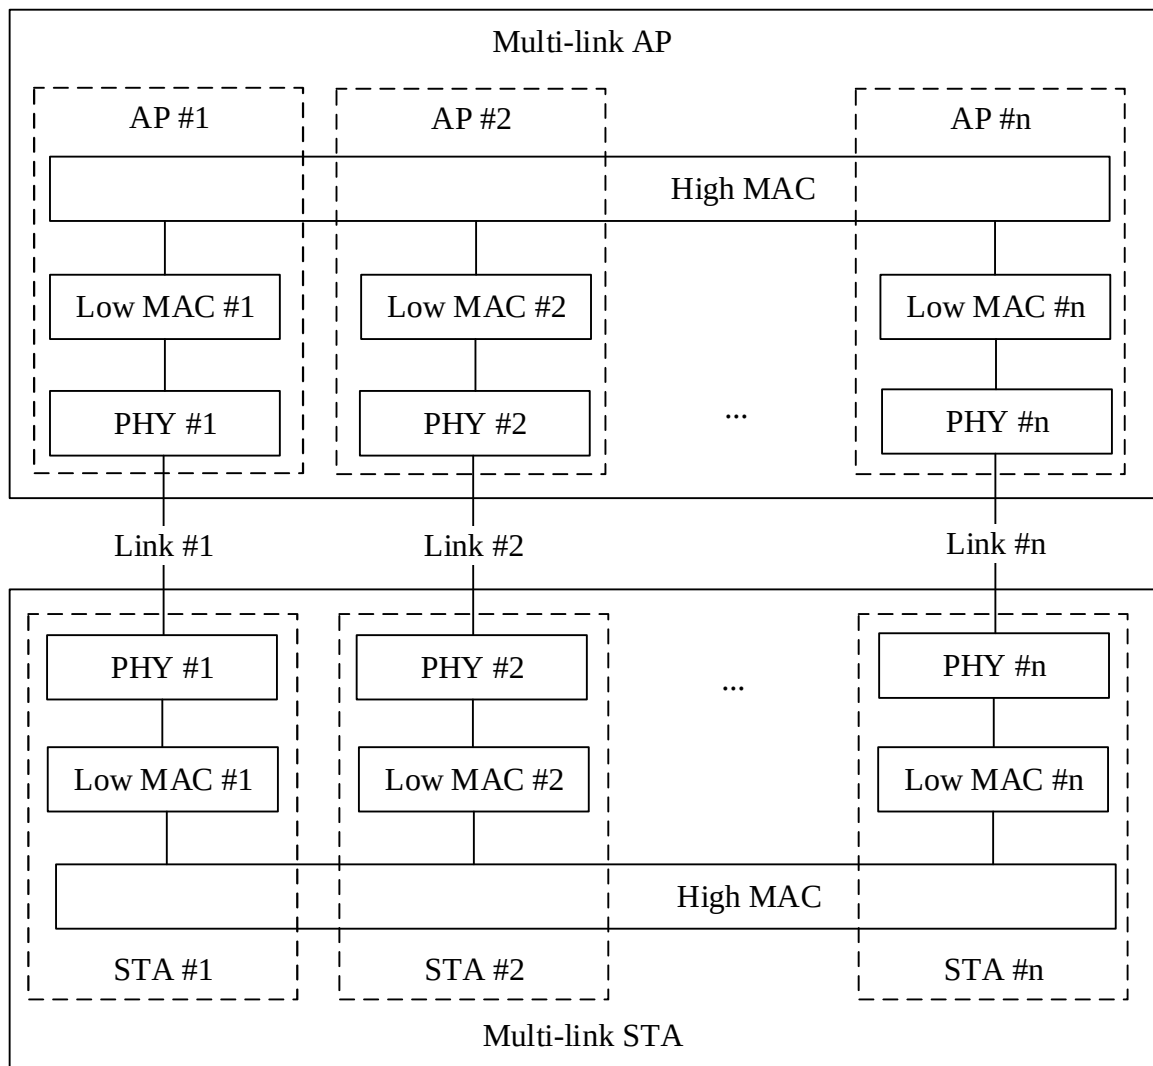


FIG. 2

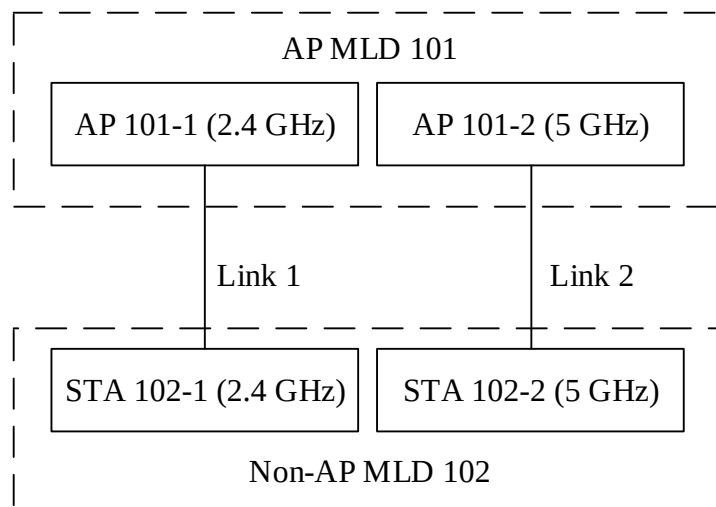


FIG. 3a

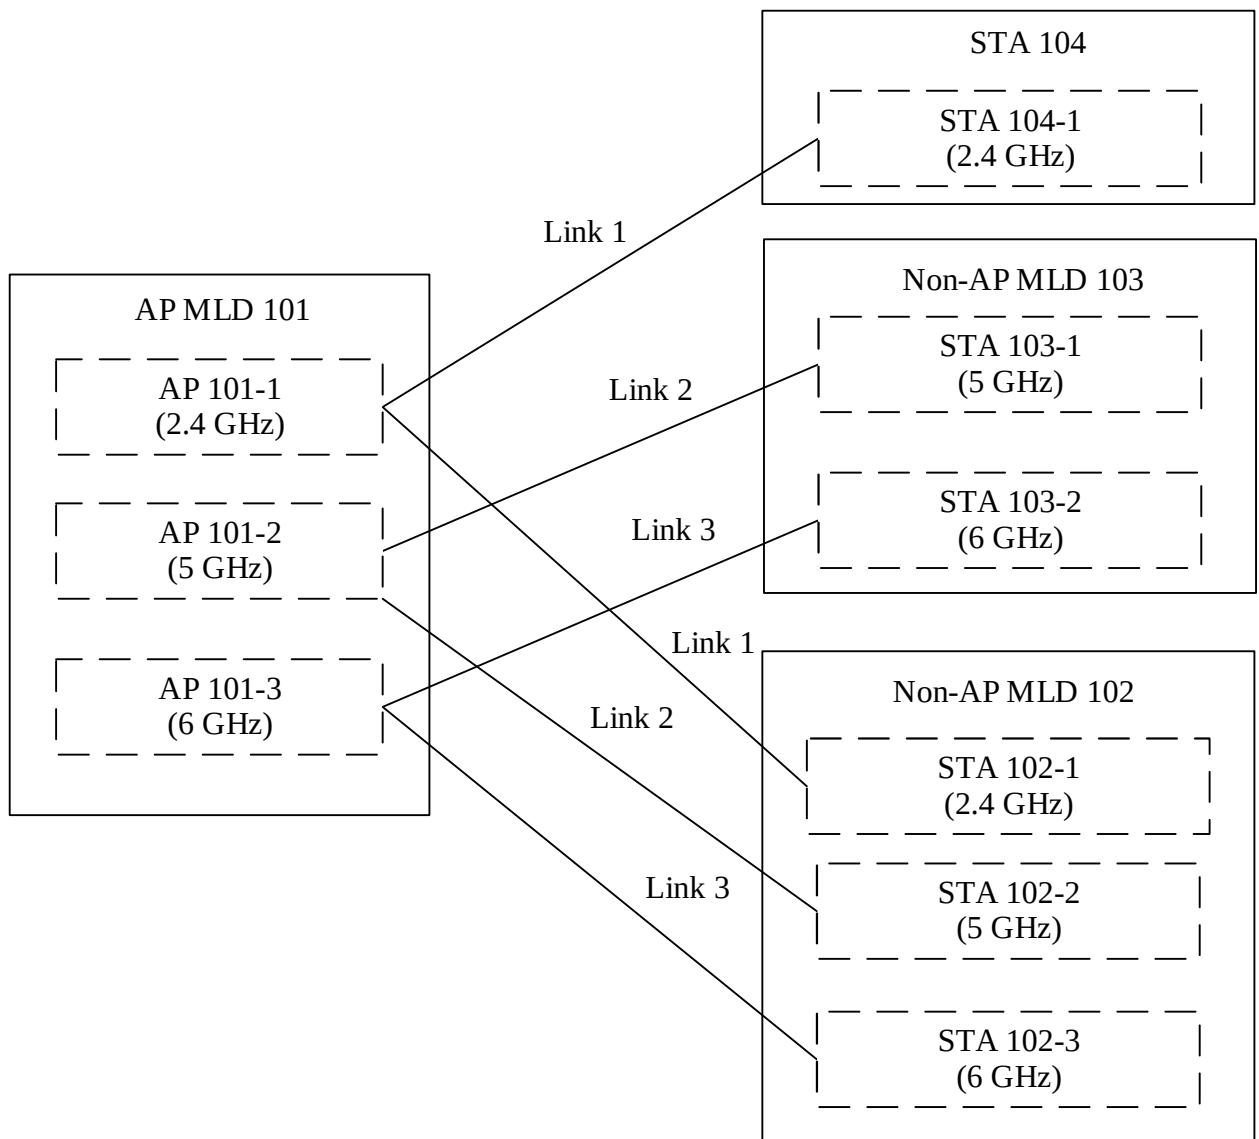


FIG. 3b

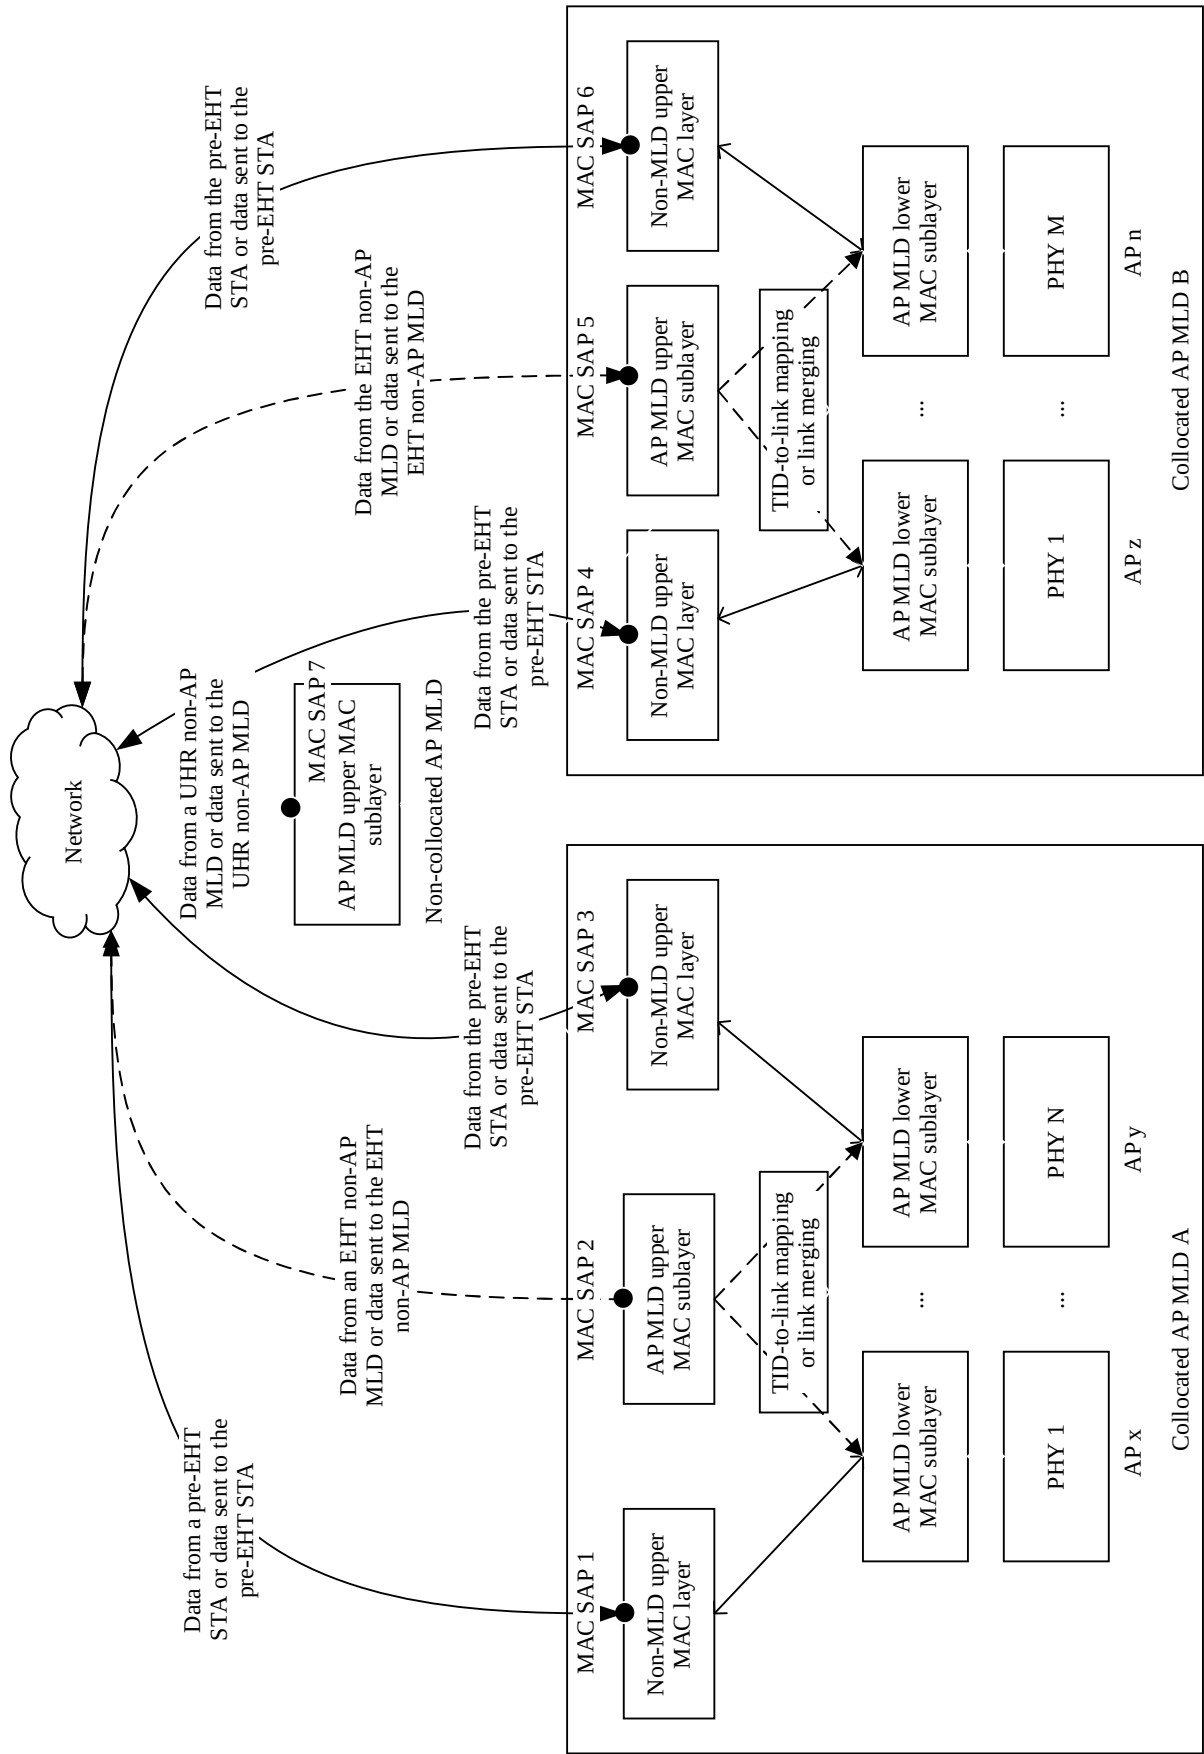


FIG. 4

5/21

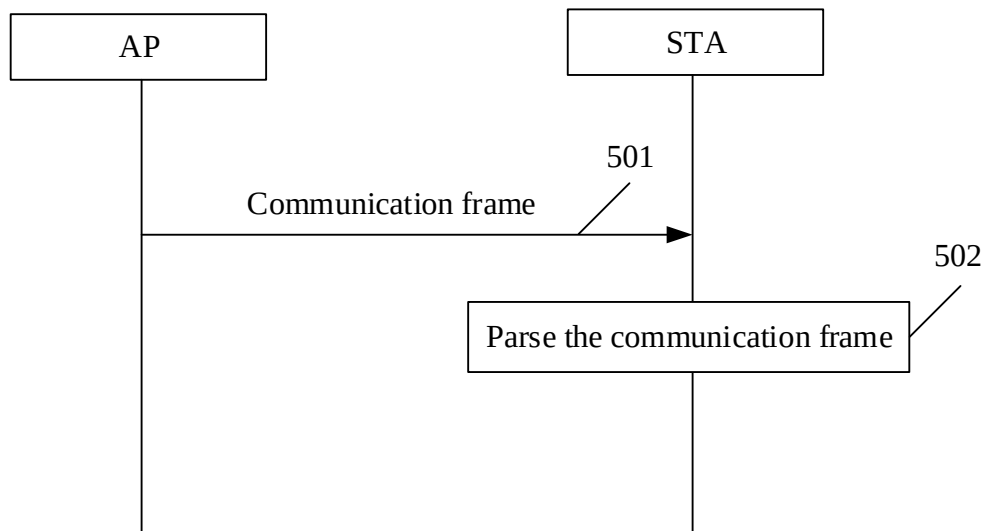


FIG. 5

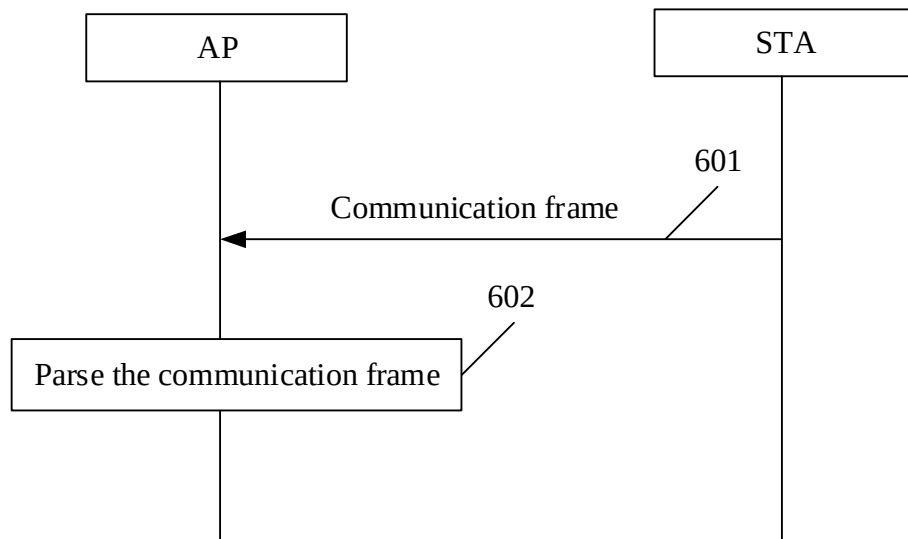


FIG. 6

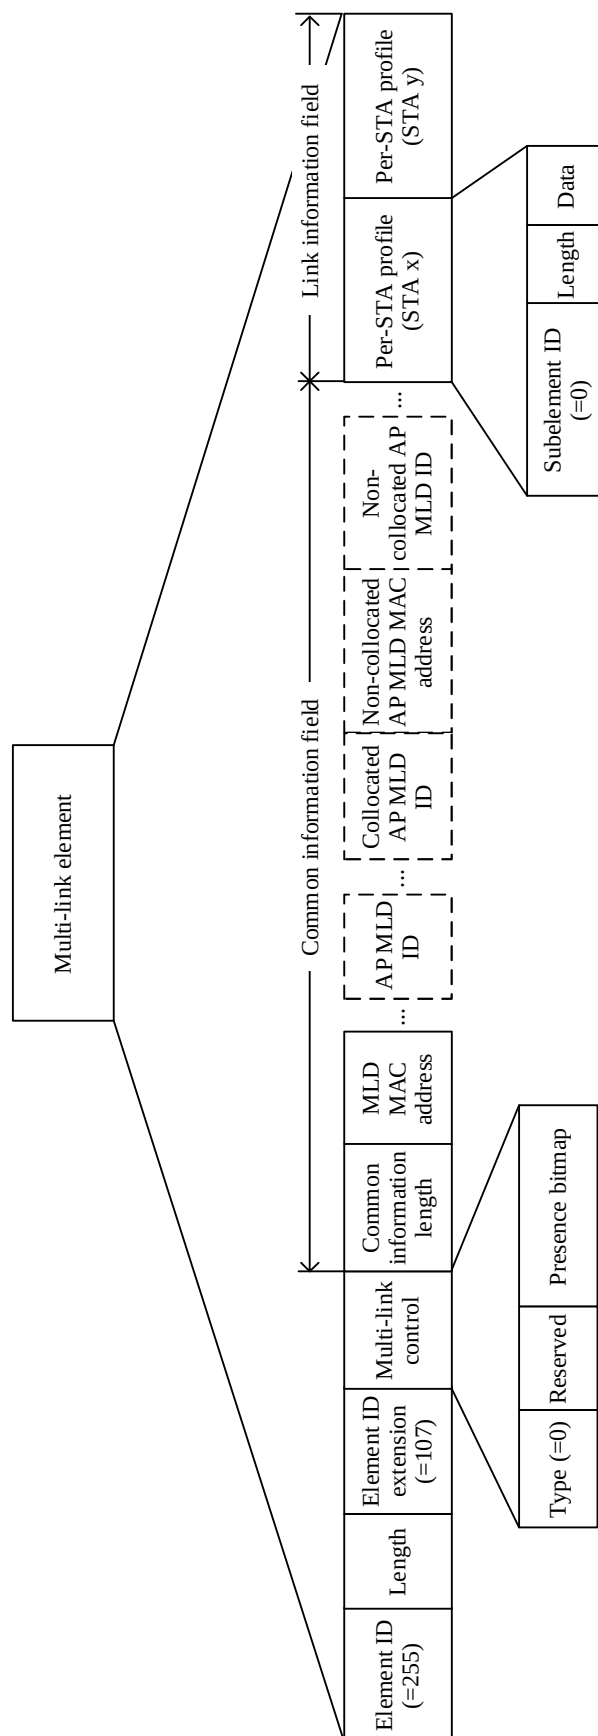


FIG. 7

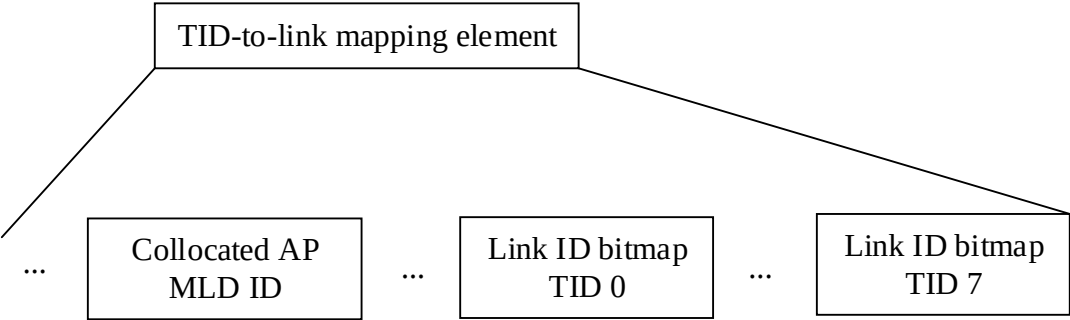


FIG. 8a

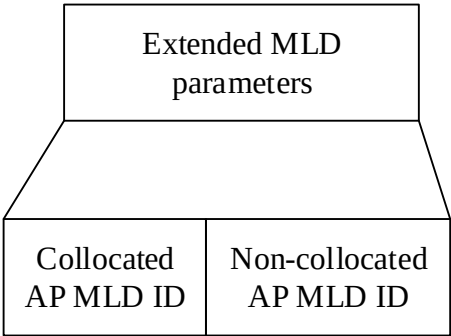


FIG. 8b

AP MLD ID	Link ID	BSS parameters change count	All updates included	Disabled link indication	Collocated AP MLD ID	Non-collocated AP MLD ID
-----------	---------	-----------------------------	----------------------	--------------------------	----------------------	--------------------------

FIG. 8c

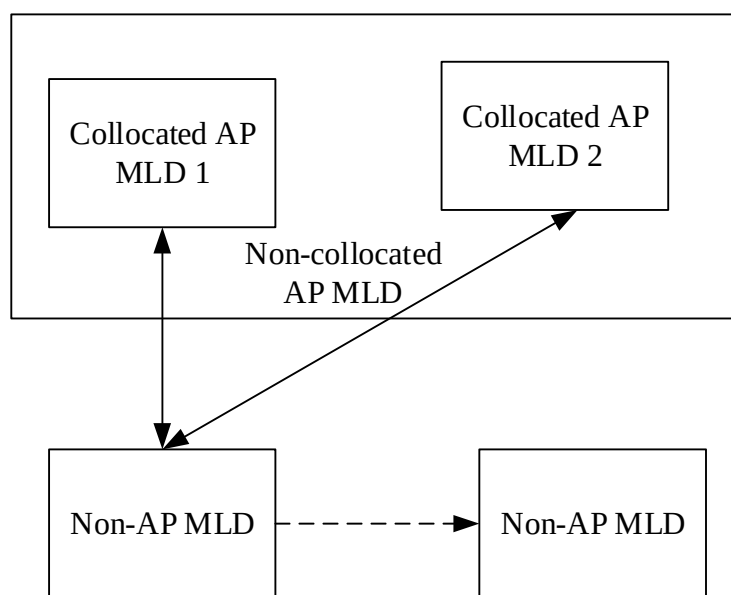


FIG. 9a

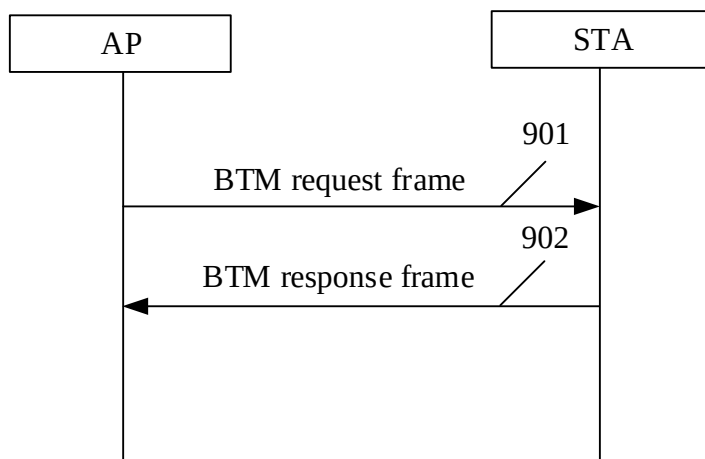


FIG. 9b

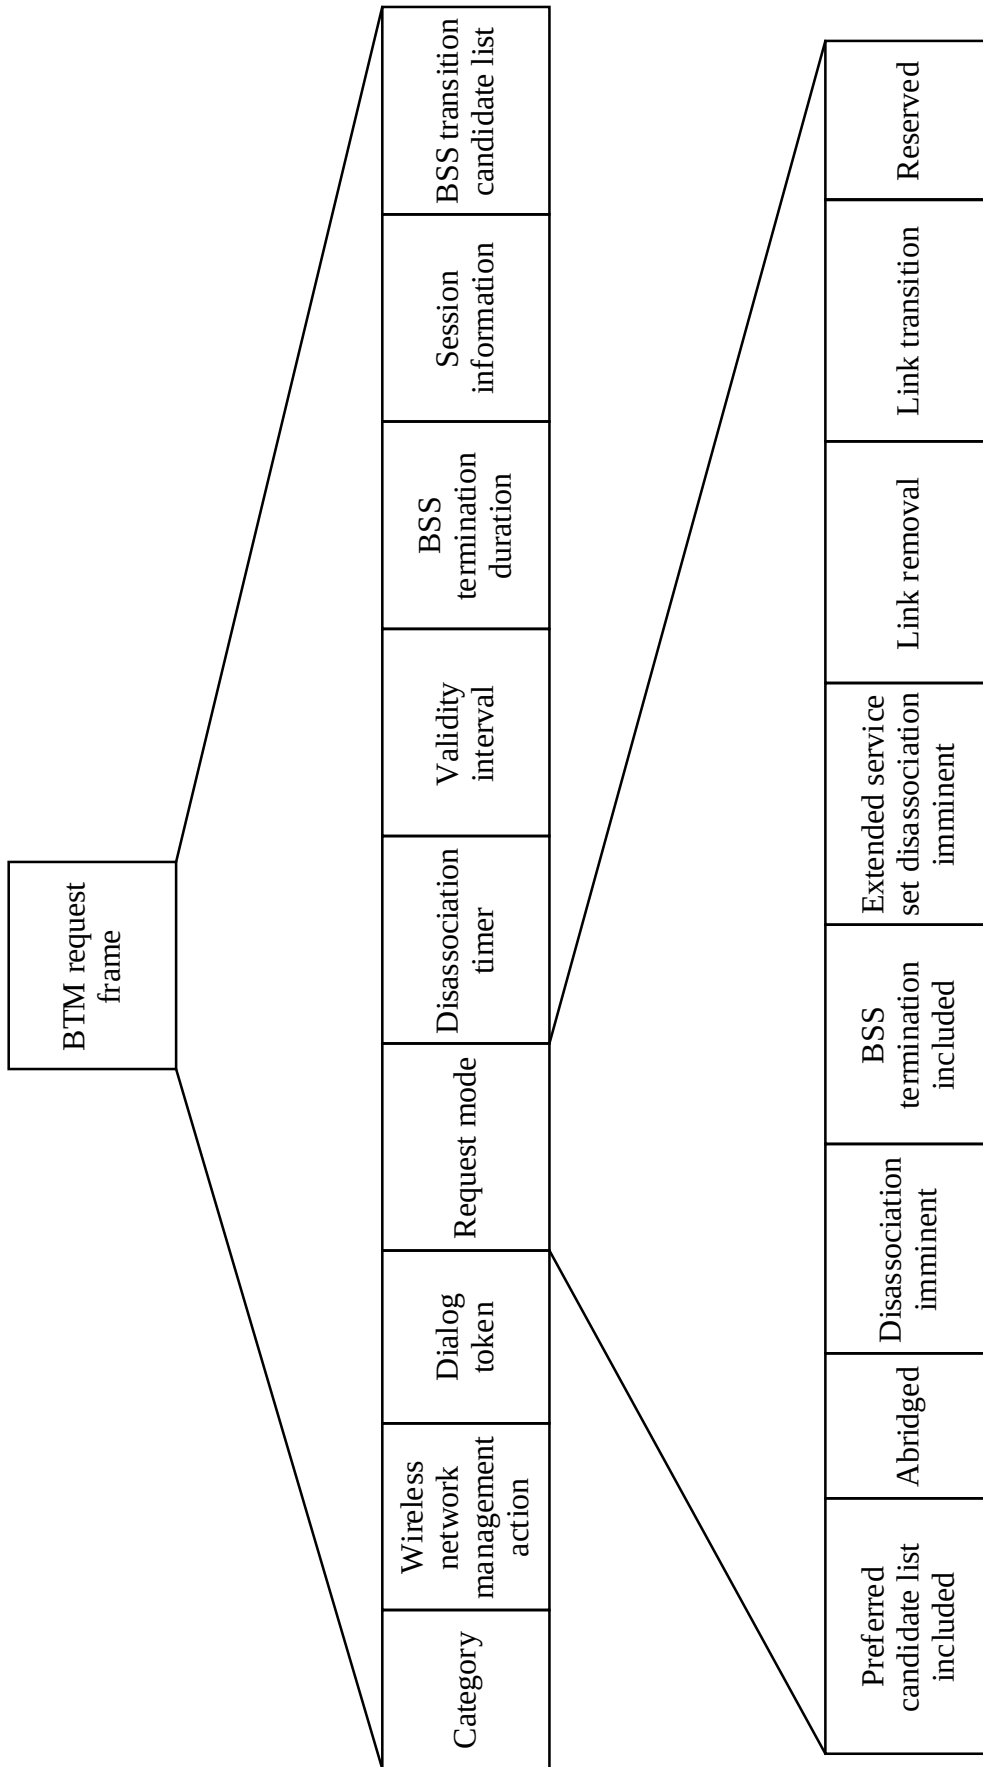


FIG. 10a

Category	Wireless network management action	Dialog token	BTM status code	BSS termination delay	Target BSSID	BSS transition candidate list
----------	------------------------------------	--------------	-----------------	-----------------------	--------------	-------------------------------

FIG. 10b

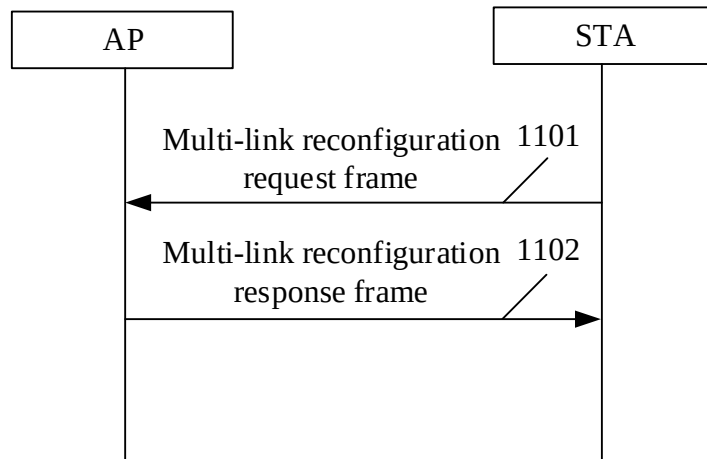


FIG. 11a

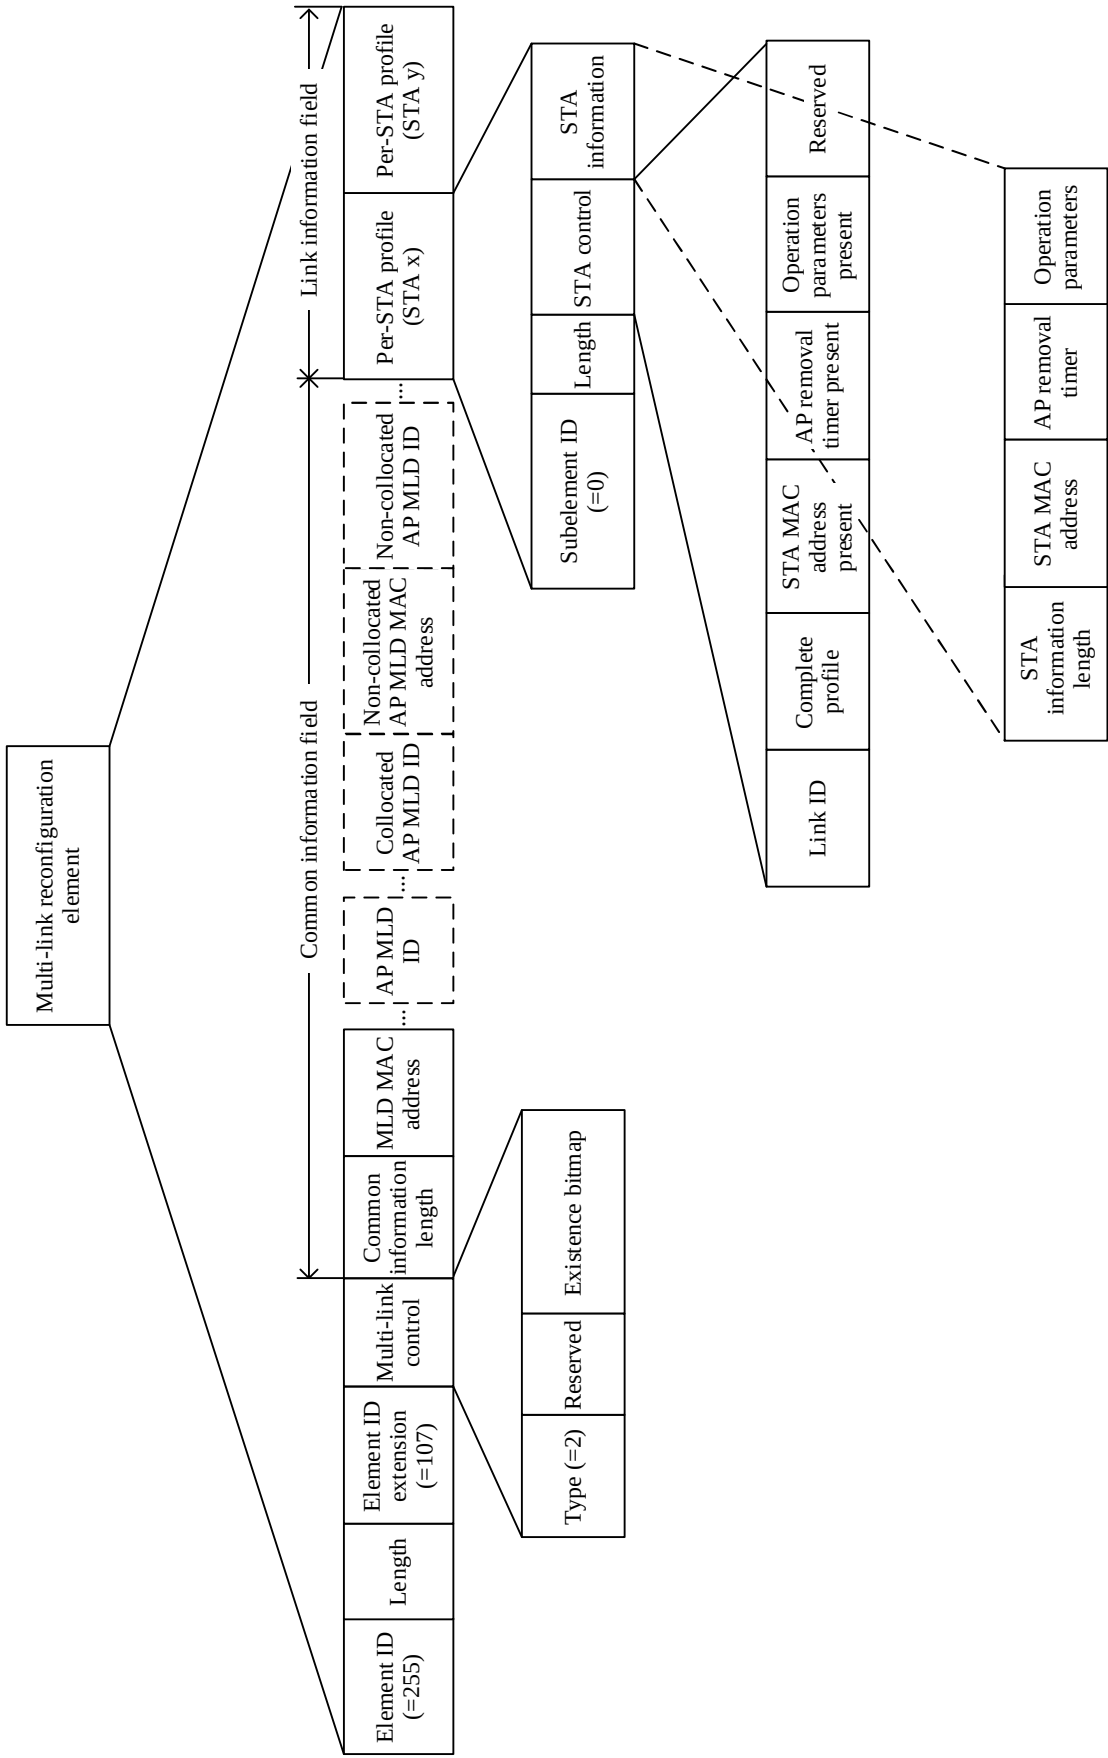


FIG. 11b

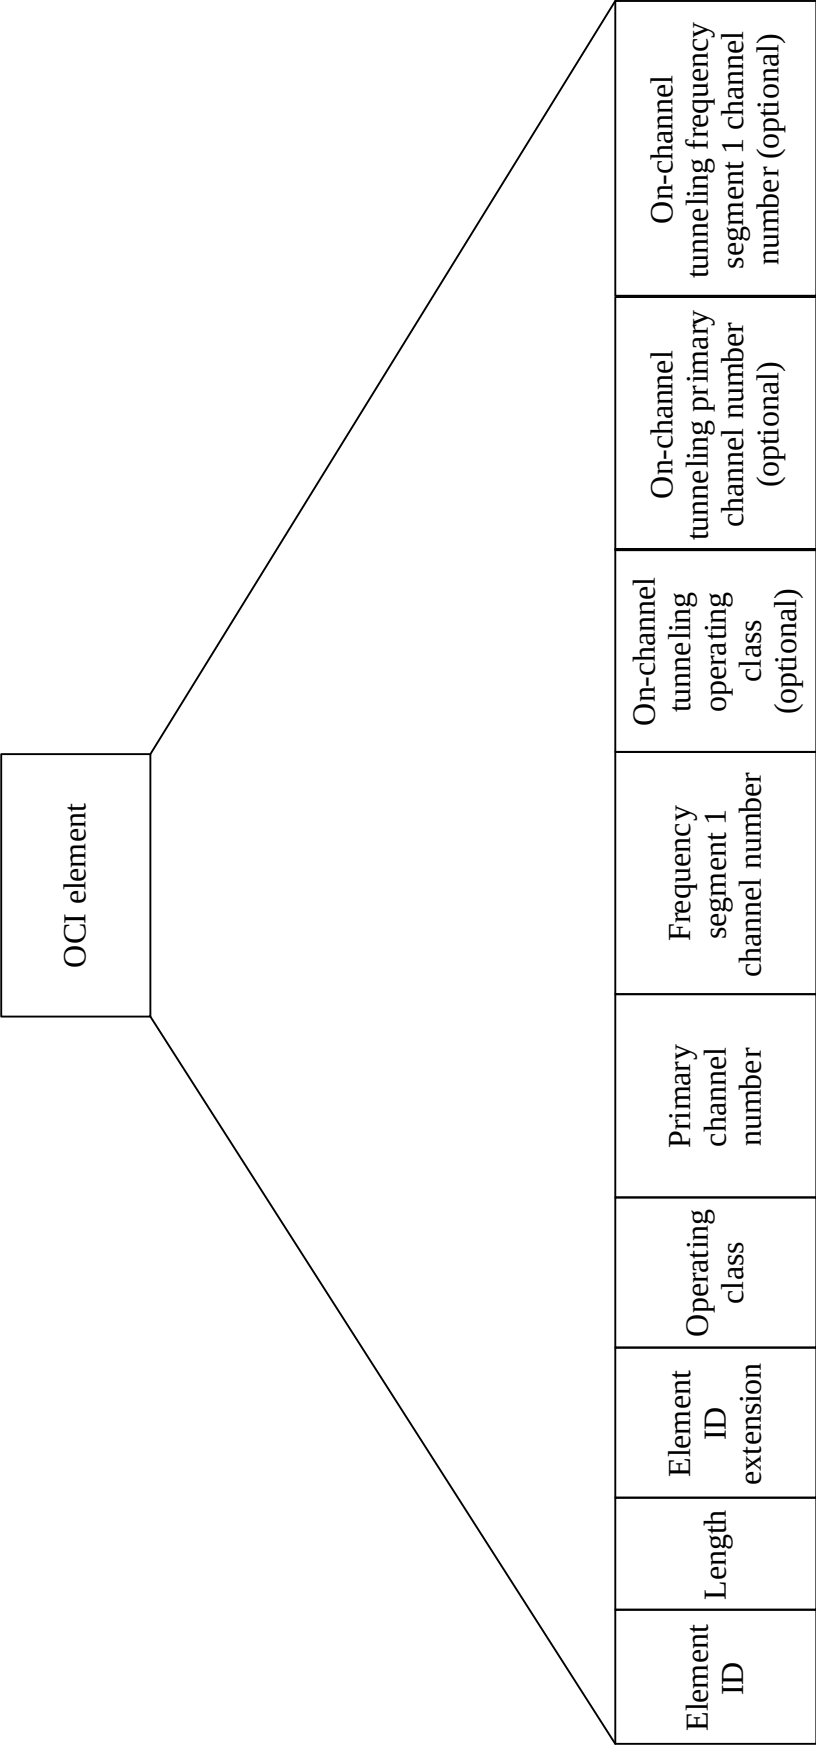


FIG. 11c

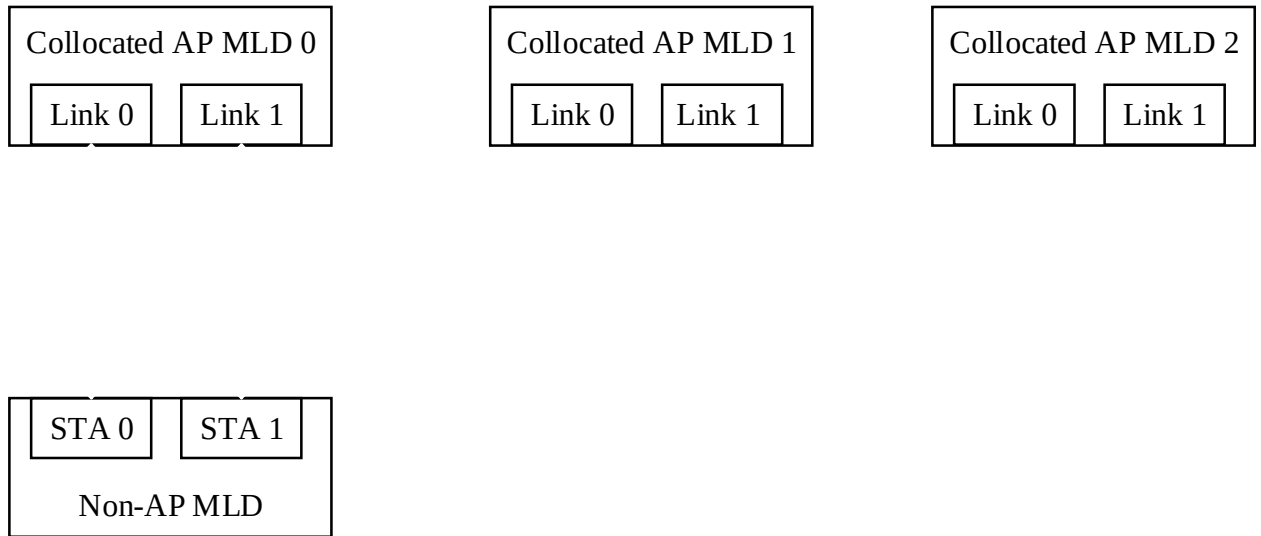


FIG. 12a

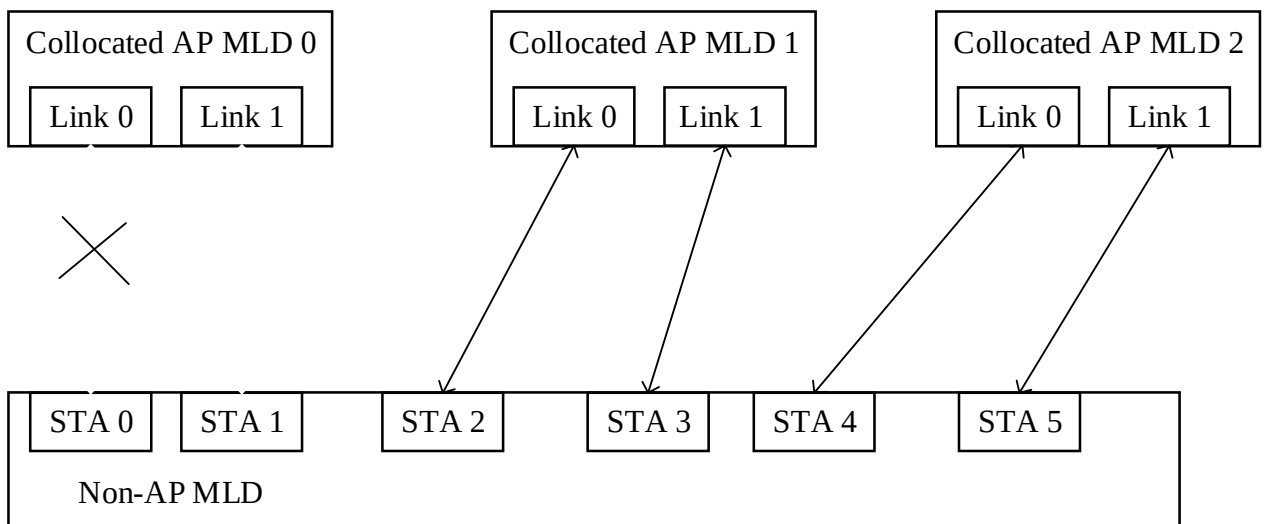


FIG. 12b

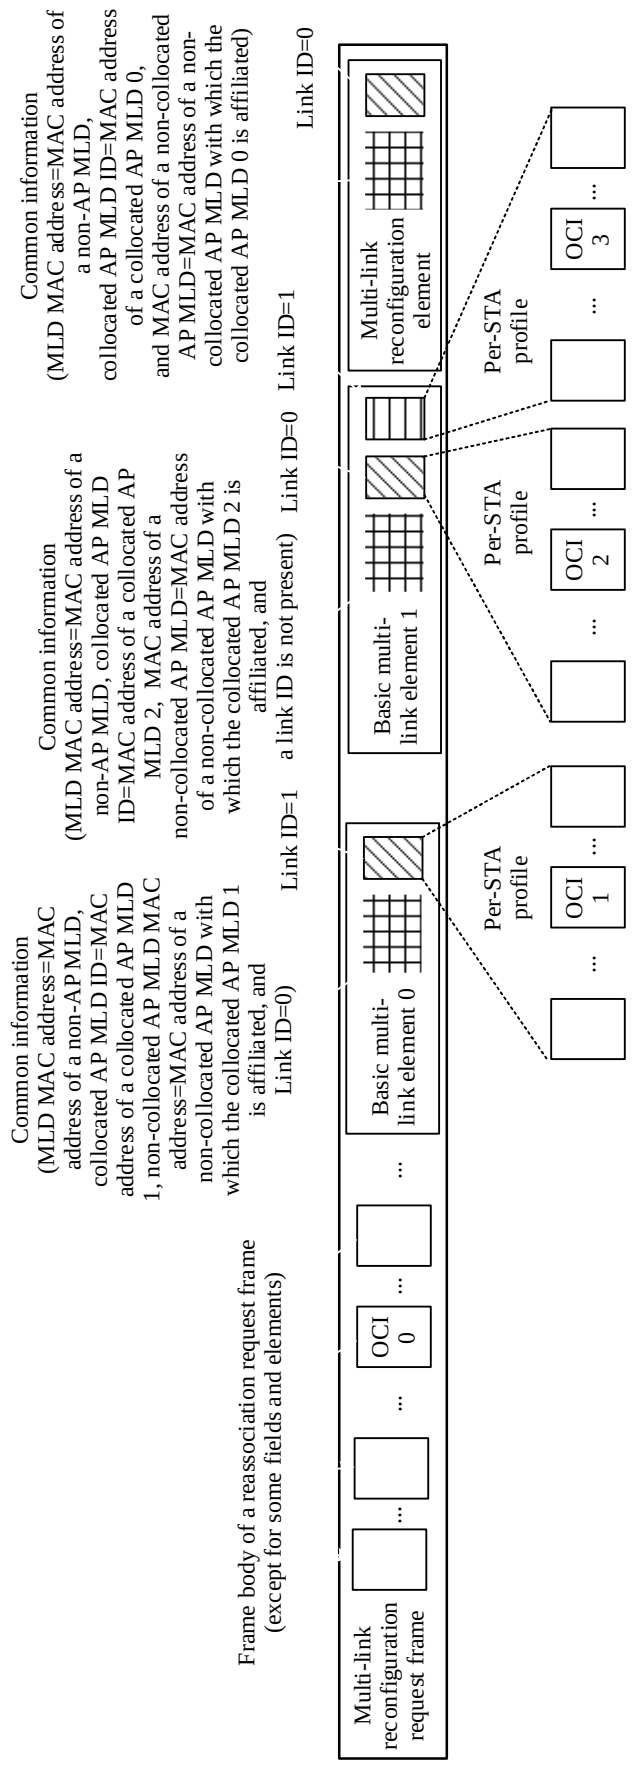


FIG. 12c

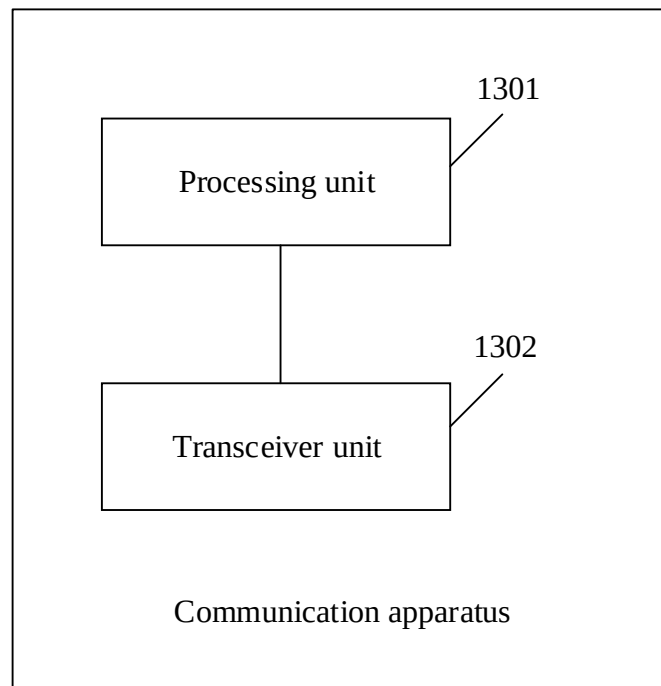


FIG. 13

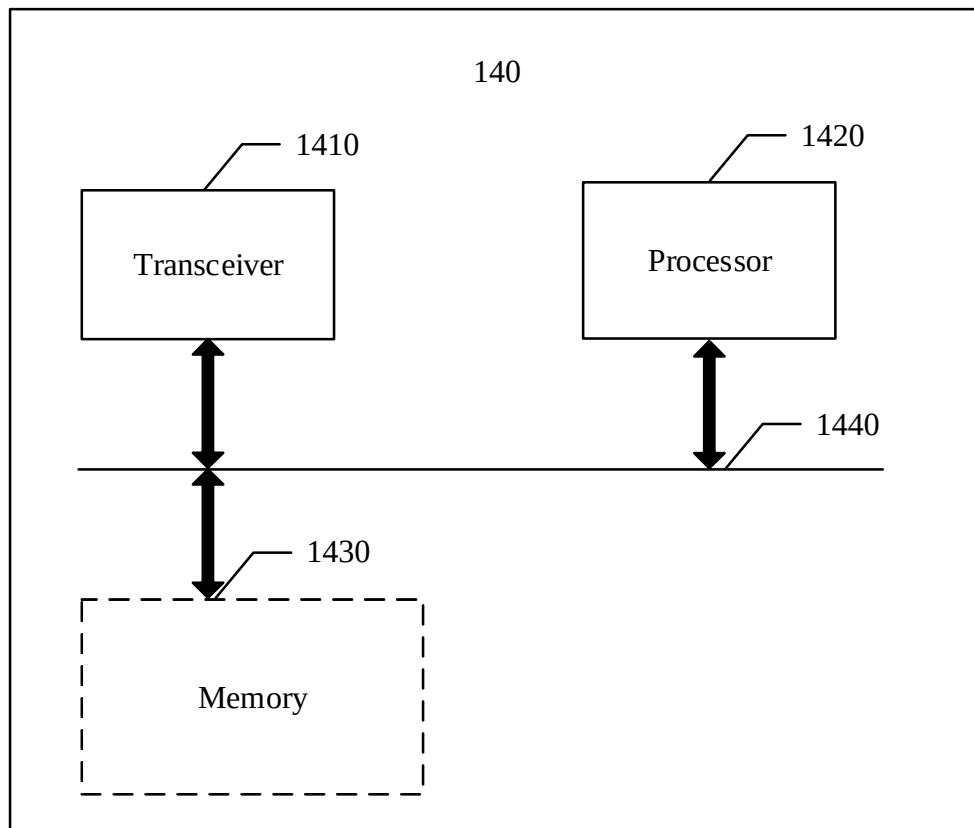


FIG. 14

17/21

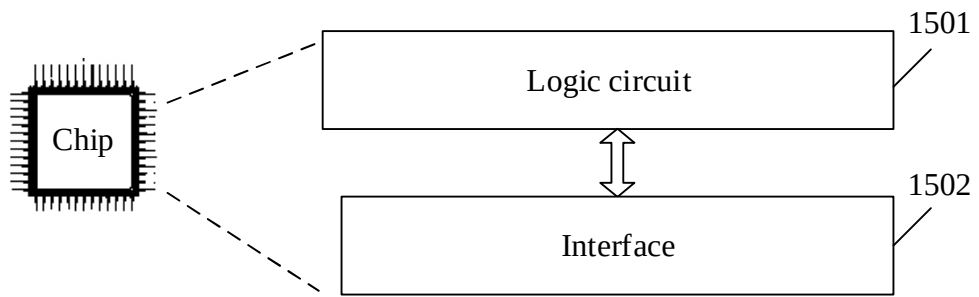


FIG. 15

AP MLD

Link 0 Link 1 Link 2

Link 0 Link 1 Link 2

Non-AP MLD

FIG. 16

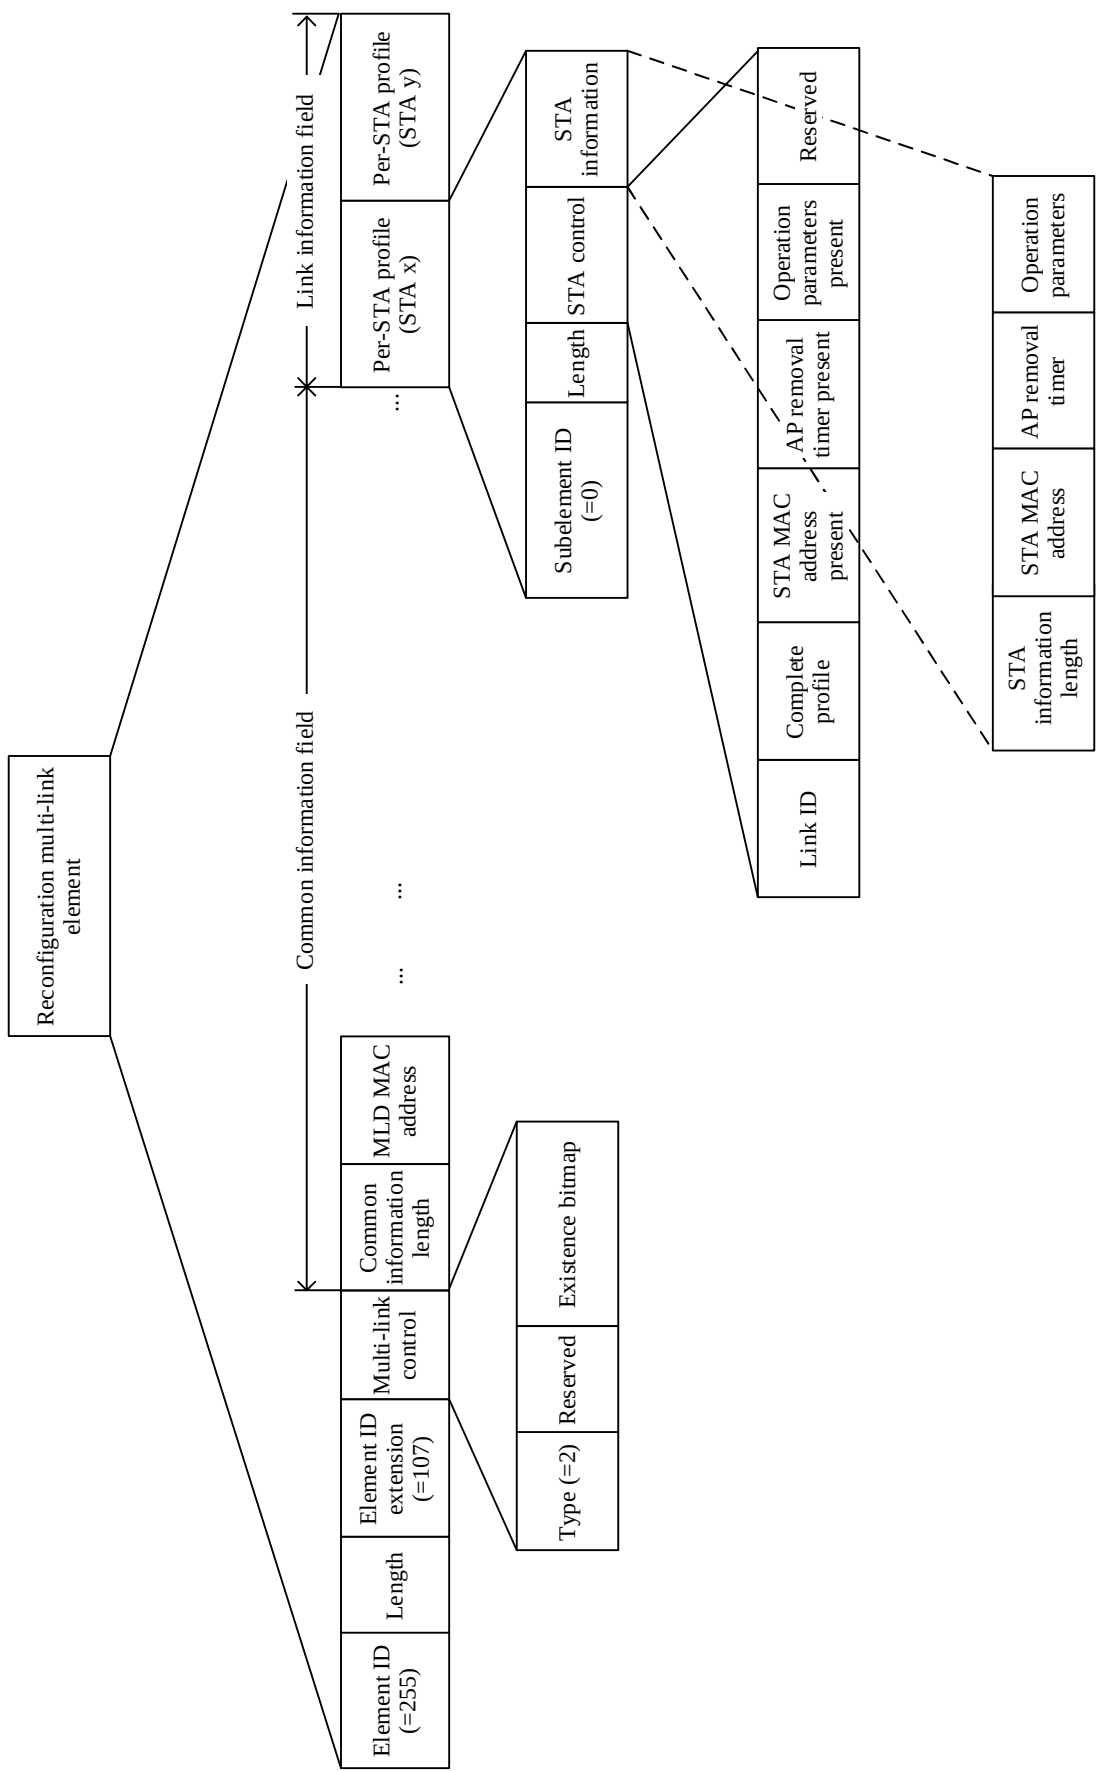


FIG. 17

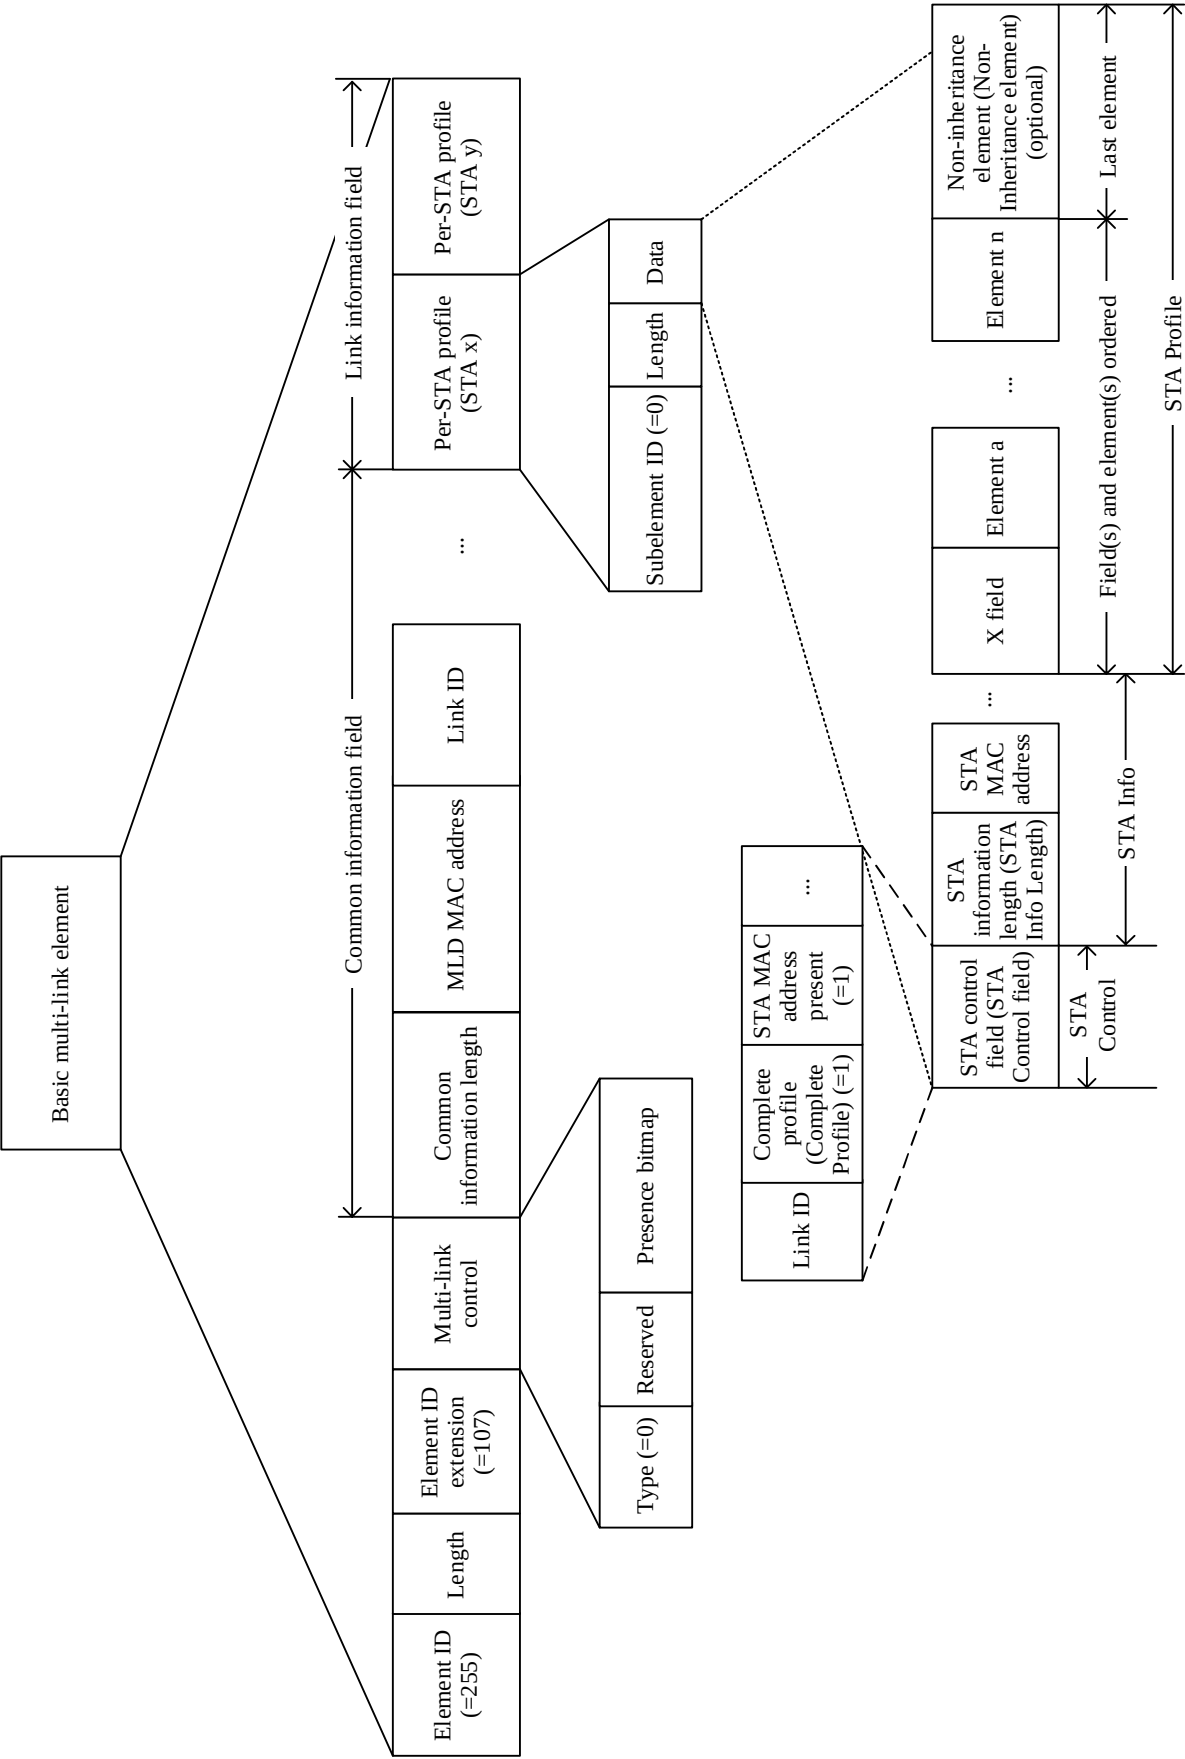


FIG. 18a

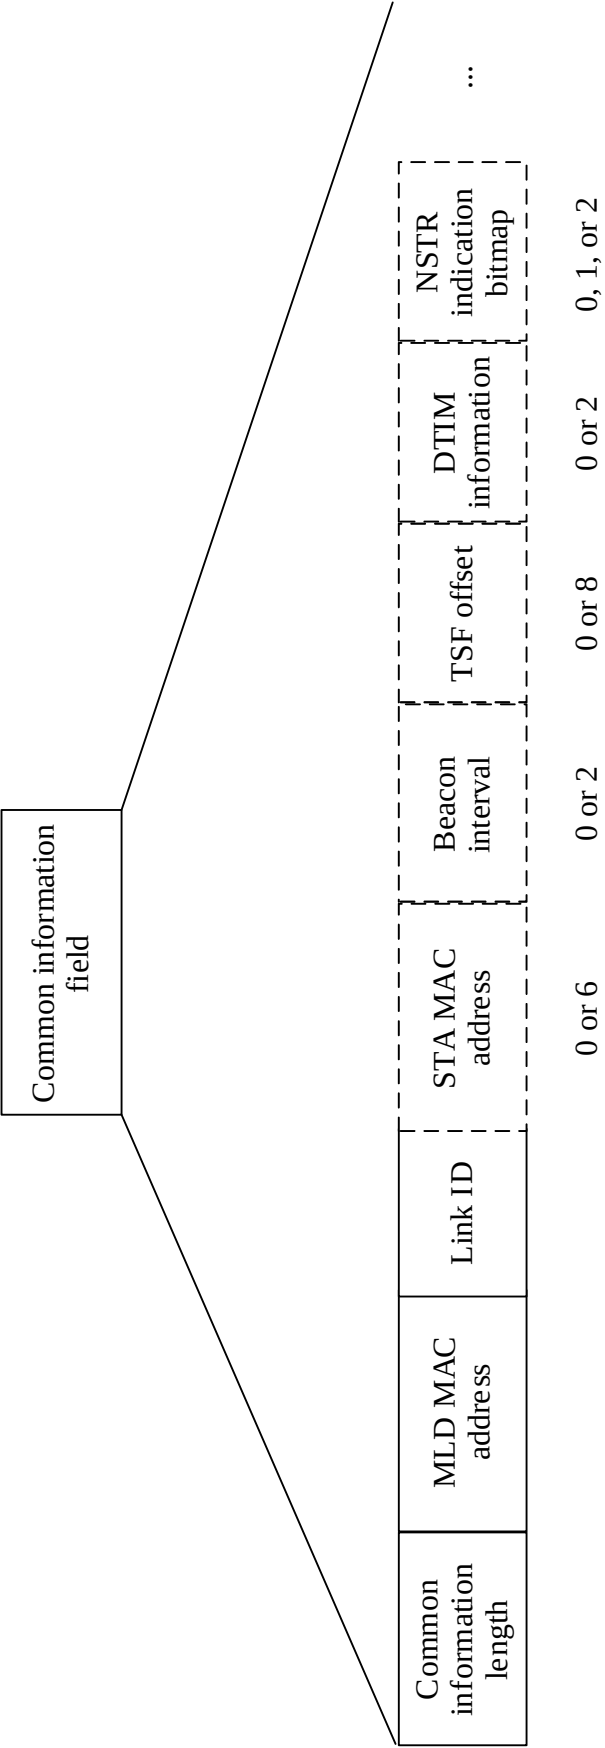


FIG. 18b

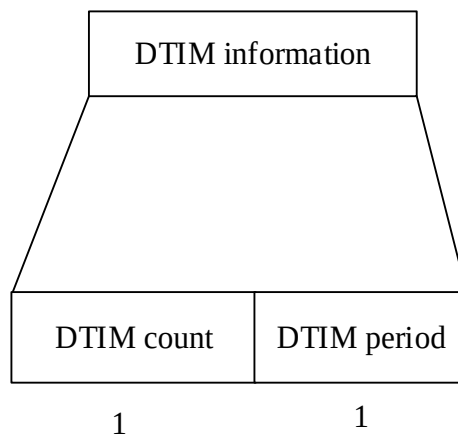


FIG. 18c

MLD Upper MAC sublayer
(MLD MAC Address)

MLD Lower MAC sublayer 1
(Link Address 1)

MLD Lower MAC sublayer 2
(Link Address 2)

FIG. 19