TELEVISION RECEIVER WITH SWITCHABLE CHROMINANCE SIGNAL FILTER

This invention relates to color television receivers generally and particularly to color television receivers of a type having multiple inputs for RF and baseband video sources and also having provisions for variably filtering the chrominance component of a selected video input signal.

A problem of color distortion can arise in color television receivers of the type having both RF (radio frequency) and base-band video input signal sources. More specifically, when one is displaying a video signal provided from an RF signal source by a tuner and associated IF (intermediate frequency) amplifier and detector, it is necessary to filter the chrominance signal to correct for sideband distortion. Distortion results because the IF filter tends to suppress the upper sideband of the chrominance signal relative to the lower sideband and this unbalance in the sidebands can lead to visible color distortion in displayed images. Conventionally, the correction is made by use of a chrominance band pass filter having a "sloped" or non-symmetrical response which attenuates the lower sideband such that the overall response is about the same (symmetrical) for the two sidebands. On the other hand, video signals provided by an auxiliary baseband video input are typically reasonably well balanced (symmetrical) signals and require only conventional symmetrical band pass filtering.

Color television receivers with source dependent variable chrominance signal filtering are known. An example is described by Sendelweck et al. in US Patent 5, 107,341 entitled COLOR TELEVISION APPARATUS WITH PICTURE IN PICTURE PROCESSING AND WITH VARIABLE CHROMINANCE SIGNAL FILTERING which issued April 21, 1992. An exemplary embodiment of the Sendelweck receiver includes a picture-in-picture processor and a variable filtering circuit for switching between a "slope" type filter and a symmetrical or "haystack" type of filter. A control signal is supplied to the filter selection switch so as to select the "slope" type filter for the chrominance signal when the main picture being displayed is

This Sheet Has Been Replaced

REPLACED SHEETS SG
Description : paged 1 to paged 5
Claim(s) : paged 6 to paged 7
Drawing(s) : paged 8 to paged 8
Abstract : paged 9 to paged 9
DATE OF RECEIPT

provided by an RF signals source and for selecting the "haystack" or symmetrical filter when the main picture being displayed is provided from an auxiliary video source.

The present invention simplifies the chrominance signal processing by a combination of fixed and tunable filters which, in addition to properly conditioning the chrominance signal based on the signal source, also provides improved group delay characteristics and an advantage in suppressing interference from a non-video source such as, for example, FM radio.

A chrominance signal sideband correction filter, embodying the invention, comprises first means for determining a lower portion of the amplitude characteristic of said sideband correction filter; second means for determining an upper portion of the amplitude response of said sideband correction filter; and means for tuning said second means to a first condition for providing a symmetrical overall amplitude response and for tuning said second means to a second condition for providing an asymmetrical overall amplitude response for said sideband correction filter.

The foregoing and further features of the invention are illustrated in the accompanying drawing, wherein:

FIGURE 1 is a block diagram of a color television receiver embodying the invention;

FIGURE 2 is a response diagram of a high pass filter used in the receiver of FIGURE 1;

FIGURES 3-6 are response diagrams illustrating the amplitude and group delay characteristics of the color filter used in the receiver of FIGURE 1; and

FIGURE 7 illustrates the overall group delay response of the chrominance filter in combination with the IF response for the receiver of FIGURE 1.

The receiver 10 of FIGURE 1 comprises inputs 12 and 15 for receiving, respectively, RF signals and auxiliary baseband video signals. The RF signal is applied via a tuner 13 and an IF amplifier, detector and sound trap 14 to one input of a signal source selector switch 16 which receives the auxiliary baseband video input from input 15. Selected source signals are applied to a luminance/chrominance signal separator 18 which supplies a

This Sheet Has Been Replaced

separated luminance signal Y1 to one input of a luminance/chrominance signal processor 20. The separated chrominance signal C1 is applied to a chrominance filter 30 (outlined in phantom) which provides a variably filtered chrominance signal C2 to a second input of the Y-C processor 20. Processor 20 provides conventional functions such as color demodulation, hue and saturation control, brightness and contrast control, etc. and supplies processed luminance and chrominance component signals to a display processor 50 that matrixes the signals and generates RGB format signals for display by a display device 52 such as a kinescope, a LCD display or some other suitable display. Control of the receiver (e.g., channel selection, source selection, video processing , etc. is provided by a receiver control unit (e.g., a microprocessor) 40 controlled by a user remote control unit 42.

The chrominance signal filter 30, under the control of unit 40, selects asymmetrical chroma filtering when the tuner source is selected by the user (to correct for the receiver IF amplifier response) and selects symmetrical response for the chrominance signal band pass characteristic when the auxiliary input signal is selected.

Filter 30 comprises a cascade connection of a high pass filter 31, a fixed frequency trap 32 and a variable frequency trap 34 coupled between the input terminal 35 and the output terminal 36. Control of the variable frequency trap 34 is provided by a switch 37 which selects reference voltages provided by reference voltage sources 38 and 39 (illustrated, for simplicity, as batteries) selected by a control signal CS provided by the control unit 40 to a control input 35 of chroma filter 30.

In operation, the change in trap frequency determines whether the filter exhibits a symmetrical response (for auxiliary input signal selection) or asymmetrical response (for tuner provided video).

Recall that in prior art systems the conventional approach is to use a separate symmetrical filter for auxiliary input signals and an asymmetrical filter for RF provided input signals to compensate for the sideband differences of the two sources and a video switch for selecting the appropriate filter.

This Sheet Has Been Replaced

Advantageously, the need for two separate filters and a selection switch is eliminated in the present invention. Instead the variable filtering function is implemented by a high pass filter 31, a fixed frequency trap 32 and a variable frequency trap 34. The present invention additionally provides, amplitude rejection at one-half the chrominance signal frequency (to avoid problems with aliasing of chroma components), symmetrical group delay about the chroma subcarrier frequency and phase equalization of the system 4.5 MHz trap. The combined effects of the high pass filter 31 and fixed frequency trap are illustrated in FIGURE 2 where it is seen that the sub-harmonic of the chrominance signal is sharply rejected.

In more detail, the fixed frequency trap 32 provides rejection at about half of the chroma frequency and, in combination with the slightly underdamped response of the high pass filter 31, determines the low frequency side (below 3.58 MHz) of the chroma response for both the symmetric and asymmetric modes.

The variable chrominance signal trap 34 is tuned to a frequency of 5 MHz in the asymmetric mode (by virtue of control unit 40). Advantageously, this prevents interference (in the USA) between channel 6 and low frequency (e.g., FM stations). In combination with the underdamped nature of the high pass filter 31 it provides the high frequency (above 3.58 MHz) response for the filter in the asymmetric mode. To accomplish the symmetric response mode for the auxiliary input video signal, the chroma trap frequency is varied (tuned) lower to 4.55 MHz, to determine the response symmetry above 3.58 MHz. This is feasible in that the FM rejection is only required when the band pass filter is in the asymmetric mode.

Phase equalization in the two modes is accommodated by having the chroma trap 34 tuned high in the case where the 4.5 MHz trap will dominate the response above 3.58 MHz and lower when the group delay of the 4.5 MHz trap is not present. In the symmetrical mode, the chroma trap 34 will provide group delay symmetry about 3.58 MHz, the color subcarrier frequency.

FIGURE 2 shows the overall effect of the high pass filter 31 and the fixed trap 32. As noted, this determines the low frequency half of the overall bandpass response and also provides a

This Sheet Has Been Replaced



notch at half the subcarrier frequency for antialiasing (e.g, in subsampled digital systems).

FIGURES 3 through 6 show the amplitude and group delay responses of the chroma filter in the two modes of operation (symmetrical and asymmetrical) while FIGURE 7 shows the group delay response of the chroma filter in cascade with the tuner 13, IF and 4.5 MHz sound trap 14. As shown in these figures, the substantially constant group delay and variable symmetry is achieved, by only changing the notch position of the variable notch filter. Additionally, for RF input sources, FM radio interference is suppressed by the presence of the 5 MHz notch location (thus preventing interference from low band FM stations, e.g., 88 MHz from TV channel 6 which differ by about 5 MHz.

Various changes and modifications may be made to the illustrated embodiments of the invention. For example, although analog devices (e.g., active filters) have been used in the illustrated embodiment, digital devices may be used instead to provide equivalent overall functions including low pass filtering with a low side fixed notch and variable high side notch filtering.

There has been shown and described a chrominance signal sideband correction filter in which a fixed filter determines a lower portion of the passband response of the correction filter and a variable filter determines the upper portion of the amplitude response and in which the variable filter is tunable to provide either symmetrical or asymmetrical overall amplitude response.

This Sheet Has Been Replaced



CLAIM:

1. A chrominance signal sideband correction filter, characterized by:

a fixed filter means (31,32) for determining a lower portion of the amplitude characteristic of said sideband correction filter;

a variable filter means (34) for determining an upper portion of the amplitude response of said sideband correction filter; and

means (37) for tuning said variable filter to provide a symmetrical or an asymmetrical overall amplitude response for said sideband correction filter.

This Sheet Has Been Replaced



Abstract

A fixed filter (31,32) determines a lower portion of the amplitude characteristic of a chrominance signal sideband correction filter (30). A variable filter (34) determines the upper portion of the amplitude characteristic. A control signal (CS) tunes the variable filter for providing a symmetrical response for video signals having balanced color sidebands and tunes the variable filter for providing an asymmetrical response for video signals having unbalanced sidebands.

This Sheet Has Been Replaced



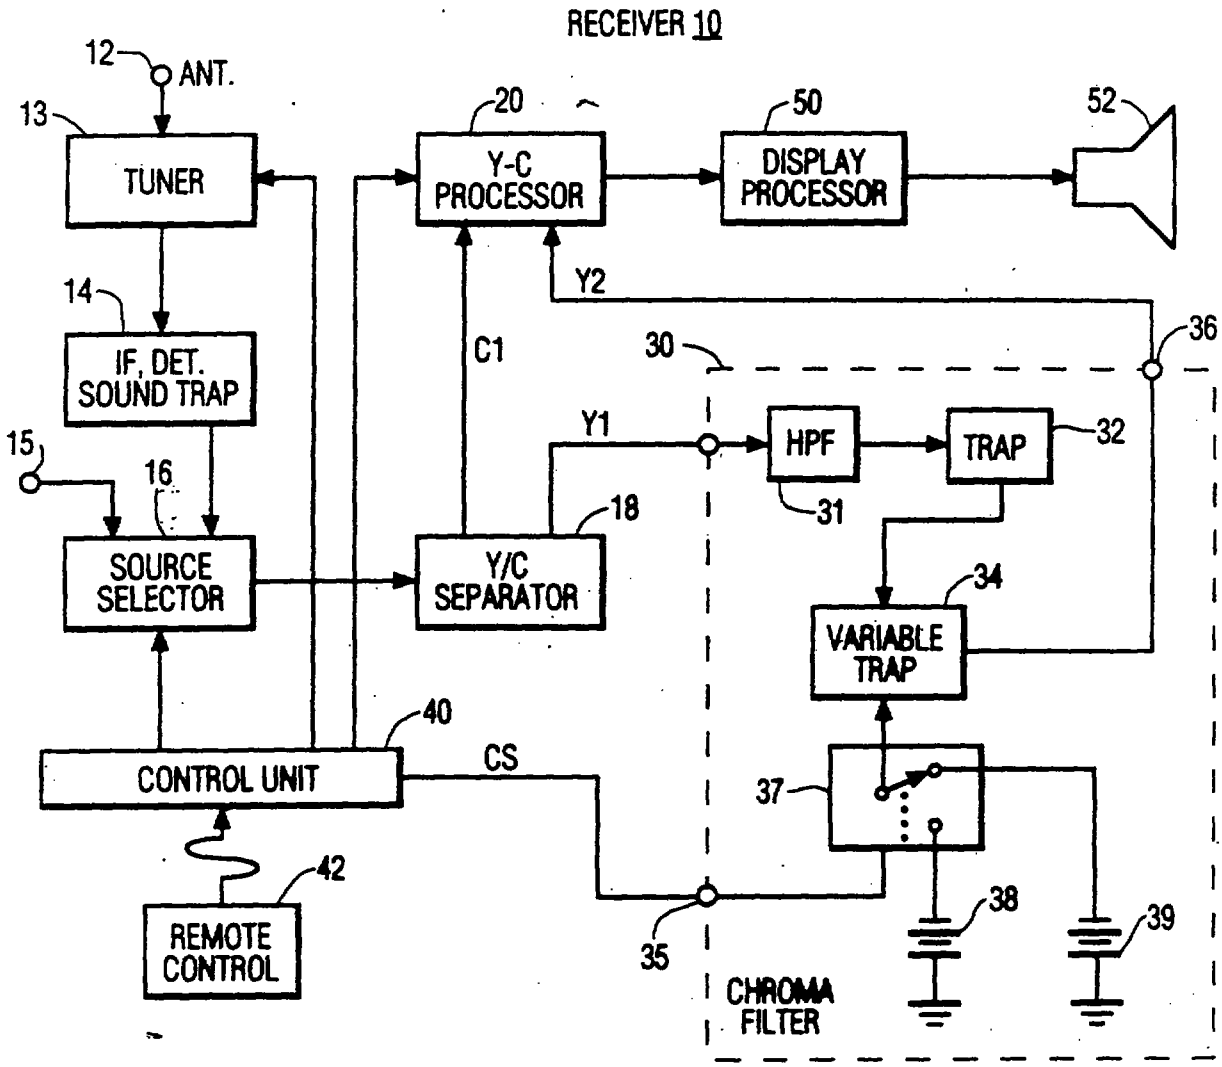


FIG 1

This Sheet Has Been Replaced

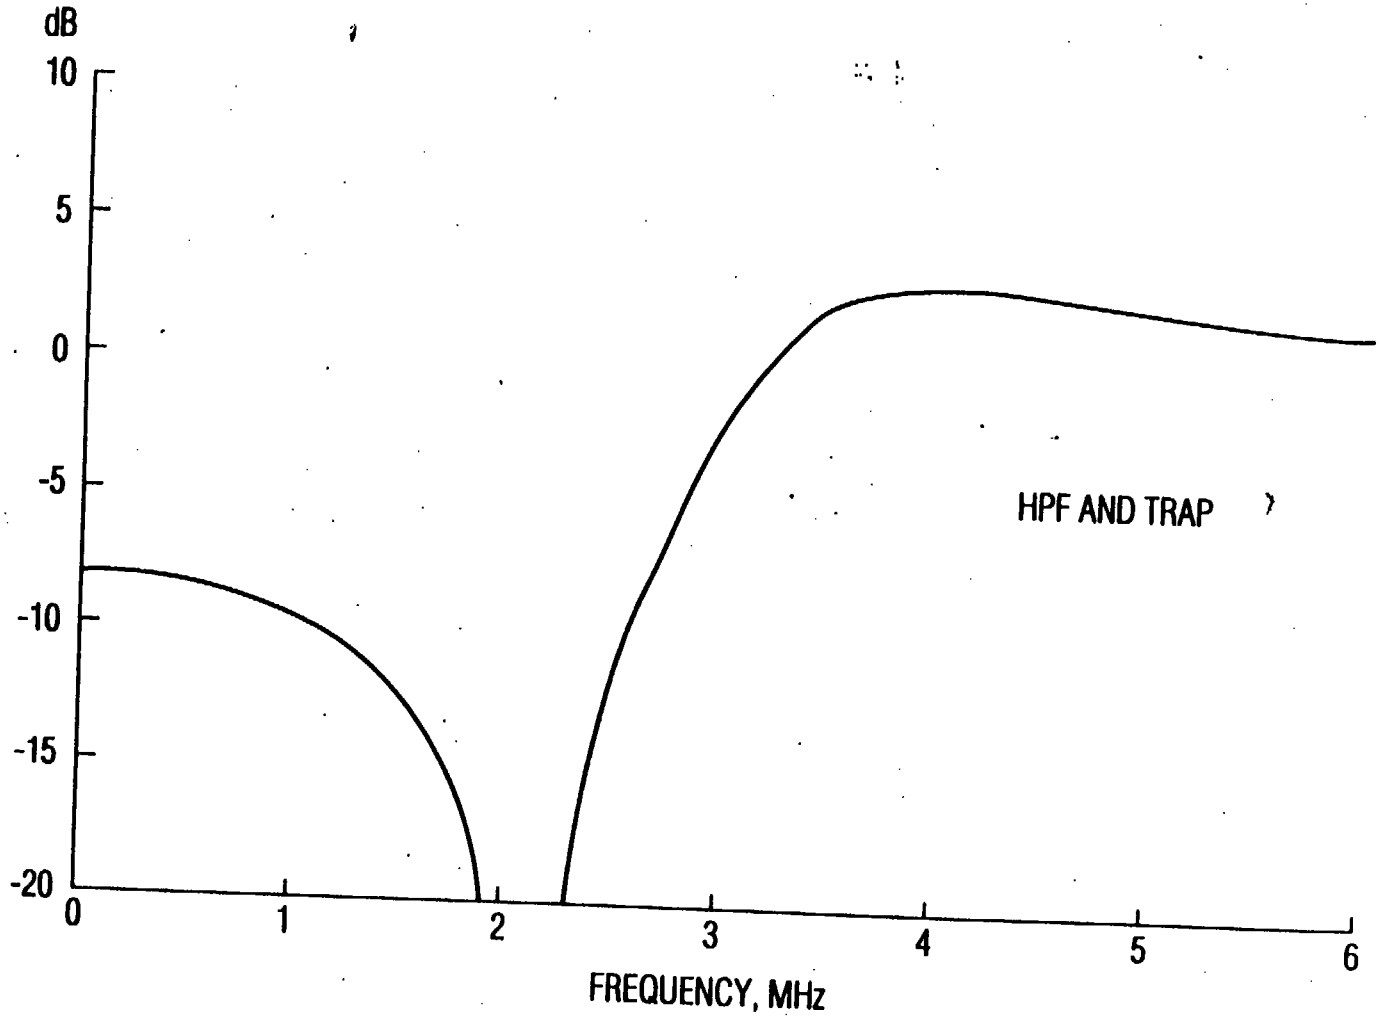


FIG. 2

This Sheet Has Been Replaced

W.A LAGOM
2 OF 8

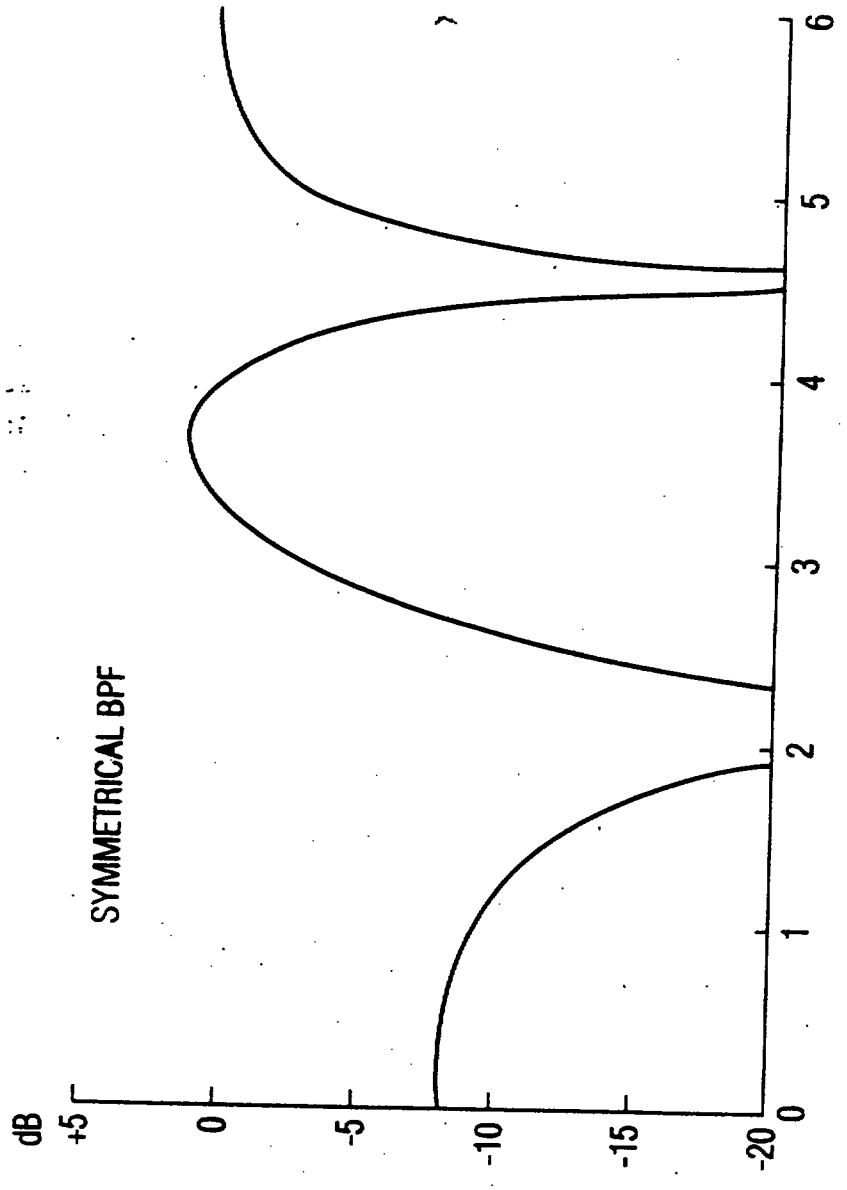


FIG. 3

This Sheet Has Been Replaced

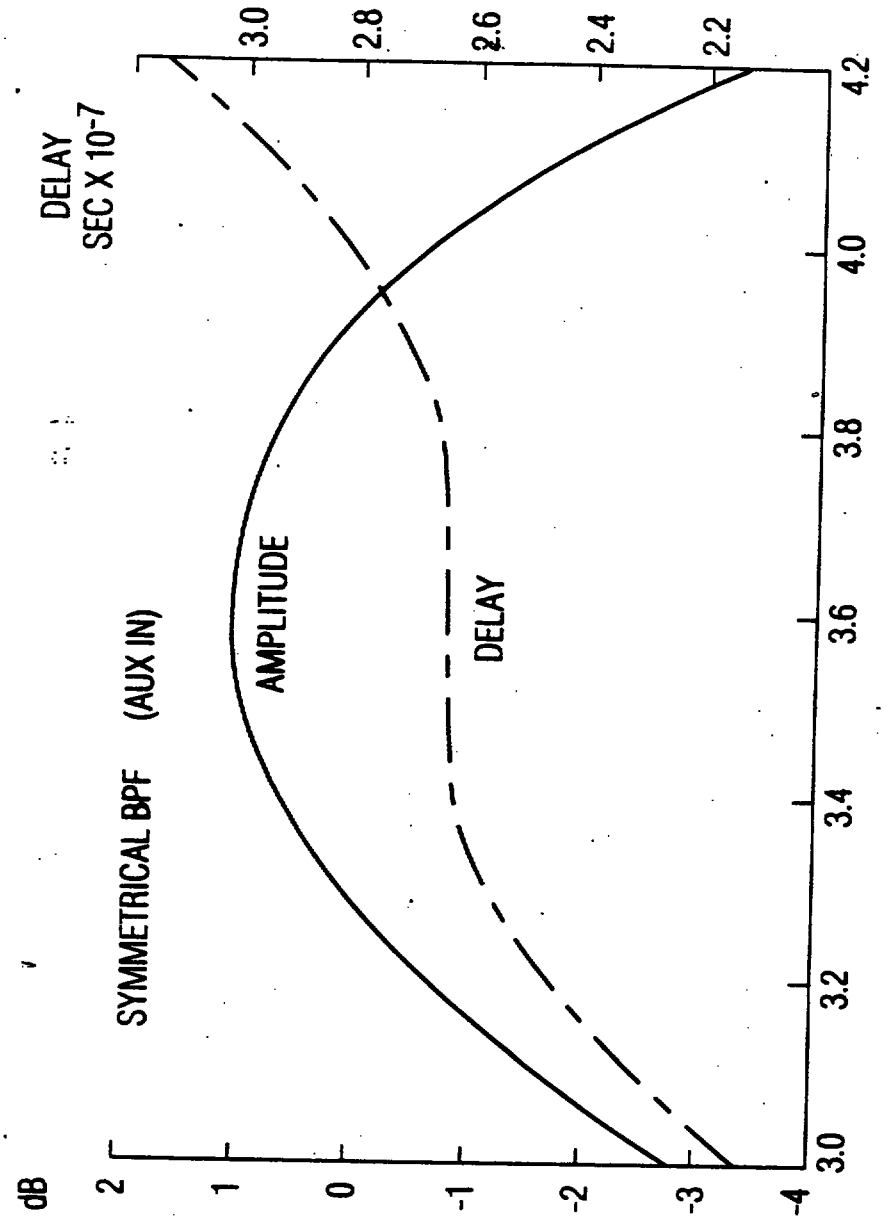


FIG. 4

This Sheet Has Been Replaced

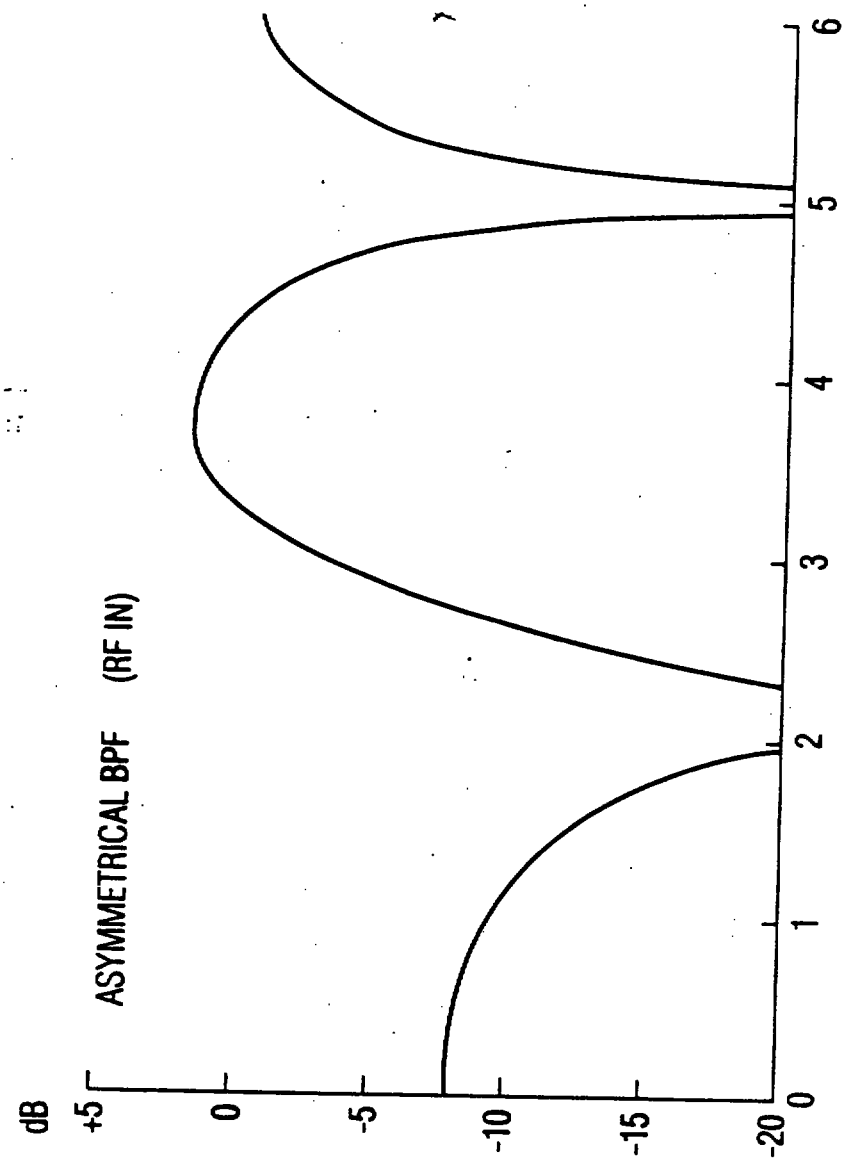


FIG. 5

This Sheet Has Been Replaced

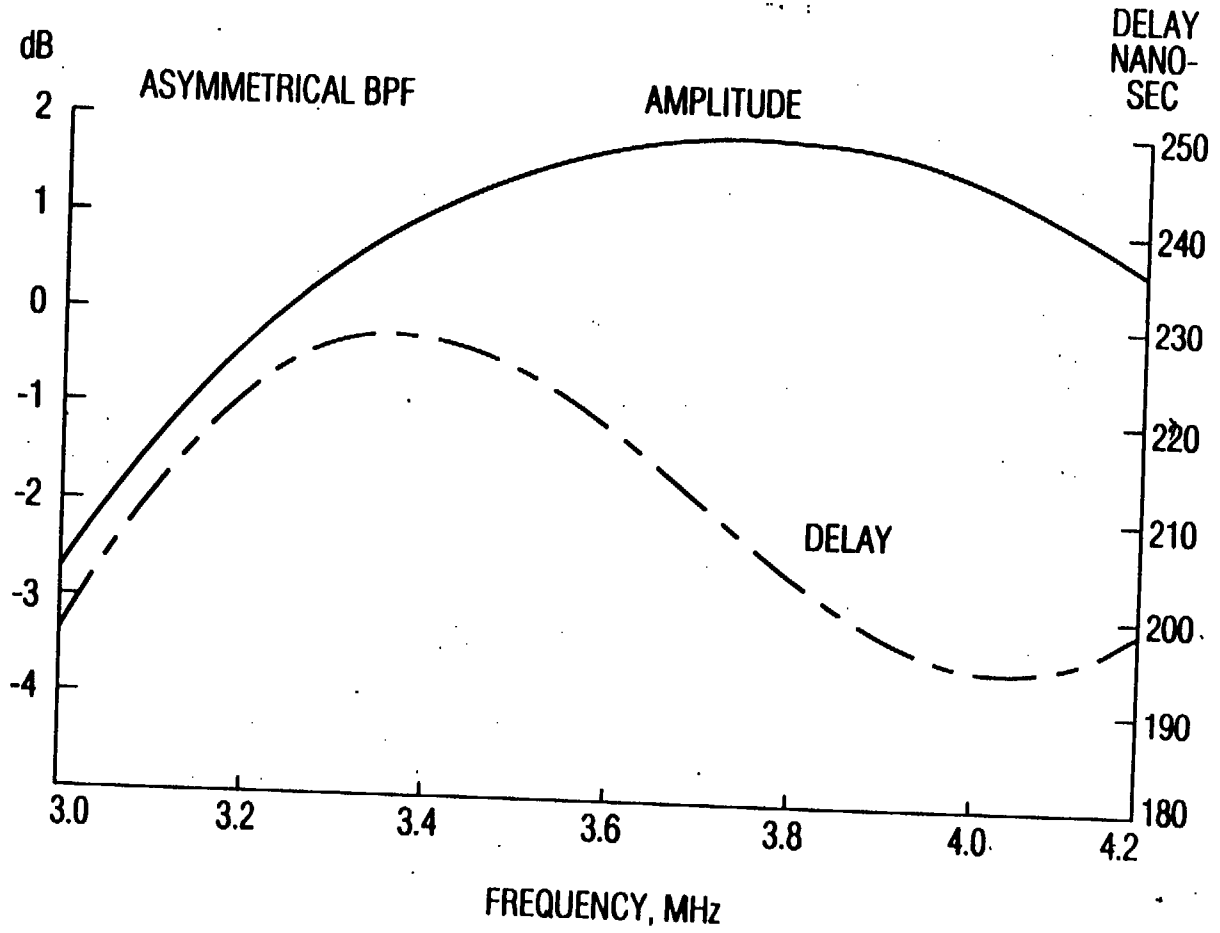


FIG. 6

This Sheet Has Been Replaced

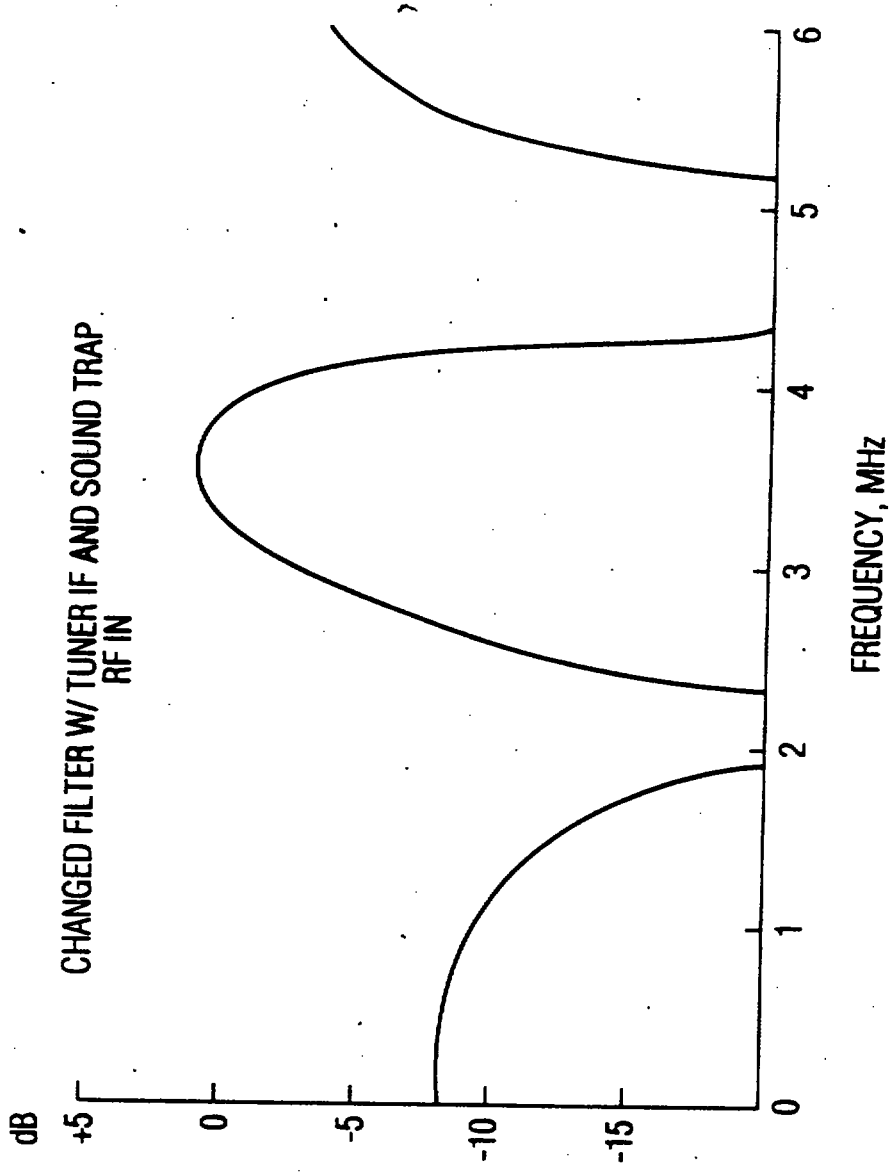


FIG. 7A

This Sheet Has Been Replaced

FIG. 7B

This Sheet Has Been Replaced

REPLACED SHEETS SG
Description : paged 2 to paged -
Claim(s) : paged 6 to paged -
Drawing(s) : paged ... to paged ...
Abstract : paged 7 to paged -
DATE OF RECEIPT ...

96023486 2805
REPLACED SHEETS SG
Description : paged 1 to paged 5
Claim(s) : paged 6 to paged -
Drawing(s) : paged 1/8 to paged 8/8
Abstract : paged 2 to paged -
DATE OF RECEIPT 9/7/96

TELEVISION RECEIVER WITH SWITCHABLE CHROMINANCE SIGNAL FILTER

This invention relates to color television receivers generally and particularly to color television receivers of a type having multiple inputs for RF and baseband video sources and also having provisions for variably filtering the chrominance component of a selected video input signal.

A problem of color distortion can arise in color television receivers of the type having both RF (radio frequency) and base-band video input signal sources. More specifically, when one is displaying a video signal provided from an RF signal source by a tuner and associated IF (intermediate frequency) amplifier and detector, it is necessary to filter the chrominance signal to correct for sideband distortion. Distortion results because the IF filter tends to suppress the upper sideband of the chrominance signal relative to the lower sideband and this unbalance in the sidebands can lead to visible color distortion in displayed images. Conventionally, the correction is made by use of a chrominance band pass filter having a "sloped" or non-symmetrical response which attenuates the lower sideband such that the overall response is about the same (symmetrical) for the two sidebands. On the other hand, video signals provided by an auxiliary baseband video input are typically reasonably well balanced (symmetrical) signals and require only conventional symmetrical band pass filtering.

Color television receivers with source dependent variable chrominance signal filtering are known. An example is described by Sendelweck et al. in US Patent 5, 107,341 entitled COLOR TELEVISION APPARATUS WITH PICTURE IN PICTURE PROCESSING AND WITH VARIABLE CHROMINANCE SIGNAL FILTERING which issued April 21, 1992. An exemplary embodiment of the Sendelweck receiver includes a picture-in-picture processor and a variable filtering circuit for switching between a "slope" type filter and a symmetrical or "haystack" type of filter. A control signal is supplied to the filter selection switch so as to select the "slope" type filter for the chrominance signal when the main picture being displayed is

This is the replacement sheet
09 JUL 1996
Date:

provided by an RF signals source and for selecting the "haystack" or symmetrical filter when the main picture being displayed is provided from an auxiliary video source.

The present invention simplifies the chrominance signal processing by a combination of fixed and tunable filters which, in addition to properly conditioning the chrominance signal based on the signal source, also provides improved group delay characteristics and an advantage in suppressing interference from a non-video source such as, for example, FM radio.

A chrominance signal sideband correction filter, embodying the invention, comprises first means for determining a lower portion of the amplitude characteristic of said sideband correction filter; second means for determining an upper portion of the amplitude response of said sideband correction filter; and means for tuning said second means to a first condition for providing a symmetrical overall amplitude response and for tuning said second means to a second condition for providing an asymmetrical overall amplitude response for said sideband correction filter.

The foregoing and further features of the invention are illustrated in the accompanying drawing, wherein:

FIGURE 1 is a block diagram of a color television receiver embodying the invention;

FIGURE 2 is a response diagram of a high pass filter used in the receiver of FIGURE 1;

FIGURES 3-6 are response diagrams illustrating the amplitude and group delay characteristics of the color filter used in the receiver of FIGURE 1; and

FIGURE 7 illustrates the overall group delay response of the chrominance filter in combination with the IF response for the receiver of FIGURE 1.

The receiver 10 of FIGURE 1 comprises inputs 12 and 15 for receiving, respectively, RF signals and auxiliary baseband video signals. The RF signal is applied via a tuner 13 and an IF amplifier, detector and sound trap 14 to one input of a signal source selector switch 16 which receives the auxiliary baseband video input from input 15. Selected source signals are applied to a luminance/chrominance signal separator 18 which supplies a

This Sheet Has Been Replaced

This is the replacement sheet
09 JUL 1996
Date:

separated luminance signal Y1 to one input of a luminance/chrominance signal processor 20. The separated chrominance signal C1 is applied to a chrominance filter 30 (outlined in phantom) which provides a variably filtered chrominance signal C2 to a second input of the Y-C processor 20. Processor 20 provides conventional functions such as color demodulation, hue and saturation control, brightness and contrast control, etc. and supplies processed luminance and chrominance component signals to a display processor 50 that matrixes the signals and generates RGB format signals for display by a display device 52 such as a kinescope, a LCD display or some other suitable display. Control of the receiver (e.g., channel selection, source selection, video processing , etc. is provided by a receiver control unit (e.g., a microprocessor) 40 controlled by a user remote control unit 42.

The chrominance signal filter 30, under the control of unit 40, selects asymmetrical chroma filtering when the tuner source is selected by the user (to correct for the receiver IF amplifier response) and selects symmetrical response for the chrominance signal band pass characteristic when the auxiliary input signal is selected.

Filter 30 comprises a cascade connection of a high pass filter 31, a fixed frequency trap 32 and a variable frequency trap 34 coupled between the input terminal 35 and the output terminal 36. Control of the variable frequency trap 34 is provided by a switch 37 which selects reference voltages provided by reference voltage sources 38 and 39 (illustrated, for simplicity, as batteries) selected by a control signal CS provided by the control unit 40 to a control input 35 of chroma filter 30.

In operation, the change in trap frequency determines whether the filter exhibits a symmetrical response (for auxiliary input signal selection) or asymmetrical response (for tuner provided video).

Recall that in prior art systems the conventional approach is to use a separate symmetrical filter for auxiliary input signals and an asymmetrical filter for RF provided input signals to compensate for the sideband differences of the two sources and a video switch for selecting the appropriate filter.

This is the replacement sheet

Date: 09 JUL 1996

Advantageously, the need for two separate filters and a selection switch is eliminated in the present invention. Instead the variable filtering function is implemented by a high pass filter 31, a fixed frequency trap 32 and a variable frequency trap 34. The present invention additionally provides, amplitude rejection at one-half the chrominance signal frequency (to avoid problems with aliasing of chroma components), symmetrical group delay about the chroma subcarrier frequency and phase equalization of the system 4.5 MHz trap. The combined effects of the high pass filter 31 and fixed frequency trap are illustrated in FIGURE 2 where it is seen that the sub-harmonic of the chrominance signal is sharply rejected.

In more detail, the fixed frequency trap 32 provides rejection at about half of the chroma frequency and, in combination with the slightly underdamped response of the high pass filter 31, determines the low frequency side (below 3.58 MHz) of the chroma response for both the symmetric and asymmetric modes.

The variable chrominance signal trap 34 is tuned to a frequency of 5 MHz in the asymmetric mode (by virtue of control unit 40). Advantageously, this prevents interference (in the USA) between channel 6 and low frequency (e.g., FM stations). In combination with the underdamped nature of the high pass filter 31 it provides the high frequency (above 3.58 MHz) response for the filter in the asymmetric mode. To accomplish the symmetric response mode for the auxiliary input video signal, the chroma trap frequency is varied (tuned) lower to 4.55 MHz, to determine the response symmetry above 3.58 MHz. This is feasible in that the FM rejection is only required when the band pass filter is in the asymmetric mode.

Phase equalization in the two modes is accommodated by having the chroma trap 34 tuned high in the case where the 4.5 MHz trap will dominate the response above 3.58 MHz and lower when the group delay of the 4.5 MHz trap is not present. In the symmetrical mode, the chroma trap 34 will provide group delay symmetry about 3.58 MHz, the color subcarrier frequency.

FIGURE 2 shows the overall effect of the high pass filter 31 and the fixed trap 32. As noted, this determines the low frequency half of the overall bandpass response and also provides a

This is the replacement sheet

Date: 09 JUL 1996

notch at half the subcarrier frequency for antialiasing (e.g, in subsampled digital systems).

FIGURES 3 through 6 show the amplitude and group delay responses of the chroma filter in the two modes of operation (symmetrical and asymmetrical) while FIGURE 7 shows the group delay response of the chroma filter in cascade with the tuner 13, IF and 4.5 MHz sound trap 14. As shown in these figures, the substantially constant group delay and variable symmetry is achieved, by only changing the notch position of the variable notch filter. Additionally, for RF input sources, FM radio interference is suppressed by the presence of the 5 MHz notch location (thus preventing interference from low band FM stations, e.g., 88 MHz from TV channel 6 which differ by about 5 MHz.

Various changes and modifications may be made to the illustrated embodiments of the invention. For example, although analog devices (e.g., active filters) have been used in the illustrated embodiment, digital devices may be used instead to provide equivalent overall functions including low pass filtering with a low side fixed notch and variable high side notch filtering.

There has been shown and described a chrominance signal sideband correction filter in which a fixed filter determines a lower portion of the passband response of the correction filter and a variable filter determines the upper portion of the amplitude response and in which the variable filter is tunable to provide either symmetrical or asymmetrical overall amplitude response.

This is the replacement sheet

Date: 09 JUL 1996

* C L M S *

CLAIM:

1. A chrominance signal sideband correction filter, characterized by:

a fixed filter means (31,32) for determining a lower portion of the amplitude characteristic of said sideband correction filter;

a variable filter means (34) for determining an upper portion of the amplitude response of said sideband correction filter; and

means (37) for tuning said variable filter to provide a symmetrical or an asymmetrical overall amplitude response for said sideband correction filter.

This Sheet Has Been Replaced

This is the replacement sheet

Date: 09 JUL 1996

TELEVISION RECEIVER WITH SWITCHABLE CHROMINANCE SIGNAL FILTER

Abstract

A fixed filter (31,32) determines a lower portion of the amplitude characteristic of a chrominance signal sideband correction filter (30). A variable filter (34) determines the upper portion of the amplitude characteristic. A control signal (CS) tunes the variable filter for providing a symmetrical response for video signals having balanced color sidebands and tunes the variable filter for providing an asymmetrical response for video signals having unbalanced sidebands.

FIGURE 1

This Sheet Has Been Replaced

This is the replacement sheet

Date: 09 JUL 1996

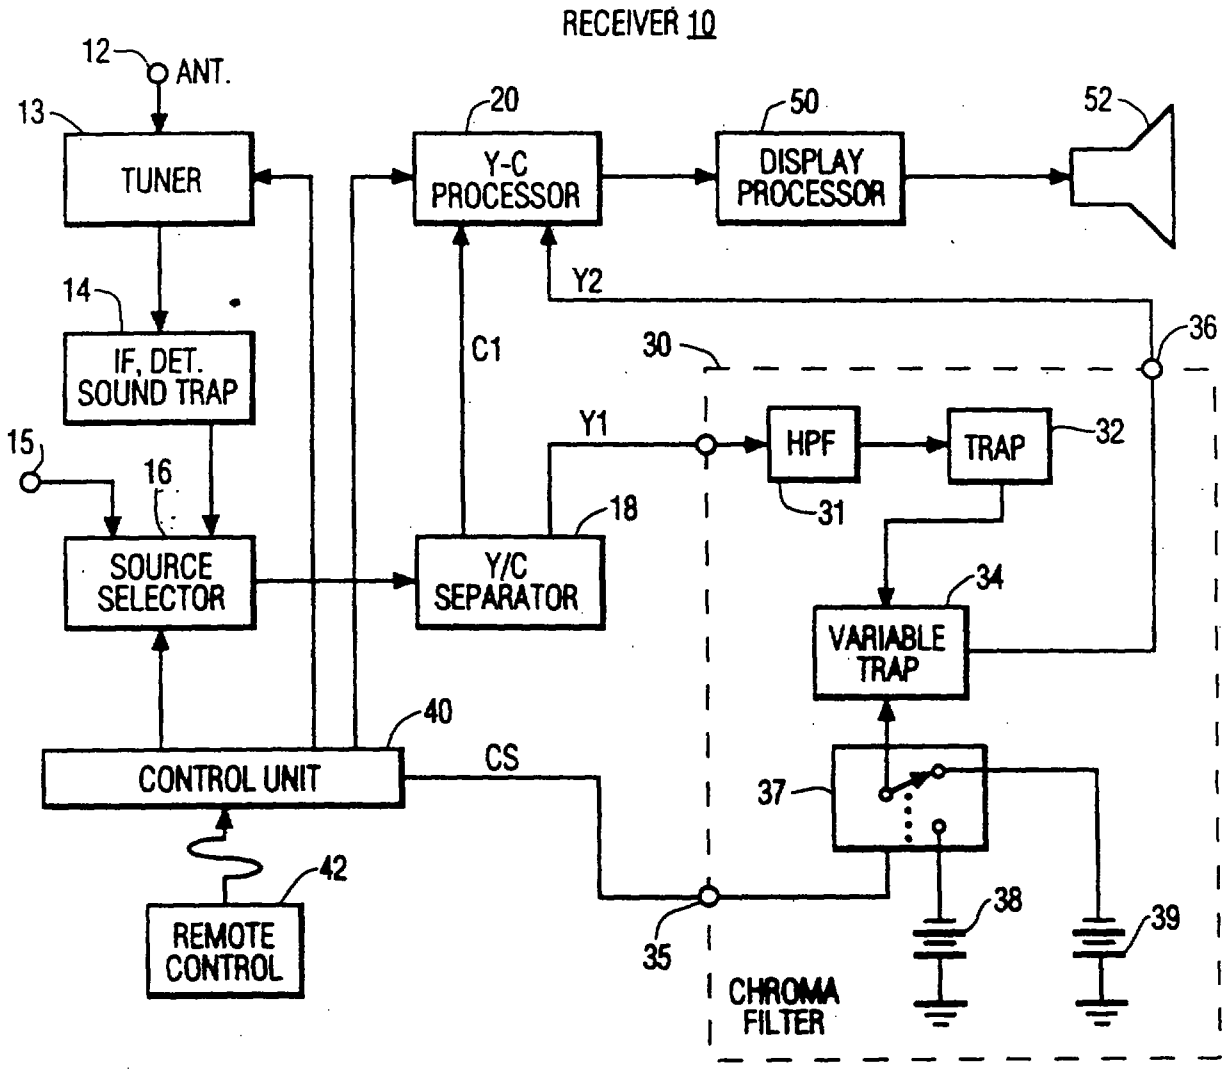


FIG 1

This is the replacement sheet

Date: 09 JUL 1996

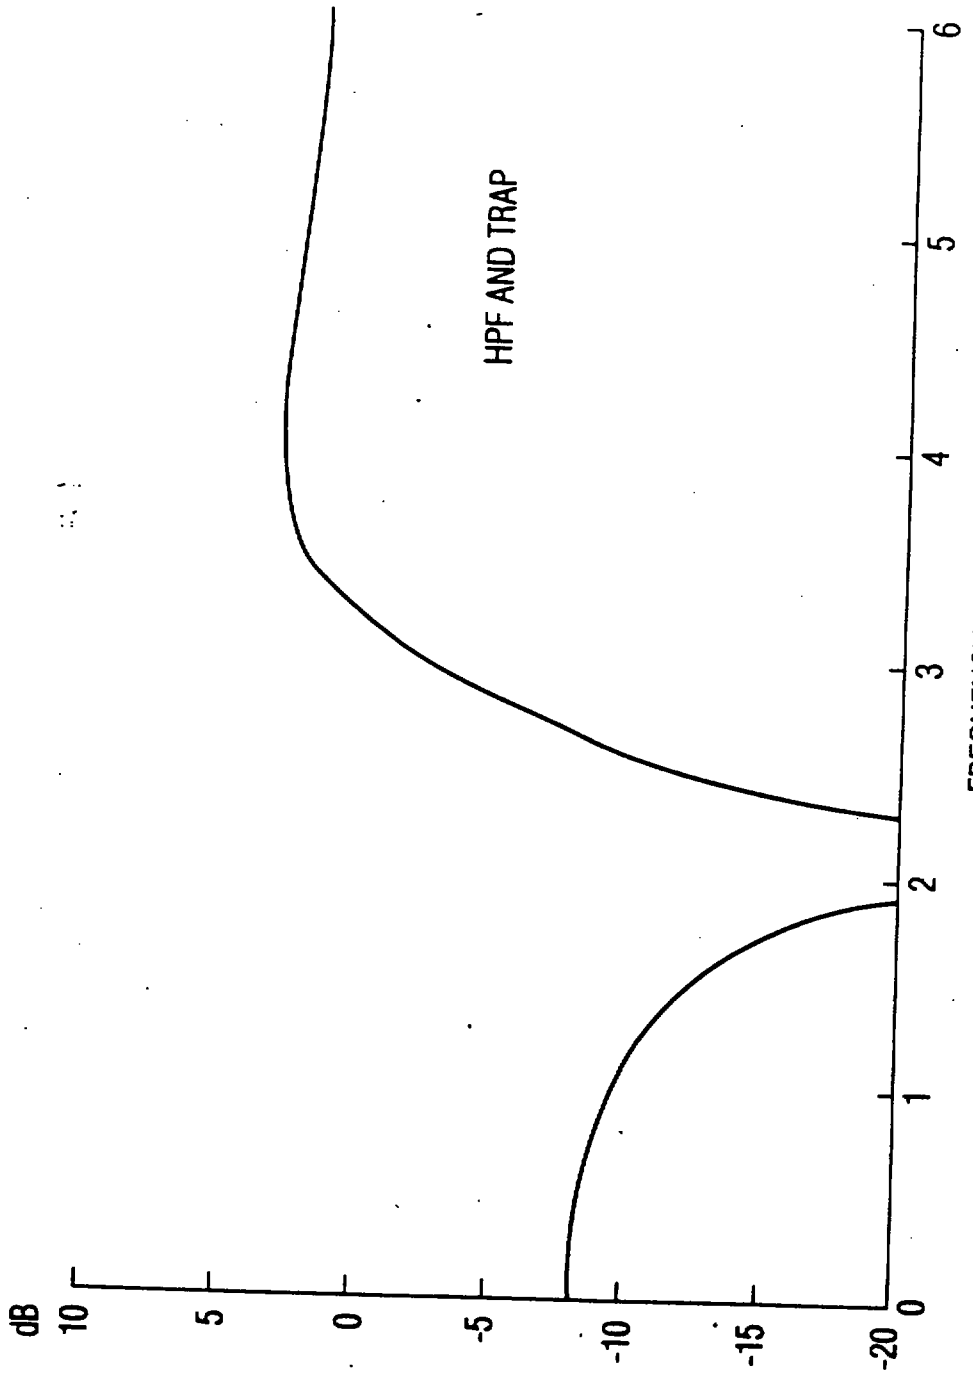


FIG. 2

This is the replacement sheet

Date: 09 JUL 1996

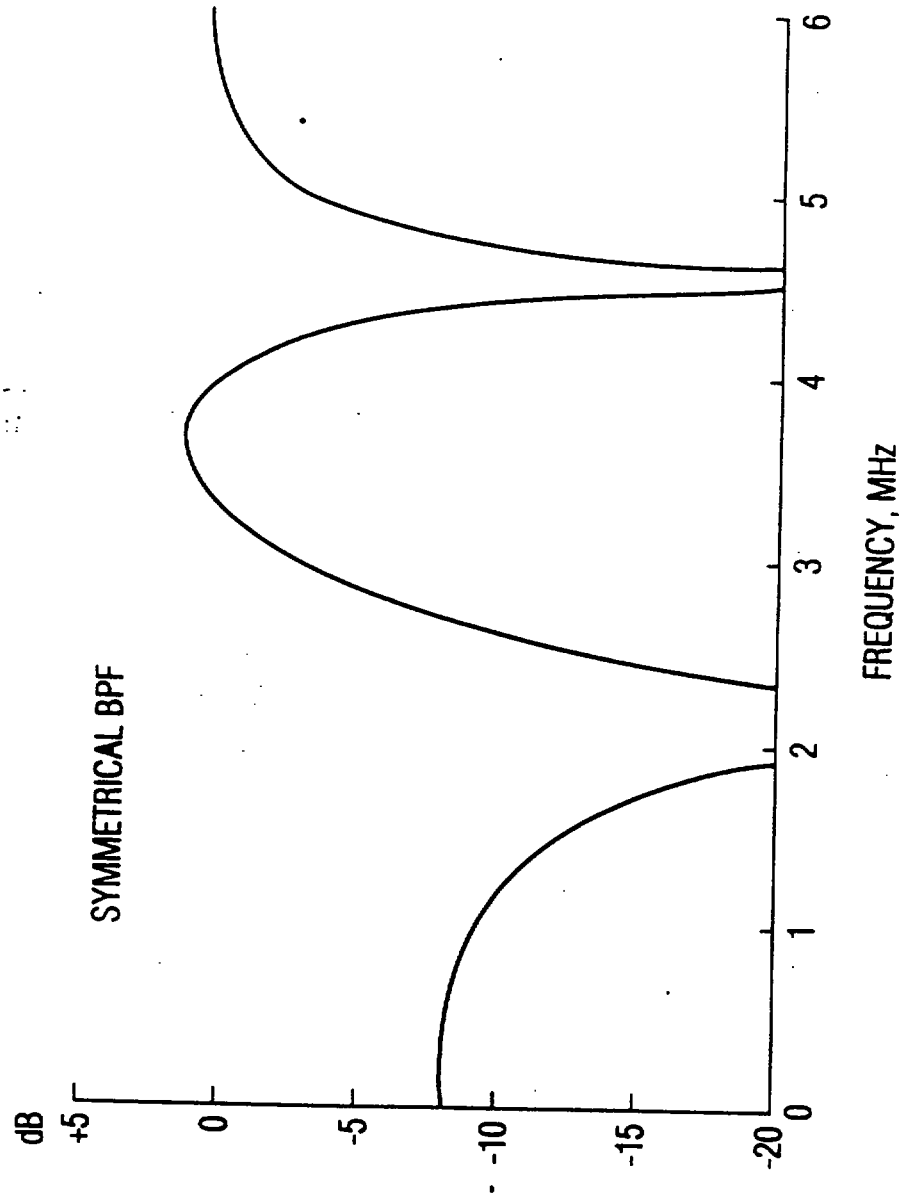


FIG. 3

This is the replacement sheet

Date: 09 JUL 1996

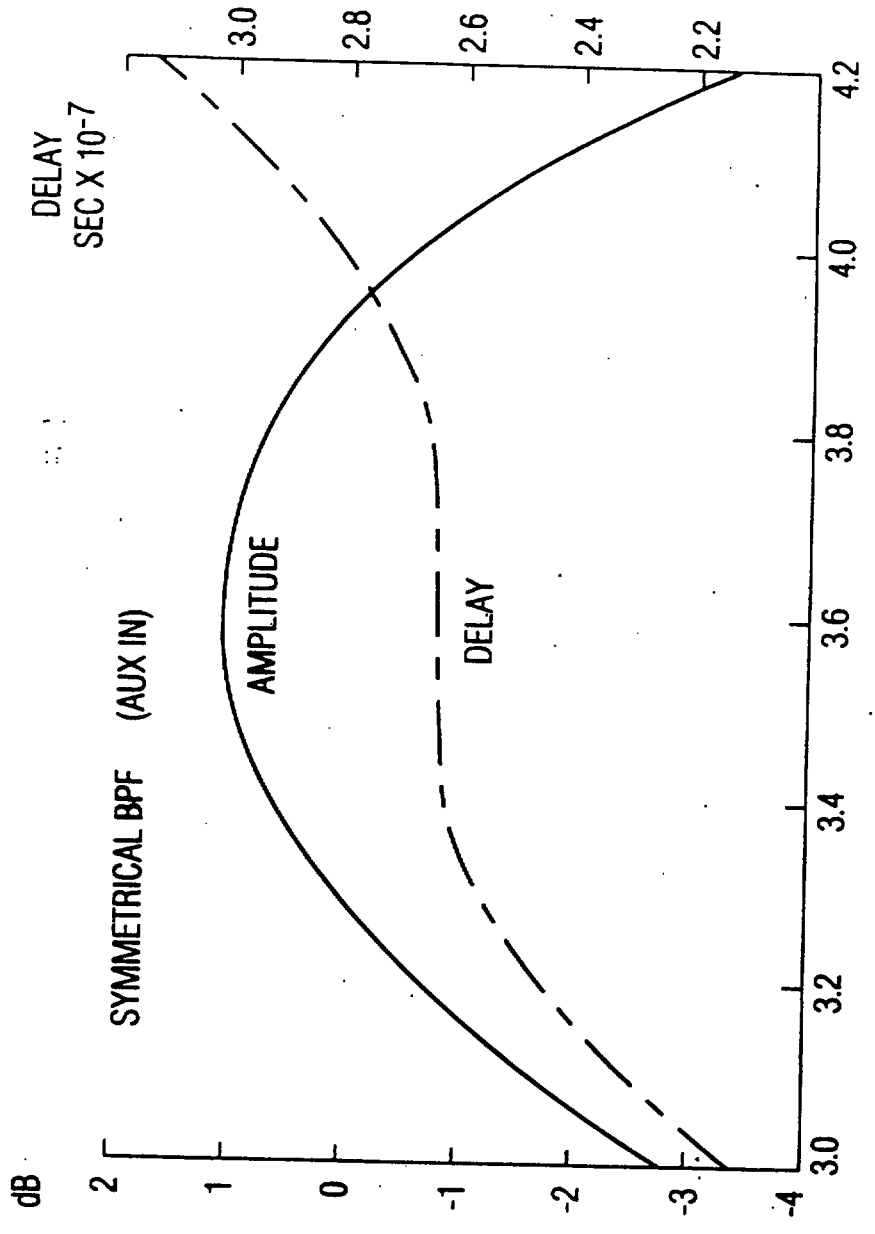


FIG. 4

This is the replacement sheet

Date: 09 JUL 1996

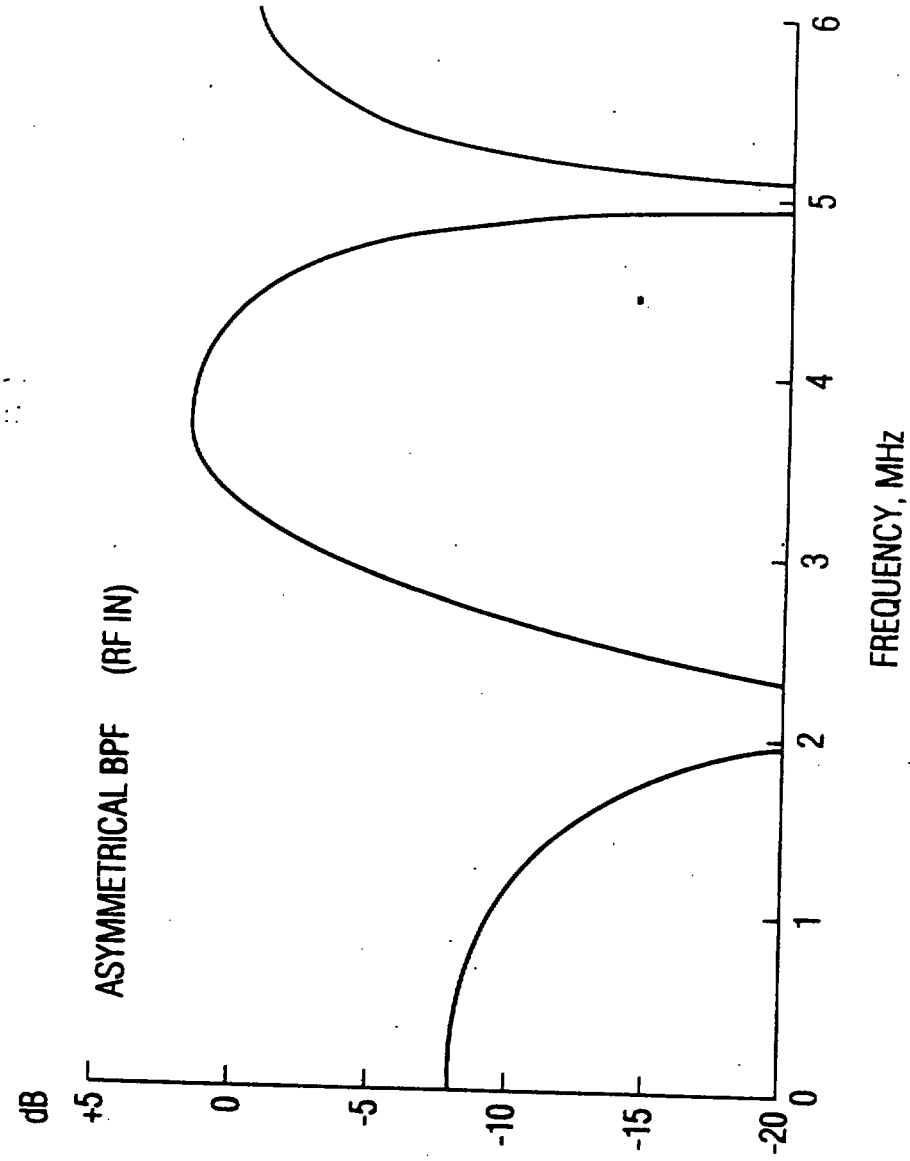


FIG. 5

This is the replacement sheet

Date: 09 JUL 1996

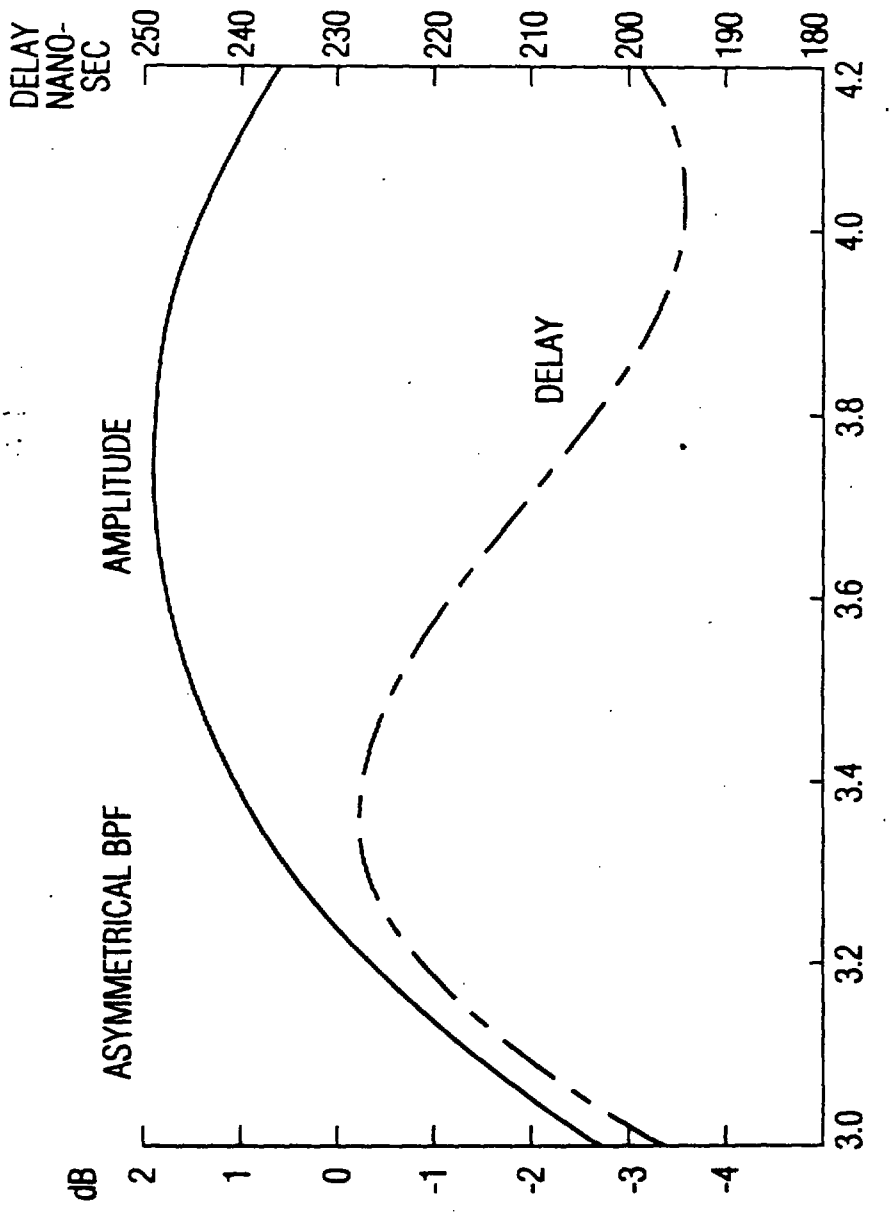


FIG. 6

This is the replacement sheet

09 JUL 1996

Date:

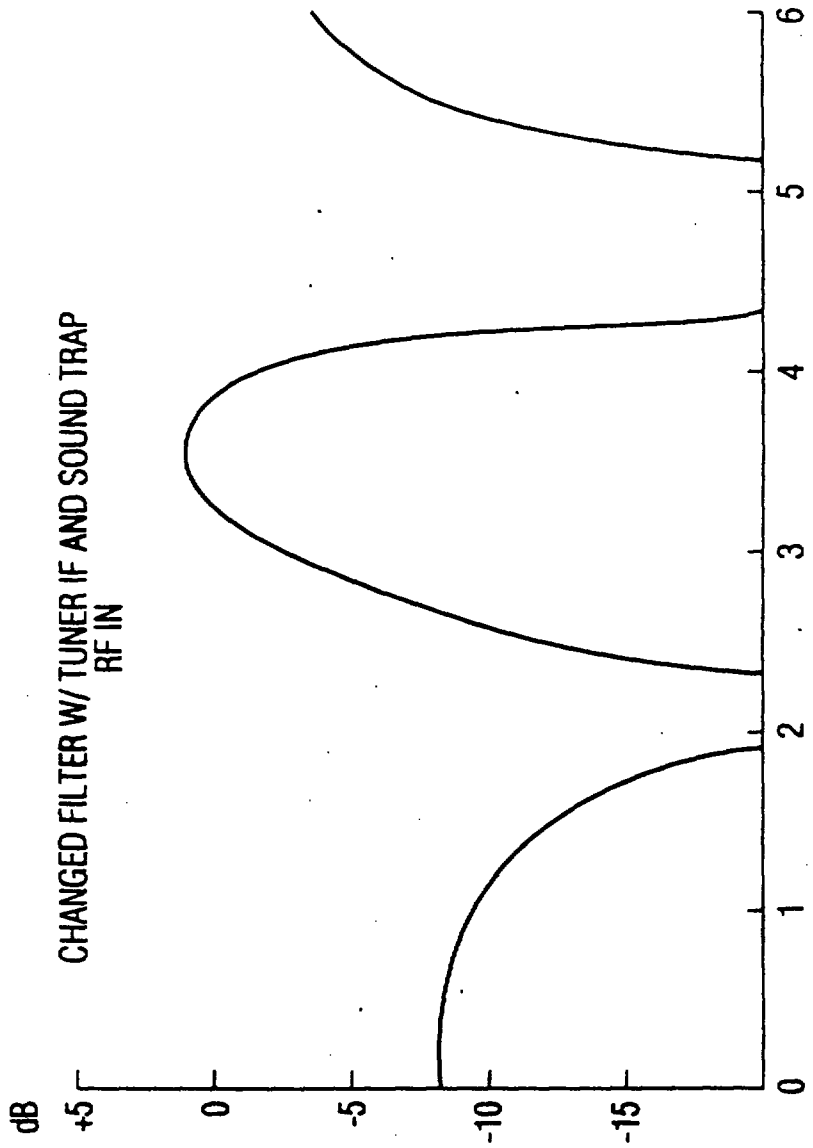


FIG. 7A

This is the replacement sheet

Date: 09 JUL 1996

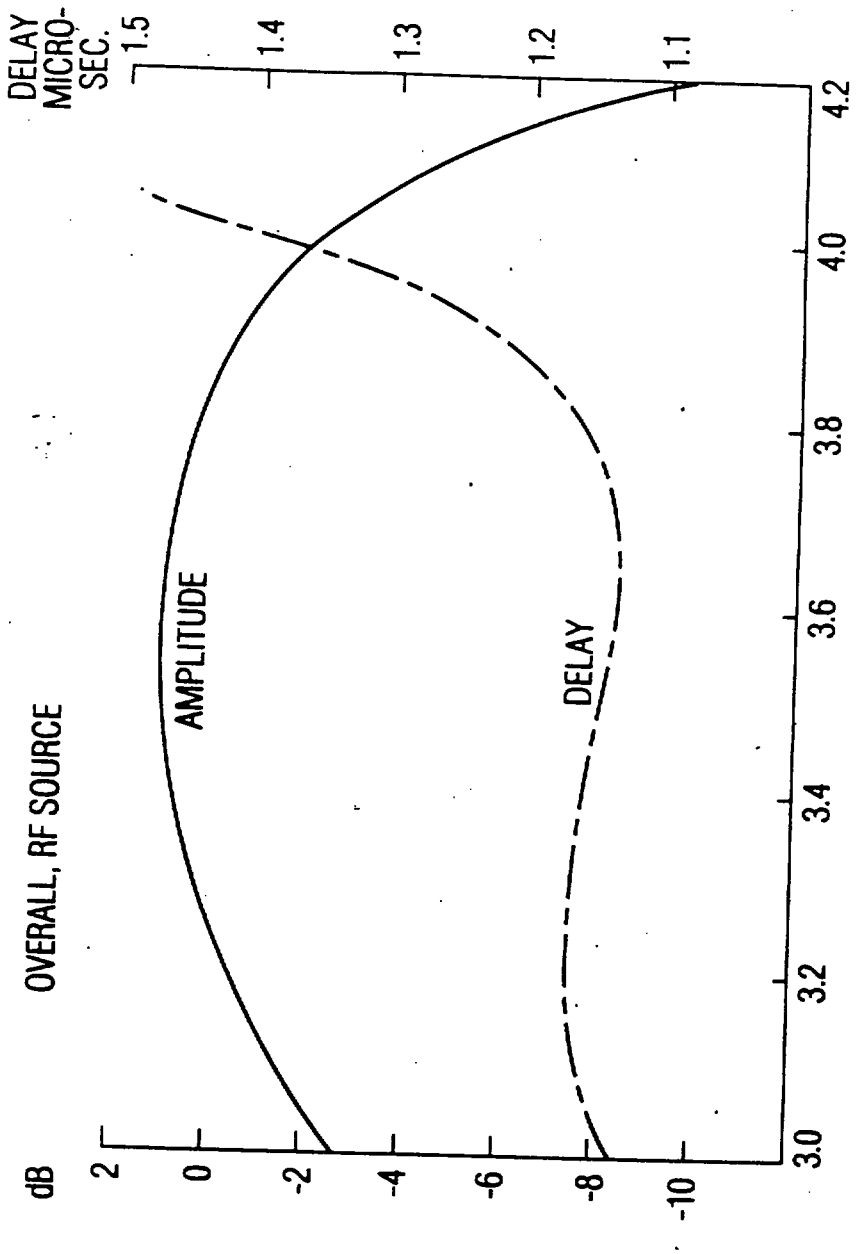


FIG. 7B

This is the replacement sheet

Date: 09 JUL 1996

SEARCH REPORT

Application No. 9602348-6

TEXT OF THE ABSTRACT

TELEVISION RECEIVER WITH SWITCHABLE CHROMINANCE SIGNAL FILTER

A fixed filter (31,32) determines a lower portion of the amplitude characteristic of a chrominance signal sideband correction filter (30). A variable filter (34) determines the upper portion of the amplitude characteristic. A control signal (CS) tunes the variable filter (34) for providing a symmetrical response for video signals having balanced color sidebands and tunes the variable filter (34) for providing an asymmetrical response for video signals having unbalanced sidebands.

Figure 1.

THIS SHEET HAS BEEN REPLACED

REPLACEMENT SHEET
28 MAY 2001

This Sheet Has Been Replaced

provided by an RF signals source and for selecting the "haystack" or symmetrical filter when the main picture being displayed is provided from an auxiliary video source.

The present invention simplifies the chrominance signal processing by a combination of fixed and tunable filters which, in addition to properly conditioning the chrominance signal based on the signal source, also provides improved group delay characteristics and an advantage in suppressing interference from a non-video source such as, for example, FM radio.

The present invention has application to chrominance signal correction apparatus of a type comprising a fixed filter means for determining a given portion of the amplitude characteristic of the sideband correction filter; a variable filter means for determining a further portion of the amplitude response of the sideband correction filter; and control means for controlling the variable filter means to provide a symmetrical or an asymmetrical overall amplitude response for the sideband correction filter.

In accordance with the invention, the apparatus is characterized by circuit means coupling the fixed filter means and the variable filter means in cascade between an input, to which a selected chrominance input signal is applied, and an output of the chrominance signal sideband correction filter; the fixed filter means comprising a high-pass filter; the variable filter means having a frequency control input and providing variable attenuation of an upper sideband of the selected chrominance input signal at one of two selectable frequencies; and the control means comprises frequency control input of the variable filter means for tuning the variable filter means to a first one of the two selectable frequencies for symmetrical chrominance input signals and for tuning the variable filter means to a second one of the two selectable frequencies for asymmetrical chrominance input signals.

REPLACEMENT SHEETS SG
☑ Description : paged 2a to paged -
☑ Claim(s) : paged 6 to paged 7
☐ Drawing(s) : paged ..... to paged .....
☑ Abstract : paged 8 to paged -

DATE OF RECEIPT 15/8/2001

This is the replacement sheet

Date: 15 AUG 2001

The foregoing and further features of the invention are illustrated in the accompanying drawing, wherein:

FIGURE 1 is a block diagram of a color television receiver embodying the invention;

FIGURE 2 is a response diagram of a high pass filter used in the receiver of FIGURE 1;

FIGURES 3-6 are response diagrams illustrating the amplitude and group delay characteristics of the color filter used in the receiver of FIGURE 1; and

FIGURE 7 illustrates the overall group delay response of the chrominance filter in combination with the IF response for the receiver of FIGURE 1.

The receiver 10 of FIGURE 1 comprises inputs 12 and 15 for receiving, respectively, RF signals and auxiliary baseband video signals. The RF signal is applied via a tuner 13 and an IF amplifier, detector and sound trap 14 to one input of a signal source selector switch 16 which receives the auxiliary baseband video input from input 15. Selected source signals are applied to a luminance/chrominance signal separator 18 which supplies a

This is the replacement sheet

Date: 15 AUG 2001

CLAIMS

1. A chrominance signal sideband correction filter, comprising:

a fixed filter means (31, 32) for determining a given portion of the amplitude characteristic of said sideband correction filter;

a variable filter means (34) for determining a further portion of the amplitude response of said sideband correction filter; and

control means (40) for controlling said variable filter means (34) to provide a symmetrical or an asymmetrical overall amplitude response for said sideband correction filter;

circuit means coupling said fixed filter means (31, 32) and said variable filter means (34) in cascade between an input (35) to which a selected chrominance input signal is applied and an output (36) of said chrominance signal sideband correction filter;

said fixed filter means (31, 32) comprising a high-pass filter;

said variable filter means (34) having a frequency control input and providing variable attenuation of an upper sideband of said selected chrominance input signal at one of two selectable frequencies; and

said control means comprises frequency control means (35, 37-40) coupled to said frequency control input of said variable filter means (34) for tuning said variable filter means to a first one of said two selectable frequencies for symmetrical chrominance input signals and for tuning said variable filter means to a second one of said two selectable frequencies for asymmetrical chrominance input signals.

2. A sideband correction filter as recited in Claim 1, further comprising:

a further filter (32) in said cascade connection for attenuating said selected chrominance signal at a frequency below the color subcarrier thereof.

3. A sideband correction filter as recited in Claim 2, wherein

said further filter (32) attenuates said selected chrominance signal at a frequency of about one-half of that of the subcarrier frequency of said selected chrominance signal.

4. A sideband correction filter as recited in Claim 1, wherein

said variable filter means (34) comprises a voltage tuned trap filter having a control input for receiving a control voltage for controlling the attenuation frequency of said trap filter; and

said frequency control means comprises means (37, 38, 39) for applying a first DC control voltage to said control input of said variable filter when said selected chrominance signal has asymmetrical sidebands and for applying a second DC control voltage to said control input of said variable filter means otherwise.

This is the replacement sheet

Date: 15 AUG 2001

TELEVISION RECEIVER WITH SWITCHABLE CHROMINANCE SIGNAL FILTER

Abstract

A fixed filter (31,32) determines a lower portion of the amplitude characteristic of a chrominance signal sideband correction filter (30). A variable filter (34) determines the upper portion of the amplitude characteristic. A control signal (CS) tunes the variable filter for providing a symmetrical response for video signals having balanced color sidebands and tunes the variable filter for providing an asymmetrical response for video signals having unbalanced sidebands.

FIGURE 1

This is the replacement sheet

Date: 15 AUG 2001