

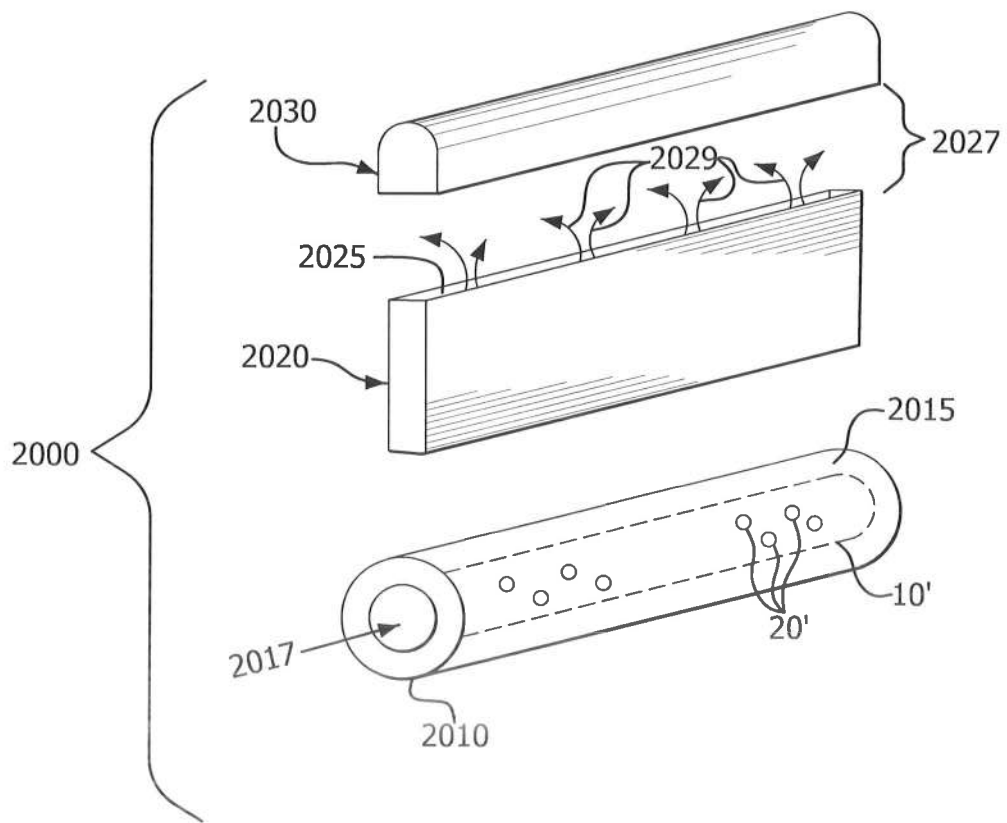
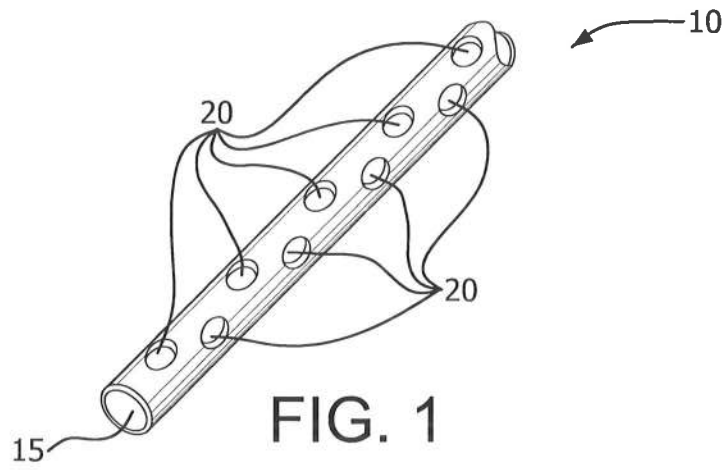


FIG. 2a

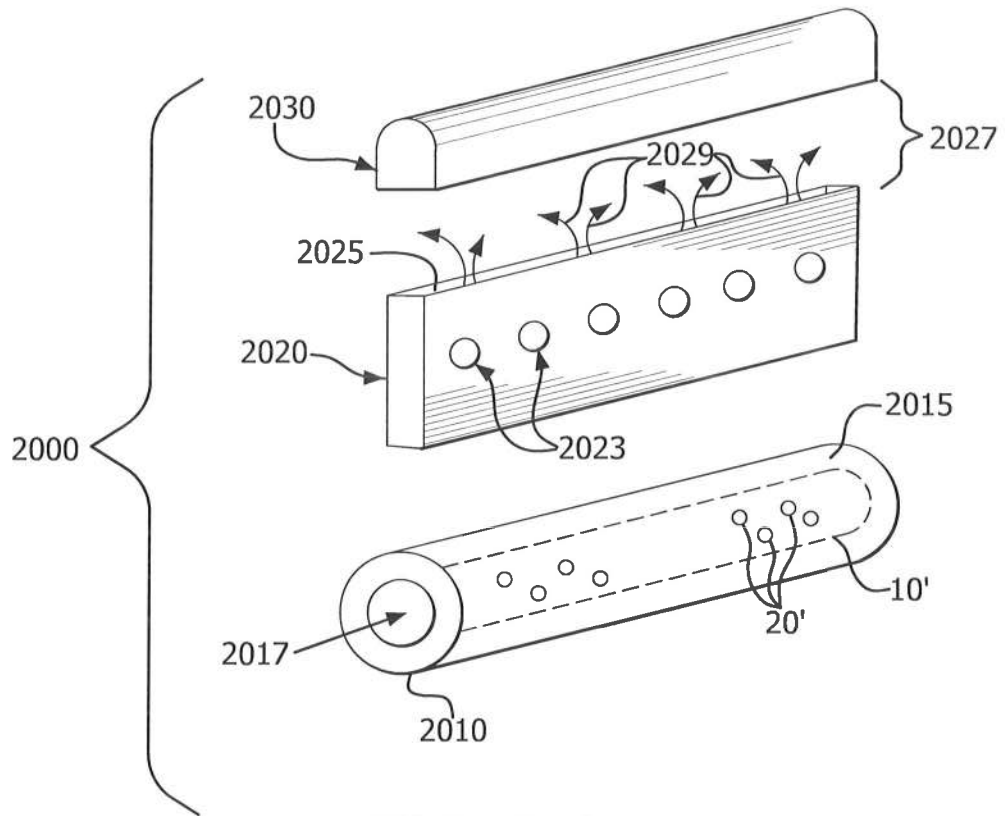


FIG. 2a'

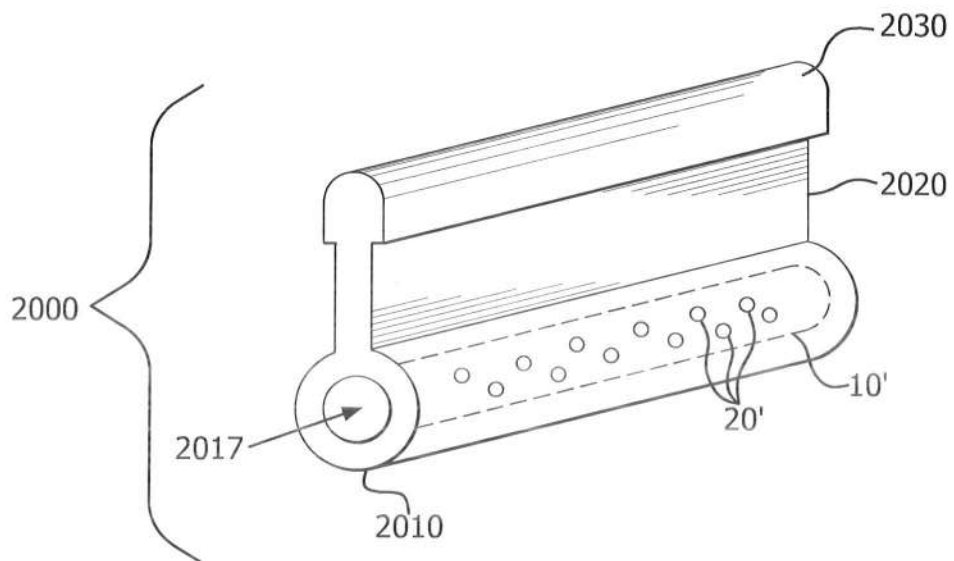


FIG. 2b

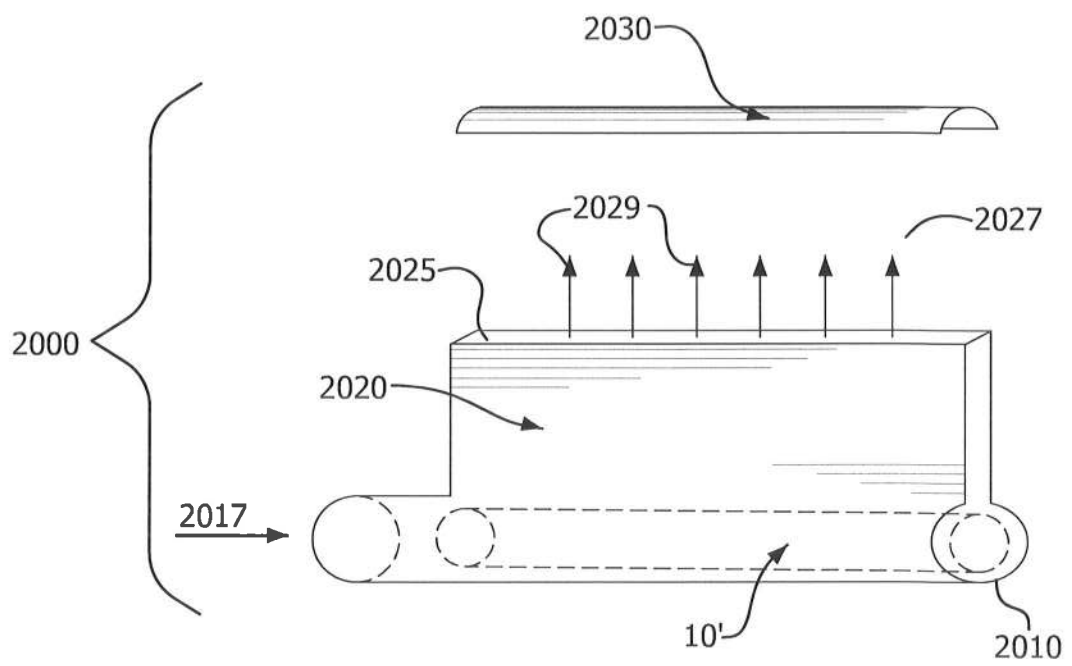


FIG. 2c

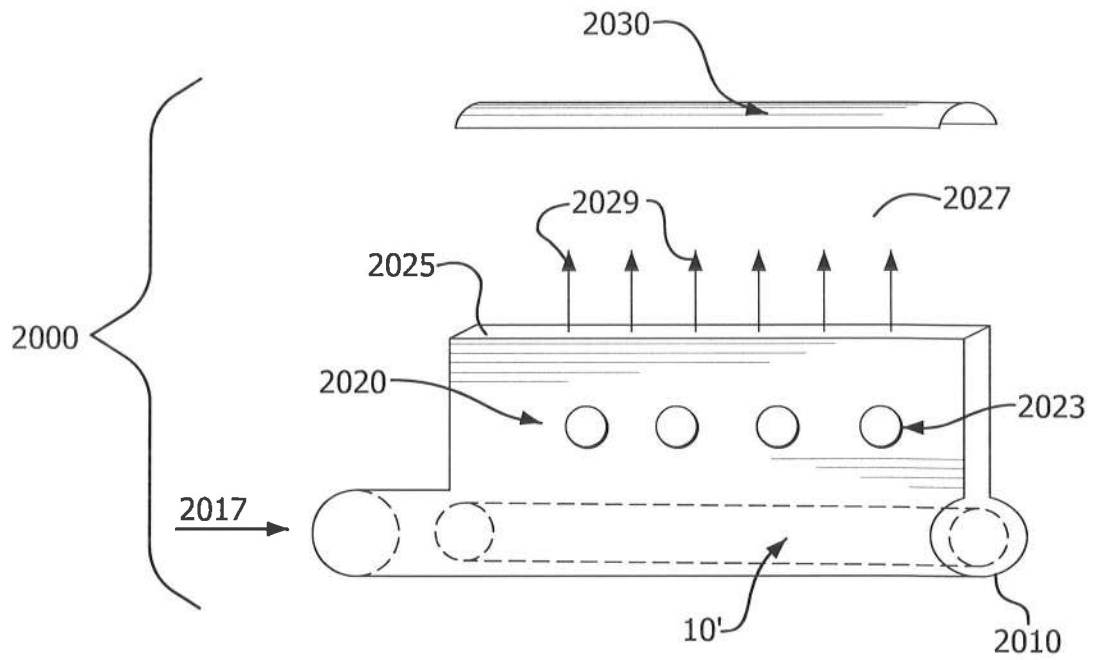


FIG. 2d

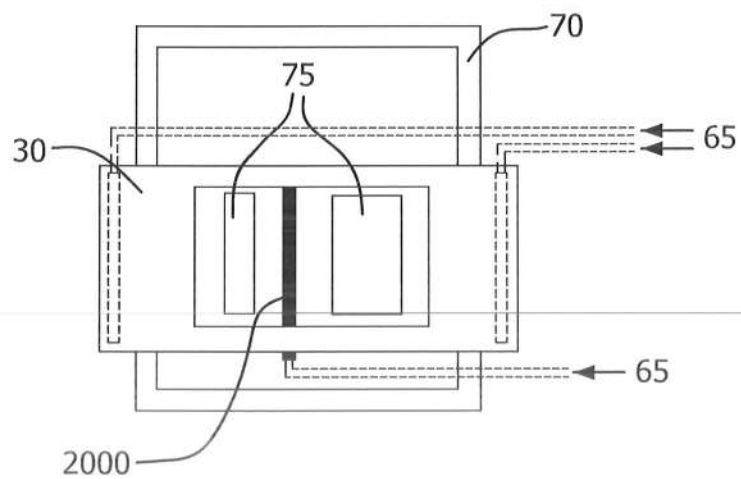


FIG. 3a

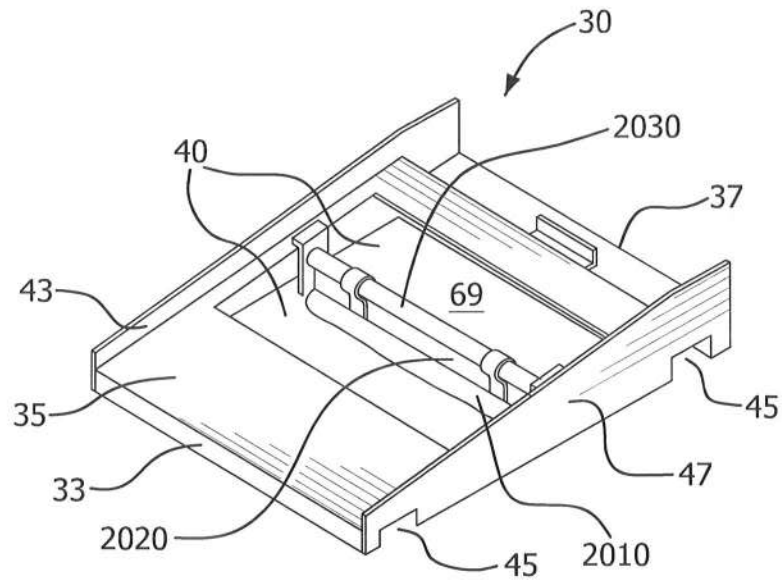


FIG. 3b

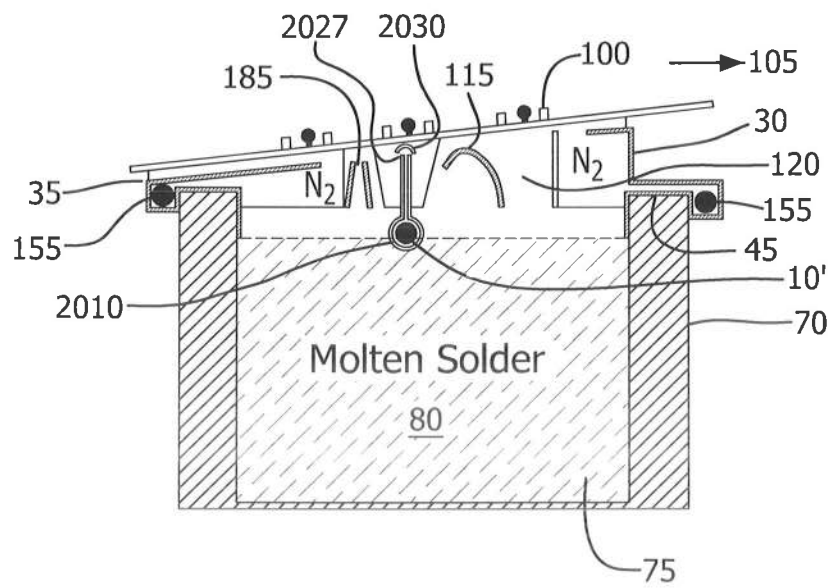


FIG. 3c

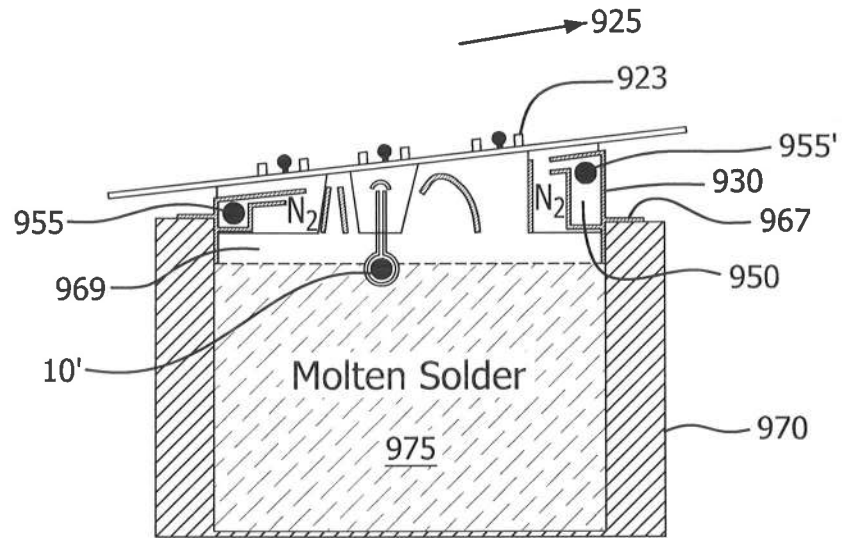


FIG. 4a

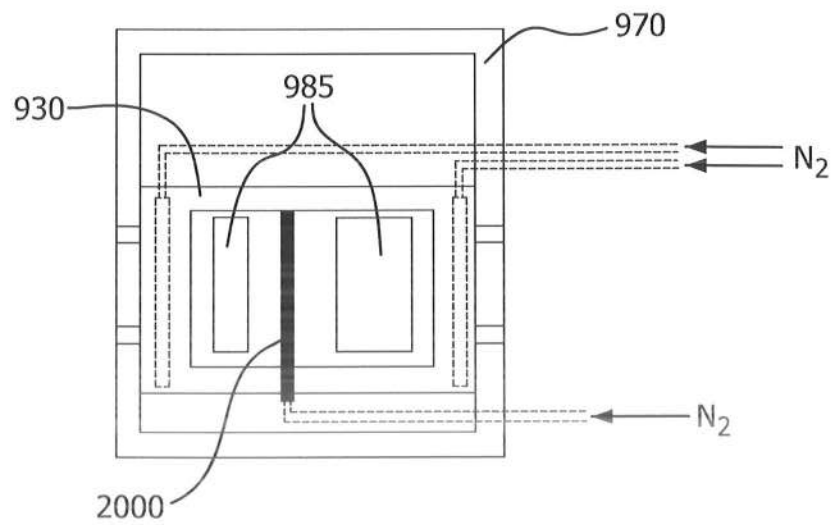


FIG. 4b

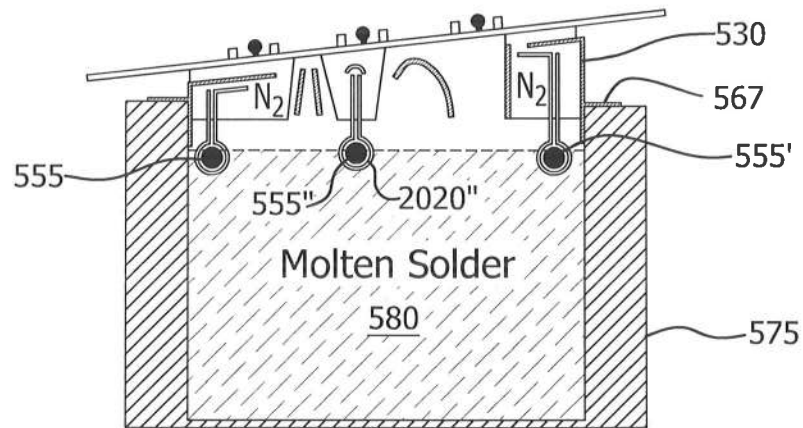


FIG. 5a

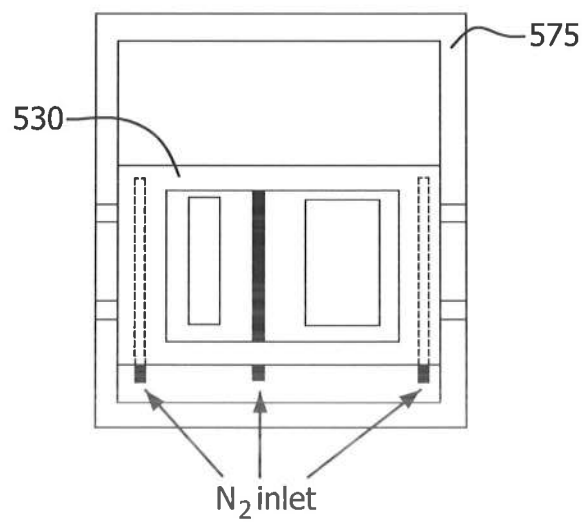


FIG. 5b

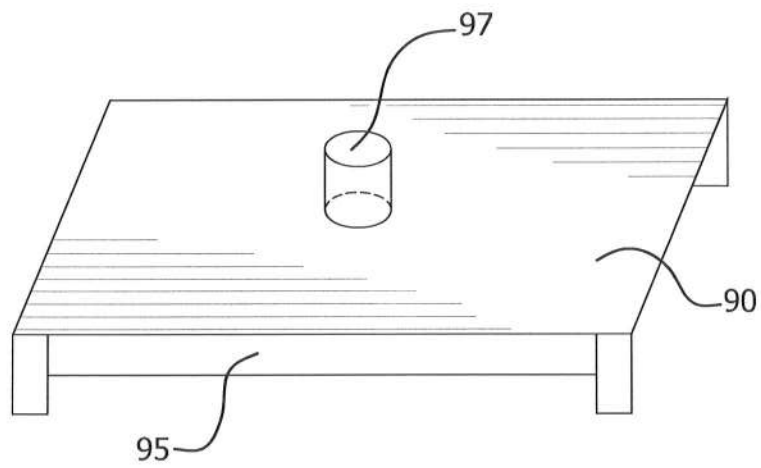


FIG. 6

The diagram shows a rectangular switch plate with two vertical switch slots. At the top are two circular screw holes. A horizontal dashed line passes through the middle of the plate, with five dots marking specific points. Labels with leader lines point to these dots: 'a' points to the first dot on the left, 'b' points to the second dot, 'c' points to the third dot (located in the gap between the two switch slots), 'd' points to the fourth dot, and 'e' points to the fifth dot on the right.

FIG. 8

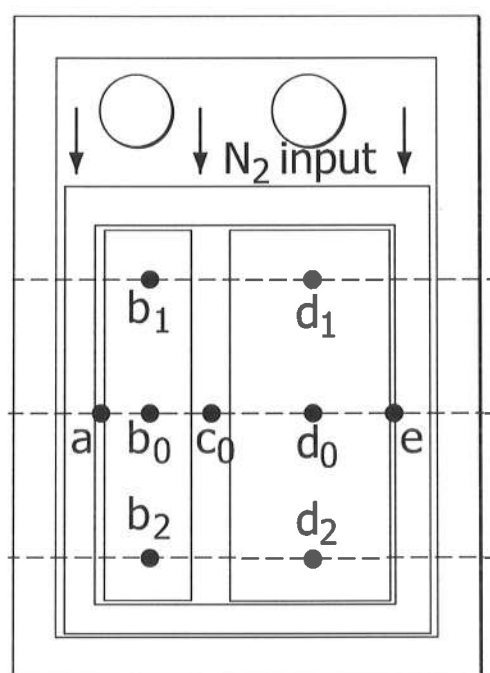


FIG. 9