

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
2 July 2009 (02.07.2009)

PCT

(10) International Publication Number
WO 2009/081155 A1

(51) International Patent Classification:
E03C 1/29 (2006.01) *E03C 1/288* (2006.01)

(74) Agents: NAISMITH, Robert, Stewart et al.; Marks & Clerk LLP, 19 Royal Exchange Square, Glasgow G1 3AE (GB).

(21) International Application Number:
PCT/GB2008/004248

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(22) International Filing Date:
22 December 2008 (22.12.2008)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0725126.7 22 December 2007 (22.12.2007) GB

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant (*for all designated States except US*):
MCALPINE & COMPANY LIMITED [GB/GB];
51-55 Kelvin Avenue, Hillington Industrial Estate, Glas-
gow G52 4LF (GB).


(72) Inventor; and

(75) Inventor/Applicant (*for US only*): **MCALPINE, James,**
Edward [GB/GB]; 51-55 Kelvin Avenue, Hillington In-
dustrial Estate, Glasgow G52 4LF (GB).

Published:

— with international search report

(54) Title: PLUMBING SEALING ARRANGEMENT

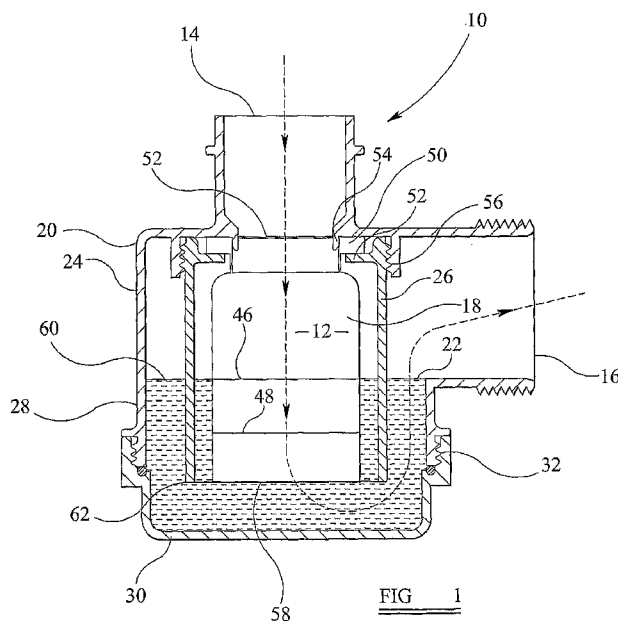

(57) Abstract: A plumbing sealing arrangement (10) comprises a passageway having an inlet (14) adapted to be connected to a waste outlet (16) and an outlet adapted to be connected to a soil stack, a one way valve (18) located between the passageway inlet and outlet, the one way valve adapted to permit the passage of fluid through the passageway in one direction only from the inlet to the outlet and a trap (20) arranged to permit a liquid seal to be formed between the passageway inlet and the passageway outlet. In normal use, at least a portion of the one way valve is immersed in the liquid seal and in a described embodiment, an outlet of the valve is immersed in the liquid seal.