

REPLACED SHEETS		SG
☒	Description : paged ...1... to paged ...17...	
☒	Claim(s) : paged ...18... to paged ...25...	
☒	Drawing(s) : paged ...1/4... to paged ...1/4...	
☒	Abstract : paged ...24... to paged ...27...	
DATE OF RECEIPT		

90791A-5
IPDS

RCA 85,648

1

A SWITCH-MODE POWER SUPPLY WITH BURST MODE STANDBY OPERATION

The invention relates to switch-mode power supplies.

- 5 In a typical switch mode power supply (SMPS) of a television receiver the AC mains supply voltage is coupled to a bridge rectifier. An unregulated direct current (DC) input supply voltage is produced. A pulse width modulator controls the duty cycle of a chopper transistor switch that
- 10 applies the unregulated supply voltage across a primary winding of a flyback transformer. A flyback voltage at a frequency that is determined by the modulator is developed at a secondary winding of the transformer and is rectified to produce DC output supply voltages such as a B+ voltage
- 15 that energizes a horizontal deflection circuit of the television receiver, and a voltage that energizes a remote control unit.

- During normal operation, the DC output supply voltages are regulated by the pulse width modulator in a
- 20 negative feedback manner. During standby operation, the SMPS is required to generate the DC output supply voltage that energizes the remote control unit. However, most other stages of the television receiver are inoperative and do not draw supply currents. Consequently, the average
- 25 value of the duty cycle of the chopper transistor may have to be substantially lower during standby than during normal operation.

- Because of, for example, storage time limitation in the chopper transistor, it may not be possible to reduce
- 30 the length of the conduction interval in a given cycle below a minimum level. Thus, in order to maintain the average value of the duty cycle low, it may be desirable to operate the chopper transistor in an intermittent or burst mode, during standby. During standby, a long dead time
- 35 interval occurs between consecutively occurring burst mode operation intervals. Only during the burst mode operation interval does switching operation occur in the chopper

This Sheet Has Been Replaced





transistor. The result is that each of the conduction intervals is of a sufficient length.

In accordance with an aspect of the invention, burst mode operation intervals are initiated and occur at a rate that is determined by a repetitive signal at the frequency of the AC mains supply voltage. For example, when the mains supply voltage is at 50Hz, with a period of 20 milliseconds, each burst mode operation interval, when switching cycles occur, may last 5 milliseconds, and the dead time interval when no switching cycles occur, may last during the remainder portion of 15 milliseconds. Such arrangement, that is triggered by a signal at the frequency of the mains supply voltage, simplifies the design of the SMPS.

The burst mode operation intervals that occur in standby operation are synchronized to the 50Hz signal. During each such interval, pulses of current are produced in transformers and inductances of the SMPS. The pulses of current occur in clusters that are repetitive at 50Hz. The pulses of current occur at a frequency that is equal to the switching frequency of the chopper transistor within each burst mode operation interval. Such current pulses might produce an objectionable sound during power-off or standby operation. The objectionable sound might be produced due to possible parasitic mechanical vibrations as a result of the pulse currents in, for example, the inductances and transformers of the SMPS.

- In accordance with another aspect of the invention, the change in the AC mains supply voltage during each period causes the length of the conduction interval in consecutively occurring switching cycle during the burst mode operation interval to increase progressively. Such operation that occurs during each burst mode operation interval may be referred to as soft start operation. The soft start operation causes, for example, gradual charging of capacitors in the SMPS. Consequently, the parasitic mechanical vibrations are substantially reduced. Also, the frequency of the switching cycles within each burst mode



operation interval is maintained above the audible range for further reducing the level of such audible noise during standby operation.

5 A switch mode power supply, embodying an aspect of the invention, for generating an output supply voltage during both a standby-mode of operation and during a run-mode of operation includes a source of AC mains input supply voltage. A control signal at a given frequency is generated. A switching arrangement energized by the input
10 supply voltage and responsive to the first control signal produces a switching current during both the standby-mode of operation and the run-mode operation. The output supply voltage is generated from the switching current. An arrangement coupled to the switching arrangement and
15 responsive to a standby-mode/run-mode control signal and to a signal at a frequency that is determined by a frequency of the AC mains input supply voltage controls the switching arrangement in a burst mode manner during the standby-mode of operation. During a burst interval, a plurality of
20 switching cycles are performed and during an alternating dead time interval no switching cycles are performed. The two intervals alternate at a frequency that is determined by the frequency of the AC mains input supply voltage.

In the Drawing:

25 FIGURE 1 illustrates a power supply embodying an aspect of the invention;

FIGURES 2a-2d illustrate waveforms useful for explaining the run mode operation of the circuit of FIGURE 1 when loading varies;

30 FIGURES 3a-3g illustrate additional waveforms useful for explaining the run mode operation of the circuit of FIGURE 1 under a constant loading condition;

FIGURE 4 illustrates the way the isolation transformers that are used in the circuit of FIGURE 1 are
35 constructed;

FIGURES 5a-5d illustrate waveforms useful for explaining a standby operation of the power supply of FIGURE 1;



FIGURES 6a-6d illustrate transient waveforms useful for explaining the operation of the circuit of FIGURE 1 during start-up;

FIGURE 7 illustrates a modification of the circuit of FIGURE 1 that increases output power;

FIGURE 8 provides performance data, in a table form, of the circuit of FIGURE 1 and also, for comparison purposes, of a conventional power supply; and

FIGURE 9 provides additional performance data, in a table form, of the circuit of FIGURE 1 and also, for comparison purposes, of a conventional power supply.

FIGURE 1 illustrates a switch-mode power supply (SMPS) 200, embodying an aspect of the invention. SMPS 200 produces a B+ output supply voltage of +145 volts that is used for energizing, for example, a deflection circuit of a television receiver, not shown, and an output supply voltage V+ of +18 volts that are both regulated. A mains supply voltage V_{AC} is rectified in a bridge rectifier 100 to produce an unregulated voltage V_{UR} . A primary winding W_p of a flyback isolation transformer T1 is coupled between a terminal 100a, where voltage V_{UR} is developed, and a drain electrode of a power chopper metal oxide semiconductor (MOS) field effect transistor Q1.

The source electrode of MOS transistor Q1 of FIGURE 1 is coupled to a common conductor, referred to herein as "hot" ground. The gate electrode of transistor Q1 is coupled via a coupling resistor 102 to a terminal 104 where a pulse-width modulated signal V_5 is produced. Signal V_5 produces a switching operation in transistor Q1. A secondary winding W_3 of an isolation transformer T2, across which signal V_5 is developed, is coupled between terminal 104 and the hot ground conductor. A pair of back-to-back zener diodes Z18A and Z18B provide gate protection in transistor Q1. Winding W_3 , winding W_p , transistor Q1 and signal V_5 are at potentials that are referenced to the hot ground conductor.



Transformers T1 and T2 are constructed in a manner shown in FIGURE 4. Similar symbols and numerals in FIGURES 1 and 4 indicate similar items or functions.

FIGURES 3a-3g illustrate waveforms useful for explaining the normal steady state operation or run mode of the SMPS of FIGURE 1 under a constant loading condition. Similar symbols and numerals in FIGURES 1 and 3a-3g indicate similar items or functions.

During, for example, interval $t-t_1$ of FIGURE 3b of a corresponding given cycle or period, the voltage of pulse signal V_5 is positive relative to the hot ground conductor for maintaining transistor Q1 of FIGURE 1 conductive during interval t_0-t_1 of FIGURE 3b. Consequently, a current i_1 in winding W_p of FIGURE 1 is upramping, as shown in FIGURE 3d, during interval t_0-t_1 . Therefore, a quantity of inductive energy is stored in transformer T1 of FIGURE 1. At time t_1 of FIGURE 3d, transistor Q1 of FIGURE 1 becomes nonconductive.

After transistor Q1 becomes nonconductive, the inductive energy stored in winding W_p is transferred, by flyback transformer action, to a secondary winding W_s of transformer T1. Flyback pulses developed at terminals 108 and 109 of winding W_s are rectified by diodes 106 and 107, respectively, and filtered in capacitors 121 and 122, respectively, for producing DC voltages B+ and V+, respectively, that are all referenced to a second common conductor, referred to herein as "cold" ground. The cold ground is conductively isolated from the hot ground conductor, with respect to an electrical shock hazard, by transformers T1 and T2. Transistor Q1, transformer T1 and diodes 106 and 107 form an output stage of the SMPS.

A pulse-width modulator of SMPS 200 includes a blocking oscillator 110, embodying an aspect of the invention, that produces switching signal V_5 for controlling the switching operation of transistor Q1. Oscillator 110 includes a switching transistor Q2 having a base electrode that is also controlled or switched by signal V_5 . Winding W_3 of transformer T2 provides positive



feedback in oscillator 110 by developing signal V_5 .

Transformer T2 has a primary winding W_1 that is coupled between voltage V_{UR} and the collector of transistor Q2 such that winding W_1 is referenced to the hot ground conductor.

5 A secondary winding W_2 of transformer T2, that is referenced to the cold ground conductor, is conductively coupled to a diode D3 of a control circuit 120, embodying another aspect of the invention, that is also referenced to the cold ground conductor.

10 The cathode of diode D3 is coupled to the cold ground conductor via a capacitor C4. As explained later on, a DC control voltage V_4 developed across capacitor C4 varies the nonconduction time or duty cycle of transistor Q2 during each period.

15 A capacitor C2 is coupled between the base electrode of transistor Q2 and a terminal 104a. A resistor R2 is coupled between terminal 104a and terminal 104 where signal V_5 is developed. During interval t_0 - t_1 of FIGURE 3b, a current i_5 of FIGURE 3c is produced in resistor R2 of FIGURE 1 that is coupled between terminals 104 and 104a. Current i_5 of FIGURE 3c, that is produced by signal V_5 of FIGURE 3b, charges capacitor C2 of FIGURE 1 in a manner that turns on transistor Q2, during interval t_0 - t_1 of FIGURE 3d.

25 During normal operation, when transistor Q2 of FIGURE 1 is conductive, a current i_2 of FIGURE 3d in winding W_1 of FIGURE 1 increases linearly, until an emitter voltage of transistor Q2, that is developed across an emitter resistor R4, is sufficiently high to initiate a rapid turn-off operation in transistor Q2. Feedback resistor R4 is coupled between the emitter of transistor Q2 and the hot ground conductor. Resistor R4 causes a gradual decrease of current i_5 of FIGURE 3c when transistor Q2 of FIGURE 1 is conductive until transistor Q2 ceases to
35 conduct at time t_1 of FIGURE 3c. Resistor R4 of FIGURE 1 also serves to optimize the switching condition and to provide current protection in transistor Q2. The result is that the voltage across winding W_1 reverses polarity. The



turn-off operation is rapid because of the positive feedback caused by winding W_3 in developing signal V_5 .

As indicated before, winding W_3 provides pulse drive signal V_5 that also controls transistor Q1. The

5 conduction interval in each cycle of transistors Q1 and Q2 remains substantially constant or unaffected by loading. Therefore, advantageously, the stored energy in transformer T1, when transistor Q1 becomes nonconductive, is substantially constant for a given level of voltage V_{UR} .

10 However, the conduction interval may vary when a variation in voltage V_{UR} occurs.

When transistor Q2 ceases to conduct, a downramping current i_4 of FIGURE 3e is produced in winding W_2 of transformer T2 of FIGURE 1. Current i_4 causes diode

15 D3 of FIGURE 1 to be conductive and charges capacitor C4, during interval t_1-t_4 of FIGURE 3e. For a given level of voltage V_{UR} of FIGURE 1, and for a given duty cycle of transistor Q2, the charge added to capacitor C4 is the same in each cycle. During interval t_1-t_4 , control voltage V_4

20 of FIGURE 1, except for the forward voltage drop in diode D3, is substantially developed across winding W_2 .

Voltage V_4 determines the length of interval t_1-t_4 of FIGURE 3e that is required to deplete the magnetic energy stored in transformer T2 of FIGURE 1. When, at time

25 t_4 of FIGURE 3e, current i_4 becomes zero, the polarity of signal V_5 of FIGURE 3b changes as a result of resonance oscillations in the windings of transformer T2. Therefore, positive current i_5 of FIGURE 3c is generated. As explained before, when current i_5 is positive, it causes

30 transistors Q1 and Q2 to be conductive.

During the aforementioned nonconduction interval t_1-t_4 of FIGURE 3b of transistors Q1 and Q2 of FIGURE 1, signal V_5 is negative, as shown during interval t_1-t_4 of FIGURE 3b. Consequently, a current in the opposite

35 polarity, as shown in FIGURES 3c, flows through capacitor C2 of FIGURE 1, during interval t_1-t_2 of FIGURE 3c, and through diode D1 of FIGURE 1 during interval t_2-t_4 of FIGURE 3c. The resulting charge in capacitor C2 of FIGURE



1 produces a voltage in capacitor C2 of such a polarity that tends to rapidly turn on transistor Q2, when, at time t_4 of FIGURES 3b, signal V_5 reverses polarity.

Control circuit 120 of FIGURE 1, that is
5 referenced to the cold ground conductor, controls the duty cycle of oscillator 110 by varying control voltage V_4 across capacitor C4. A transistor Q4 of circuit 120 is coupled in a common base amplifier configuration. The base voltage of transistor Q4 is obtained via a temperature
10 compensating forward biased diode D5 from a +12V voltage regulator VR1. Regulator VR1 is energized by voltage V_+ .

A fixed resistor R51 is coupled between the emitter of transistor Q4 and voltage B+. As a result of the common base operation, a current i_g in resistor R51 is
15 proportional to voltage B+. An adjustable resistor R5 that is used for adjusting the level of voltage B+ is coupled between the cold ground conductor and a junction terminal between the emitter of transistor Q4 and resistor R51. Resistor R51 is used to determine the level of the current
20 in transistor Q4. Thus, an adjustable preset portion of current i_g flows to the cold ground conductor through resistor R5, and an error component of current i_g flows through the emitter of transistor Q4.

The collector current of transistor Q4 is coupled
25 to the base of a transistor Q3 for controlling a collector current of transistor Q3. The collector of transistor Q3 forming a high output impedance is coupled to the junction between capacitor C4 and diode D3. When transistor Q2 becomes nonconductive the stored energy in transformer T2
30 causes current i_4 to flow via diode D3 into capacitor C4, as indicated before. Regulation of the power supply is achieved by controlling control voltage V_4 . Voltage V_4 is controlled by controlling the loading across winding W_2 of transformer T2 by means of transistor Q3.

35 The collector current of transistor Q3, that forms a current source having a high output impedance, is coupled to capacitor C4 that operates as a flywheel. In steady state, the amount of charge that is added to capacitor C4



during interval t_1-t_4 of FIGURE 3e is equal to the amount of charge that is removed by transistor Q3 from capacitor C4 in a given period t_0-t_4 .

FIGURES 2a-2d illustrate waveforms useful for explaining the regulation operation of the SMPS of FIGURE 1 under different loading conditions. Similar symbols and numerals in FIGURES 1, 2a-2d and 3a-3g indicate similar items or functions.

After, for example, time t_A of FIGURES 2a-2d, the power supply current loading across capacitor 121 of FIGURE 1 decreases and voltage B+ tends to increase. As a result of the increase in voltage B+, transistor Q3 conducts a higher level of collector current. Therefore, voltage V_4 of FIGURE 2c across capacitor C4 of FIGURE 1 becomes smaller. Therefore, a longer time is required in each period for removing the stored inductive energy from transformer T2 of blocking oscillator 110, after transistor Q2 becomes nonconductive. It follows that the length of the interval, t_A-t_B , of FIGURE 2a, in a given cycle, when transistor Q2 of oscillator 110 of FIGURE 1 is nonconductive, increases under reduced loading condition. The result is that the duty cycle, that is the ratio between the "on" time to the "off" time of transistor Q1, decreases, as required for proper regulation.

In steady state, voltage V_4 is stabilized at a level that causes an equilibrium between the charging and discharging currents of capacitor C4. The increase in voltage B+ is capable of causing, advantageously, a proportionally greater change in voltage V_4 , as a result of amplification and current integration of the collector current of transistor Q3 in capacitor C4. In a transient condition, as long as voltage B+ is, for example, greater than +145 volts, voltage V_4 will decrease.

The result is that voltage V_4 of FIGURE 1 tends to change in a manner that tends to nullify the aforementioned tendency of voltage B+ to increase under reduced loading. Thus, regulation is obtained in a negative feedback manner. In the extreme case, a short circuit across winding W_2



could inhibit oscillation in oscillator 110 thus providing, advantageously, an inherent fail safe feature, as described later on.

Conversely, a tendency of voltage B+ to decrease
5 will increase the duty cycle of transistors Q1 and Q2 in a manner that provides regulation. Thus, the nonconduction interval of transistor Q1 varies with current loading at a terminal 99 where voltage B+ is developed.

Processing voltage B+ for producing control
10 voltage V₄ is accomplished, advantageously, in a DC coupled signal path for improving error sensing. Also, a change in voltage B+ is capable of causing a proportionally greater change in voltage V₄, thus improving error sensitivity.

Only after the error in voltage B+ is amplified, the
15 amplified error contained in DC coupled voltage V₄ is transformer or AC coupled to effectuate pulse-width modulation. The combination of such features improves the regulation of voltage B+.

Another way by which an arrangement similar to
20 control circuit 120 is used for regulation purposes is shown and explained in a copending U.S. Patent Application 424,353 entitled, A SYNCHRONIZED SWITCH-MODE POWER SUPPLY, (RCA 85439 GB Application No.) filed GB concurrently. voltage that is produced similarly to voltage V₄ of FIGURE
25 1 is transformer coupled to a sawtooth generator. The transformer coupled voltage varies a sawtooth signal that is used for producing a pulse-width modulated control signal.

A zener diode D4 is coupled in series with a
30 resistor RD4, between the base and collector electrodes of transistor Q3. Zener diode D4, advantageously, limits voltage V₄ to about 39 volts, which limits the frequency of oscillator 110, or the minimum cut-off time of transistors Q2 and Q1. In this way, the maximum power transferred to
35 the load is, advantageously, limited for providing over-current protection.

For safe operation, it may be desirable to have secondary current i₃ in winding W₃ decay to zero before



transistor Q1 is turned on again. This means that the decay time of current i_3 should be, preferably, shorter than that of current i_4 of blocking oscillator 110. This condition can be met by a proper choice of the primary
5 inductance of transformer T2 and of the value of zener diode D4.

Standby operation is initiated by operating SMPS 200 in a low power operation mode. The low power operation mode occurs when the power demand from the SMPS drops below
10 20-30 watts. For example, within horizontal deflection circuit 222 a horizontal oscillator, not shown, that is controlled by a remote control unit 333 ceases operating during standby. Therefore, a horizontal deflection output stage in deflection circuit 222, that is energized by
15 voltage B+, ceases operation as well. Consequently, the loading at terminal 99, where voltage B+ is produced, is reduced. It follows that voltage B+ and the error current in transistor Q4 tend to increase. Therefore, transistor Q3 saturates, causing a near short circuit across winding
20 W₂ of transformer T2, that causes voltage V₄ to be approximately zero throughout the standby mode of operation. Consequently, unlike in the run-mode of operation, a positive pulse of signal V₅ cannot be generated by resonance oscillations in transformer T2. It
25 follows that the regenerative feedback loop is prevented from initiating the turn on transistor Q2. Consequently, continuous oscillation cannot be sustained.

In accordance with an aspect of the invention, transistor Q2 is periodically triggered into switching in a
30 burst mode operation by an upramping portion of a half wave rectified voltage of a signal V₇. Signal V₇ occurs at the mains frequency, such as 50Hz. Signal V₇ is derived from bridge rectifier 100 and is applied to the base of transistor Q2 via a series arrangement of a resistor R1 and
35 a capacitor C1. The series arrangement operates as a differentiator that produces a current i_7 .

FIGURES 5a-5d illustrate waveforms during standby operation, indicating that burst mode switching operation



of oscillator 110 occurs during an interval t_{10} - t_{12} followed by a dead time interval t_{12} - t_{13} , when no trigger pulses of signal V_5 are present in the blocking oscillator.

Similar symbols and numerals in FIGURES 1 and 5a-5d

5 indicate similar items or functions.

A parallel arrangement of a capacitor C3 of FIGURE 1 and a resistor R3 is coupled in series with a diode D2 to form an arrangement that is coupled between the hot ground conductor and junction terminal 104a, between capacitor C2
10 and resistor R2. A diode D1 is coupled in parallel with capacitor C2.

During normal run mode operation, capacitor C3 remains charged to a constant voltage V_6 by the positive voltage pulses of signal V_5 that is developed in winding W_3
15 each time transistor Q2 is conductive. Therefore, capacitor C3 is decoupled from the positive feedback signal path and has no effect on circuit operation. During standby operation, capacitor C3 discharges during the long inactive periods or dead time, as shown by voltage V_6
20 between times t_{12} - t_{13} in FIGURE 5b.

Immediately after time t_{10} of FIGURE 5a of a given interval t_{10} - t_{13} , current i_7 of FIGURE 1, produced by voltage differentiation in capacitor C1, increases from zero to a maximum positive value. As a result, a base
25 current, produced in transistor Q2, causes transistor Q2 to be conductive. When transistor Q2 becomes conductive, a positive pulse of signal V_5 is produced in winding W_3 that maintains transistors Q1 and Q2 conductive.

Similarly to normal run mode operation that was
30 described before, transistor Q2 remains conductive until the magnitude of the base current of transistor Q2 is insufficient to maintain transistor Q2 in saturation, as collector current i_2 is upramping. Then, collector voltage V_2 increases and signal V_5 decreases. The result is that
35 by means of positive feedback transistor Q2 is turned-off.

The voltage across capacitor C2 produces negative current i_5 that discharges capacitor C2 via a diode D7 and that maintains transistor Q2 in cut-off. As long as a



magnitude of negative current i_5 is larger than that of positive current i_7 , the base current in transistor Q2 is zero and transistor Q2 remains nonconductive. When the magnitude of negative current i_5 of FIGURE 1 becomes
5 smaller than current i_7 , transistor Q2 is turned on again and positive current i_5 is generated.

During a substantial portion of a given conduction interval of transistor Q2, current i_5 flows entirely via capacitor C2 to form the base current of transistor Q2.
10 Because collector current i_2 is upramping, the emitter voltage of transistor Q2 increases in an upramping manner, causing the voltage at the anode of diode D2 to increase. When the voltage at the anode of diode D2 becomes sufficiently positive, diode D2 begins conducting.
15 Therefore, a substantial portion of current i_5 is diverted by capacitor C3 from the base of transistor Q2. The result is that the base current becomes insufficient to sustain the collector current of transistor Q2. Therefore, the positive feedback signal path causes transistor Q2 to turn-
20 off. Thus, the peak amplitude of current i_2 is determined by the level of voltage V_6 across capacitor C3.

During interval t_{10} - t_{12} of FIGURES 5a-5d, capacitor C3 of FIGURE 1 is coupled via diode D2 to the positive feedback signal path and charged by positive
25 current i_5 . Therefore, voltage V_6 of FIGURE 5b becomes progressively larger.

In accordance with a further aspect of the invention, voltage V_6 that becomes progressively larger causes the conduction interval during each cycle that
30 occurs in interval t_{10} - t_{12} of FIGURES 5a-5d to become progressively longer. Consequently, the peak amplitudes and the pulse widths of currents i_1 and i_2 of FIGURE 1 increase progressively.

During a corresponding nonconduction portion of
35 each cycle that occurs in interval t_{10} - t_{12} of FIGURES 5a-5d, capacitor C2 of FIGURE 1 is discharged via a diode D7 and resistor R2. The length of the nonconduction interval of transistor Q2 in each cycle is determined by the time

required for discharging capacitor C2 to such a level that causes a magnitude of negative current i_5 to be smaller than that of positive current i_7 .

5 In accordance with an embodiment of an aspect of the invention, the nonconduction interval becomes progressively longer because capacitor C2 is charged to a progressively higher voltage and also because the magnitude of current i_7 becomes progressively smaller. Therefore, positive base current will begin flowing in the base of transistor Q2
10 after progressively longer nonconduction intervals. The result is that the switching frequency during the burst mode interval will vary or decrease progressively.

At time t_{12} of FIGURE 5a current i_7 is zero. Therefore, burst mode operation that occurred during
15 interval t_{10} - t_{12} cannot continue and the long dead time interval t_{12} - t_{13} occurs in which no switching operation happens. At time t_{13} , positive current i_7 is generated again and a subsequent burst mode switching interval occurs in transistors Q1 and Q2.

20 During the burst mode interval t_{10} - t_{12} of FIGURE 5d, the length of the conduction interval in each cycle increases progressively, as explained before. Such operation may be referred to by the term soft start operation. Because of the soft start operation,
25 capacitors, for example, of SMPS 200 are charged or discharged in a gradual manner.

In accordance with an embodiment of another aspect of the invention, voltage V_6 of capacitor C3, by being lower than during run mode operation, maintains the switching
30 frequency of transistors Q1 and Q2 of FIGURE 1 above the audible range in SMPS 200 of FIGURE 1 throughout interval t_{10} - t_{12} of FIGURE 5a. As a result of the soft start operation during standby and of the high switching frequency during standby, noise produced by parasitic
35 mechanical vibrations in inductors and transformers of SMPS 200 of FIGURE 1 is, advantageously, substantially reduced.

The burst mode operation during interval t_{10} - t_{12} of FIGURE 5c produces voltage V_+ of FIGURE 1 at a



sufficient level to enable the operation of remote control unit 333 of FIGURE 1, during standby. Because of the burst mode operation, the energy consumed in SMPS 200 is maintained substantially lower, at about 6 watts, than during normal run mode operation.

To generate voltage V_+ at the required level for operating remote control unit 333, a corresponding average duty cycle of transistors Q1 and Q2, that is substantially lower than during run mode, is required. The length of the conduction interval in transistor Q1, for example, should be longer than the storage time of transistor Q1.

Accordingly, by operating in the burst mode, the conduction interval of transistor Q1 in each cycle can be maintained longer for obtaining the required lower average duty cycle than if continuous switching operation had occurred during standby. Such continuous switching operation in transistors Q1 and Q2 occurs during normal run mode operation without the occurrence of dead time intervals such as interval $t_{12}-t_{13}$ of FIGURE 5d.

The SMPS has also a soft start-up feature, as will now be explained with the aid of waveforms in FIGURES 6a-6d. Similar symbols and numerals in FIGURES 1, 5a-5d and 6a-6d indicate similar items or functions. The start-up mode is similar to the stand-by operation. When the power supply is first turned on, capacitors C3 and C4 are discharged and there is no forward bias on the base of transistor Q2. Oscillation is initiated by feeding a small portion of rectified AC supply signal V_7 to the base of transistor Q2. As illustrated by FIGURE 6d, the oscillator duty cycle is initially very short, or the interval in each cycle when transistor Q2 is nonconductive is long, because winding W2 of transformer T2 is heavily loaded by the discharged capacitor C4. The charge on capacitors C3 and C4, and voltage B_+ build up gradually over a period of about 15msec, as shown in FIGURE 6c. Normal operation begins following this slow build up.

In case of a short circuit at output terminal 99 of FIGURE 1, for example, SMPS 200 goes into an



intermittent mode operation, in a similar manner to the stand-by operation mode. For example, if capacitor C121 of FIGURE 1 is short circuited, the increase in current i_3 flowing through secondary winding W_s of transformer T1 causes a higher negative bias to develop across a resistor R6 that is coupled to the emitter of transistor Q3. Base current then flows into transistor Q3 through a diode D55, causing transistor Q3 to saturate and to clamp its collector voltage V4 to ground. The consequent loading of transformer T2 causes SMPS 200 to operate in the intermittent burst mode as described for stand-by mode operation.

The low voltage supply portion of SMPS 200 that produces voltage V+ may be arranged to operate as a forward converter in case of, for example, high audio power requirements. FIGURE 7 shows a modification of the circuit of FIGURE 1 for obtaining forward converter operation. A resistor Rx and a diode Dy of FIGURE 7 serve as an overload protection, as explained later on. Similar symbols and numerals in FIGURES 1 and 7 indicate similar items or functions. Should an overload occur when the modification shown in FIGURE 7 is employed to provide the high power audio supply, resistor Rx senses the excess current and provides negative bias to the emitter of transistor Q3.

FIGURE 8 shows, in a table form, the variation of voltage B+ caused by a corresponding variation in a beam current flowing in an ultor electrode, not shown, of a television receiver. Voltage B+ energizes the deflection circuit output stage, not shown, for producing the ultor voltage and the beam current. FIGURE 9 shows, in a table form, a variation of voltage B+ caused by a variation of mains supply voltage V_{AC} .

For comparison purposes, row No. 1 in each of the tables of FIGURES 8 and 9 provides data obtained when a conventional prior art SMPS using an integrated circuit TDA4601 control circuit and a power transformer Orega No. V4937700 is utilized. Row No. 2 in each of the tables of FIGURES 8 and 9 provides data obtained when the unmodified



SMPS of FIGURE 1 is utilized. As can be seen, the performance of SMPS 200 of FIGURE 1 is superior.

This Sheet Has Been Replaced



CLAIMS:

1. A switch mode power supply (200) of a television apparatus for generating an output supply voltage (B+) during both a standby-mode of operation and during a run-mode of operation, comprising:

means (100) for generating an input supply voltage (V_{UR}) from a source of AC mains voltage;

first means (110) for generating a periodic first control signal (V_5);

switching second means (Q1) energized by said input supply voltage (V_{UR}) and responsive to said first control signal (V_5) for producing a switching current (i_1) during both said standby-mode of operation and said run-mode of operation;

third means (T1) responsive to said switching current (i_1) for generating therefrom said output supply voltage (B+);

a source (333) of a standby-mode/run-mode first control signal; characterized by

fourth means (Q4,Q3,Q2) coupled to said switching means (Q1) and responsive to said standby-mode/run-mode first control signal and to a second control signal (i_7) at a frequency that is determined by a frequency of said AC mains voltage for controlling said switching means (Q1) in a burst mode manner during said standby mode of operation, such that during a burst interval a plurality of switching cycles are performed, and during an alternating dead time interval no switching cycles are performed, the two intervals alternating at a frequency that is determined by said frequency of said AC mains voltage.

2. A power supply in accordance with Claim 1 characterized in that said switching means (Q1) continuously produces, in said run mode of operation, pulses of said switching current (i_1).

3. A power supply according to Claim 1 characterized by, a load circuit (222) coupled to said





output supply voltage (B+) and responsive to said standby-mode/run-mode first control signal (from 333) to generate a load current (i_3) therein that varies in accordance with said standby-mode/run-mode first control signal and means coupled to said load circuit (222) and responsive to at least one of said output supply voltage (B+) and said load current (i_3) for generating a third control signal (V_4) that is coupled to said third means (T1) for enabling said burst mode operation when a level of said at least one of said output supply voltage (B+) and load current (i_3) is outside a normal operation range.

4. A power supply according to Claim 3 characterized in that said third control signal (V_4) varies a duty cycle of said switching means (Q1) during said run mode of operation in accordance with said output supply voltage (B+) in a negative feedback manner.

5. A power supply according to Claim 1 characterized in that during said run mode of operation the switching cycles of said switching means (Q1) occur continuously and uninterrupted by dead time intervals.

6. A power supply according to Claim 1 characterized by, modulating means (T2,C3) responsive to said output supply voltage (B+) and coupled to said switching means (Q1) for pulse width modulating said switching operation of said switching means (Q1) during said run mode of operation in a negative feedback manner, thereby regulating said output supply voltage (B+) during said run mode of operation.

7. A power supply according to Claim 6 characterized in that said switching operation is controlled in an open loop manner with respect to variation of said output supply voltage (B+) during said standby mode of operation.





8. A power supply according to Claim 6 characterized in that said modulating means (T2) is responsive to said AC mains voltage and coupled to said first control signal generating means (110) for pulse-width modulating said first control signal (V_5) in accordance with a waveform of said AC mains voltage to provide a soft start operation during each period of said AC mains voltage that occurs in said standby mode of operation.

9. A power supply according to Claim 8 characterized in that said switching means (Q1) operates in first and second switching states during a given switching cycle and wherein a length of an interval when said switching means (Q1) operates in one of said states increases progressively during corresponding periods of said AC mains voltage in accordance with a waveform of said AC mains voltage to provide said soft start operation during said standby mode of operation.

10. A power supply according to Claim 8 characterized in that said soft start operation causes a reduction in parasitic mechanical noise in said power supply during said standby mode of operation.

11. A power supply according to Claim 8 characterized by a load (222) coupled to said output supply voltage that generates a load current (i_3), wherein said fourth means (Q4, Q3, Q2) is responsive to a magnitude of said load current for controlling said switching operation in said burst mode manner when said magnitude of said load current is excessive.

12. A power supply according to Claim 11 characterized in that said modulating means (T2, C3) modulates said first control signal (V_5) in accordance with said waveform of said AC mains voltage to provide said soft start operation when said magnitude of said load current





(i_3) is excessive, for providing an over-current protection.

13. A switch mode power supply, comprising:
means for generating an input supply voltage (V_{UR})
from a source of AC mains voltage at a first frequency;
a transformer (T2) having a first winding (W_1)
coupled to said input supply voltage (V_{UR}); characterized
by

first switching means (Q2) coupled to said first
winding (W_1) for generating a switching current (i_2)
therein, said first switching means (Q2) and said
transformer (T2) forming a regenerative positive feedback
signal path that forms an oscillator (110) that oscillates
continuously during a run-mode of operation;

means (Q1) coupled to said input supply voltage
(V_{UR}) and responsive to an output signal (V_5) of said
oscillator (110) for generating from said input supply
voltage (V_{UR}) an output supply voltage (B+) by a switching
operation controlled in accordance with said output signal
(V_5) of said oscillator (110);

means (Q3,Q4) responsive to said output supply
voltage (B+) and coupled to said oscillator (110) for
modulating said oscillator output signal (V_5) during said
run mode of operation in a negative feedback manner,
thereby regulating said output supply voltage (B+);

means (Q4,Q3) responsive to a standby-mode/run-
mode control signal (from 333) and coupled to said
oscillator (110) for disabling the continuous oscillations
in said oscillator (110), in a standby mode of operation;
and

means (D2,C3) responsive to a signal (i_7) at a
frequency that is determined by said first frequency for
initiating a burst mode switching operation in said first
switching means (Q2) that is repetitive at a frequency
determined by said first frequency when the continuous
oscillations are disabled.





14. A power supply according to Claim 13 characterized in that said modulating means (Q3,Q4) comprises a capacitor (C4) for generating a control voltage (V₄) in said capacitor (C4) having a value that is indicative of a duty cycle of said first switching means (Q2) required for regulating said output supply voltage (B+), and wherein said modulating means further comprises second switching means (Q3) that is responsive to said switching current (i₂) for coupling said capacitor (C4) to a second winding (W₂) to apply said control voltage (V₄) in said capacitor (C4) to said second winding (W₂) during a flyback interval of a given switching cycle of said first switching means (Q2), and

means (Q4) coupled to said capacitor (C4) and responsive to said standby-mode/run-mode control signal (from 333) for controlling said control voltage (V₄) in a manner that disables said regenerative positive feedback signal path during said standby mode of operation.

15. A power supply according to Claim 13 characterized in that said modulating means (Q3,Q4) forms a DC coupled signal path between a terminal (99) where said output supply voltage (B+) is developed and said second winding (W₂) of said transformer (T2).

16. A switch mode power supply for generating an output supply voltage (B+) during both a standby-mode of operation and during a run-mode of operation, comprising;
means for generating an input supply voltage (V_{UR}) from a source of AC mains voltage;

means (110) for generating a first control signal (V₅) at a given frequency;

switching means (Q1) energized by said input supply voltage (V_{UR}) and responsive to said first control signal (V₅) for producing a switching current (i₁) during both said standby-mode of operation and said run-mode of operation;





means (T1,W_S) responsive to said switching current (i₁) for generating therefrom said output supply voltage (B+);

a source (333) of a standby-mode/run-mode control signal; characterized by

means (Q4,Q3,T2,C3) responsive to said standby-mode/run-mode control signal for controlling said switching means (Q1) in a burst mode manner during said standby mode of operation, such that, during a burst interval, a plurality of switching cycles are performed, and during an alternating dead time interval, no switching cycles are performed; and

means (D2,R3,C2) coupled to said switching means (Q1) for controlling a switching frequency in said switching means (Q1) during said standby-mode of operation, such that said switching frequency of said switching means (Q1) varies within said burst interval.

17. A power supply in accordance with Claim 16 characterized in that during said standby mode of operation said switching frequency of said switching means (Q1) is a function of a waveform of said input supply voltage.

18. A power supply according to Claim 16 characterized in that said switching frequency progressively decreases during said burst mode interval.

19. A power supply according to Claim 18 characterized in that the on-time of said switching means progressively increases during said burst mode interval.

20. A power supply according to Claim 16 characterized in that said frequency control means provides a soft start operation within said burst interval.

21. A switch mode power supply, comprising:
a source of input supply voltage (V_{UR});





a transformer (T2) having a first winding (W_1) coupled to said input supply voltage (V_{UR});

first switching means (Q2) coupled to said first winding (W_1) for generating a switching signal (i_2) in said transformer (T2) that is coupled back in a positive feedback manner to said first switching means (Q2) to form an oscillator (110) that oscillates continuously during a run-mode of operation;

means coupled to said input supply voltage (V_{UR}) and responsive to an output signal (V_5) of said oscillator (110) for generating from said input supply voltage (V_{UR}) said output supply voltage (B+) by a switching operation controlled in accordance with said oscillator output signal (V_5); characterized by

means (Q4, Q3, T2) responsive to said output supply voltage (B+) and coupled to said oscillator (110) for modulating said oscillator output signal (V_5) during a run mode of operation in a negative feedback manner thereby regulating said output supply voltage (B+);

means responsive to a standby-mode/run-mode control signal (from 333) and coupled to said oscillator (110) for disabling in a standby mode of operation the continuous oscillations in said oscillator;

means (D1, C2) responsive to a signal at a first frequency for initiating a burst mode switching operation in said first switching means (Q1) that is repetitive at a frequency determined by said first frequency when the continuous oscillations are disabled;

a capacitor (C3); and

second switching means (D2) responsive to said standby-mode/run-mode control signal for coupling said capacitor (C3) to said positive feedback signal path to maintain a switching frequency of said first switching means (Q1) above an audible range during said burst mode of operation and for decoupling said capacitor (C3) from said positive feedback signal path to prevent said capacitor from affecting the oscillation (110) frequency of said oscillator during said run-mode of operation.





22. A power supply according to Claim 21 characterized by, a resistor (R3) coupled to said capacitor (C3) for discharging said capacitor (C3) during dead time intervals when no burst mode switching operation occurs in said standby mode of operation.

23. A power supply according to Claim 22 characterized in that said second switching means comprises a diode (D2) that is coupled between a second winding (W₃) of said transformer and said capacitor.

24. A power supply according to Claim 23 characterized in that a current that charges said capacitor (C3) via said diode (D2) develops a voltage in said capacitor (C3) that is ramping in a first direction during a given burst-mode interval and wherein said resistor (R3) causes said capacitor (C3) voltage to ramp in an opposite direction during said dead time intervals.



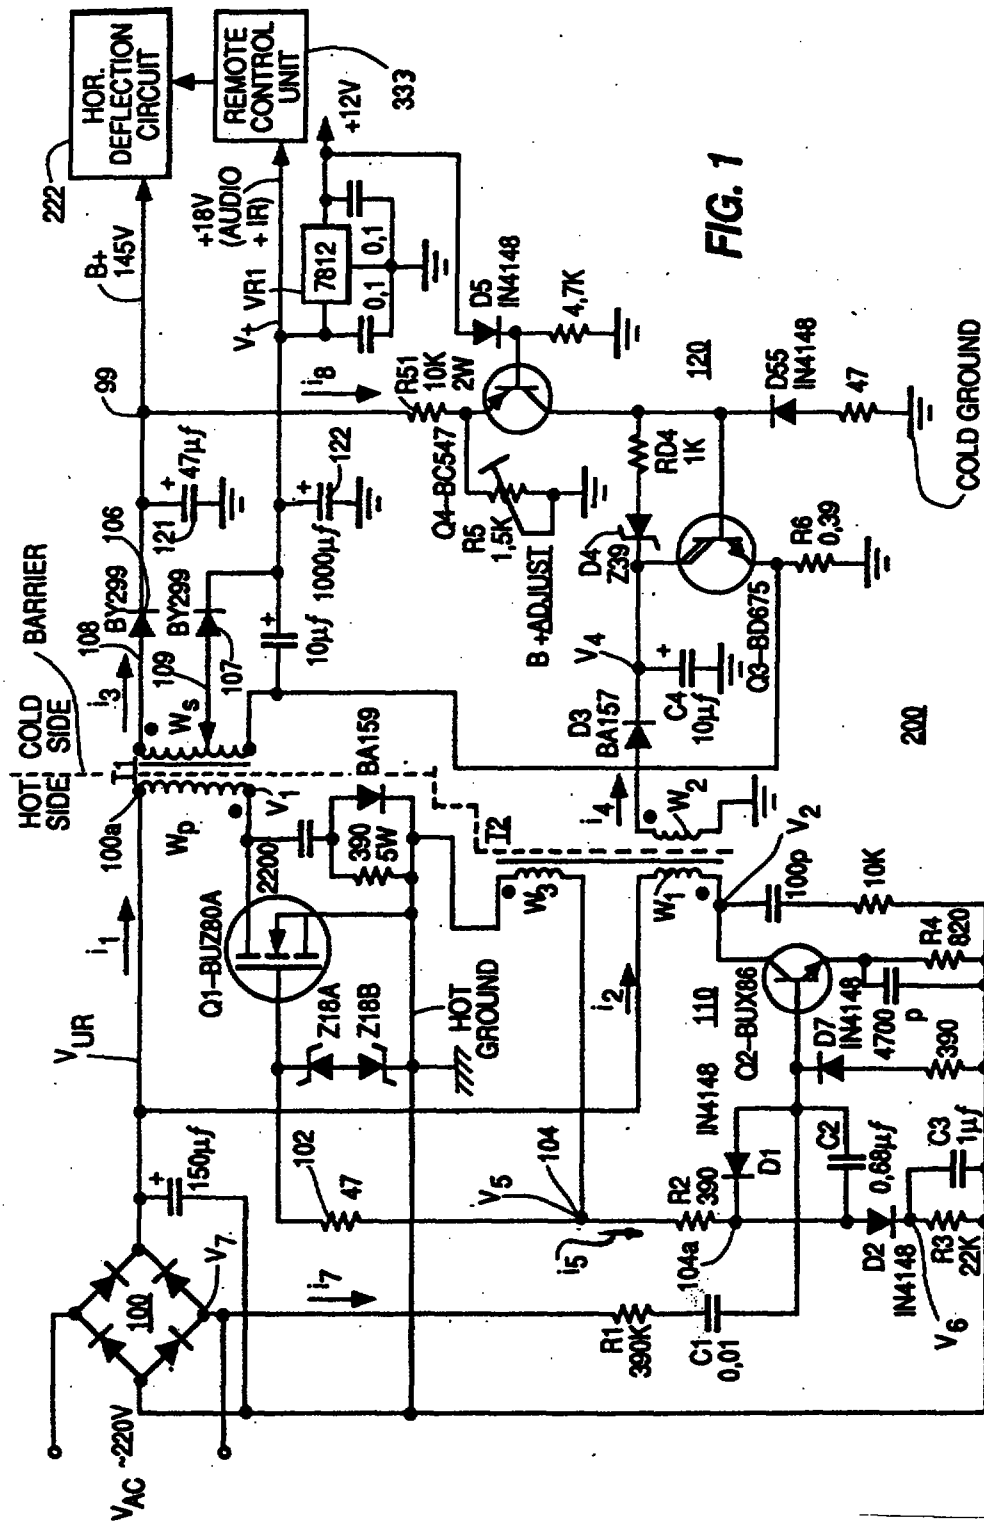


FIG. 1



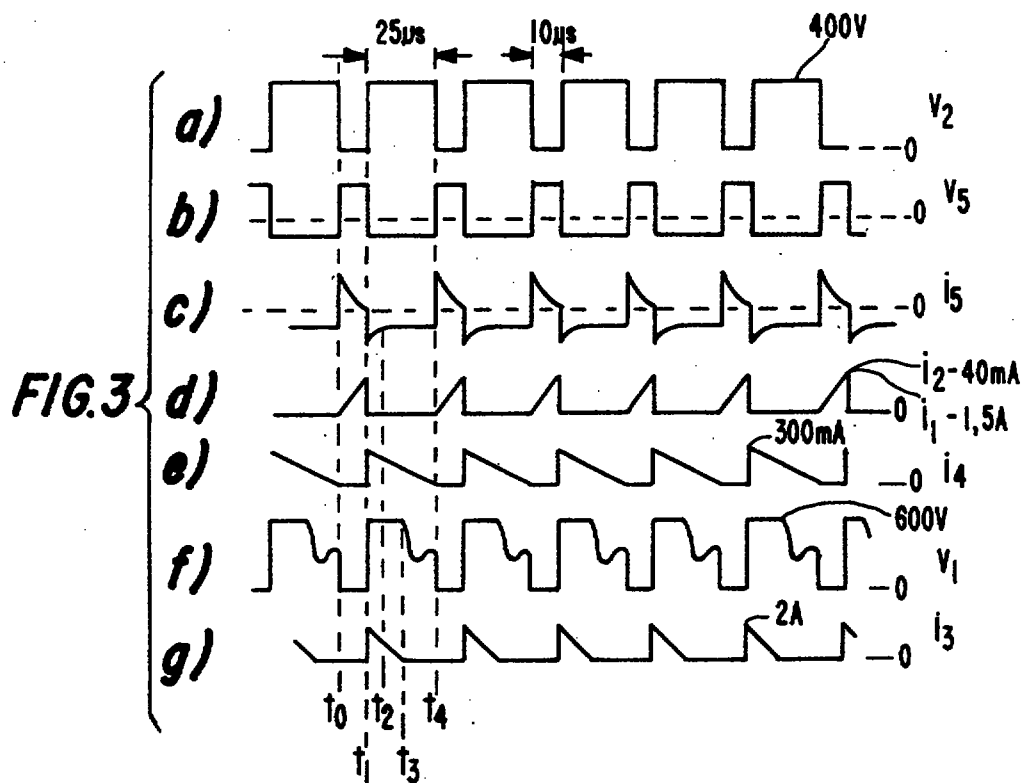
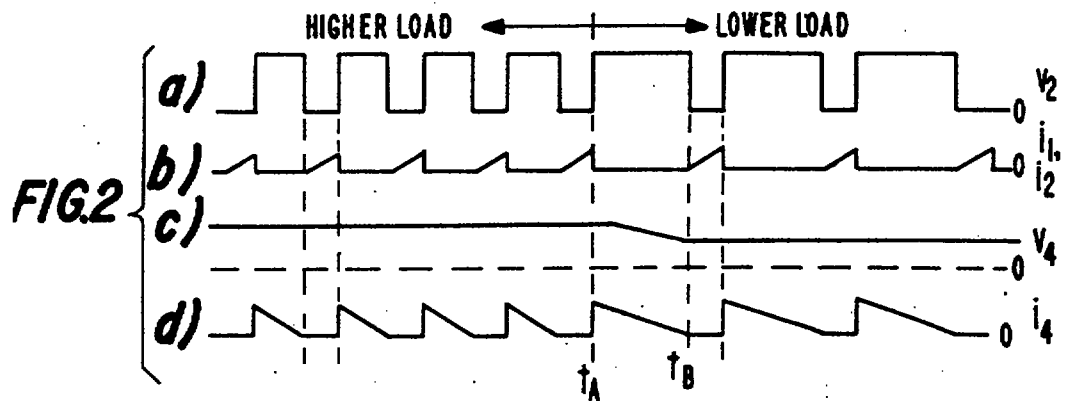
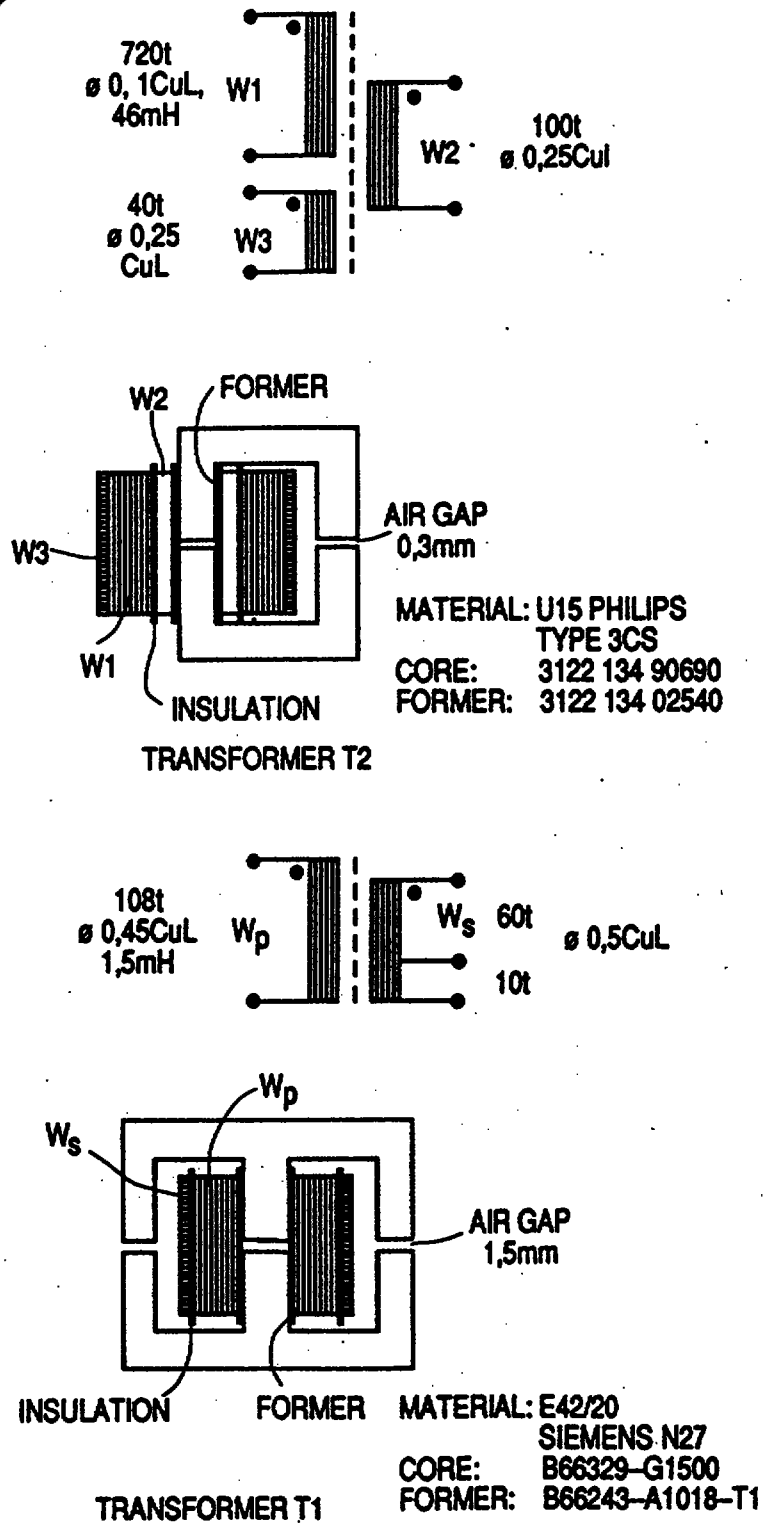


FIG. 4
TRANSFORMER
DATA



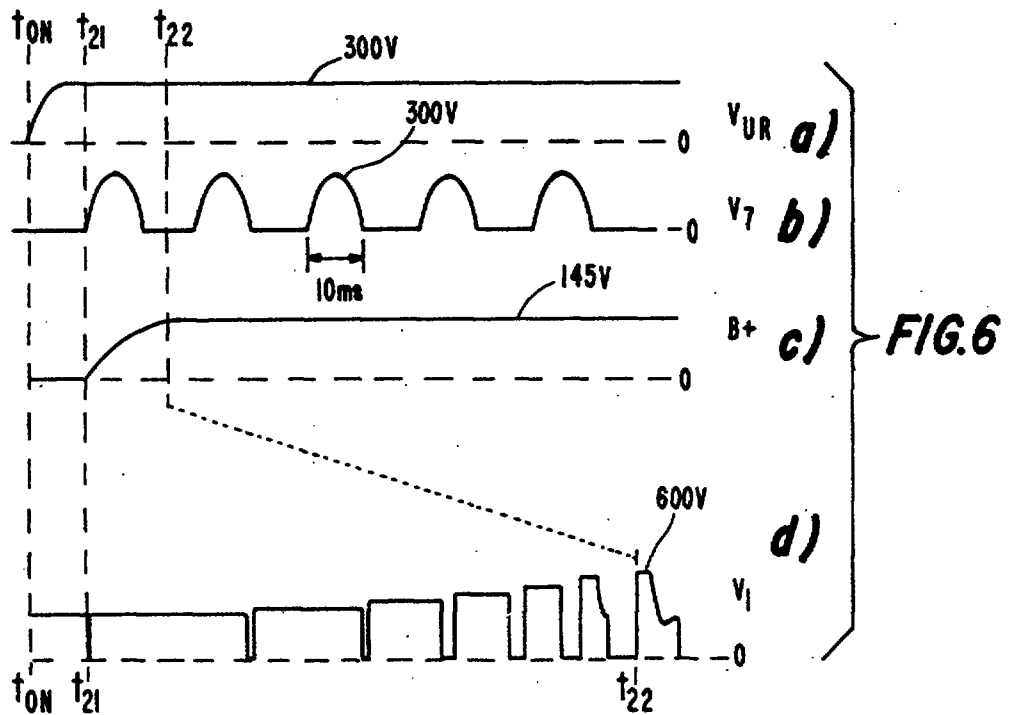
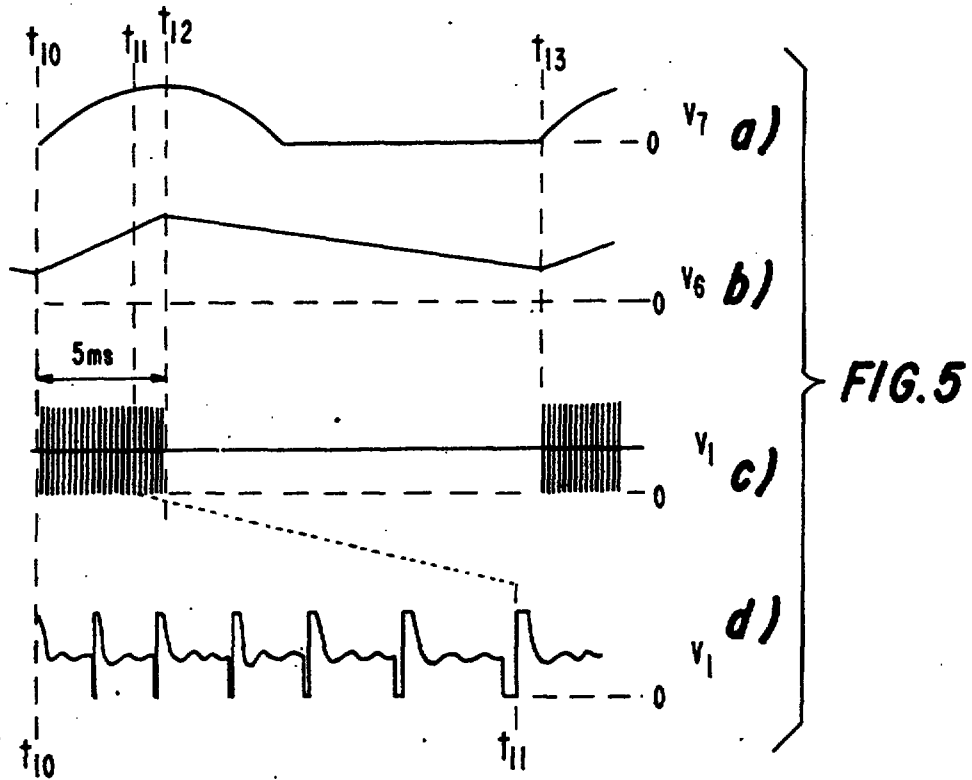


FIG. 7
MODIFICATION OF THE CIRCUIT OF FIGURE 1
FOR HIGH AUDIO POWER CONSUMPTION

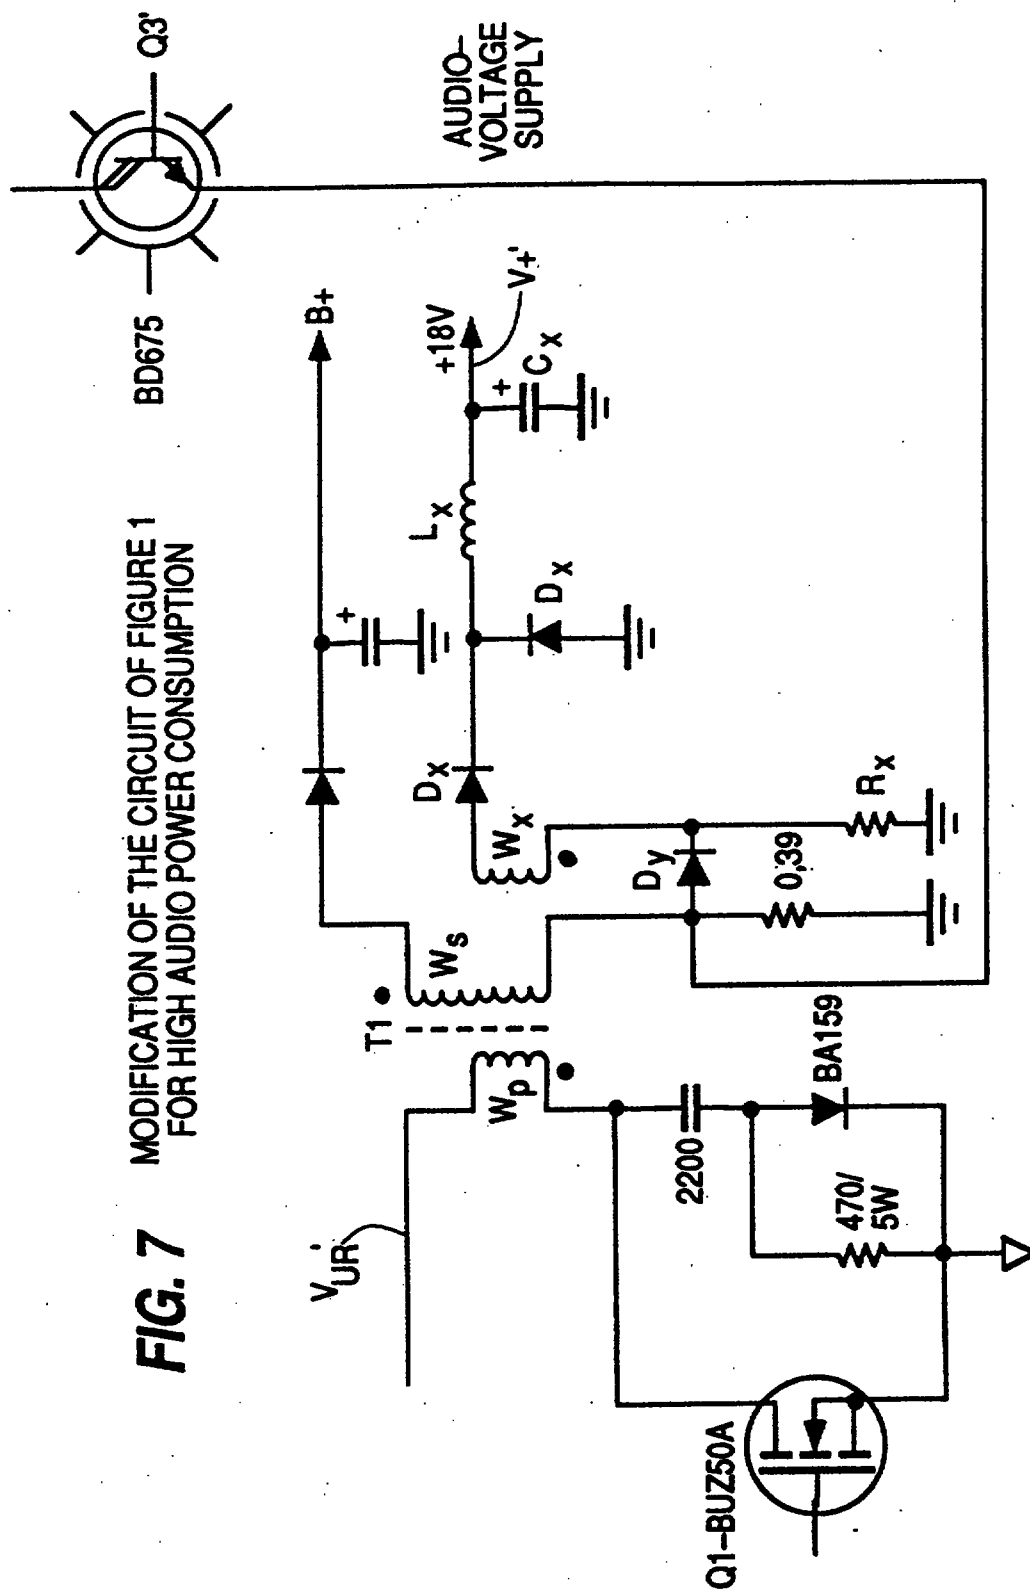


FIG. 8

ROW #	MAINS VOLTAGE [V]	BEAM CURRENT [mA]	B+ VOLTAGE [V]	ΔV [mV]	CIRCUIT TYPE
1	220	0.8	139.8	700	PRIOR ART
		0	140.5		
2	220	0.8	140.5	200	SMPS OF FIG. 1
		0	140.7		

FIG. 9

ROW #	MAINS VOLTAGE [V] V _{AC}	BEAM CURRENT [mA]	B+ VOLTAGE [V]	ΔV [mV]	CIRCUIT TYPE
1	180	0.5	139.1	1.4	PRIOR ART
	250		140.5		
2	180	0.5	140.4	0.1	SMPS OF FIG. 1
	250		140.5		



ABSTRACT

A SWITCH-MODE POWER SUPPLY WITH BURST MODE
STANDBY OPERATION

5 In a switch mode power supply (200), a
first switching transistor (Q2) is coupled to a primary
winding (W_1) of a transformer (T2) for generating pulses of
a switching current (i_2). A secondary winding (W_2) of the
transformer is coupled via a switching diode (D3) to a
10 capacitor (C4) of a control circuit for developing a
control signal (V_4) in the capacitor (C4). The control
signal (V_4) is applied to a mains coupled chopper second
transistor (Q1) for generating and regulating supply
voltages in accordance with pulse width modulation of the
15 control signal (V_4). During standby operation, the first
(Q2) and second (Q1) transistors operate in a burst mode
that is repetitive at a frequency of the AC mains supply
voltage such as 50Hz. In the burst mode operation, during
intervals in which pulses of the switching current occur,
20 the pulse width and peak amplitude of the switching current
pulses progressively increase in accordance with the
waveform of the mains supply voltage to provide a soft
start operation in the standby mode of operation within
each burst group.

25



REPLACEMENT SHEETS		SG
☒	Description : paged 11 to paged 17..	
☒	Claim(s) : paged 17. to paged 25..	
☒	Drawing(s) : paged 14. to paged 14..	
☒	Abstract : paged 24. to paged 24..	
DATE OF RECEIPT ..28/12/91.....		

1

A SWITCH-MODE POWER SUPPLY WITH BURST MODE STANDBY OPERATION

The invention relates to switch-mode power supplies.

5 In a typical switch mode power supply (SMPS) of a television receiver the AC mains supply voltage is coupled to a bridge rectifier. An unregulated direct current (DC) input supply voltage is produced. A pulse width modulator controls the duty cycle of a chopper transistor switch that
10 applies the unregulated supply voltage across a primary winding of a flyback transformer. A flyback voltage at a frequency that is determined by the modulator is developed at a secondary winding of the transformer and is rectified to produce DC output supply voltages such as a B+ voltage
15 that energizes a horizontal deflection circuit of the television receiver, and a voltage that energizes a remote control unit.

During normal operation, the DC output supply voltages are regulated by the pulse width modulator in a
20 negative feedback manner. During standby operation, the SMPS is required to generate the DC output supply voltage that energizes the remote control unit. However, most other stages of the television receiver are inoperative and do not draw supply currents. Consequently, the average
25 value of the duty cycle of the chopper transistor may have to be substantially lower during standby than during normal operation.

- Because of, for example, storage time limitation in the chopper transistor, it may not be possible to reduce
30 the length of the conduction interval in a given cycle below a minimum level. Thus, in order to maintain the average value of the duty cycle low, it may be desirable to operate the chopper transistor in an intermittent or burst mode, during standby. During standby, a long dead time
35 interval occurs between consecutively occurring burst mode operation intervals. Only during the burst mode operation interval does switching operation occur in the chopper

28 DEC 1996

2

transistor. The result is that each of the conduction intervals is of a sufficient length.

5 In accordance with an aspect of the invention, burst mode operation intervals are initiated and occur at a rate that is determined by a repetitive signal at the frequency of the AC mains supply voltage. For example, when the mains supply voltage is at 50Hz, with a period of 20 milliseconds, each burst mode operation interval, when switching cycles occur, may last 5 milliseconds, and the
10 dead time interval when no switching cycles occur, may last during the remainder portion of 15 milliseconds. Such arrangement, that is triggered by a signal at the frequency of the mains supply voltage, simplifies the design of the SMPS.

15 The burst mode operation intervals that occur in standby operation are synchronized to the 50Hz signal. During each such interval, pulses of current are produced in transformers and inductances of the SMPS. The pulses of current occur in clusters that are repetitive at 50Hz. The
20 pulses of current occur at a frequency that is equal to the switching frequency of the chopper transistor within each burst mode operation interval. Such current pulses might produce an objectionable sound during power-off or standby operation. The objectionable sound might be produced due to
25 possible parasitic mechanical vibrations as a result of the pulse currents in, for example, the inductances and transformers of the SMPS.

- In accordance with another aspect of the invention, the change in the AC mains supply voltage during
30 each period causes the length of the conduction interval in consecutively occurring switching cycle during the burst mode operation interval to increase progressively. Such operation that occurs during each burst mode operation interval may be referred to as soft start operation. The
35 soft start operation causes, for example, gradual charging of capacitors in the SMPS. Consequently, the parasitic mechanical vibrations are substantially reduced. Also, the frequency of the switching cycles within each burst mode

28 DEC 1996

operation interval is maintained above the audible range for further reducing the level of such audible noise during standby operation.

5 A switch mode power supply, embodying an aspect of the invention, for generating an output supply voltage during both a standby-mode of operation and during a run-mode of operation includes a source of AC mains input supply voltage. A control signal at a given frequency is generated. A switching arrangement energized by the input
10 supply voltage and responsive to the first control signal produces a switching current during both the standby-mode of operation and the run-mode operation. The output supply voltage is generated from the switching current. An arrangement coupled to the switching arrangement and
15 responsive to a standby-mode/run-mode control signal and to a signal at a frequency that is determined by a frequency of the AC mains input supply voltage controls the switching arrangement in a burst mode manner during the standby-mode of operation. During a burst interval, a plurality of
20 switching cycles are performed and during an alternating dead time interval no switching cycles are performed. The two intervals alternate at a frequency that is determined by the frequency of the AC mains input supply voltage.

In the Drawing:

25 FIGURE 1 illustrates a power supply embodying an aspect of the invention;

FIGURES 2a-2d illustrate waveforms useful for explaining the run mode operation of the circuit of FIGURE 1 when loading varies;

30 FIGURES 3a-3g illustrate additional waveforms useful for explaining the run mode operation of the circuit of FIGURE 1 under a constant loading condition;

FIGURE 4 illustrates the way the isolation transformers that are used in the circuit of FIGURE 1 are
35 constructed;

FIGURES 5a-5d illustrate waveforms useful for explaining a standby operation of the power supply of FIGURE 1;

28 DEC 1996

FIGURES 6a-6d illustrate transient waveforms useful for explaining the operation of the circuit of FIGURE 1 during start-up;

FIGURE 7 illustrates a modification of the circuit of FIGURE 1 that increases output power;

FIGURE 8 provides performance data, in a table form, of the circuit of FIGURE 1 and also, for comparison purposes, of a conventional power supply; and

FIGURE 9 provides additional performance data, in a table form, of the circuit of FIGURE 1 and also, for comparison purposes, of a conventional power supply.

FIGURE 1 illustrates a switch-mode power supply (SMPS) 200, embodying an aspect of the invention. SMPS 200 produces a B+ output supply voltage of +145 volts that is used for energizing, for example, a deflection circuit of a television receiver, not shown, and an output supply voltage V_+ of +18 volts that are both regulated. A mains supply voltage V_{AC} is rectified in a bridge rectifier 100 to produce an unregulated voltage V_{UR} . A primary winding W_p of a flyback isolation transformer T1 is coupled between a terminal 100a, where voltage V_{UR} is developed, and a drain electrode of a power chopper metal oxide semiconductor (MOS) field effect transistor Q1.

The source electrode of MOS transistor Q1 of FIGURE 1 is coupled to a common conductor, referred to herein as "hot" ground. The gate electrode of transistor Q1 is coupled via a coupling resistor 102 to a terminal 104 where a pulse-width modulated signal V_5 is produced. Signal V_5 produces a switching operation in transistor Q1. A secondary winding W_3 of an isolation transformer T2, across which signal V_5 is developed, is coupled between terminal 104 and the hot ground conductor. A pair of back-to-back zener diodes Z18A and Z18B provide gate protection in transistor Q1. Winding W_3 , winding W_p , transistor Q1 and signal V_5 are at potentials that are referenced to the hot ground conductor.

28 DEC 1996

Transformers T1 and T2 are constructed in a manner shown in FIGURE 4. Similar symbols and numerals in FIGURES 1 and 4 indicate similar items or functions.

FIGURES 3a-3g illustrate waveforms useful for explaining the normal steady state operation or run mode of the SMPS of FIGURE 1 under a constant loading condition. Similar symbols and numerals in FIGURES 1 and 3a-3g indicate similar items or functions.

During, for example, interval $t-t_1$ of FIGURE 3b of a corresponding given cycle or period, the voltage of pulse signal V_5 is positive relative to the hot ground conductor for maintaining transistor Q1 of FIGURE 1 conductive during interval t_0-t_1 of FIGURE 3b. Consequently, a current i_1 in winding W_p of FIGURE 1 is upramping, as shown in FIGURE 3d, during interval t_0-t_1 . Therefore, a quantity of inductive energy is stored in transformer T1 of FIGURE 1. At time t_1 of FIGURE 3d, transistor Q1 of FIGURE 1 becomes nonconductive.

After transistor Q1 becomes nonconductive, the inductive energy stored in winding W_p is transferred, by flyback transformer action, to a secondary winding W_s of transformer T1. Flyback pulses developed at terminals 108 and 109 of winding W_s are rectified by diodes 106 and 107, respectively, and filtered in capacitors 121 and 122, respectively, for producing DC voltages B+ and V+, respectively, that are all referenced to a second common conductor, referred to herein as "cold" ground. The cold ground is conductively isolated from the hot ground conductor, with respect to an electrical shock hazard, by transformers T1 and T2. Transistor Q1, transformer T1 and diodes 106 and 107 form an output stage of the SMPS.

A pulse-width modulator of SMPS 200 includes a blocking oscillator 110, embodying an aspect of the invention, that produces switching signal V_5 for controlling the switching operation of transistor Q1. Oscillator 110 includes a switching transistor Q2 having a base electrode that is also controlled or switched by signal V_5 . Winding W_3 of transformer T2 provides positive

28 DEC 1996

feedback in oscillator 110 by developing signal V_5 .

Transformer T2 has a primary winding W_1 that is coupled between voltage V_{UR} and the collector of transistor Q2 such that winding W_1 is referenced to the hot ground conductor.

5 A secondary winding W_2 of transformer T2, that is referenced to the cold ground conductor, is conductively coupled to a diode D3 of a control circuit 120, embodying another aspect of the invention, that is also referenced to the cold ground conductor.

10 The cathode of diode D3 is coupled to the cold ground conductor via a capacitor C4. As explained later on, a DC control voltage V_4 developed across capacitor C4 varies the nonconduction time or duty cycle of transistor Q2 during each period.

15 A capacitor C2 is coupled between the base electrode of transistor Q2 and a terminal 104a. A resistor R2 is coupled between terminal 104a and terminal 104 where signal V_5 is developed. During interval t_0 - t_1 of FIGURE 3b, a current i_5 of FIGURE 3c is produced in resistor R2 of
20 FIGURE 1 that is coupled between terminals 104 and 104a. Current i_5 of FIGURE 3c, that is produced by signal V_5 of FIGURE 3b, charges capacitor C2 of FIGURE 1 in a manner that turns on transistor Q2, during interval t_0 - t_1 of FIGURE 3d.

25 During normal operation, when transistor Q2 of FIGURE 1 is conductive, a current i_2 of FIGURE 3d in winding W_1 of FIGURE 1 increases linearly, until an emitter voltage-of transistor Q2, that is developed across an emitter resistor R4, is sufficiently high to initiate a
30 rapid turn-off operation in transistor Q2. Feedback resistor R4 is coupled between the emitter of transistor Q2 and the hot ground conductor. Resistor R4 causes a gradual decrease of current i_5 of FIGURE 3c when transistor Q2 of FIGURE 1 is conductive until transistor Q2 ceases to
35 conduct at time t_1 of FIGURE 3c. Resistor R4 of FIGURE 1 also serves to optimize the switching condition and to provide current protection in transistor Q2. The result is that the voltage across winding W_1 reverses polarity. The

28 DEC 1996

turn-off operation is rapid because of the positive feedback caused by winding W_3 in developing signal V_5 .

- As indicated before, winding W_3 provides pulse drive signal V_5 that also controls transistor Q1. The
- 5 conduction interval in each cycle of transistors Q1 and Q2 remains substantially constant or unaffected by loading. Therefore, advantageously, the stored energy in transformer T1, when transistor Q1 becomes nonconductive, is substantially constant for a given level of voltage V_{UR} .
- 10 However, the conduction interval may vary when a variation in voltage V_{UR} occurs.

- When transistor Q2 ceases to conduct, a downramping current i_4 of FIGURE 3e is produced in winding W_2 of transformer T2 of FIGURE 1. Current i_4 causes diode
- 15 D3 of FIGURE 1 to be conductive and charges capacitor C4, during interval t_1 - t_4 of FIGURE 3e. For a given level of voltage V_{UR} of FIGURE 1, and for a given duty cycle of transistor Q2, the charge added to capacitor C4 is the same in each cycle. During interval t_1 - t_4 , control voltage V_4
- 20 of FIGURE 1, except for the forward voltage drop in diode D3, is substantially developed across winding W_2 .

- Voltage V_4 determines the length of interval t_1 - t_4 of FIGURE 3e that is required to deplete the magnetic energy stored in transformer T2 of FIGURE 1. When, at time
- 25 t_4 of FIGURE 3e, current i_4 becomes zero, the polarity of signal V_5 of FIGURE 3b changes as a result of resonance oscillations in the windings of transformer T2. Therefore, positive current i_5 of FIGURE 3c is generated. As explained before, when current i_5 is positive, it causes
- 30 transistors Q1 and Q2 to be conductive.

- During the aforementioned nonconduction interval t_1 - t_4 of FIGURE 3b of transistors Q1 and Q2 of FIGURE 1, signal V_5 is negative, as shown during interval t_1 - t_4 of FIGURE 3b. Consequently, a current in the opposite
- 35 polarity, as shown in FIGURES 3c, flows through capacitor C2 of FIGURE 1, during interval t_1 - t_2 of FIGURE 3c, and through diode D1 of FIGURE 1 during interval t_2 - t_4 of FIGURE 3c. The resulting charge in capacitor C2 of FIGURE

1 produces a voltage in capacitor C2 of such a polarity that tends to rapidly turn on transistor Q2, when, at time t_4 of FIGURES 3b, signal V_5 reverses polarity.

Control circuit 120 of FIGURE 1, that is
 5 referenced to the cold ground conductor, controls the duty cycle of oscillator 110 by varying control voltage V_4 across capacitor C4. A transistor Q4 of circuit 120 is coupled in a common base amplifier configuration. The base voltage of transistor Q4 is obtained via a temperature
 10 compensating forward biased diode D5 from a +12V voltage regulator VR1. Regulator VR1 is energized by voltage V_+ .

A fixed resistor R51 is coupled between the emitter of transistor Q4 and voltage B_+ . As a result of the common base operation, a current i_8 in resistor R51 is
 15 proportional to voltage B_+ . An adjustable resistor R5 that is used for adjusting the level of voltage B_+ is coupled between the cold ground conductor and a junction terminal between the emitter of transistor Q4 and resistor R51. Resistor R51 is used to determine the level of the current
 20 in transistor Q4. Thus, an adjustable preset portion of current i_8 flows to the cold ground conductor through resistor R5, and an error component of current i_8 flows through the emitter of transistor Q4.

The collector current of transistor Q4 is coupled
 25 to the base of a transistor Q3 for controlling a collector current of transistor Q3. The collector of transistor Q3 forming a high output impedance is coupled to the junction between capacitor C4 and diode D3. When transistor Q2 becomes nonconductive the stored energy in transformer T2
 30 causes current i_4 to flow via diode D3 into capacitor C4, as indicated before. Regulation of the power supply is achieved by controlling control voltage V_4 . Voltage V_4 is controlled by controlling the loading across winding W_2 of transformer T2 by means of transistor Q3.

35 The collector current of transistor Q3, that forms a current source having a high output impedance, is coupled to capacitor C4 that operates as a flywheel. In steady state, the amount of charge that is added to capacitor C4

28 DEC 1996

during interval t_1-t_4 of FIGURE 3e is equal to the amount of charge that is removed by transistor Q3 from capacitor C4 in a given period t_0-t_4 .

FIGURES 2a-2d illustrate waveforms useful for explaining the regulation operation of the SMPS of FIGURE 1 under different loading conditions. Similar symbols and numerals in FIGURES 1, 2a-2d and 3a-3g indicate similar items or functions.

After, for example, time t_A of FIGURES 2a-2d, the power supply current loading across capacitor 121 of FIGURE 1 decreases and voltage B+ tends to increase. As a result of the increase in voltage B+, transistor Q3 conducts a higher level of collector current. Therefore, voltage V_4 of FIGURE 2c across capacitor C4 of FIGURE 1 becomes smaller. Therefore, a longer time is required in each period for removing the stored inductive energy from transformer T2 of blocking oscillator 110, after transistor Q2 becomes nonconductive. It follows that the length of the interval, t_A-t_B , of FIGURE 2a, in a given cycle, when transistor Q2 of oscillator 110 of FIGURE 1 is nonconductive, increases under reduced loading condition. The result is that the duty cycle, that is the ratio between the "on" time to the "off" time of transistor Q1, decreases, as required for proper regulation.

In steady state, voltage V_4 is stabilized at a level that causes an equilibrium between the charging and discharging currents of capacitor C4. The increase in voltage B+ is capable of causing, advantageously, a proportionally greater change in voltage V_4 , as a result of amplification and current integration of the collector current of transistor Q3 in capacitor C4. In a transient condition, as long as voltage B+ is, for example, greater than +145 volts, voltage V_4 will decrease.

The result is that voltage V_4 of FIGURE 1 tends to change in a manner that tends to nullify the aforementioned tendency of voltage B+ to increase under reduced loading. Thus, regulation is obtained in a negative feedback manner. In the extreme case, a short circuit across winding W_2

28 DEC 1996

10

could inhibit oscillation in oscillator 110 thus providing, advantageously, an inherent fail safe feature, as described later on.

5 Conversely, a tendency of voltage B+ to decrease will increase the duty cycle of transistors Q1 and Q2 in a manner that provides regulation. Thus, the nonconduction interval of transistor Q1 varies with current loading at a terminal 99 where voltage B+ is developed.

10 Processing voltage B+ for producing control voltage V_4 is accomplished, advantageously, in a DC coupled signal path for improving error sensing. Also, a change in voltage B+ is capable of causing a proportionally greater change in voltage V_4 , thus improving error sensitivity.

15 Only after the error in voltage B+ is amplified, the amplified error contained in DC coupled voltage V_4 is transformer or AC coupled to effectuate pulse-width modulation. The combination of such features improves the regulation of voltage B+.

20 Another way by which an arrangement similar to control circuit 120 is used for regulation purposes is shown and explained in a copending U.S. Patent Application 424,353 entitled, A SYNCHRONIZED SWITCH-MODE POWER SUPPLY, (RCA 85439 GB Application No.) filed GB concurrently. voltage that is produced similarly to voltage V_4 of FIGURE 25 1 is transformer coupled to a sawtooth generator. The transformer coupled voltage varies a sawtooth signal that is used for producing a pulse-width modulated control signal."

30 A zener diode D4 is coupled in series with a resistor RD4, between the base and collector electrodes of transistor Q3. Zener diode D4, advantageously, limits voltage V_4 to about 39 volts, which limits the frequency of oscillator 110, or the minimum cut-off time of transistors Q2 and Q1. In this way, the maximum power transferred to 35 the load is, advantageously, limited for providing over-current protection.

For safe operation, it may be desirable to have secondary current i_3 in winding W_3 decay to zero before

28 DEC 1996

11

transistor Q1 is turned on again. This means that the decay time of current i_3 should be, preferably, shorter than that of current i_4 of blocking oscillator 110. This condition can be met by a proper choice of the primary
5 inductance of transformer T2 and of the value of zener diode D4.

Standby operation is initiated by operating SMPS 200 in a low power operation mode. The low power operation mode occurs when the power demand from the SMPS drops below
10 20-30 watts. For example, within horizontal deflection circuit 222 a horizontal oscillator, not shown, that is controlled by a remote control unit 333 ceases operating during standby. Therefore, a horizontal deflection output stage in deflection circuit 222, that is energized by
15 voltage B+, ceases operation as well. Consequently, the loading at terminal 99, where voltage B+ is produced, is reduced. It follows that voltage B+ and the error current in transistor Q4 tend to increase. Therefore, transistor Q3 saturates, causing a near short circuit across winding
20 W_2 of transformer T2, that causes voltage V_4 to be approximately zero throughout the standby mode of operation. Consequently, unlike in the run-mode of operation, a positive pulse of signal V_5 cannot be generated by resonance oscillations in transformer T2. It
25 follows that the regenerative feedback loop is prevented from initiating the turn on transistor Q2. Consequently, continuous oscillation cannot be sustained.

- In accordance with an aspect of the invention, transistor Q2 is periodically triggered into switching in a
30 burst mode operation by an upramping portion of a half wave rectified voltage of a signal V_7 . Signal V_7 occurs at the mains frequency, such as 50Hz. Signal V_7 is derived from bridge rectifier 100 and is applied to the base of transistor Q2 via a series arrangement of a resistor R1 and
35 a capacitor C1. The series arrangement operates as a differentiator that produces a current i_7 .

FIGURES 5a-5d illustrate waveforms during standby operation, indicating that burst mode switching operation

28 DEC 1996

12

of oscillator 110 occurs during an interval t_{10} - t_{12} followed by a dead time interval t_{12} - t_{13} , when no trigger pulses of signal V_5 are present in the blocking oscillator. Similar symbols and numerals in FIGURES 1 and 5a-5d indicate similar items or functions.

5 A parallel arrangement of a capacitor C3 of FIGURE 1 and a resistor R3 is coupled in series with a diode D2 to form an arrangement that is coupled between the hot ground conductor and junction terminal 104a, between capacitor C2 and resistor R2. A diode D1 is coupled in parallel with capacitor C2.

10 During normal run mode operation, capacitor C3 remains charged to a constant voltage V_6 by the positive voltage pulses of signal V_5 that is developed in winding W_3 each time transistor Q2 is conductive. Therefore, capacitor C3 is decoupled from the positive feedback signal path and has no effect on circuit operation. During standby operation, capacitor C3 discharges during the long inactive periods or dead time, as shown by voltage V_6 between times t_{12} - t_{13} in FIGURE 5b.

20 Immediately after time t_{10} of FIGURE 5a of a given interval t_{10} - t_{13} , current i_7 of FIGURE 1, produced by voltage differentiation in capacitor C1, increases from zero to a maximum positive value. As a result, a base current, produced in transistor Q2, causes transistor Q2 to be conductive. When transistor Q2 becomes conductive, a positive pulse of signal V_5 is produced in winding W_3 that maintains transistors Q1 and Q2 conductive.

30 Similarly to normal run mode operation that was described before, transistor Q2 remains conductive until the magnitude of the base current of transistor Q2 is insufficient to maintain transistor Q2 in saturation, as collector current i_2 is upramping. Then, collector voltage V_2 increases and signal V_5 decreases. The result is that by means of positive feedback transistor Q2 is turned-off.

35 The voltage across capacitor C2 produces negative current i_5 that discharges capacitor C2 via a diode D7 and that maintains transistor Q2 in cut-off. As long as a

28 DEC 1996

13

magnitude of negative current i_5 is larger than that of positive current i_7 , the base current in transistor Q2 is zero and transistor Q2 remains nonconductive. When the magnitude of negative current i_5 of FIGURE 1 becomes smaller than current i_7 , transistor Q2 is turned on again and positive current i_5 is generated.

During a substantial portion of a given conduction interval of transistor Q2, current i_5 flows entirely via capacitor C2 to form the base current of transistor Q2. Because collector current i_2 is upramping, the emitter voltage of transistor Q2 increases in an upramping manner, causing the voltage at the anode of diode D2 to increase. When the voltage at the anode of diode D2 becomes sufficiently positive, diode D2 begins conducting. Therefore, a substantial portion of current i_5 is diverted by capacitor C3 from the base of transistor Q2. The result is that the base current becomes insufficient to sustain the collector current of transistor Q2. Therefore, the positive feedback signal path causes transistor Q2 to turn-off. Thus, the peak amplitude of current i_2 is determined by the level of voltage V_6 across capacitor C3.

During interval t_{10} - t_{12} of FIGURES 5a-5d, capacitor C3 of FIGURE 1 is coupled via diode D2 to the positive feedback signal path and charged by positive current i_5 . Therefore, voltage V_6 of FIGURE 5b becomes progressively larger.

In accordance with a further aspect of the invention, voltage V_6 that becomes progressively larger causes the conduction interval during each cycle that occurs in interval t_{10} - t_{12} of FIGURES 5a-5d to become progressively longer. Consequently, the peak amplitudes and the pulse widths of currents i_1 and i_2 of FIGURE 1 increase progressively.

During a corresponding nonconduction portion of each cycle that occurs in interval t_{10} - t_{12} of FIGURES 5a-5d, capacitor C2 of FIGURE 1 is discharged via a diode D7 and resistor R2. The length of the nonconduction interval of transistor Q2 in each cycle is determined by the time

28 DEC 1996

14

required for discharging capacitor C2 to such a level that causes a magnitude of negative current i_5 to be smaller than that of positive current i_7 .

5 In accordance with an embodiment of an aspect of the invention, the nonconduction interval becomes progressively longer because capacitor C2 is charged to a progressively higher voltage and also because the magnitude of current i_7 becomes progressively smaller. Therefore, positive base current will begin flowing in the base of transistor Q2
10 after progressively longer nonconduction intervals. The result is that the switching frequency during the burst mode interval will vary or decrease progressively.

At time t_{12} of FIGURE 5a current i_7 is zero. Therefore, burst mode operation that occurred during
15 interval t_{10} - t_{12} cannot continue and the long dead time interval t_{12} - t_{13} occurs in which no switching operation happens. At time t_{13} , positive current i_7 is generated again and a subsequent burst mode switching interval occurs in transistors Q1 and Q2.

20 During the burst mode interval t_{10} - t_{12} of FIGURE 5d, the length of the conduction interval in each cycle increases progressively, as explained before. Such operation may be referred to by the term soft start operation. Because of the soft start operation,
25 capacitors, for example, of SMPS 200 are charged or discharged in a gradual manner.

In accordance with an embodiment of another aspect of the invention, voltage V_6 of capacitor C3, by being lower than during run mode operation, maintains the switching
30 frequency of transistors Q1 and Q2 of FIGURE 1 above the audible range in SMPS 200 of FIGURE 1 throughout interval t_{10} - t_{12} of FIGURE 5a. As a result of the soft start operation during standby and of the high switching frequency during standby, noise produced by parasitic
35 mechanical vibrations in inductors and transformers of SMPS 200 of FIGURE 1 is, advantageously, substantially reduced.

The burst mode operation during interval t_{10} - t_{12} of FIGURE 5c produces voltage V_+ of FIGURE 1 at a

28 DEC 1996

15

sufficient level to enable the operation of remote control unit 333 of FIGURE 1, during standby. Because of the burst mode operation, the energy consumed in SMPS 200 is maintained substantially lower, at about 6 watts, than
5 during normal run mode operation.

To generate voltage V_+ at the required level for operating remote control unit 333, a corresponding average duty cycle of transistors Q1 and Q2, that is substantially lower than during run mode, is required. The length of the
10 conduction interval in transistor Q1, for example, should be longer than the storage time of transistor Q1. Accordingly, by operating in the burst mode, the conduction interval of transistor Q1 in each cycle can be maintained longer for obtaining the required lower average duty cycle
15 than if continuous switching operation had occurred during standby. Such continuous switching operation in transistors Q1 and Q2 occurs during normal run mode operation without the occurrence of dead time intervals such as interval t_{12} - t_{13} of FIGURE 5d.

20 The SMPS has also a soft start-up feature, as will now be explained with the aid of waveforms in FIGURES 6a-6d. Similar symbols and numerals in FIGURES 1, 5a-5d and 6a-6d indicate similar items or functions. The start-up mode is similar to the stand-by operation. When the power
25 supply is first turned on, capacitors C3 and C4 are discharged and there is no forward bias on the base of transistor Q2. Oscillation is initiated by feeding a small portion of rectified AC supply signal V_7 to the base of transistor Q2. As illustrated by FIGURE 6d, the oscillator
30 duty cycle is initially very short, or the interval in each cycle when transistor Q2 is nonconductive is long, because winding W2 of transformer T2 is heavily loaded by the discharged capacitor C4. The charge on capacitors C3 and C4, and voltage B_+ build up gradually over a period of
35 about 15msec, as shown in FIGURE 6c. Normal operation begins following this slow build up.

In case of a short circuit at output terminal 99 of FIGURE 1, for example, SMPS 200 goes into an


28 DEC 1996

intermittent mode operation, in a similar manner to the stand-by operation mode. For example, if capacitor C121 of FIGURE 1 is short circuited, the increase in current i_3 flowing through secondary winding W_s of transformer T1 causes a higher negative bias to develop across a resistor R6 that is coupled to the emitter of transistor Q3. Base current then flows into transistor Q3 through a diode D55, causing transistor Q3 to saturate and to clamp its collector voltage V4 to ground. The consequent loading of transformer T2 causes SMPS 200 to operate in the intermittent burst mode as described for stand-by mode operation.

The low voltage supply portion of SMPS 200 that produces voltage V+ may be arranged to operate as a forward converter in case of, for example, high audio power requirements. FIGURE 7 shows a modification of the circuit of FIGURE 1 for obtaining forward converter operation. A resistor Rx and a diode Dy of FIGURE 7 serve as an overload protection, as explained later on. Similar symbols and numerals in FIGURES 1 and 7 indicate similar items or functions. Should an overload occur when the modification shown in FIGURE 7 is employed to provide the high power audio supply, resistor Rx senses the excess current and provides negative bias to the emitter of transistor Q3.

FIGURE 8 shows, in a table form, the variation of voltage B+ caused by a corresponding variation in a beam current flowing in an ultor electrode, not shown, of a television receiver. Voltage B+ energizes the deflection circuit output stage, not shown, for producing the ultor voltage and the beam current. FIGURE 9 shows, in a table form, a variation of voltage B+ caused by a variation of mains supply voltage V_{AC} .

For comparison purposes, row No. 1 in each of the tables of FIGURES 8 and 9 provides data obtained when a conventional prior art SMPS using an integrated circuit TDA4601 control circuit and a power transformer Orega No. V4937700 is utilized. Row No. 2 in each of the tables of FIGURES 8 and 9 provides data obtained when the unmodified

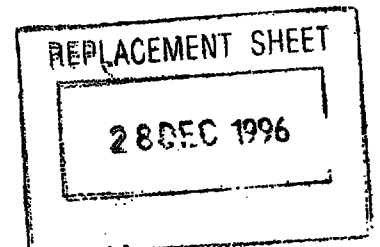

SMPS of FIGURE 1 is utilized. As can be seen, the performance of SMPS 200 of FIGURE 1 is superior.

**CLAIMS:**

1. A switch mode power supply (200) of a television apparatus for generating an output supply voltage (B+) during both a standby-mode of operation and during a run-mode of operation, comprising:

means (100) for generating an input supply voltage (V_{UR}) from a source of AC mains voltage;

first means (110) for generating a periodic first control signal (V_5);

switching second means (Q1) energized by said input supply voltage (V_{UR}) and responsive to said first control signal (V_5) for producing a switching current (i_1) during both said standby-mode of operation and said run-mode of operation;


third means (T1) responsive to said switching current (i_1) for generating therefrom said output supply voltage (B+);

a source (333) of a standby-mode/run-mode first control signal; characterized by

fourth means (Q4, Q3, Q2) coupled to said switching means (Q1) and responsive to said standby-mode/run-mode first control signal and to a second control signal (i_7) at a frequency that is determined by a frequency of said AC mains voltage for controlling said switching means (Q1) in a burst mode manner during said standby mode of operation, such that during a burst interval a plurality of switching cycles are performed, and during an alternating dead time interval no switching cycles are performed, the two intervals alternating at a frequency that is determined by said frequency of said AC mains voltage.

2. A power supply in accordance with Claim 1 characterized in that said switching means (Q1) continuously produces, in said run mode of operation, pulses of said switching current (i_1).

3. A power supply according to Claim 1 characterized by, a load circuit (222) coupled to said

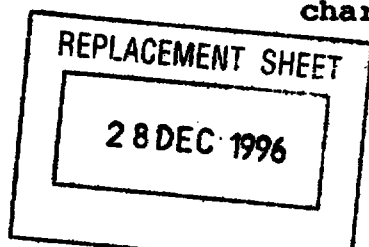



output supply voltage (B+) and responsive to said standby-mode/run-mode first control signal (from 333) to generate a load current (i_3) therein that varies in accordance with said standby-mode/run-mode first control signal and means coupled to said load circuit (222) and responsive to at least one of said output supply voltage (B+) and said load current (i_3) for generating a third control signal (V_4) that is coupled to said third means (T1) for enabling said burst mode operation when a level of said at least one of said output supply voltage (B+) and load current (i_3) is outside a normal operation range.

4. A power supply according to Claim 3 characterized in that said third control signal (V_4) varies a duty cycle of said switching means (Q1) during said run mode of operation in accordance with said output supply voltage (B+) in a negative feedback manner.

5. A power supply according to Claim 1 characterized in that during said run mode of operation the switching cycles of said switching means (Q1) occur continuously and uninterrupted by dead time intervals.

6. A power supply according to Claim 1 characterized by, modulating means (T2,C3) responsive to said output supply voltage (B+) and coupled to said switching means (Q1) for pulse width modulating said switching operation of said switching means (Q1) during said run mode of operation in a negative feedback manner, thereby regulating said output supply voltage (B+) during said run mode of operation.

7. A power supply according to Claim 6 characterized in that said switching operation is controlled in an open loop manner with respect to variation of said output supply voltage (B+) during said standby mode of operation.

REPLACEMENT SHEET

28 DEC 1996



8. A power supply according to Claim 6 characterized in that said modulating means (T2) is responsive to said AC mains voltage and coupled to said first control signal generating means (110) for pulse-width modulating said first control signal (V_5) in accordance with a waveform of said AC mains voltage to provide a soft start operation during each period of said AC mains voltage that occurs in said standby mode of operation.

9. A power supply according to Claim 8 characterized in that said switching means (Q1) operates in first and second switching states during a given switching cycle and wherein a length of an interval when said switching means (Q1) operates in one of said states increases progressively during corresponding periods of said AC mains voltage in accordance with a waveform of said AC mains voltage to provide said soft start operation during said standby mode of operation.

10. A power supply according to Claim 8 characterized in that said soft start operation causes a reduction in parasitic mechanical noise in said power supply during said standby mode of operation.

11. A power supply according to Claim 8 characterized by a load (222) coupled to said output supply voltage that generates a load current (i_3), wherein said fourth means (Q4, Q3, Q2) is responsive to a magnitude of said load current for controlling said switching operation in said burst mode manner when said magnitude of said load current is excessive.

12. A power supply according to Claim 11 characterized in that said modulating means (T2, C3) modulates said first control signal (V_5) in accordance with said waveform of said AC mains voltage to provide said soft start operation ~~when said magnitude of said load current~~

REPLACEMENT SHEET

28 DEC 1996



(i_3) is excessive, for providing an over-current protection.

13. A switch mode power supply, comprising:
means for generating an input supply voltage (V_{UR})

from a source of AC mains voltage at a first frequency;

a transformer (T2) having a first winding (W_1)
coupled to said input supply voltage (V_{UR}); characterized
by

first switching means (Q2) coupled to said first
winding (W_1) for generating a switching current (i_2)
therein, said first switching means (Q2) and said
transformer (T2) forming a regenerative positive feedback
signal path that forms an oscillator (110) that oscillates
continuously during a run-mode of operation;

means (Q1) coupled to said input supply voltage
(V_{UR}) and responsive to an output signal (V_5) of said
oscillator (110) for generating from said input supply
voltage (V_{UR}) an output supply voltage (B+) by a switching
operation controlled in accordance with said output signal
(V_5) of said oscillator (110);

means (Q3,Q4) responsive to said output supply
voltage (B+) and coupled to said oscillator (110) for
modulating said oscillator output signal (V_5) during said
run mode of operation in a negative feedback manner,
thereby regulating said output supply voltage (B+);

means (Q4,Q3) responsive to a standby-mode/run-
mode control signal (from 333) and coupled to said
oscillator (110) for disabling the continuous oscillations
in said oscillator (110), in a standby mode of operation;
and

means (D2,C3) responsive to a signal (i_7) at a
frequency that is determined by said first frequency for
initiating a burst mode switching operation in said first
switching means (Q2) that is repetitive at a frequency
determined by said first frequency when the continuous
oscillations are disabled.

REPLACEMENT SHEET

28 DEC 1996



14. A power supply according to Claim 13 characterized in that said modulating means (Q3,Q4) comprises a capacitor (C4) for generating a control voltage (V_4) in said capacitor (C4) having a value that is indicative of a duty cycle of said first switching means (Q2) required for regulating said output supply voltage (B+), and wherein said modulating means further comprises second switching means (Q3) that is responsive to said switching current (i_2) for coupling said capacitor (C4) to a second winding (W_2) to apply said control voltage (V_4) in said capacitor (C4) to said second winding (W_2) during a flyback interval of a given switching cycle of said first switching means (Q2), and

means (Q4) coupled to said capacitor (C4) and responsive to said standby-mode/run-mode control signal (from 333) for controlling said control voltage (V_4) in a manner that disables said regenerative positive feedback signal path during said standby mode of operation.

15. A power supply according to Claim 13 characterized in that said modulating means (Q3,Q4) forms a DC coupled signal path between a terminal (99) where said output supply voltage (B+) is developed and said second winding (W_2) of said transformer (T2).

16. A switch mode power supply for generating an output supply voltage (B+) during both a standby-mode of operation and during a run-mode of operation, comprising;

means for generating an input supply voltage (V_{UR}) from a source of AC mains voltage;

means (110) for generating a first control signal (V_5) at a given frequency;

switching means (Q1) energized by said input supply voltage (V_{UR}) and responsive to said first control signal (V_5) for producing a switching current (i_1) during both said standby-mode of operation and said run-mode of operation;

REPLACEMENT SHEET

28 DEC 1996



means (T1, W_S) responsive to said switching current (i₁) for generating therefrom said output supply voltage (B+);

a source (333) of a standby-mode/run-mode control signal; characterized by

means (Q4, Q3, T2, C3) responsive to said standby-mode/run-mode control signal for controlling said switching means (Q1) in a burst mode manner during said standby mode of operation, such that, during a burst interval, a plurality of switching cycles are performed, and during an alternating dead time interval, no switching cycles are performed; and

means (D2, R3, C2) coupled to said switching means (Q1) for controlling a switching frequency in said switching means (Q1) during said standby-mode of operation, such that said switching frequency of said switching means (Q1) varies within said burst interval.


17. A power supply in accordance with Claim 16 characterized in that during said standby mode of operation said switching frequency of said switching means (Q1) is a function of a waveform of said input supply voltage.

18. A power supply according to Claim 16 characterized in that said switching frequency progressively decreases during said burst mode interval.

— 19. A power supply according to Claim 18 characterized in that the on-time of said switching means progressively increases during said burst mode interval.

20. A power supply according to Claim 16 characterized in that said frequency control means provides a soft start operation within said burst interval.

21. A switch mode power supply, comprising:
a source of input supply voltage (V_{UR});





a transformer (T2) having a first winding (W_1) coupled to said input supply voltage (V_{UR});

first switching means (Q2) coupled to said first winding (W_1) for generating a switching signal (i_2) in said transformer (T2) that is coupled back in a positive feedback manner to said first switching means (Q2) to form an oscillator (110) that oscillates continuously during a run-mode of operation;

means coupled to said input supply voltage (V_{UR}) and responsive to an output signal (V_5) of said oscillator (110) for generating from said input supply voltage (V_{UR}) said output supply voltage ($B+$) by a switching operation controlled in accordance with said oscillator output signal (V_5); characterized by


means (Q4, Q3, T2) responsive to said output supply voltage ($B+$) and coupled to said oscillator (110) for modulating said oscillator output signal (V_5) during a run mode of operation in a negative feedback manner thereby regulating said output supply voltage ($B+$);

means responsive to a standby-mode/run-mode control signal (from 333) and coupled to said oscillator (110) for disabling in a standby mode of operation the continuous oscillations in said oscillator;

means (D1, C2) responsive to a signal at a first frequency for initiating a burst mode switching operation in said first switching means (Q1) that is repetitive at a frequency determined by said first frequency when the continuous oscillations are disabled;

a capacitor (C3); and

second switching means (D2) responsive to said standby-mode/run-mode control signal for coupling said capacitor (C3) to said positive feedback signal path to maintain a switching frequency of said first switching means (Q1) above an audible range during said burst mode of operation and for decoupling said capacitor (C3) from said positive feedback signal path to prevent said capacitor from affecting the oscillation (110) frequency of said oscillator during said run-mode of operation.





22. A power supply according to Claim 21 characterized by, a resistor (R3) coupled to said capacitor (C3) for discharging said capacitor (C3) during dead time intervals when no burst mode switching operation occurs in said standby mode of operation.

23. A power supply according to Claim 22 characterized in that said second switching means comprises a diode (D2) that is coupled between a second winding (W₃) of said transformer and said capacitor.

24. A power supply according to Claim 23 characterized in that a current that charges said capacitor (C3) via said diode (D2) develops a voltage in said capacitor (C3) that is ramping in a first direction during a given burst-mode interval and wherein said resistor (R3) causes said capacitor (C3) voltage to ramp in an opposite direction during said dead time intervals.

REPLACEMENT SHEET

28 DEC 1996

THIS SHEET HAS BEEN
REPLACED


ABSTRACT

A SWITCH-MODE POWER SUPPLY WITH BURST MODE
STANDBY OPERATION

5 In a switch mode power supply (200), a
first switching transistor (Q2) is coupled to a primary
winding (W_1) of a transformer (T2) for generating pulses of
a switching current (i_2). A secondary winding (W_2) of the
transformer is coupled via a switching diode (D3) to a
10 capacitor (C4) of a control circuit for developing a
control signal (V_4) in the capacitor (C4). The control
signal (V_4) is applied to a mains coupled chopper second
transistor (Q1) for generating and regulating supply
voltages in accordance with pulse width modulation of the
15 control signal (V_4). During standby operation, the first
(Q2) and second (Q1) transistors operate in a burst mode
that is repetitive at a frequency of the AC mains supply
voltage such as 50Hz. In the burst mode operation, during
intervals in which pulses of the switching current occur,
20 the pulse width and peak amplitude of the switching current
pulses progressively increase in accordance with the
waveform of the mains supply voltage to provide a soft
start operation in the standby mode of operation within
each burst group.

25

FIGURE 1

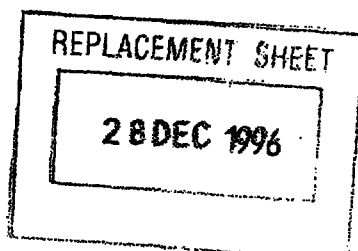

This Sheet Has Been Replaced





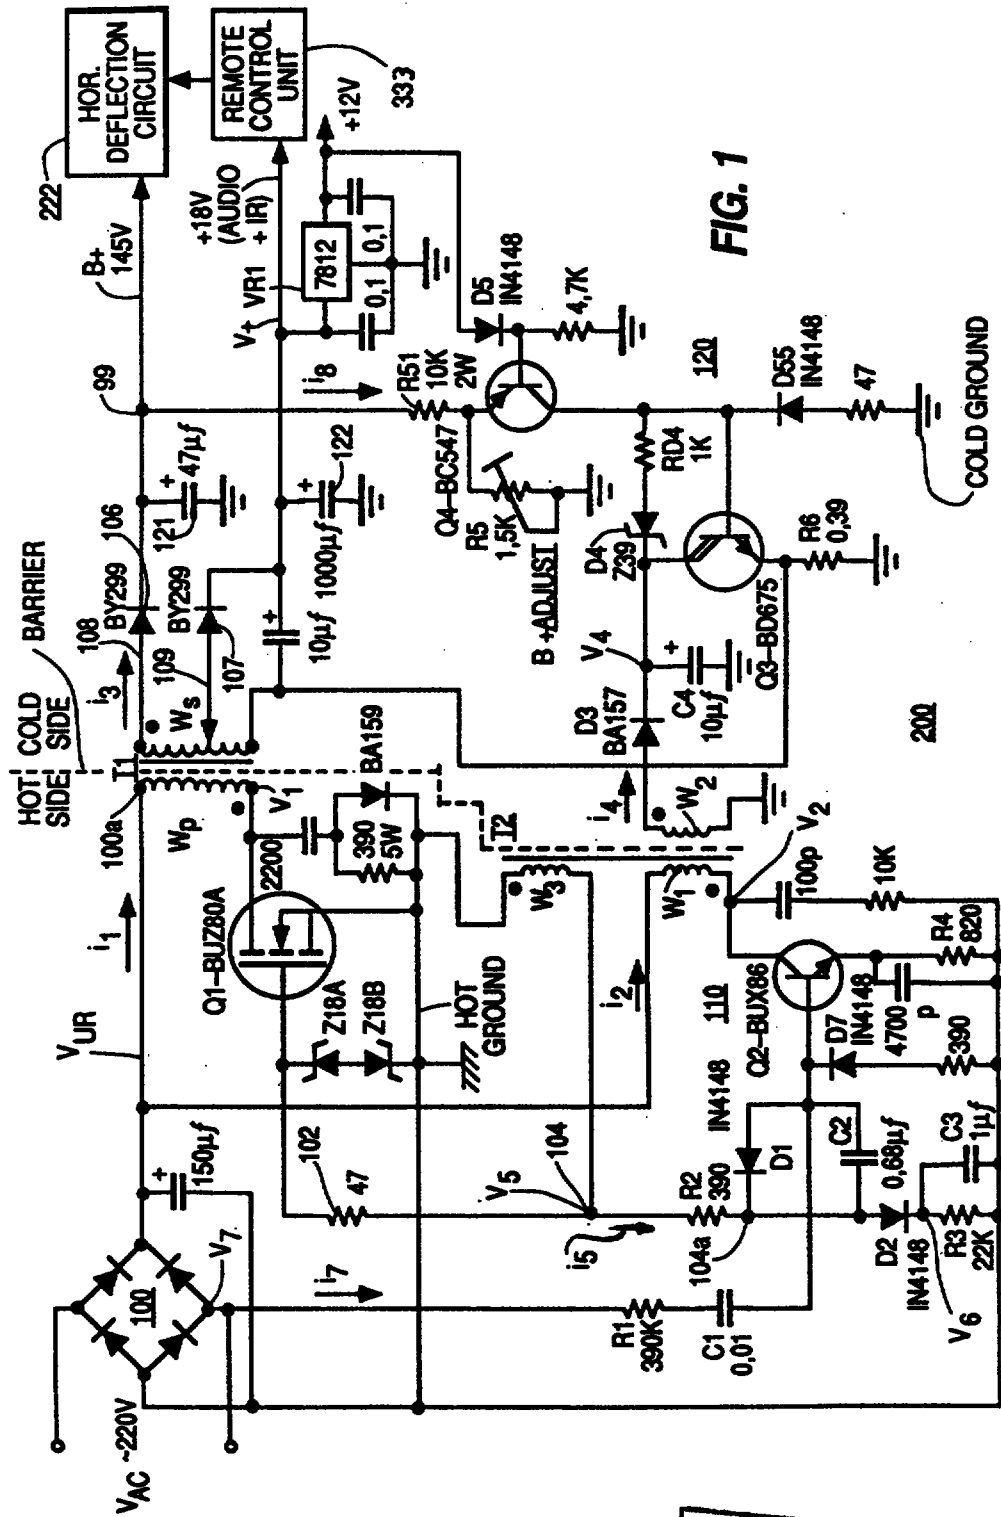


FIG. 1

REPLACEMENT SHEET


28 DEC 1996

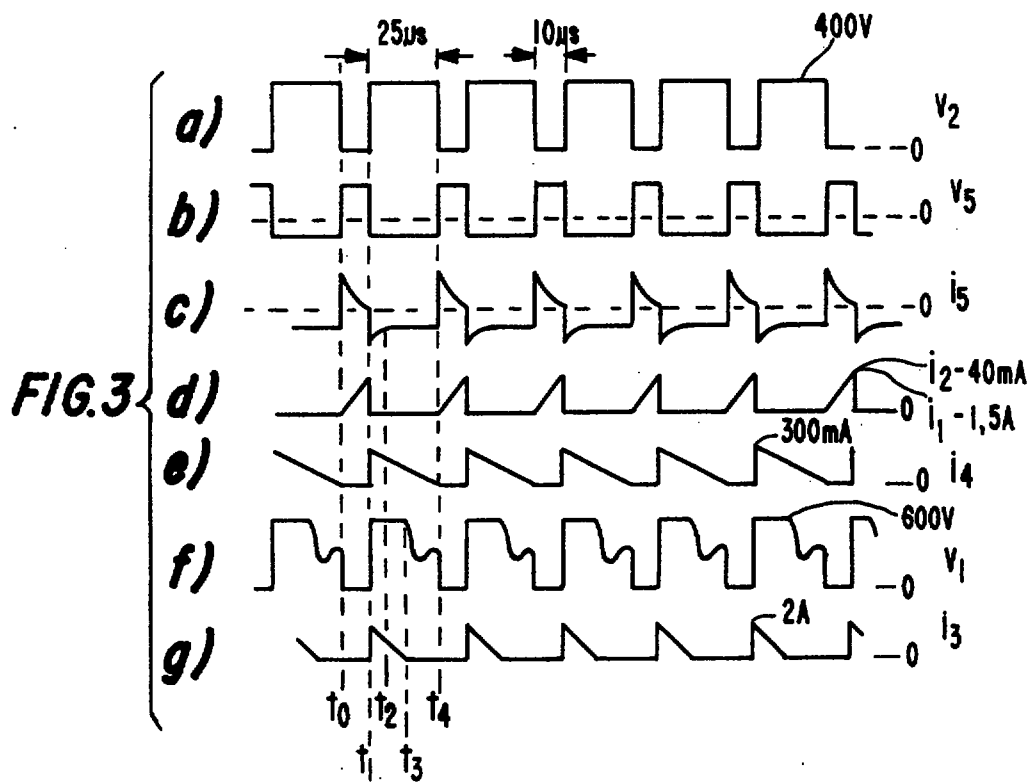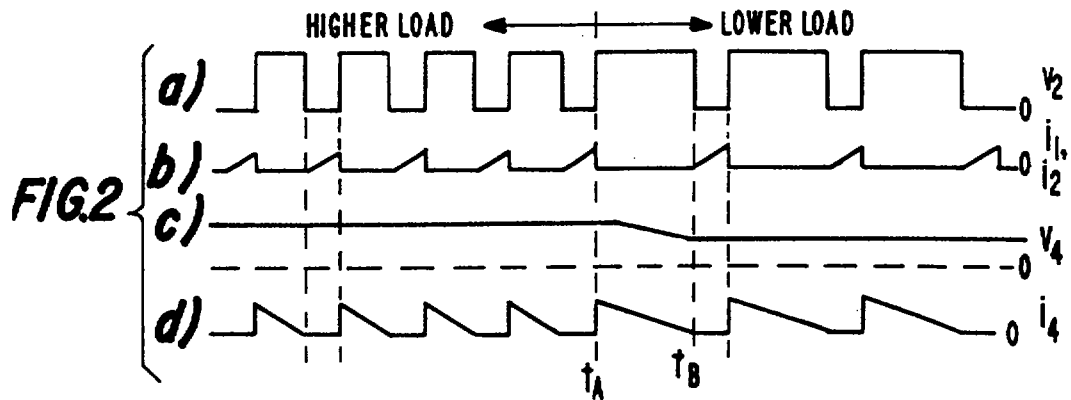

REPLACEMENT SHEET



28 DEC 1996

FIG. 4
TRANSFORMER
DATA

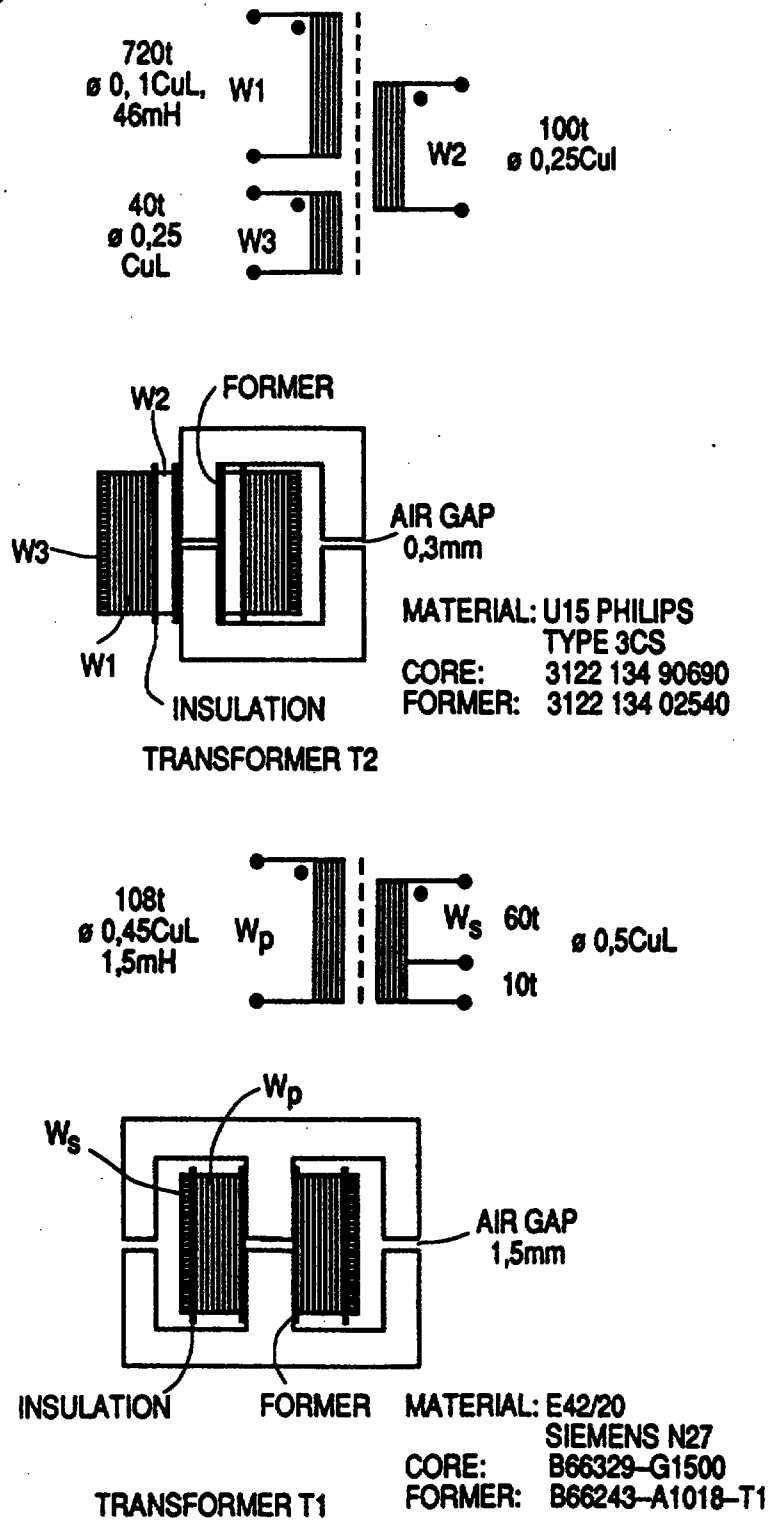

REPLACEMENT SHEET


28 DEC 1996

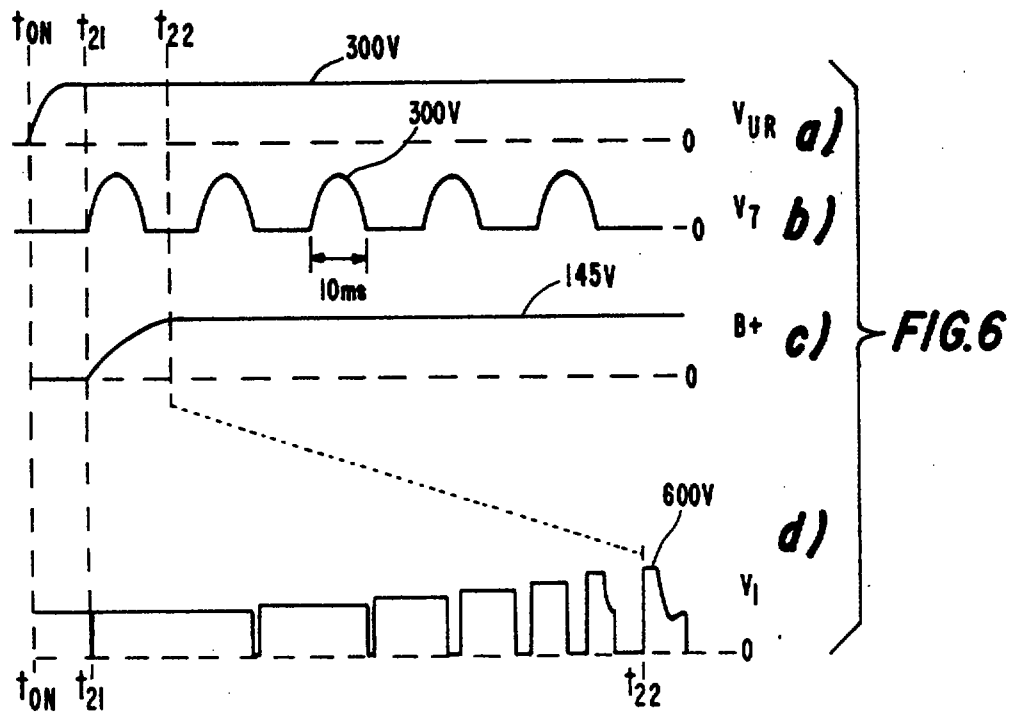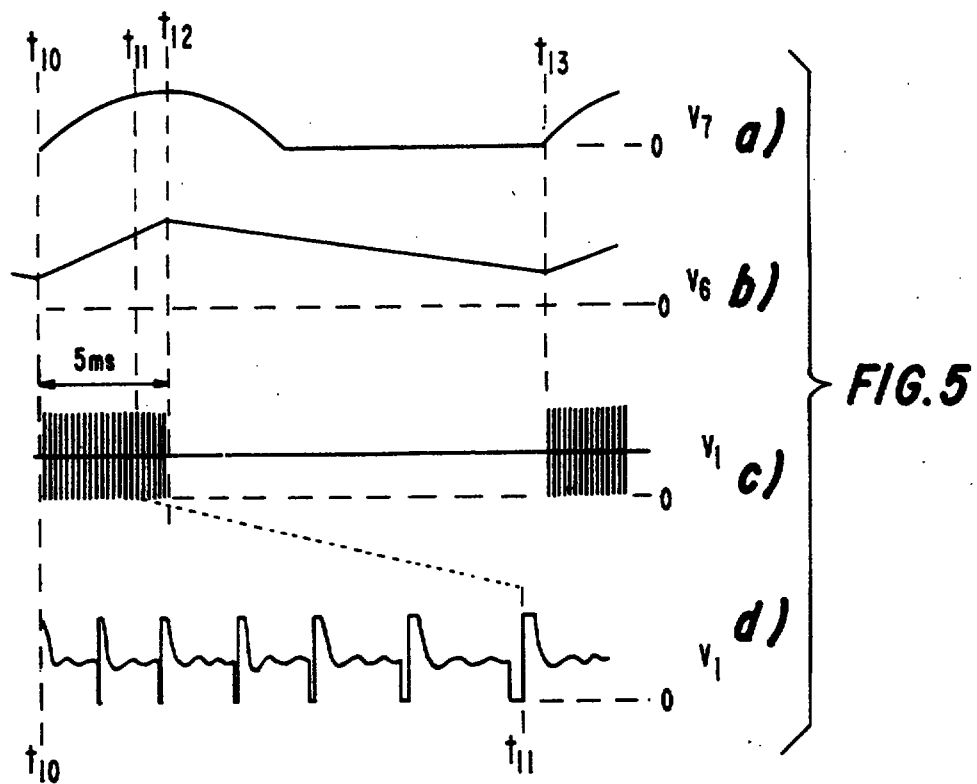

REPLACEMENT SHEET

28 DEC 1996

FIG. 7 MODIFICATION OF THE CIRCUIT OF FIGURE 1
FOR HIGH AUDIO POWER CONSUMPTION

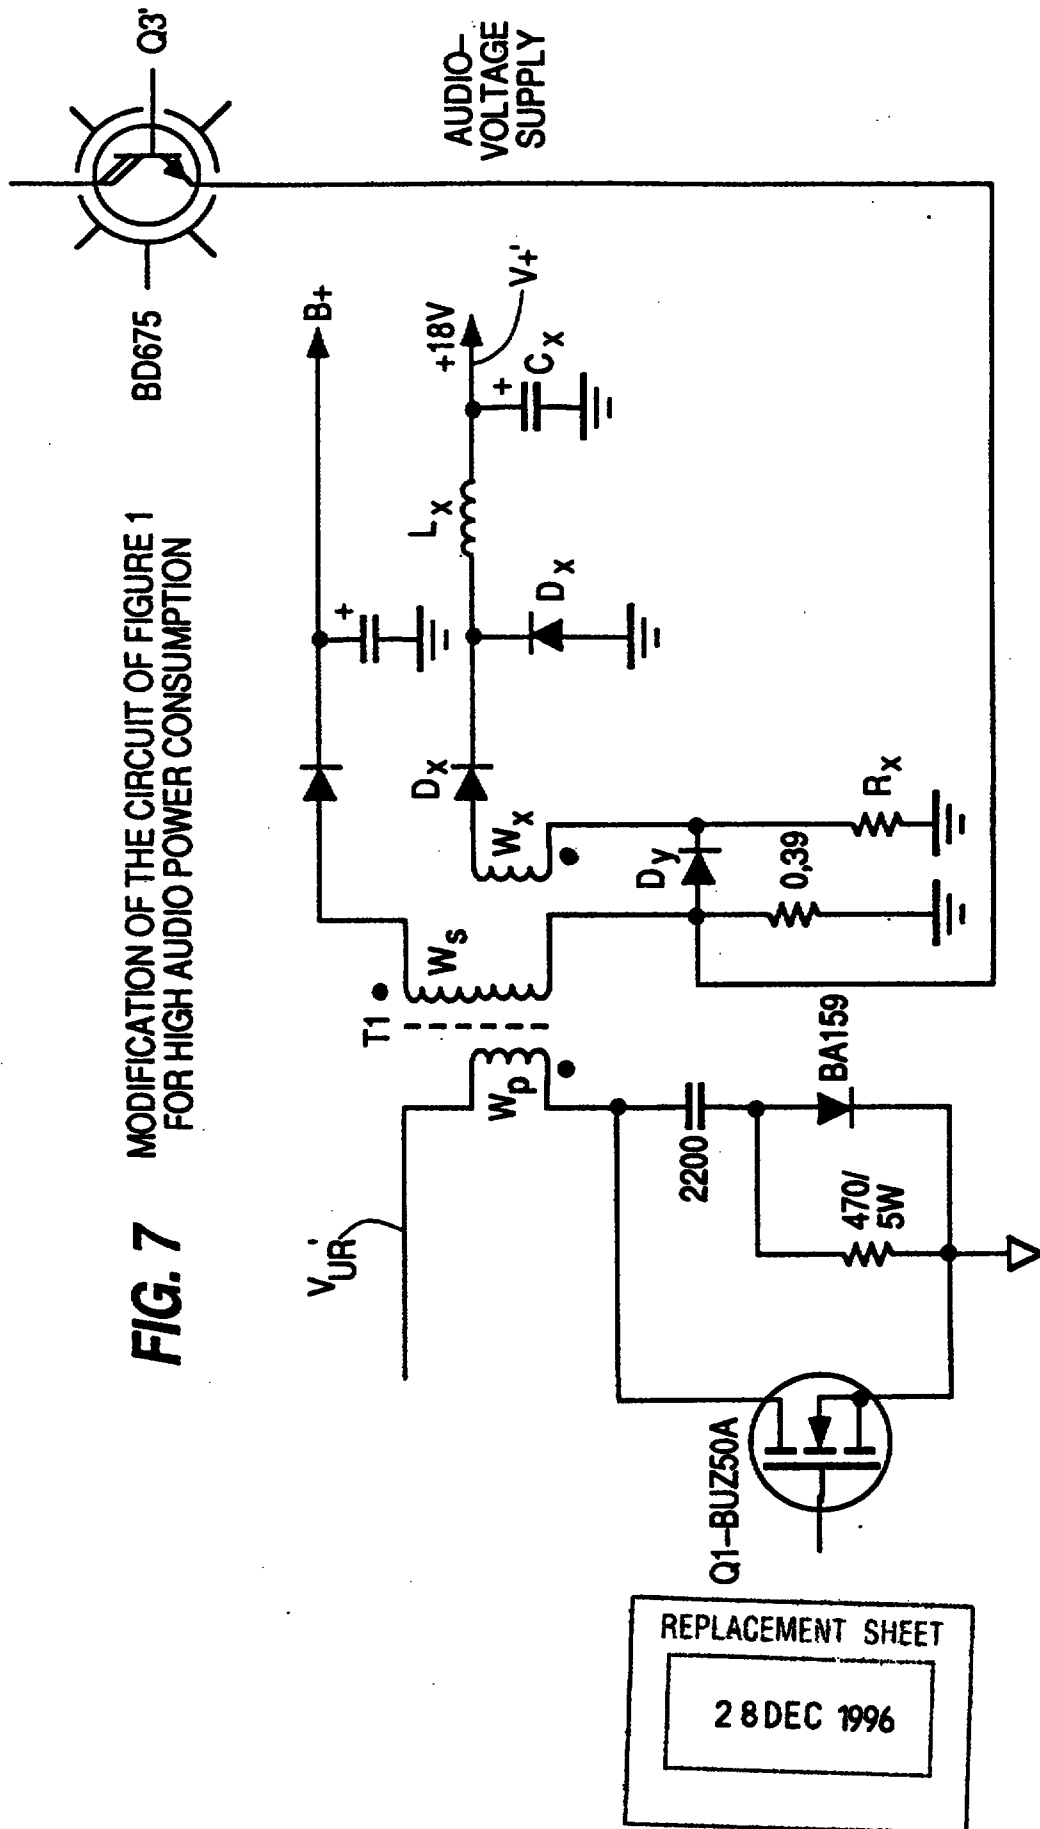

REPLACEMENT SHEET

28 DEC 1996

FIG. 8

ROW #	MAINS VOLTAGE [V]	BEAM CURRENT [mA]	B+ VOLTAGE [V]	ΔV [mV]	CIRCUIT TYPE
1	220	0.8	139.8	700	PRIOR ART
		0	140.5		
2	220	0.8	140.5	200	SMPS OF FIG. 1
		0	140.7		

FIG. 9

ROW #	MAINS VOLTAGE [V] V_{AC}	BEAM CURRENT [mA]	B+ VOLTAGE [V]	ΔV [mV]	CIRCUIT TYPE
1	180	0.5	139.1	1.4	PRIOR ART
	250		140.5		
2	180	0.5	140.4	0.1	SMPS OF FIG. 1
	250		140.5		

REPLACEMENT SHEET

28 DEC 1996

TEXT OF THE ABSTRACT

A SWITCH MODE POWER SUPPLY WITH BURST MODE
STANDBY OPERATION

In a switch mode power supply (200), a first switching transistor (Q2) is coupled to a primary winding (W_1) of a transformer (T2) for generating pulses of a switching current (i_2). A secondary winding (W_2) of the transformer (T2) is coupled via a switching diode (D3) to a capacitor (C4) of a control circuit for developing a control signal (V_4) in the capacitor (C4). The control signal (V_4) is applied to a mains coupled chopper second transistor (Q1) for generating and regulating supply voltages in accordance with pulse width modulation of the control signal (V_4). During standby operation, the first (Q2) and second (Q1) transistors operate in a burst mode that is repetitive at a frequency of the AC mains supply voltage such as 50Hz. In the burst mode operation, during intervals in which pulses of the switching current occur, the pulse width and peak amplitude of the switching current pulses progressively increase in accordance with the waveform of the mains supply voltage to provide a soft start operation in the standby mode of operation within each burst group.

Fig. 1

REPLACEMENT SHEET

11 JUN 1999