9600807-6
DJ/02/96
SPOS

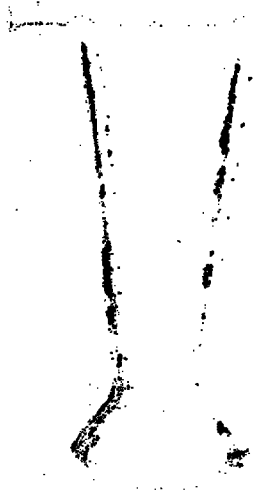

COPY OF CORRESPONDING EUROPEAN APPLICATION AS ORIGINALLY FILED

J.21784 EP

THIS SHEET HAS BEEN REPLACED

REPLACED SHEETS SG
☑ Description : paged ....1.... to paged ....50....
☑ Claim(s) : paged ....51.... to paged ....55....
☑ Drawing(s) : paged ....1/71.... to paged ....71/71....
☑ Abstract : paged ....56.... to paged ....-....

TITLE OF THE INVENTION

DATA CONVERSION METHOD AND RECORDING/REPRODUCING APPARATUS USING THE SAME

BACKGROUND OF THE INVENTION

Field of the Invention

The present invention relates to a data conversion method for converting digital data to signals suitable for the recording system or the transmission channel used when recording or transmitting the digital data onto magnetic tape, and a recording/reproducing apparatus employing the data conversion method.

Description of Related Art

Prior art data conversion methods employed in magnetic recording/reproducing apparatus include, for example, an 8/10 modulation method such as disclosed in "THE DAT CONFERENCE STANDARD" (issued June 1987). The 8/10 modulation method is a data conversion method in which digital data are partitioned into datawords of 8 bits each for conversion into 10-bit codewords. Fig. 1 is a circuit block diagram for explaining this data conversion method, and Fig. 2 is a data conversion table used for the same. In Fig. 1, the

This Sheet Has Been Replaced

reference numeral 1 designates an encoder for accepting eight-bit digital data and a one-bit table select signal (Q') at its respective inputs and for outputting a total of 11 bits, i.e. a 10-bit codeword plus a one-bit signal (Q) for selecting the table for the next codeword. Further, the numeral 2 denotes a flip-flop for delaying the codeword table select signal by one dataword. The encoder 1 includes a read-only memory (ROM) or the like which contains the data conversion table shown in Fig. 2, wherein codewords of CDS (Codeword Digital Sum) = 0 are mapped on a one-to-one basis to 256 datawords from "00" to "FF" of hexadecimal numeral, while in the case of codewords of CDS $\neq$ 0, pairs of codewords, one with CDS = +2 and the other with CDS = -2, are each mapped to one dataword, the table of Q' = -1 consisting of codewords of CDS = +2 and the table of Q' = +1 consisting of codewords of CDS = -2. The table select signal (Q) is used to select the CDS (the table) having the direction that suppresses the dispersion of charges in the codeword sequence.

The operation of the above circuit will now be explained with reference to the timing diagram of Fig. 3. In Fig. 3, the reference signs (a), (Q), and (b) correspond to inputs/outputs at the respective parts shown in Fig. 1, and the reference signs (c) and (d) respectively represent an output signal from an NRZI

This Sheet Has Been Replaced

converter (not shown) and a DSV (Digital Sum Variation) value at the end of codeword.

First, an eight-bit dataword "FF" is input to the encoder 1, along with the table select signal (Q') = -1, and consequently, the encoder 1 outputs a 10-bit codeword "1111101010" of CDS = +2 corresponding to "FF" for Q' = -1. At the same time, the table select signal Q = -1 is output for the next codeword. The parallel 10-bit signal is then converted to a serial signal, after which the signal is NRZI-modulated. As a result, the DSV value at the end of the codeword becomes +2.

Next, when "00" is input to the encoder 1, the encoder 1 outputs Q = 1 together with a 10-bit signal "0101010101" of CDS = 0 corresponding to "00" for Q' = -1 which is produced by introducing a one-symbol delay in the previous output Q = -1. As a result, the DSV value at the end of the codeword after NRZI modulation remains at +2.

Next, when "11" is input to the encoder 1, the encoder 1 outputs Q = -1 together with a 10-bit signal of CDS = -2 corresponding to "11" for Q' = 1. As a result, the DSV value at the end of the codeword after NRZI modulation becomes zero. In this manner, for each eight-bit dataword input to the encoder 1, a codeword to be output is selected

This Sheet Has Been Replaced



from the table of either Q' = -1 or Q' = 1 corresponding to the dataword on the basis of the table select signal output previously. The DSV at the end of each codeword after NRZI modulation can only take the value 0, +2 or -2. This means that the DSV dispersion is suppressed, as a result of which DC-free data conversion is realized.

As described above, according to the prior art data conversion method, eight-bit data is converted to a 10-bit codeword of CDS = 0 or CDS = +2 or -2, and a DC-free signal is produced with the DSV dispersion suppressed, thereby minimizing intersymbol interference on the transmission channel and thus increasing the recording density per track. However, for recent digital magnetic recording/reproducing apparatus using a rotary head, a recording density as high as several square micrometers per bit is demanded, which necessitates not only increasing the recording density per track but also reducing the track width down to several micrometers. To implement such apparatus, it is essential to employ a dynamic tracking following (DTF) control system whereby pilot signals for tracking are recorded on the main track recorded by the rotary head and the playback head is controlled to follow the recorded track curves during playback. When the prior art data conversion method is employed in such apparatus for multiplex recording of the pilot signals, the digital signal spectral distribution has to be

This Sheet Has Been Replaced



obtained down to ultra low frequency ranges although the recorded information signals contain no DC components; the resulting problem is that the pilot signals cause external disturbances, leading to increased errors in the detection of the digital signals.

One possible approach to overcoming the problem of the pilot signals causing external disturbances to the digital signals may be by generating pilot signals synchronized to the digital signals. However, the prior art data conversion method is effective only in suppressing the DSV dispersion and is not capable of actively controlling the DSV, and therefore, has the problem that it cannot generate pilot signals synchronized to the digital signals.

Fig. 4 shows a DAT recording format employed in a magnetic recording apparatus using the 8/10 modulation method. As shown, according to the format of Fig. 4, ATF areas for tracking control are provided in each of which a pilot signal for tracking control is recorded. Further, Fig. 5 shows a digital VTR recording format which is disclosed in Japanese Patent Application Laid Open No.3-217179 (1991). As shown, the track is divided into a video data area, an audio data area, a servo pilot area, and a sub code area, the pilot signal being recorded in the servo pilot area only.

This Sheet Has Been Replaced

According to the above construction of the prior art, it is not possible to control the DSV in such a manner as desired, and a separate area has to be reserved for recording a pilot signal for tracking control. Accordingly, accurate tracking control cannot be realized without increasing the data amount and hence increasing the recording rate, which makes it difficult to achieve high density recording.

SUMMARY OF THE INVENTION

It is an object of the present invention to provide a data conversion method which, by suppressing low frequency components, can minimize intersymbol interference on the transmission channel, thus permitting increased per-track recording density, as in the prior art data conversion method, and which is capable of generating pilot signals synchronized to digital signals, which has not been possible with the prior art method, and thus achieves increased recording density with reduced track width.

It is another object of the present invention to provide a recording/reproducing apparatus optimized for the data conversion method capable of generating pilot signals synchronized to digital signals.

This Sheet Has Been Replaced

It is a further object of the present invention to provide a data conversion method which is capable of generating pilot signals for tracking control and which involves hardly any increase in the recording rate and therefore permits high density recording, and a recording/reproducing apparatus using such a data conversion method.

According to the present invention, there is provided a data conversion method for word-converting an r-bit first dataword to an m-bit second dataword ($r < m$) and converting the word-converted m-bit second dataword to an n-bit codeword ($m < n$), in which, for r/m word-conversion, a sequence of first datawords is divided into groups of x bits where x is the least common multiple of r and m, an arbitrary first dataword selected from x/r groups of first datawords is divided into x/m, and r/(x/m)-bit data obtained by dividing the first dataword into x/m is appended to the LSB (or MSB) side of one or other of the non-divided first datawords to form the m-bit second dataword. The m-bit second dataword can thus be handled as r + (r/(x/m)) (or (r/(x/m)) + r). Therefore, if, in m/n conversion, the n-bit codeword is formed by dividing it into n1 and n2 bits, the data conversion can be performed by relating r to n1 and r/(x/m) to n2. This serves to reduce the possibility of error propagation due to a bit error that may occur in reverse data conversion.

This Sheet Has Been Replaced

Furthermore, when converting the word-converted m-bit second dataword to the n-bit codeword, the number of successive 0s between a bit "1" and the next bit "1" in each n-bit codeword is limited to 4, and two codewords, one with CDS = +1 and the other with CDS = -1, are paired and related to the m-bit second dataword, the two codewords being selectively used in accordance with a DSV control signal. This enables the DSV to be controlled at a desired value for each codeword, thereby achieving spectrum suppression in a relatively low frequency range. Also, by controlling the CDS polarity in accordance with the DSV control signal, a pilot signal of the DSV variation cycle synchronized to digital data can be generated in the low frequency band where the digital data power spectrum exhibits an abrupt drop.

When the above data conversion method is employed in a recording/reproducing apparatus, the number of first datawords to be recorded in a data block where an error-correcting code and an error-detection code are appended for every synchronizing signal is set at an integral multiple of x/r. The recording/reproducing apparatus thus constructed achieves an efficient code format that does not require redundant bits.

This Sheet Has Been Replaced

The recording/reproducing apparatus employing the above data conversion method has: decoding means for decoding n1 bits in the reproduced n-bit codeword into r bits, the reproduced n-bit codeword being divided into n1 bits and n2 bits for reverse conversion into the m-bit second dataword; decoding means for decoding the n2 bits into r/(x/m) bits; decoding means for decoding the n bits into the m bits; identifying means for identifying the type of bits at prescribed positions in the n-bit codeword and for outputting an identification signal designating the identified type; and means for selecting decoded data from the respective decoding means on the basis of the identification signal supplied from the identifying means and for outputting the decoded second dataword. This construction serves to reduce the possibility of the error propagation that may occur between decoded first datawords due to a single bit random error in the n-bit codeword.

Another recording/reproducing apparatus of the invention has: means for recording multiple kinds of data in partitioned areas; means for relating 14-bit codewords of CDS = 0 and pairs of codewords of CDS = ± 2 to respective 12-bit datawords when encoding and recording at least one of the multiple kinds of data and for encoding the data by selectively using these codewords; and means for appending one bit to each 14-bit codeword to form a pair of codewords,

This Sheet Has Been Replaced

one with CDS = +1 and the other with CDS = -1, when encoding and recording at least one other of the multiple kinds of data and for encoding the data by selectively using these codewords.

In the above recording/reproducing apparatus, when encoding and recording at least one of the area-partitioned multiple kinds of data, either a 14-bit codeword of CDS = 0 or a pair of codewords differing only in MSB, one with CDS = +2 and the other with CDS = -2, are related to one dataword, and the dataword is encoded by selectively using these codewords, thus constructing a DC-free code of Tmin = 0.86T and Tmax = 4.29T; on the other hand, when encoding and recording at least one other of the multiple kinds of data, one bit is appended to each 14-bit codeword to form a pair of codewords, one with CDS = +1 and the other with CDS = -1, and the data is encoded by selectively using these codewords, thus constructing a code that provides the DSV coming round to the same value at prescribed intervals.

The above and further objects and features of the invention will more fully be apparent from the following detailed description with accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a diagram showing the circuit configuration

This Sheet Has Been Replaced

of a prior art data converting apparatus.

Fig. 2 is a code conversion table according to a prior art data conversion method.

Fig. 3 is a diagram for explaining the operation of the data converting apparatus of Fig. 1.

Fig. 4 is a diagram showing a recording format of a prior art DAT.

Fig. 5 is a diagram showing a recording format of a prior art digital VTR.

Figs. 6 is a diagram showing the number of codewords for deriving codewords in accordance with a first embodiment of the invention.

Figs. 7 is a diagram showing the number of codewords for deriving codewords in accordance with a first embodiment of the invention.

Figs. 8 is a diagram for explaining the construction of code conversion tables according to the first embodiment of the invention.

Figs. 9 is a diagram for explaining the construction of code conversion tables according to the first embodiment of the invention.

Figs. 10 is a diagram for explaining the construction of code conversion tables according to the first embodiment of the invention.

Figs. 11 is a diagram showing code conversion according

This Sheet Has Been Replaced

to the first embodiment of the invention.

Figs. 12 is a diagram showing code conversion according to the first embodiment of the invention.

Figs. 13 is a diagram showing code conversion according to the first embodiment of the invention.

Figs. 14 is a diagram showing code conversion according to the first embodiment of the invention.

Figs. 15 is a diagram showing code conversion according to the first embodiment of the invention.

Figs. 16 is a diagram showing code conversion according to the first embodiment of the invention.

Figs. 17 is a diagram showing code conversion according to the first embodiment of the invention.

Figs. 18 is a diagram showing code conversion according to the first embodiment of the invention.

Figs. 19 is a diagram showing code conversion according to the first embodiment of the invention.

Figs. 20 is a diagram showing code conversion according to the first embodiment of the invention.

Figs. 21 is a diagram showing code conversion according to the first embodiment of the invention.

Figs. 22 is a diagram showing code conversion according to the first embodiment of the invention.

Figs. 23 is a diagram showing code conversion according to the first embodiment of the invention.

This Sheet Has Been Replaced

Figs. 24 is a diagram showing code conversion according to the first embodiment of the invention.

Figs. 25 is a diagram showing code conversion according to the first embodiment of the invention.

Figs. 26 is a diagram showing code conversion according to the first embodiment of the invention.

Fig. 27 is a diagram showing the circuit configuration of a data converting apparatus for implementing the code conversion method of the first embodiment.

Fig. 28 is a diagram for explaining the operation of the data converting apparatus of Fig. 27.

Fig. 29 is a power spectrum diagram showing the effect of the first embodiment.

Fig. 30 is a diagram showing the structure of a first dataword block recorded by a recording/reproducing apparatus employing the data conversion method of the first embodiment.

Fig. 31 is a diagram showing the structure of the first dataword block recorded by the recording/reproducing apparatus employing the data conversion method of the first embodiment along with the structure of the first datawords recorded at the top of the block.

Fig. 32 is a diagram showing the configuration of a circuit for implementing a decoding method in the

This Sheet Has Been Replaced

recording/reproducing apparatus employing the data conversion method of the first embodiment.

Fig. 33 is a diagram showing classifications for 5-bit LSB codewords in the codewords of the first embodiment.

Figs. 34 is a diagram showing code conversion according to a second embodiment of the invention.

Figs. 35 is a diagram showing code conversion according to a second embodiment of the invention.

Figs. 36 is a diagram showing code conversion according to a second embodiment of the invention.

Figs. 37 is a diagram showing code conversion according to a second embodiment of the invention.

Figs. 38 is a diagram showing code conversion according to a second embodiment of the invention.

Figs. 39 is a diagram showing code conversion according to a second embodiment of the invention.

Figs. 40 is a diagram showing code conversion according to a second embodiment of the invention.

Figs. 41 is a diagram showing code conversion according to a second embodiment of the invention.

Figs. 42 is a diagram showing code conversion according to a second embodiment of the invention.

Figs. 43 is a diagram showing code conversion according to a second embodiment of the invention.

Figs. 44 is a diagram showing code conversion according

This Sheet Has Been Replaced

to a second embodiment of the invention.

Figs. 45 is a diagram showing code conversion according to a second embodiment of the invention.

Figs. 46 is a diagram showing code conversion according to a second embodiment of the invention.

Figs. 47 is a diagram showing code conversion according to a second embodiment of the invention.

Figs. 48 is a diagram showing code conversion according to a second embodiment of the invention.

Figs. 49 is a diagram showing code conversion according to a second embodiment of the invention.

Fig. 50 is a diagram showing the circuit configuration of a data converting apparatus for implementing the data conversion method of the second embodiment.

Fig. 51 is a diagram showing a code select table according to the second embodiment.

Fig. 52 is a diagram for explaining the operation of the data converting apparatus of Fig. 50.

Fig. 53 is a diagram showing a recording format of a recording/reproducing apparatus according to the second embodiment.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

(Embodiment 1)

A first embodiment of the invention will now be

This Sheet Has Been Replaced

described below with reference to accompanying drawings. Now suppose a first dataword length r = 8, a word-converted second dataword length m = 12, and a data-converted codeword length n = 15, to form a code with a modulation parameter Tmax/Tmin = 5. At this time, d = 0 and k = 4, where d is the minimum number of 0s between an arbitrary 1 and the next 1, and k is the maximum number of 0s between an arbitrary 1 and the next 1. The NRZI (F) rule is used to form the code. To achieve such a data conversion, the maximum number of successive 0s in each codeword is limited to 3 on the MSB side, 1 on the LSB side, and 4 within codeword. In this situation, the number of possible codewords having the MSB of 0 and satisfying the 0 run length condition is given in Fig. 6 for each CDS.

To form a DC-free code, 2^{12} pairs (4096 pairs) of codewords, each pair having codewords of different CDS polarities, should be provided. The numbers given in Fig. 6 are only for codewords whose MSB is 0; by converting the MSB to 1, codewords of reverse CDS polarity can be obtained while satisfying the 0 run length condition. Accordingly, of the codewords given in Fig. 6, only the codewords of CDS = ± 1 are enough to satisfy the minimum required number of second datawords = 2^{12} (4096 < number of codewords = 4650). Therefore, by using only the codewords of MSB = 0 and CDS = ± 1 and by setting the MSB to 0 or 1, it is possible to suppress

This Sheet Has Been Replaced

the dispersion of DSV.

Fig. 7 shows possible combinations of codewords n1 and n2 when the codewords of CDS = ± 1 given in Fig. 6 are each divided into n1 = 10 bits and n2 = 5 bits, n1 representing the 10 bits on the MSB side and n2 representing the 5 bits on the LSB side. In Fig. 7, Group A consists of n1 codewords of CDS = 0, Group B of n1 codewords of CDS = +2, Group C of n1 codewords of CDS = -2, Group D of n1 codewords of +4, and Group E of n1 codewords of CDS = -4. Each of the codeword groups A to E is subdivided in accordance with the 0 run length at codeword end resulting from the concatenation of the codewords n1 and n2.

First, we focus our attention on Group A. It can be seen that there are 18 different n2 codewords that can be paired with A1 while, of the 18 codewords, 17 codewords excluding the codeword "02" can also be paired with A2. Therefore, for Group A, 16 codewords, excluding the codewords "02" and "05", are used, and m = 12 bits are divided into m1 = 8 bits and m2 = 4 bits at the time of m/n conversion, to realize m1/n1 (8/10) conversion and m2/n2 (4/5) conversion, respectively. This coding technique serves to avoid propagation of errors between divided codewords at the time of decoding. To utilize this property, when 8-bit first datawords of length (r) supplied from an error-correcting circuit are word-converted to 12-bit second data-

This Sheet Has Been Replaced

words of length (m), four bits separated from the eight bits are mapped to m2, while non-divided 8 bits are mapped to m1. As a result, when a random error occurred to one bit in n bits during the reconstruction process, the error occurring to the first dataword after decoding is limited only to one dataword; the error is thus prevented from propagating between datawords.

In the first embodiment, 1s and 0s used to represent one-bit signals are binary numbers, a 1 representing a high level and a 0 a low level. On the other hand, "0" to "F" used to represent datawords, codewords, or parallel data bit sequences are hexadecimal numbers.

If the above coding method is provided in 256 pairs, a single bit error in n bits during the reconstruction process can be prevented from propagating between first datawords after decoding. However, as is apparent from Fig. 7, under the condition that satisfies the modulation parameter of the data conversion method of the first embodiment, the above coding method can be applied only to Group A, and cannot be applied to the other Groups B to E.

In view of the above situation, we now consider a method of coding, as shown in Figs. 8 to 10 wherein the m1/n1, m2/n2 coding method is divided into three major coding groups, i.e. the first coding group consisting only of Group A codewords corresponding to the first datawords m1

This Sheet Has Been Replaced



= "00" to "73", the second coding group consisting of Group B and Group C codewords corresponding to the first datawords m1 = "74" to "BA", and the third coding group consisting of the codewords in the other groups as well as the remaining codewords in Group B and Group C corresponding to the first datawords m1 = "BB" to "FF".

First, referring to the first coding group of Fig. 8 which consists only of Group A codewords, if an error occurred to one bit in n bits in the reconstruction process, the error occurring to the first dataword after decoding is limited only to one dataword and is thus prevented from propagating between datawords.

Next, in the second coding group shown in Fig. 9, there is provided a one-to-one correspondence for the m2/n2 conversion, but for the m1/n1 conversion, two n1 codewords are mapped to one m1. Therefore, of the encoded 15 bits, if the 10 bits mapped to n1 contains a single bit error, the error occurring to the first dataword after decoding is limited only to one dataword and is thus prevented from propagating between datawords. However, if there is an error in one bit out of the five bits mapped to n2, error propagation can occur between first datawords after decoding from the probability point of view.

Further, in the third encoding group shown in Fig. 10, one m1 is mapped to a plurality of n1 codewords for the

This Sheet Has Been Replaced

m1/n1 conversion, while for the m2/n2 conversion, a plurality of m2 codewords are mapped to one n2. Therefore, any one bit error can cause error propagation between first datawords after decoding from the probability point of view whether the error is in n1 or n2.

In the data conversion method wherein an 8-bit first dataword is word-converted to a 12-bit second dataword which is further converted to a 15-bit codeword, the above coding method has the effect of reducing the possibility of error propagation that may occur between first datawords after decoding due to a single bit detection error in the encoded 15 bits.

Code conversion tables thus constructed are shown in Figs. 11 to 26. The numbers given in Figs. 11 to 26 represent binary digital signals in hexadecimal notation; "0" to "F" in the uppermost row each correspond to the four bits on the LSB side of a 12-bit input codeword, and "00" to "FF" in the leftmost column each correspond to the eight bits on the MSB side of a 12-bit input codeword, each row and column intersection "XXXX" forming the resulting 16-bit codeword. For example, when a 12-bit dataword "15A" is input, a codeword "9539" is obtained from the intersection between the row of "15" and the column of "A" (see Fig. 12). For a 12-bit input codeword (the second codeword), the resulting codeword consists of 16 bits, of which the MSB

This Sheet Has Been Replaced

corresponds to a Q signal ("1" for a high level and "0" for a low level, representing the end level of an NRZI-modulated codeword when the MSB of the premodulation codeword is "0"), the 15th bit represents the CDS information ("1" for +1 and "0" for -1), and the remaining bits from the 14th bit to the LSB correspond to the bits from the 14th bit to the LSB of the 15-bit codeword to be NRZI-modulated. For the m/n (12/15) data conversion, the codeword output is selected as 16 bits because the codeword MSB control is performed by comparing the CDS information of the codeword to be converted with the end level of the previous NRZI-modulated codeword on the basis of a DSV control signal of 50% duty cycle derived by further dividing the data conversion rate signal.

Fig. 27 is a diagram showing an example of a circuit configuration implementing the first embodiment. The reference numeral 3 designates a clock generator circuit which generates, from a channel clock for transmitting a data-converted code, a symbol clock of fCH/10 for transmitting a first codeword (r), a clock (fMW/2) of fCH/30 (a value obtained by multiplying 24, the least common multiple of r and m, by n/m (10/8)) for word-converting the first dataword to the second dataword, a clock (fMW) for parallel-transmitting a converted n-bit codeword, and a DSV control signal (i) for determining the variation frequency of DSV.

This Sheet Has Been Replaced

The numeral 4 is a shift register constructed from three stages of flip-flops (F-F) for transmitting 8-bit first datawords in parallel at the symbol clock (fsym); 5 is a latch circuit that latches at the clock (fMW/2) the 24-bit parallel signal output from the shift register 4; 6 is a selector for word-converting the first datawords of 3 bytes to two second datawords by using the clock (fMW/2) as a select switch; 7 is an encoder for data-converting each 12-bit dataword to a codeword selected from the tables shown in Figs. 11 to 26; and 8 is an MSB controller for outputting the MSB of the codeword in accordance with the Q and CDS information supplied from the encoder 7 and the DSV control signal (i) supplied from the clock generator circuit 3, the MSB controller 8 having four EXOR circuits, A to D, and a one-word delay for delaying the end level of the previous NRZI-modulated codeword by one encoding cycle by using the clock (fMW). Further, the numeral 9 designates a parallel/serial converter for loading the encoded 15-bit parallel signal at the clock (fMW) and for converting the parallel signal to a serial signal which is transmitted at the channel clock (fCH), and the numeral 10 indicates an NRZI modulator for causing state inversion (high to low and low to high transitions) when signal "1" is input.

Fig. 28 is a timing diagram for explaining the operation of the circuit shown in Fig. 27. The reference

This Sheet Has Been Replaced

signs (a) to (k), (m), (n), and (r) correspond to the respective points designated by the same signs appearing at the inputs/outputs of the respective circuit sections.

The operation of the circuit will now be described in detail. 8-bit first datawords (r) fed from an error-correcting circuit section are shifted at the symbol clock (fsym) into and along the shift register 4 and are output as a 3-byte or 24-bit parallel signal. The 24-bit parallel signal is latched by the latch circuit 5 at the clock (fMW/2) of three-symbol cycle. That is, three bytes of signals "08", "1A", and "93" are latched by the latch circuit 5 at the rising edge, between times 3 and 4, of the clock (fMW/2) shown in Fig. 28. Of the three bytes of parallel signals, the first byte (8 bits) "08" is input to DH11 - DH4 of the selector 6, and the four bits of "1" on the MSB side of the second byte are input to DH3 - DH0 of the selector 6. Further, the last byte (8 bits) "93" is input to DL11 - DL4 of the selector 6, and the four bits of "A" on the LSB side of the second byte are input to DH3 - DH0, respectively. As a result, between time 4 and the first half of time 5 in Fig. 28, the selector 6 outputs a 12-bit parallel signal "081". Between the second half of time 5 and time 6, the selector 6 outputs a 12-bit parallel signal "93A".

With the above operation, the three 8-bit first

This Sheet Has Been Replaced

datawords "08", "1A", and "93" are word-converted to two 12-bit second datawords, "081" and "93", by dividing the second of the three first datawords into two and appending the respective halves to the LSBs of the first and third bytes of the first dataword. Likewise, the three bytes of the first dataword, "41", "DE", and "F2", latched by the latch circuit 5 at the rising edge, between times 6 and 7, of the clock (fMW/2) in Fig. 28, are word-converted by the selector 6 to two second datawords "41D" and "F2E".

Next, we will describe in detail the operation for converting the 12-bit second datawords to 15-bit codewords. For the convenience of explanation, it is assumed that, at time 4 in Fig. 28, the output Q' of the one-word delay in the MSB controller 8 is low, and that the DSV value for the codeword sequence up to the converted second dataword immediately preceding "081" is 0.

In this condition, when the second dataword "081" is input to the encoder 7 during the period from time 4 to the first half of time 5, the encoder 7 outputs a signal, 8BC9, in accordance with the conversion tables shown in Figs. 11 to 26, the signal having a total of 16 bits, i.e. a codeword formed from the LSB to the 14th bit and the CDS signal and Q signal, one bit each, associated with the codeword. To describe the contents of the signal, of the four bits "1000" corresponding to "8", the MSB represents the Q signal, "0"

This Sheet Has Been Replaced

for a low level and "1" for a high level. Further, of "1000" corresponding to "8", the bit immediately preceding the MSB represents the CDS signal for the codeword, "0" indicating CDS = -1 and a low level and "1" indicating CDS = +1 and a high level. The remaining two bits of the "1000" corresponding to "8", plus the 12 bits "BC9", a total of 14 bits, constitute the data-converted codeword which has 14 bits of "00101111001001" from the 14th bit to the LSB.

Of the signals thus created, the Q signal and the CDS signal are input, along with the DSV control signal (i), to the MSB controller 8 which then determines and outputs the MSB of the codeword in accordance with the operation hereinafter described. The DSV control signal (i) is set at "1" (high level) if the DSV is to be dispersed in the positive direction and at "0" (low level) if the DSV is to be dispersed in the negative direction. In the present embodiment, the DSV control signal is set at a high level for the duration of times 4, 5, and 6 and at a low level for the duration of times 7, 8, and 9, so that the CDS is controlled to give +1 for encoding the second datawords "081" and "93A" and -1 for encoding the second datawords "41D" and "F2E".

The operation of the MSB controller 8 will now be described in detail. First, using the EXOR circuit A, it is checked whether the CDS value of the codeword currently

This Sheet Has Been Replaced

output agrees with the direction in which the DSV is to be dispersed; if they agree, a 0 is output, and if they do not agree, a 1 is output, thereby making the CDS value of the codeword agree with the dispersing direction of the DSV. Note, however, that the above output condition is based on the assumption that encoding is performed with the start point of the codeword at a low level at the time of NRZI modulation. Also note that the MSB needs to be determined by referencing the Q' signal (a 0 for a low level and a 1 for a high level) indicating the end level of the previous NRZI-modulated codeword. The output of the EXOR circuit A and the Q' signal are both input to the EXOR circuit B, and when the Q' signal is "0" (indicating that the NRZI-modulated word level at the end of the previous codeword is low), the output level of the EXOR circuit A appears unchanged at the output of the EXOR circuit B. On the other hand, when the Q' signal is "1" (indicating that the NRZI-modulated word level at the end of the previous codeword is high), since the polarity of the CDS of the codeword is inverted after NRZI modulation, the output level of the EXOR circuit A appears inverted at the output of the EXOR circuit B. The output of the EXOR circuit B is supplied as the MSB of the codeword to the parallel/serial converter 9.

To describe the above operation as applied to the present embodiment, when the second dataword "081" is input

This Sheet Has Been Replaced

to the encoder 7, the CDS signal output from the encoder 7 is "0", and the DSV control signal (i) is at a high level ("1") that causes the DSV to disperse in the positive direction, as can be seen from Fig. 28, so that the EXOR circuit A outputs a high level signal ("1"). At this time, the Q' signal that indicates the end level of the previous NRZI-modulated codeword is at a low level ("0"), so that the EXOR circuit B outputs a 1 as the MSB of the codeword.

As a result, a 15-bit parallel signal "1001011101" is loaded into the parallel/serial converter 9 in the middle of time 5 when the clock (fMW) goes low. The loaded bits are then output serially at the channel clock (fCH) from the parallel/serial converter 9 to form a code sequence with the MSB at the top of the sequence. The code sequence output from the parallel/serial converter 9 is fed to the NRZI modulator 10 where the polarity of the signal is inverted each time a "1" is input, the resulting signal being shown in Fig. 28(k). Here, with +1 as a high level and -1 as a low level, the CDS can be calculated as +1, which indicates that the DSV of the code sequence is in the positive dispersing direction.

With the above operation, the 12-bit dataword is data-converted to the 15-bit codeword in accordance with the DSV control signal, but it is further necessary to check the end level of the NRZI-modulated codeword, as previously de-

This Sheet Has Been Replaced



scribed. This is accomplished by the following operation.

The Q signal from the encoder 7 and the MSB signal from the EXOR circuit B are input to the EXOR circuit C in the MSB controller 8. When the MSB is "0", the Q signal appears unchanged at the output of the EXOR circuit C. On the other hand, when the MSB is "1", the number of inversions that occur in the NRZI modulation increases by one as the number of 1s in the codeword increases by one, and therefore, the Q signal is inverted for output. During the NRZI modulation, the polarity is inverted between positive and negative in accordance with the level of the connected signal. Therefore, the output of the EXOR circuit C is input to the EXOR circuit D along with the Q' signal indicating the word end level of the previous NRZI-modulated codeword, and when the Q' signal is "0" (indicating the word end level after NRZI modulation is low), the output signal of the EXOR circuit C appears unchanged at the output of the EXOR circuit D. On the other hand, when the Q' signal is "1" (indicating the word end level after NRZI modulation is high), the output of the EXOR circuit C is inverted through the EXOR circuit D. The output of the EXOR circuit D is supplied to the one-word delay as a signal indicating the end level of the NRZI-modulated codeword for the immediately following data conversion.

To describe the above operation as applied to the

This Sheet Has Been Replaced

present embodiment, when the second dataword "081" is input to the encoder 7, the Q signal output from the encoder 7 is "1", and the MSB output from the EXOR circuit B is also "1", as can be seen from Fig. 28, so that the output of the EXOR circuit D is at a low level ("0"). At this time, the signal Q' that indicates the end level of the previous NRZI-modulated codeword is at a low level ("0"), and therefore, the EXOR circuit D outputs a signal "0" indicating that the end level of the NRZI-modulated codeword is low, the signal "0" being input at the clock (fMW) to the one-word delay through which the signal is delayed by one encoding cycle. By repeating the above operation for every m/n data conversion with one word delay at each time, the end level of each codeword can be checked correctly for continuous sequences of codewords.

As described above, the data that has been word-converted by the selector 6 from 8-bit first datawords to 12 bit second datawords is converted by the encoder 7 to a 16-bit codeword, which is further converted by the MSB controller 8 to a 15-bit codeword, capable of determining the dispersing direction of the DSV as desired by the DSV control signal (i), by converting the two bits on the MSB side of the 16-bit codeword to a one-bit signal that determines the polarity of the CDS. Likewise, subsequent second datawords "93A", "41D", and "F2E" are respectively input to the

This Sheet Has Been Replaced

encoder 7 and converted to the signal shown in Fig. 28(j), with their CDSs being controlled in accordance with the DSV control signal (i). As a result, the DSV value at the codeword end obtained at the output of the NRZI modulator 10 has a variation width p - p2 over four data conversion cycles as shown in Fig. 28(k), the resulting signal thus being made to synchronize with the DSV control signal.

The power spectrum of the digital signal is dependent on the state transition probability, and by keeping the DSV variation cycle at a constant value, the state transition occurring at the DSV variation cycle becomes high, thus making it possible to obtain a spectrum having high power at frequencies corresponding to the DSV variation cycle. In the present embodiment, the cycle of the DSV control signal is selected to be equal to four m/n data conversion cycles. However, if the signal cycle is set equal to about 10 data conversion cycles, it will be possible to obtain a relatively low frequency signal corresponding to the DSV variation cycle synchronized with the digital data, and such a low frequency signal can be used as a tracking pilot signal that will become necessary when the track width is reduced. Fig. 29 is a diagram illustrating the power spectrum obtained when first datawords constructed from 8-bit M-sequence random signals expressed as $X^{23} + X^5 + 1$ are input in a circuit constructed in accordance with the first

This Sheet Has Been Replaced

embodiment but with the cycle of the DSV control signal set equal to ten m/n data conversion cycles. As can be seen from Fig. 29, the resulting spectrum has no DC content (DC-free) and, at the same time, exhibits high power only at frequencies corresponding to the cycle of the DSV control signal.

We will now describe a digital magnetic recording/reproducing apparatus that can be constructed into a system optimized for the above-described data conversion method.

Digital magnetic recording/reproducing apparatus such as DAT, digital VTR, etc. have the characteristic of being insusceptible to system variation in the sense that degradation in the signal-to-noise ratio does not lead to degradation in the audio and video reproduction performance as long as 1s and 0s can be distinguished. On the other hand, there is some danger with such digital apparatus that only a single bit error in a large volume of information may entirely change the contents of the information. Therefore, in digital magnetic recording/reproducing apparatus, it is essential to employ error-correcting codes for correction of errors caused on the transmission channel. Usually, error-correcting codewords are recorded in error-correcting code blocks separated from one another by a synchronizing signal as shown in Fig. 30. In Fig. 30, the numeral 21 is the

This Sheet Has Been Replaced



synchronizing signal for separating one error-correcting code block from another, 22 is an ID signal for the block identified by the track number or the synchronizing signal, 23 is a parity-check codeword for checking whether the ID signal is correctly reproduced, 24 is an audio/video sector, and 25 is an error-correcting code. Rotary head type digital magnetic recording/reproducing apparatus usually have about 100 such blocks per track, each block being separated by the synchronizing signal.

The following description deals with a method of setting the amount of information for each block.

The synchronizing signal 21 serves not only as a signal for separating each error-correcting code block but also as a signal for executing word synchronization for decoding the codeword, encoded and recorded as previously described, into the original dataword. The synchronizing signal thus has a very important role, and therefore, a unique signal that does not usually appear in the recorded signal sequences is often used as the synchronizing signal. This unique signal can only be obtained by reconverting the data-converted codeword. According to the data conversion method of the first embodiment in which 8-bit first datawords are first converted to 12-bit second datawords and then converted to 15-bit codewords, the synchronizing signal length corresponds to 1.5 bytes in the original first datawords. There-

This Sheet Has Been Replaced

fore, if the synchronizing signal sector is constructed from one-byte synchronizing signal data plus 0.5 byte obtained by dividing the first dataword, these components would become separated at the time of decoding, so that the 0.5 byte in the synchronizing signal sector would cause a fixed error and therefore, the one byte data immediately following the synchronizing signal data would also cause a fixed error. This problem may be solved by inserting a dummy dataword of one byte immediately following the first dataword (which may be formed from a fixed pattern) used for the synchronizing signal.

However, it is not advantageous in terms of space utilization to add a dummy dataword in a limited package. Therefore, in the recording/reproducing apparatus employing the data conversion method of the first embodiment, the first dataword used for the synchronizing signal is constructed from a fixed pattern of one byte, and the immediately following first dataword is constructed from a fixed pattern of four bits on the MSB side and data (e.g., a cue signal, track address, etc.) of four or less bits on the LSB side. Ordinary 8-bit datawords are mapped starting with the first dataword of the third byte. The pattern of the synchronizing signal sector may be set in any pattern suitable for the reconversion performed after ordinary data conversion.

This Sheet Has Been Replaced

We will now describe a method of setting the number of first datawords for each block separated by the synchronizing signal. According to the data conversion method of the first embodiment, r-bit first datawords are first word-converted to m-bit second datawords and then data-converted to n-bit codewords. This requires word synchronization for every x bits, where x is the least common multiple of r and m. For example, in the present embodiment, r = 8 and m = 12, and hence the least common multiple is 24 bits, so that the first codewords are word-synchronized for every three bytes. Since word synchronization is performed for every three bytes in each block, as described above, if the number of first datawords in the block is not an integral multiple of 3, the first dataword remaining after dividing the number by 3 will cause a fixed error. Therefore, in the recording/reproducing apparatus employing the data conversion method of the first embodiment, the number of first datawords per block is selected to be equal to an integral multiple of x/r.

The following describes a method of converting the reproduced 15-bit codeword back to the original 12-bit second dataword in the recording/reproducing apparatus employing the above-described data conversion method.

Fig. 32 is a diagram illustrating an example of a circuit configuration for decoding the reproduced 15-bit

This Sheet Has Been Replaced

code-word into the original 12-bit second dataword (m), employed in the recording/reproducing apparatus using the data conversion method of the first embodiment. In Fig. 32, the reference numeral 11 is an NRZI demodulator for NRZI-demodulating the reproduction signal transmitted by a reproduction channel clock; 12 is a serial/parallel converter for converting the NRZI-demodulated serial signal, fed from the NRZI demodulator 11, to a 15-bit parallel signal by using a reproduction word clock which is word-synchronized by a synchronizing signal appended to the top of each block; 13 is a first decoder for accepting at its input the 10 bits n1 on the MSB side of the 15-bit codeword (n) output from the serial/parallel converter 12 and for decoding the n1 into a dataword that forms the eight bits on the MSB side of the second dataword; and 14 is a second decoder for accepting at its input the five bits n2 on the LSB side of the 15-bit codeword (n) output from the serial/parallel converter 12 and for decoding the n2 into a dataword that forms the four bits on the LSB side of the second dataword. The numeral 15 designates a third decoder for decoding the 15-bit codeword, output from the serial/parallel converter 12, into 12-bit decoded data. The third decoder 15 is constructed to perform one-to-one decoding when the five bits on the LSB side is of a prescribed type.

Furthermore, the reference numeral 16 indicates an LSB

This Sheet Has Been Replaced

discriminating circuit which accepts at its input the five bits on the LSB side of the 15-bit codeword output from the serial/parallel converter 12, and which discriminates the type of the codeword and outputs a control signal (o) designating the classification type; and 17 refers to a selector which selects either the 12-bit dataword having decoded data from the first decoder 13 and the second decoder 14 or the 12-bit dataword from the third decoder 15 by using the control signal supplied from the LSB discriminating circuit 17 as a select SW, and which generates the second dataword (m) after decoding.

The operation of this embodiment will now be described. The reproduction signal is NRZI-demodulated by the NRZI demodulator 11 and fed to the serial/parallel converter 12 through which the demodulated serial signal is converted to a 15-bit codeword (n). Of the 15 bits in the codeword (n), the 10 bits n1 on the MSB side are entered to the first demodulator 13, and the five bits n2 on the LSB side are fed to the second demodulator 14 as well as to the LSB discriminating circuit 16. On the other hand, all the 15 bits of the codeword (n) are loaded directly into the third demodulator 15.

We will now describe in detail the operation of decoders for decoding the 15-bit codeword back into the 12-bit second dataword. From Figs. 8 to 10, the five-bit codeword

This Sheet Has Been Replaced



n2 on the LSB side of the 15-bit codeword can be classified in relation to the demodulated 4-bit dataword m2, as shown in Fig. 33. The codewords classified as the first LSB code group in Fig. 33 correspond to the LSB codewords n2 in the first and second coding groups in Figs. 8 and 9 as well as in the first n1 group for m1 = "BB" to "E7" in the third coding group in Fig. 10, and each n1 in the n1 group is related to one decoding data m1 within the limits of the first LSB code group. Further, the codewords classified as the second LSB code group correspond to the LSB codewords classified as the second n1 group in the third coding group as well as the fourth n1 group for m1 = "EE" to "FF in the same coding group. The codewords classified as the third LSB code group correspond to the LSB codewords classified as the third n1 group, while the codewords classified as the fourth LSB code group correspond to the LSB codewords in the n1 group for m1 = "E8" to "FF". Note, however, that the n1 group in the second to the fourth LSB code groups overlaps with the n1 group in the first LSB code group, and that, in some cases, a plurality of m2 are mapped to one LSB codeword n2.

Now, the first decoder 13 decodes the 10 bits on the MSB side into an eight-bit dataword. In this case, the top bit in the 10-bit codeword is a control bit for controlling the DSV during demodulation and may therefore be disregarded

This Sheet Has Been Replaced

at the time of decoding. Thus, the remaining nine bits are decoded. The decoding is performed on the codewords in the first and second coding groups in Figs. 8 and 9 as well as in the first n1 group for m1 = "BB" to "E7" in the third coding group in Fig. 10, and the decoded 8-bit dataword is applied to V11 - V4 on the selector 17 as data representing the eight bits on the MSB side of the second dataword. On the other hand, the second decoder 14 decodes the five bits on the LSB side into a four-bit dataword. In this case, the decoding is performed on the codeword n2 in the first LSB code group. The decoded 4-bit dataword is applied to V3 - V0 on the selector 17 as data representing the four bits on the LSB side of the second dataword. The third decoder 15 decodes the input 15-bit codeword into a 12-bit dataword. In this case also, the top bit on the MSB side is excluded, as in the case of the first decoder 13, and the remaining 14 bits are decoded. The decoding is performed only when the five-bit LSB codeword falls in one of the second to the fourth LSB code groups, and the decoded 12-bit dataword is applied to W11 - W0 on the selector 17.

The selector 17 is switched to select either the dataword supplied from the first decoder 13 and second decoder 14 or the dataword supplied from the third decoder 15, and outputs the selected dataword as the decoded second dataword; the switching of the selector 17 is controlled by

This Sheet Has Been Replaced

a control signal supplied from the LSB discriminating circuit 16. Of the 15 bits in the codeword, the five bits n2 on the LSB side are input to the LSB discriminating circuit 16 to discriminate the type of the LSB codeword. For example, if the LSB codeword n2 is a codeword discriminated as belonging to one of the second to the fourth LSB code groups, the LSB discriminating circuit 16 outputs a control signal (o) indicating the discriminated type and applies it to the select SW on the selector 17. When no control signal (o) is received, the selector 17 selects the eight-bit MSB dataword V11 - V4 supplied from the first decoder 13 and the four-bit LSB dataword V3 - V0 supplied from the second decoder 14 and outputs the resulting 12-bit dataword V. On the other hand, when the control signal (o) is received, the selector 17 is switched to select the 12-bit dataword W decoded by the third decoder 15.

Thus, the selector 17 outputs the 12-bit dataword m obtained by reconverting the codeword that was encoded in accordance with the tables shown in Figs. 8 to 10. As described, the 15-bit codeword is decoded on a one-to-one basis to the 12-bit dataword only when the five-bit LSB codeword n2 is discriminated as belonging to one of the second to the fourth LSB code groups in Fig. 33; otherwise, the 15-bit codeword is decoded by dividing it into 10 bits on the MSB side and five bits on the LSB side. This con-

This Sheet Has Been Replaced



struction serves to reduce the possibility of the error propagation that may occur between decoded first datawords due to a single bit detection error in the 15-bit codeword.

In the above decoding method, the discrimination of the five-bit LSB codeword is determined by which of the two major groups, the first LSB code group or the second to fourth LSB code group, the LSB codeword belongs to. However, in an alternative method, the types of codeword may be classified into three major groups, for example, the first LSB code group, the second LSB code group, and the third/fourth LSB code group, and four decoders, i.e. the first to the fourth decoders, may be provided, the outputs of these decoders being selected accordingly by using a control signal from the LSB discriminating circuit. Such configuration may somewhat increase the circuit complexity compared to that of the above embodiment, but will serve to further reduce the possibility of error propagation between decoded first datawords.

Thus, according to the first embodiment, eight-bit first datawords are first word-converted to 12-bit second datawords, and then, the 12-bit second datawords are converted to 15-bit codewords, each having bits of CDS = +1 or -1, by executing word-synchronization for every two second datawords, which is the least common multiple of the first and second datawords. In the conversion process, the first

This Sheet Has Been Replaced

byte of the first dataword is mapped to the eight bits on the MSB side of the first of the two second datawords, and the four bits on the MSB side of the second byte of the first dataword are mapped to the four bits on the LSB side of the first of the two second datawords. For the second of the two second dataword, the third byte of the first dataword is mapped to the eight bits on the MSB side, while the four bits on the LSB side of the second byte of the first dataword are mapped to the four bits on the LSB side of the second of the two second datawords, thus accomplishing the 8/12 word-conversion. Thereafter, each 12-bit dataword is converted to a 15-bit codeword (12/15 data conversion). This encoding method permits the 8/10 encoding of non-divided first datawords and the 4/5 encoding of divided first datawords, which serves to reduce the possibility of the error propagation that may occur, due to a single bit error in the codeword, between first datawords during reverse conversion at the time of decoding. Furthermore, when this data conversion method is applied to a recording/reproducing apparatus, it is possible to construct a system capable of efficient recording of data without requiring redundant bits, the system being constructed such that the number of first datawords for each block separated by a synchronizing signal is set at a multiple of r/x and that the first dataword as the synchronizing signal at the beginning of the

This Sheet Has Been Replaced

block is formed from a fixed pattern and the immediately following first dataword is formed from a fixed pattern of four bits on the MSB side and data of four or less bits (e.g., cue signal, track address, etc.) on the LSB side.

On the other hand, when decoding the 15-bit codeword into the 12-bit second dataword, the 15-bit codeword is divided into 10 bits on the MSB side and five bits on the LSB side, and the 10 bits are decoded into eight bits by the first decoder and the five bits are decoded into four bits by the second decoder, while the 15 bits are decoded into 12 bits by the third decoder. The discriminating circuit discriminates the type of the five bits on the LSB side of the 15-bit codeword and outputs a control signal indicating the discriminated type, on the basis of which the decoded data from the decoders are selected to reconstruct the second dataword. Thus, the codeword is decoded by reverse conversion of 10/8 and 5/4, except when the LSB codeword falls under specific conditions. This has the effect of reducing the possibility of the error propagation that may occur between decoded first datawords due to a detection error in the codeword.

(Embodiment 2)

A second embodiment of the invention will now be described below. Suppose a code of dataword length = 12 and codeword length = 14 with one bit added to form a code with

This Sheet Has Been Replaced

Tmax/Tmin = 5. Here, let d = 0 and k = 4. The NRZI(F) rule is used to construct the code. To satisfy k = 4 in each codeword, the number of successive 0s in the codeword is limited to 4, and since one bit is inserted between codewords, the number of successive 0s is limited to 2 on the MSB side and 1 on the LSB side.

To form a DC-free code, 4096 pairs of codewords, each pair having codewords of different CDS polarities, should be provided. There are 2481 codewords with CDS = 0, 2169 codewords with CDS = +2, and 1888 codewords with CDS = -2, which satisfy the above conditions. Hence, 2481 codewords with CDS = 0 and 1615 pairs of codewords with CDS = ± 2, which differ only in MSB, are used to suppress the dispersion of DSV to achieve DC-free modulation. Code conversion tables thus constructed are shown in Figs. 34 to 49. The data given in Figs. 34 to 49 represent binary digital signals in hexadecimal notation. For every 12-bit input data (dataword), there are output a total of 16 bits, i.e. a 14-bit codeword, one-bit data (hereinafter represented by Q) indicating the number of inversions performed on the NRZI-modulated codeword, and the CDS (a zero or nonzero bit) of the codeword.

Fig. 50 is a diagram illustrating an example of a circuit configuration implementing the second embodiment. In Fig. 50, the reference numeral 33 is an encoder for

This Sheet Has Been Replaced

converting 12-bit digital data (dataword) to 16-bit digital data shown in Figs. 34 to 49; 34 and 36 are NOT gates; 35, 37, 38, and 39 are EXOR gates; 40, 42, and 48 are flip-flops; 41 and 46 are selectors; 43 is a parallel/serial converter for converting 14-bit or 15-bit parallel data to a serial data sequence; 44 is a counter; 45 is a four-input NAND gate; and 47 is an NRZI modulator for processing the codeword, converted to serial data, so that the signal polarity is inverted each time a 1 is input.

Fig. 51 shows a code select table used to determine a code to be selected in accordance with the current and the previous DSV control signal values, the CDS value of the codeword just selected, and the previous Q' signal.

Fig. 52 is a diagram illustrating code conversion and DSV value variation according to the second embodiment. In Fig. 52, (a) is a pilot signal (write at "1"), (b) is a DSV control signal (positive direction at "1"), (c) is input data (12 bits), (d) is a code select signal Q', (e) is a selected codeword, (f) is a signal waveform to be recorded, and (g) is a DSV value at the end of each codeword.

Fig. 53 is a diagram illustrating the recording format of a magnetic recording/reproducing apparatus according to the second embodiment. In Fig. 53, subcode signals, etc. are recorded in the subdata areas (SUB1, SUB2), and video and audio signals are recorded in the main

This Sheet Has Been Replaced

data area (MAIN). Pilot signals are recorded in the subdata areas (SUB1, SUB2).

The circuit operation of the second embodiment will now be described below with reference to Fig. 50.

First, when the pilot area signal output from the flip-flop 48 is "0", i.e. when data other than that for the subdata area is to be encoded for recording, 12-bit data is input to the encoder 33 where the 12-bit data is converted to a 14-bit codeword (parallel) by using the code select signal Q' supplied from the flip-flop 42. The resulting 14-bit codeword is supplied to the parallel/serial converter 43. The encoder 33 also outputs a Q signal which is supplied to the selector 41. On the other hand, the selector 46 selects "10" by the input pilot area signal "0", which sets the load value of the counter 14 to "0010", and the counter 14 outputs a load CLK of one CLK width to the parallel/serial converter 43 for every 14 CH-CLKs. The parallel/serial converter 43 converts the input 14-bit parallel codeword to serial data which is fed to the NRZI modulator 47. At this time, the output of the NOT gate 34, i.e. the LSB, is input to the parallel/serial converter 43, but since a load CLK is input for every 14 CH-CLKs, the LSB is not output from the parallel/serial converter 43. The serial codeword input to the NRZI modulator 47 is NRZI-modulated for output. The Q signal output from the encoder

This Sheet Has Been Replaced

33 is input to the selector 41 which selects the Q signal by the pilot area signal and supplies it to the flip-flop 42.

On the other hand, when the pilot area signal output from the flip-flop 48 is "1", i.e. when data for the subdata area is to be encoded for recording, 12-bit data is input to the encoder 33 which converts the 12-bit data to a 14-bit codeword (parallel) by using the code select signal Q' supplied from the flip-flop 42. The resulting 14-bit codeword is supplied to the parallel/serial converter 43. The encoder 33 also supplies a Q signal to the selector 41 and the NOT gate 34, and a CDS signal to the EXOR gate 35. The selector 46 selects "01" by the input pilot area signal "1", which sets the load value of the counter 14 to "0001", and the counter 14 supplies a load CLK of one CLK width to the parallel/serial converter 43 for every 15 CH-CLKs. The parallel/serial converter 43 converts the input 14-bit parallel codeword and LSB to serial data which is supplied to the NRZI modulator 47. The serial codeword input to the NRZI modulator 47 is NRZI-modulated for output. The DSV control signal is input to the flip-flop 40 and the EXOR gate 39, the output of the flip-flop 40 being coupled to the other input of the EXOR gate 39. The output of the EXOR gate 39, i.e. the exclusive OR sum of the current DSV control signal and the previous DSV control signal, is supplied to one input of the EXOR gate 38. The EXOR gate 35

This Sheet Has Been Replaced

EXORs the CDS signal output from the encoder 33 with the Q' signal. The output of the EXOR gate 35 is inverted through the NOT gate 36 and applied to one input of the EXOR gate 37. The EXOR gate 37 EXORs the output of the NOT gate 36 with the Q' signal and supplies the result to the other input of the EXOR gate 38. The EXOR gate 38 EXORs the outputs of the EXOR gates 37 and 39 and supplies the result to the other input of the selector 41. In this manner, the signal selected in accordance with the codeword select table is output as a Q" signal. The Q" signal is selected by the pilot area signal and is fed to the flip-flop 42 to form a code select signal Q' for the next coding.

Suppose, for example, that the pilot area signal is "0", the input data is "3FF", the previous polarity is "1", and the Q' signal is "0". In this case, the 14-bit codeword output from the encoder 33 is "11001000010111"; the CDS is -2 and the DSV is also -2. As a result, the Q signal "0" is output. Next, when data "200" is input, since the Q' signal, i.e. the previous Q signal, is "0", the selected codeword is "01110011011010"; the CDS is +2 and the DSV is 0. Next, when the pilot area signal and the DSV control signal both go to a "1" and data "E11" is input, since the Q' signal is "1", the output codeword is "11010111010101", and a Q signal of "0" and a CDS signal of "0" are output; CDS and DSV are both 0. When data "715" is input, since the Q'

This Sheet Has Been Replaced

signal is "1", the selected codeword is "00101111101001" and the LSB is "0"; CDS and DSV are both +1. Next, when data "BFC" is input, since the Q' signal is "1", the selected codeword is "10100111101110" and the LSB is "1"; CDS is +1 and DSV is +2. The above operation is repeated for the subdata areas where the pilot area signal is "1", thereby achieving a modulation method in which the DSV varies at the cycle of the DSV control signal.

Using the above-described modulation method, a tracking servo pilot signal is recorded at two places within one track. Therefore, in the subdata areas (SUB1, SUB2), one LSB bit is added to the 14-bit codeword to form a 15-bit codeword, as described previously, and modulation is performed on the codeword including the pilot signal, while for other areas, the 14-bit codeword is directly modulated.

According to the format shown in Fig. 53, two subdata areas are provided within one track, and the pilot signals are recorded in these areas. Alternatively, three or more pilot signal recording areas may be provided within one track in order to enhance the tracking accuracy with a narrower track. It will also be appreciated that the pilot signal may be recorded in any portion within the subdata areas.

As described, according to the second embodiment, 12-bit datawords are each converted to a 14-bit codeword which,

This Sheet Has Been Replaced



after NRZI modulation, has a succession of the same level, more than one bit long and five bits at maximum, and provides CDS = 0, +2 or -2, the CDS value being controlled to suppress the dispersion of DSV, thus accomplishing a DC-free modulation method. Furthermore, in areas where pilot signals are recorded, one bit is added to the 14-bit codeword to form codewords of CDS = ± 1, and the modulation is performed so that the DSV varies in synchronism with the DSV control signal to produce a tracking control pilot signal. This eliminates the need for ATF areas, the areas where only tracking control signals are recorded. Moreover, since one bit is added to the codeword and the pilot signal is recorded in a restricted area, it is not necessary to substantially raise the recording rate, and therefore, high density recording is achieved. Furthermore, since the modulation method is basically the same for both the pilot signal areas and other areas, the configuration does not involve any appreciable increase in the circuit complexity.

As this invention may be embodied in several forms without departing from the spirit of essential characteristics thereof, the present embodiment is therefore illustrative and not restrictive, since the scope of the invention is defined by the appended claims rather than by the description preceding them, and all changes that fall within metes and bounds of the claims, or equivalence of

This Sheet Has Been Replaced

such metes and bounds thereof are therefore intended to be embraced by the claims.

This Sheet Has Been Replaced

* C L M S *

CLAIMS

1. A data conversion method for word-converting an r-bit first dataword to an m-bit second dataword (r < m) and converting the word-converted m-bit second dataword to an n-bit codeword (m < n), comprising the steps of:

dividing a sequence of first datawords into groups of x bits where x is the least common multiple of r and m;

dividing into x/m an arbitrary first dataword selected from a group which consists of x/r first datawords; and

forming the m-bit second dataword by appending r/(x/m)-bit data, obtained by dividing the first dataword into x/m, to the LSB or MSB side of one or other of the non-divided first datawords.

2. A recording/reproducing apparatus employing the data conversion method of claim 1, comprising:

means for formatting blocks so that each block separated by a synchronizing signal contains the first datawords of the number equal to an integral multiple of x/r.

3. A recording/reproducing apparatus employing the data conversion method of claim 1, comprising:

means for mapping r bits and r/(x/m) bits to a second dataword corresponding to a synchronizing signal; and

means for mapping the remaining bits of the divided

This Sheet Has Been Replaced

first dataword to a signal, other than the synchronizing signal, that can complete as data with the remaining bits alone.

4. A recording/reproducing apparatus employing the data conversion method of claim 1, comprising:

first decoding means for decoding n1 bits in the reproduced n-bit codeword into r bits, the reproduced n-bit codeword being divided into n1 bits and n2 bits for reverse conversion into the m-bit second dataword;

second decoding means for decoding the n2 bits into r/(x/m) bits;

third decoding means for decoding the n bits into the m bits;

identifying means for identifying the type of bits at prescribed positions in the n-bit codeword and for outputting an identification signal designating the identified type; and

means for selecting decoded data from the first, second, or third decoding means on the basis of the identification signal supplied from the identifying means and for outputting the decoded second dataword.

5. A data converting apparatus for word-converting an r-bit first dataword to an m-bit second dataword (r < m) and converting the word-converted m-bit second dataword to an n-

This Sheet Has Been Replaced

* C L M S *

bit codeword (m < n), comprising:

means for dividing a sequence of first datawords into groups of x bits where x is the least common multiple of r and m;

means for dividing into x/m an arbitrary first dataword selected from a group which consists of x/r first datawords; and

means for forming the m-bit dataword by appending r/(x/m)-bit data, obtained by dividing the first dataword into x/m, to the LSB or MSB side of one or other of the non-divided first datawords.

6. A data conversion method for converting an m-bit dataword to a codeword consisting of a greater number of bits than m, comprising the steps of:

a first data conversion process wherein the m-bit dataword is converted to an n-bit codeword having a finite digital sum variation (DSV); and

a second data conversion process wherein the DSV is controlled at a desired value by appending one bit to the n-bit codeword obtained by the first data conversion process.

7. A data conversion method for dividing digital data first into 12-bit datawords and then converting the 12-bit datawords to 14-bit codewords,

wherein the number of successive 0s between a 1 and a 1 in each of the codewords is limited to 4 within the codeword

This Sheet Has Been Replaced

* C L M S *

and to 3 between codewords, and codewords having a codeword digital sum (CDS) of 0 are directly related to the 12-bit data, while for codewords having a CDS of +2 or -2, two codewords that differ only in MSB are paired and related to the 12-bit data, the two codewords being switched selectively by using polarity signals of the respective codewords.

8. A data conversion method for dividing digital data first into 12-bit datawords and then converting the 12-bit datawords to 15-bit codewords,

wherein one bit is appended to a 14-bit codeword converted in accordance with the data conversion method of claim 7, to form a pair of codewords, one having a CDS of +1 and the other having a CDS of -1, with the number of successive 0s between a 1 and a 1 in the code sequence being limited to 4, and one or other of the pair of codewords is selected in accordance with a DSV control signal with the DSV being made to vary in synchronism with the DSV control signal.

9. A magnetic recording/reproducing apparatus for recording multiple kinds of data in partitioned areas, wherein

when converting digital data to codewords for recording, the data conversion method of claim 8 is used for

This Sheet Has Been Replaced

* C L M S *

recording one or more areas within one track and the data conversion method of claim 7 is used for recording the other areas in the same track.

10. A data converting apparatus for converting an m-bit dataword to a codeword consisting of a greater number of bits than m, comprising:

means for converting the m-bit data to an n-bit codeword having a finite digital sum variation (DSV) as a first data conversion process; and

means for controlling the DSV at a desired value by appending one bit to the n-bit codeword obtained by the first data conversion process as a second data conversion process.

11. A data conversion method for word-converting first datawords, the method comprising, for each group of n first datawords, dividing x of the datawords by (n-x) and adding each divided part to a respective one of the other datawords in the group to form respective second datawords, and converting the second datawords to codewords of greater length.

CLMS

This Sheet Has Been Replaced

ABSTRACT OF THE DISCLOSURE

A data conversion method, wherein a sequence of first r-bit datawords is divided into groups of x bits where x is the least common multiple of r and m, an arbitrary first dataword selected from x/r groups of first datawords is divided into x/m, an m-bit second dataword is formed by appending r/(x/m)-bit data, obtained by dividing the first dataword into x/m, to the LSB or MSB side of one or other of the non-divided first datawords, and the word-converted m-bit second dataword is converted to an n-bit codeword ($m < n$).

This Sheet Has Been Replaced

Fig. 1
Prior Art

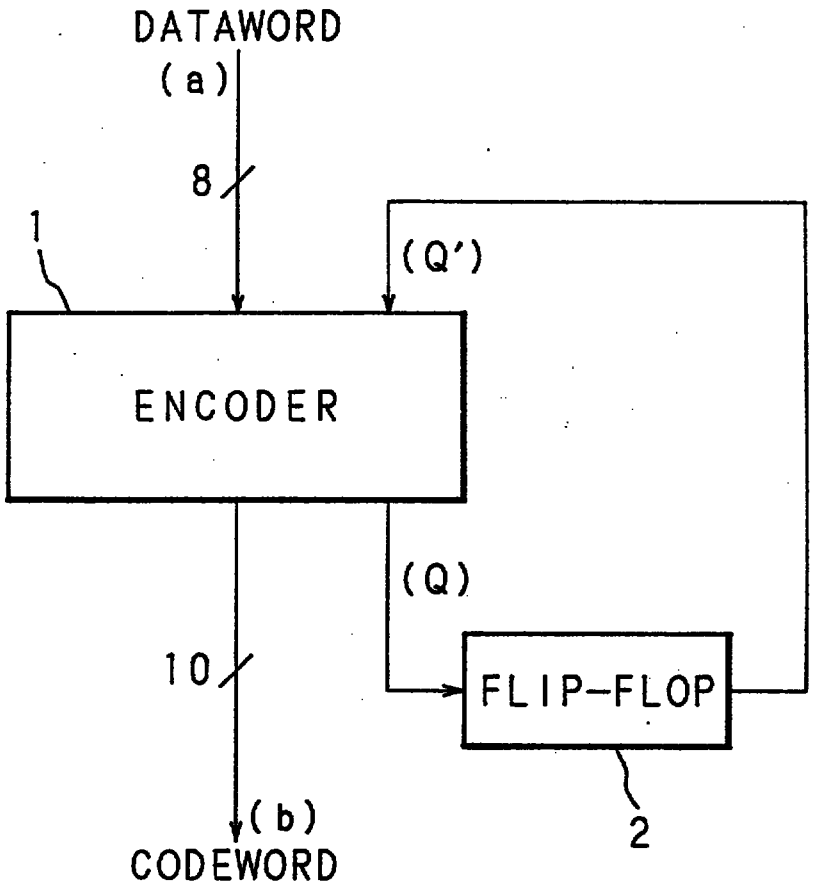

This Sheet Has Been Replaced

Fig. 2
Prior Art

		Q′=−1			Q′=1		
	DATAWORD (MSB-LSB)	CODEWORD (MSB-LSB)	DC	Q	CODEWORD (MSB-LSB)	DC	Q
00	00000000	0101010101	0	1	0101010101	0	−1
01	00000001	0101010111	0	−1	0101010111	0	1
02	00000010	0101011101	0	−1	0101011101	0	1
03	00000011	0101011111	0	1	0101011111	0	−1
04	00000100	0101001001	0	−1	0101001001	0	1
05	00000101	0101001011	0	1	0101001011	0	−1
06	00000110	0101001110	0	1	0101001110	0	−1
07	00000111	0101011010	0	1	0101011010	0	−1
08	00001000	0101110101	0	−1	0101110101	0	1
09	00001001	0101110111	0	1	0101110111	0	−1
0A	00001010	0101111101	0	1	0101111101	0	−1
0B	00001011	0101111111	0	−1	0101111111	0	1
0C	00001100	0101101001	0	1	0101101001	0	−1
0D	00001101	0101101011	0	−1	0101101011	0	1
0E	00001110	0101101110	0	−1	0101101110	0	1
0F	00001111	0101111010	0	−1	0101111010	0	1
.	.	.	.	.	.	.	.
.	.	.	.	.	.	.	.
.	.	.	.	.	.	.	.
.	.	.	.	.	.	.	.
.	.	.	.	.	.	.	.
.	.	.	.	.	.	.	.
.	.	.	.	.	.	.	.
.	.	.	.	.	.	.	.
F0	11110000	1101010101	0	−1	1101010101	0	1
F1	11110001	1101010111	0	1	1101010111	0	−1
F2	11110010	1101011101	0	1	1101011101	0	−1
F3	11110011	1101011111	0	−1	1101011111	0	1
F4	11110100	1101001001	0	1	1101001001	0	−1
F5	11110101	1101001011	0	−1	1101001011	0	1
F6	11110110	1101001110	0	−1	1101001110	0	1
F7	11110111	1101011010	0	−1	1101011010	0	1
F8	11111000	1111100101	2	−1	0111100101	−2	−1
F9	11111001	1111100111	2	1	0111100111	−2	1
FA	11111010	1111101101	2	1	0111101101	−2	1
FB	11111011	1111101111	2	−1	0111101111	−2	−1
FC	11111100	1111111001	2	1	0111111001	−2	1
FD	11111101	1111111011	2	−1	0111111011	−2	−1
FE	11111110	1111111110	2	−1	0111111110	−2	−1
FF	11111111	1111101010	2	−1	0111101010	−2	−1

This Sheet Has Been Replaced

Fig. 3
Prior Art

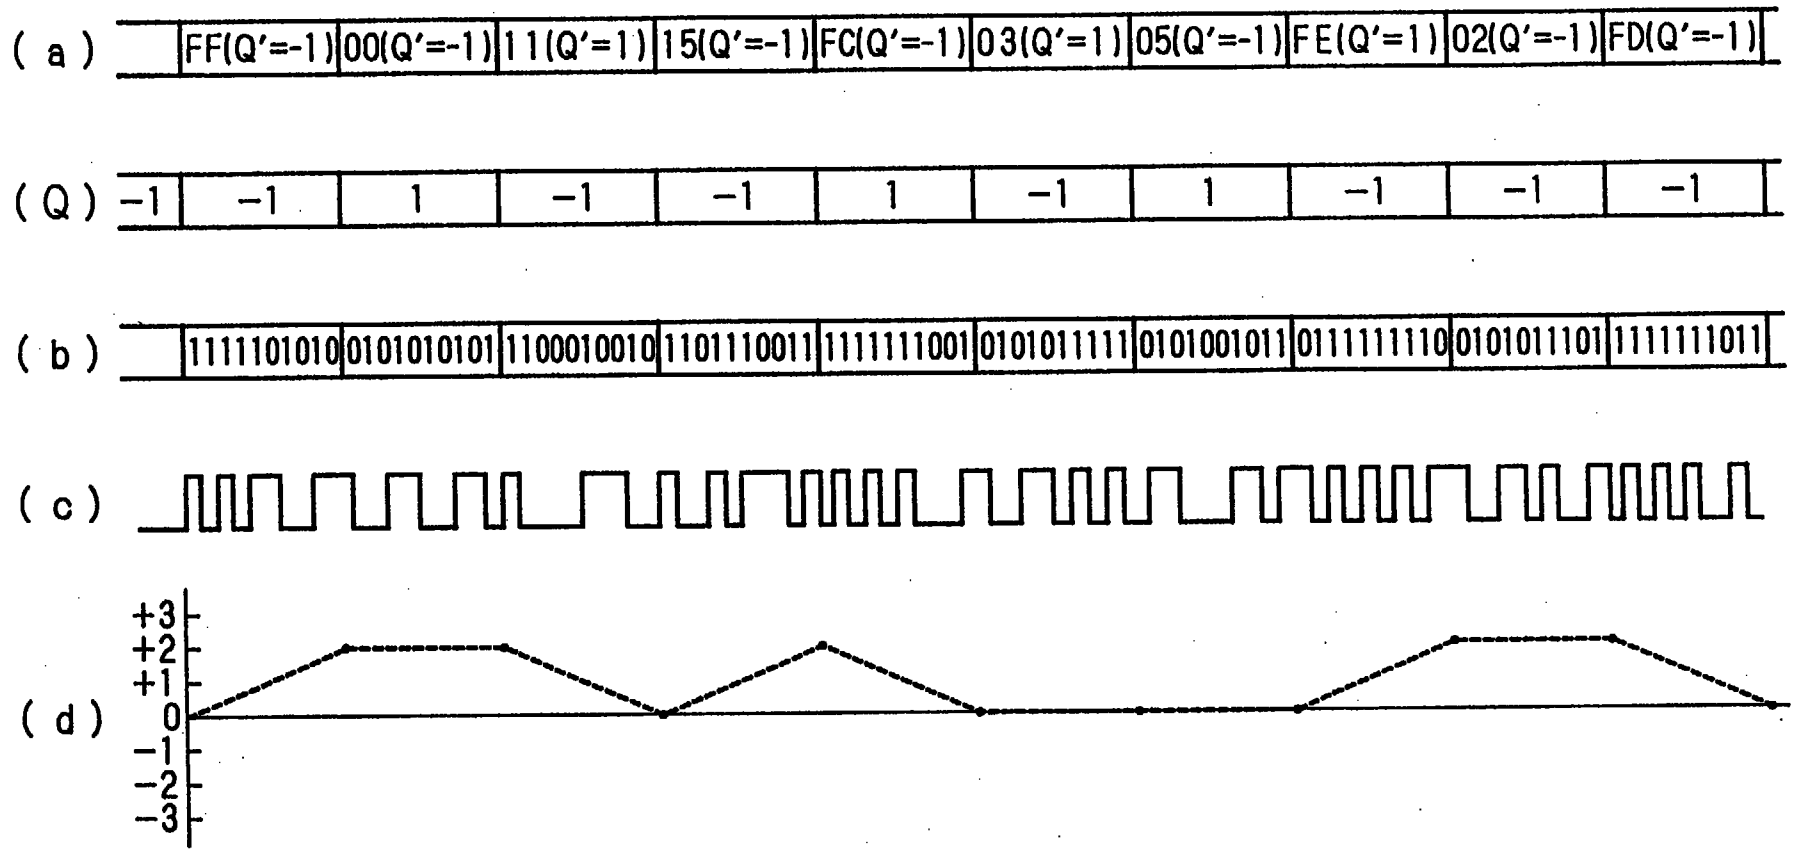

This Sheet Has Been Replaced

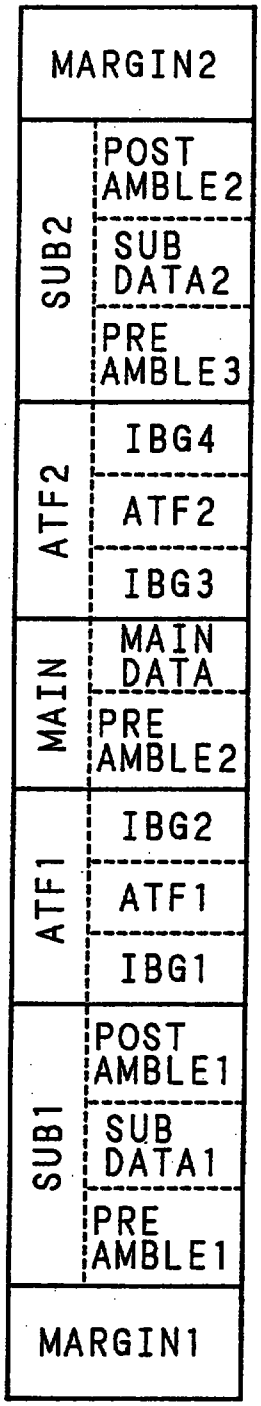

Fig. 4
Prior Art

This Sheet Has Been Replaced

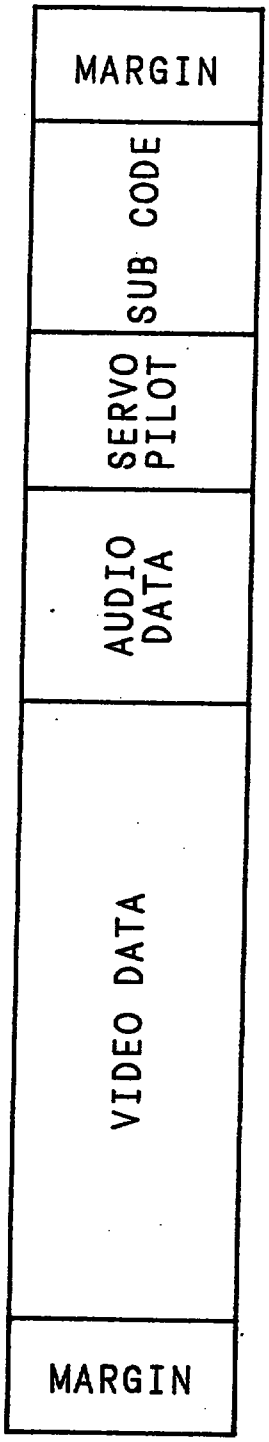

Fig. 5
Prior Art

This Sheet Has Been Replaced

Fig. 6

CDS	−1	+1	−3	+3	−5	+5
NUMBER OF CODEWORDS	2481	2169	1888	1231	909	410

This Sheet Has Been Replaced

Fig. 7

CONDITION OF n1	A CDS=0			B CDS=+2			C CDS=−2		D CDS=+4		E CDS=−4	
	A1	A2	A3	B1	B2	B3	C1	C2	D1	D2	E1	
NUMBER OF n1 CODEWORDS	102	14	4	51	17	3	116	4	18	2	68	
n2 CODEWORD MATCHING WITH n1	02			02	02							
	05	05		05	05	05						
	07	07		07	07	07						
	09	09	09				09					
	0A	0A	0A	0A	0A	0A						
	0B	0B	0B				0B					
	0D	0D	0D	0D	0D	0D						
	0E	0E	0E				0E					
	0F	0F	0F	0F	0F	0F						
	12	12	12				12	12				
	15	15	15				15	15				
	17	17	17				17	17				
	19	19	19	19	19	19						
	1A	1A	1A				1A	1A				
	1B	1B	1B	1B	1B	1B						
	1D	1D	1D				1D	1D				
	1E	1E	1E	1E	1E	1E						
	1F	1F	1F				1F	1F				
				01					01			
				03	03				03	03		
				06	06	06			06	06		
							11	11			11	
							13	13			13	
							16	16			16	

NOTE : SUBDIVISIONS OF A TO E GROUPS ARE EXECUTED FOR EACH n1 GROUP IN ACCORDANCE WITH "0" RUN-LENGTH AT LSB SIDE OF n1.

This Sheet Has Been Replaced



Fig. 8

	m1 DATAWORD	n1 GROUP	n2 CODEWORD m2 0 1 2 3 4 5 6 7 8 9 A B C D E F
1	00~73	A GROUP (A1, A2)	07 09 0A 0B 0D 0E 0F 12 15 17 19 1A 1B 1D 1E 1F

This Sheet Has Been Replaced

Fig. 9

	m1 DATAWORD	n1 GROUP	n2 CODEWORD m2 0 1 2 3 4 5 6 7 8 9 A B C D E F
2	74~BA	1st n1 GROUP C1	09 0B 0E 121517 1A 1D1E
		2nd n1 GROUP B1	07 0A 0D 0F 19 1B 1F

This Sheet Has Been Replaced

Fig. 10

	m1 DATAWORD	n1 GROUP	n2 CODEWORD m2 0 1 2 3 4 5 6 7 8 9 A B C D E F
3	BB~E7	1st n1 GROUP C1	09 0B 0E 121517 1A 1D1E
		2nd n1 GROUP B1	01 03 05 06
		3rd n1 GROUP E1	11 13 16
	E8~ED	1st n1 GROUP C1	11 13 16 111316 11 1316
		2nd n1 GROUP B1	01 03 05 06
		3rd n1 GROUP E1	11 13 16
	EE~FF	1st n1 GROUP C1	11 13 16 111316 11 1316
		2nd n1 GROUP D1	01 03 06
		3rd n1 GROUP E1,C2	11 13 16
		4th n1 GROUP B2,B3	05

This Sheet Has Been Replaced

Fig. 11

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
00	8847	4849	084A	C84B	884D	C84E	084F	4852	C855	4857	8859	C85A	085D	485D	085E	C85F
01	48A7	88A9	C8AA	08AB	48AD	08AE	C8AF	88B2	08B5	88B7	48B9	08BA	C8BD	88BD	C8BE	08BF
02	88E7	48E9	08EA	C8EB	88ED	C8EE	08EF	48F2	C8F5	48F7	88F9	C8FA	08FD	48FD	08FE	C8FF
03	4947	8949	C94A	094B	494D	094E	C94F	8952	0955	8957	4959	095A	C95D	895D	C95E	095F
04	89A7	49A9	09AA	C9AB	89AD	C9AE	09AF	49B2	C9B5	49B7	89B9	C9BA	09BD	49BD	09BE	C9BF
05	49E7	89E9	C9EA	09EB	49ED	09EE	C9EF	89F2	09F5	89F7	49F9	09FA	C9FD	89FD	C9FE	09FF
06	8B27	4B29	0B2A	CB2B	8B2D	CB2E	0B2F	4B32	CB35	4B37	8B39	CB3A	0B3D	4B3D	0B3E	CB3F
07	4B67	8B69	CB6A	0B6B	4B6D	0B6E	CB6F	8B72	0B75	8B77	4B79	0B7A	CB7D	8B7D	CB7E	0B7F
08	4BC7	8BC9	CBCA	0BCB	4BCD	0BCE	CBCF	8BD2	0BD5	8BD7	4BD9	0BDA	CBDD	8BDD	CBDE	0BDF
09	8E27	4E29	0E2A	CE2B	8E2D	CE2E	0E2F	4E32	CE35	4E37	8E39	CE3A	0E3D	4E3D	0E3E	CE3F
0A	4E67	8E69	CE6A	0E6B	4E6D	0E6E	CE6F	8E72	0E75	8E77	4E79	0E7A	CE7D	8E7D	CE7E	0E7F
0B	4EC7	8EC9	CECA	0ECB	4ECD	0ECE	CECF	8ED2	0ED5	8ED7	4ED9	0EDA	CEDD	8EDD	CEDE	0EDF
0C	5127	9129	D12A	112B	512D	112E	D12F	9132	1135	9137	5139	113A	D13D	913D	D13E	113F
0D	9167	5169	116A	D16B	916D	D16E	116F	5172	D175	5177	9179	D17A	117D	517D	117E	D17F
0E	91C7	51C9	11CA	D1CB	91CD	D1CE	11CF	51D2	D1D5	51D7	91D9	D1DA	11DD	51DD	11DE	D1DF
0F	5247	9249	D24A	124B	524D	124E	D24F	9252	1255	9257	5259	125A	D25D	925D	D25E	125F

This Sheet Has Been Replaced

Fig. 12

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
10	92A7	52A9	12AA	D2AB	92AD	D2AE	12AF	52B2	D2B5	52B7	92B9	D2BA	12BB	52BD	12BE	D2BF
11	52E7	92E9	D2EA	12EB	52ED	12EE	D2EF	92F2	12F5	92F7	52F9	12FA	D2FB	92FD	D2FE	12FF
12	9347	5349	134A	D34B	934D	D34E	134F	5352	D355	5357	9359	D35A	135B	535D	135E	D35F
13	53A7	93A9	D3AA	13AB	53AD	13AE	D3AF	93B2	13B5	93B7	53B9	13BA	D3BB	93BD	D3BE	13BF
14	93E7	53E9	13EA	D3EB	93ED	D3EE	13EF	53F2	D3F5	53F7	93F9	D3FA	13FB	53FD	13FE	D3FF
15	9527	5529	152A	D52B	952D	D52E	152F	5532	D535	5537	9539	D53A	153B	553D	153E	D53F
16	5567	9569	D56A	156B	556D	156E	D56F	9572	1575	9577	5579	157A	D57B	957D	D57E	157F
17	55C7	95C9	D5CA	15CB	55CD	15CE	D5CF	95D2	15D5	95D7	55D9	15DA	D5DB	95DD	D5DE	15DF
18	9647	5649	164A	D64B	964D	D64E	164F	5652	D655	5657	9659	D65A	165B	565D	165E	D65F
19	56A7	96A9	D6AA	16AB	56AD	16AE	D6AF	96B2	16B5	96B7	56B9	16BA	D6BB	96BD	D6BE	16BF
1A	96E7	56E9	16EA	D6EB	96ED	D6EE	16EF	56F2	D6F5	56F7	96F9	D6FA	16FB	56FD	16FE	D6FF
1B	5747	9749	D74A	174B	574D	174E	D74F	9752	1755	9757	5759	175A	D75B	975D	D75E	175F
1C	97A7	57A9	17AA	D7AB	97AD	D7AE	17AF	57B2	D7B5	57B7	97B9	D7BA	17BB	57BD	17BE	D7BF
1D	57E7	97E9	D7EA	17EB	57ED	17EE	D7EF	97F2	17F5	97F7	57F9	17FA	D7FB	97FD	D7FE	17FF
1E	9A27	5A29	1A2A	DA2B	9A2D	DA2E	1A2F	5A32	DA35	5A37	9A39	DA3A	1A3B	5A3D	1A3E	DA3F
1F	5A67	9A69	DA6A	1A6B	5A6D	1A6E	DA6F	9A72	1A75	9A77	5A79	1A7A	DA7B	9A7D	DA7E	1A7F

This Sheet Has Been Replaced

Fig. 13

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
20	5AC7	9AC9	DACA	1ACB	5ACD	1ACE	DACF	9AD2	1AD5	9AD7	5AD9	1ADA	DADB	9ADD	DADE	1ADF
21	9C47	5C49	1C4A	DC4B	9C4D	DC4E	1C4F	5C52	DC55	5C57	9C59	DC5A	1C5B	5C5D	1C5E	DC5F
22	5CA7	9CA9	DCAA	1CAB	5CAD	1CAE	DCAF	9CB2	1CB5	9CB7	5CB9	1CBA	DCBB	9CBD	DCBE	1CBF
23	9CE7	5CE9	1CEA	DCEB	9CED	DCEE	1CEF	5CF2	DCF5	5CF7	9CF9	DCFA	1CFB	5CFD	1CFE	DCFF
24	5D47	9D49	DD4A	1D4B	5D4D	1D4E	DD4F	9D52	1D55	9D57	5D59	1D5A	DD5B	9D5D	DD5E	1D5F
25	9DA7	5DA9	1DAA	DDAB	9DAD	DDAE	1DAF	5DB2	DDB5	5DB7	9DB9	DDBA	1DDB	5DBD	1DBE	DDBF
26	5DE7	9DE9	DDEA	1DEB	5DED	1DEE	DDEF	9DF2	1DF5	9DF7	5DF9	1DFA	DDFB	9DFD	DDFE	1DFF
27	9F27	5F29	1F2A	DF2B	9F2D	DF2E	1F2F	5F32	DF35	5F37	9F39	DF3A	1F3B	5F3D	1F3E	DF3F
28	5F67	9F69	DF6A	1F6B	5F6D	1F6E	DF6F	9F72	1F75	9F77	5F79	1F7A	DF7B	9F7D	DF7E	1F7F
29	5FC7	9FC9	DFCA	1FCB	5FCD	1FCE	DFCF	9FD2	1FD5	9FD7	5FD9	1FDA	DFDB	9FDD	DFDE	1FDF
2A	6227	A229	E22A	222B	622D	222E	E22F	A232	2235	A237	6239	223A	E23B	A23D	E23E	223F
2B	A267	6269	226A	E26B	A26D	E26E	226F	6272	E275	6277	A279	E27A	227B	627D	227E	E27F
2C	A2C7	62C9	22CA	E2CB	A2CD	E2CE	22CF	62D2	E2D5	62D7	A2D9	E2DA	22DB	62DD	22DE	E2DF
2D	6447	A449	E44A	244B	644D	244E	E44F	A452	2455	A457	6459	245A	E45B	A45D	E45E	245F
2E	A4A7	64A9	24AA	E4AB	A4AD	E4AE	24AF	64B2	E4B5	64B7	A4B9	E4BA	24DB	64BD	24BE	E4BF
2F	64E7	A4E9	E4EA	24EB	64ED	24EE	E4EF	A4F2	24F5	A4F7	64F9	24FA	E4FB	A4FD	E4FE	24FF

This Sheet Has Been Replaced

Fig. 14

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
30	A547	6549	254A	E54B	A54D	E54E	254F	6552	E555	6557	A559	E55A	255B	655D	255E	E55F
31	65A7	A5A9	E5AA	25AB	65AD	25AE	E5AF	A5B2	25B5	A5B7	65B9	25BA	E5BB	A5BD	E5BE	25BF
32	A5E7	65E9	25EA	E5EB	A5ED	E5EE	25EF	65F2	E5F5	65F7	A5F9	E5FA	25FB	65FD	25FE	E5FF
33	6727	A729	E72A	272B	672D	272E	E72F	A732	2735	A737	6739	273A	E73B	A73D	E73E	273F
34	A767	6769	276A	E76B	A76D	E76E	276F	6772	E775	6777	A779	E77A	277B	677D	277E	E77F
35	A7C7	67C9	27CA	E7CB	A7CD	E7CE	27CF	67D2	E7D5	67D7	A7D9	E7DA	27DB	67DD	27DE	E7DF
36	A927	6929	292A	E92B	A92D	E92E	292F	6932	E935	6937	A939	E93A	293B	693D	293E	E93F
37	6967	A969	E96A	296B	696D	296E	E96F	A972	2975	A977	6979	297A	E97B	A97D	E97E	297F
38	69C7	A9C9	E9CA	29CB	69CD	29CE	E9CF	A9D2	29D5	A9D7	69D9	29DA	E9DB	A9DD	E9DE	29DF
39	AA47	6A49	2A4A	EA4B	AA4D	EA4E	2A4F	6A52	EA55	6A57	AA59	EA5A	2A5B	6A5D	2A5E	EA5F
3A	6AA7	AAA9	EAAA	2AAB	6AAD	2AAE	EAAF	AAB2	2AB5	AAB7	6AB9	2ABA	EABB	AABD	EABE	2ABF
3B	AAE7	6AE9	2AEA	EAEB	AAED	EAEE	2AEF	6AF2	EAF5	6AF7	AAF9	EAFA	2AFB	6AFD	2AFE	EAFF
3C	6B47	AB49	EB4A	2B4B	6B4D	2B4E	EB4F	AB52	2B55	AB57	6B59	2B5A	EB5B	AB5D	EB5E	2B5F
3D	ABA7	6BA9	2BAA	EBAB	ABAD	EBAE	2BAF	6BB2	EBB5	6BB7	ABB9	EBBA	2BBB	6BBD	2BBE	EBBF
3E	6BE7	ABE9	EBEA	2BEB	6BED	2BEE	EBEF	ABF2	2BF5	ABF7	6BF9	2BFA	EBFB	ABFD	EBFE	2BFF
3F	6D27	AD29	ED2A	2D2B	6D2D	2D2E	ED2F	AD32	2D35	AD37	6D39	2D3A	ED3B	AD3D	ED3E	2D3F

This Sheet Has Been Replaced

Fig. 15

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
40	AD67	6D69	2D6A	ED6B	AD6D	ED6E	2D6F	6D72	ED75	6D77	AD79	ED7A	2D7B	6D7D	2D7E	ED7F
41	ADC7	6DC9	2DCA	EDCB	ADCD	EDCE	2DCF	6DD2	EDD5	6DD7	ADD9	EDDA	2DDB	6DDD	2DDE	EDDF
42	6E47	AE49	EE4A	2E4B	6E4D	2E4E	EE4F	AE52	2E55	AE57	6E59	2E5A	EE5B	AE5D	EE5E	2E5F
43	AEA7	6EA9	2EAA	EEAB	AEAD	EEAE	2EAF	6EB2	EEB5	6EB7	AEB9	EEBA	2EBB	6EBD	2EBE	EEBF
44	6EE7	AEE9	EEEA	2EEB	6EED	2EEE	EEEF	AEF2	2EF5	AEF7	6EF9	2EFA	EEFB	AEFD	EEFE	2EFF
45	AF47	6F49	2F4A	EF4B	AF4D	EF4E	2F4F	6F52	EF55	6F57	AF59	EF5A	2F5B	6F5D	2F5E	EF5F
46	6FA7	AFA9	EFAA	2FAB	6FAD	2FAE	EFAF	AFB2	2FB5	AFB7	6FB9	2FBA	EFBB	AFBD	EFBE	2FBF
47	AFE7	6FE9	2FEA	EFEB	AFED	EFEE	2FEF	6FF2	EFF5	6FF7	AFF9	EFFA	2FFB	6FFD	2FFE	EFFF
48	B227	7229	322A	F22B	B22D	F22E	322F	7232	F235	7237	B239	F23A	323B	723D	323E	F23F
49	7267	B269	F26A	326B	726D	326E	F26F	B272	3275	B277	7279	327A	F27B	B27D	F27E	327F
4A	72C7	B2C9	F2CA	32CB	72CD	32CE	F2CF	B2D2	32D5	B2D7	72D9	32DA	F2DB	B2DD	F2DE	32DF
4B	B447	7449	344A	F44B	B44D	F44E	344F	7452	F455	7457	B459	F45A	345B	745D	345E	F45F
4C	74A7	B4A9	F4AA	34AB	74AD	34AE	F4AF	B4B2	34B5	B4B7	74B9	34BA	F4BB	B4BD	F4BE	34BF
4D	B4E7	74E9	34EA	F4EB	B4ED	F4EE	34EF	74F2	F4F5	74F7	B4F9	F4FA	34FB	74FD	34FE	F4FF
4E	7547	B549	F54A	354B	754D	354E	F54F	B552	3555	B557	7559	355A	F55B	B55D	F55E	355F
4F	B5A7	75A9	35AA	F5AB	B5AD	F5AE	35AF	75B2	F5B5	75B7	B5B9	F5BA	35BB	75BD	35BE	F5BF

This Sheet Has Been Replaced

Fig. 16

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
50	75E7	B5E9	F5EA	35EB	75ED	35EE	F5EF	B5F2	35F5	B5F7	75F9	35FA	F5FB	B5FD	F5FE	35FF
51	B727	7729	372A	F72B	B72D	F72E	372F	7732	F735	7737	B739	F73A	373B	773D	373E	F73F
52	7767	B769	F76A	376B	776D	376E	F76F	B772	3775	B777	7779	377A	F77B	B77D	F77E	377F
53	77C7	B7C9	F7CA	37CB	77CD	37CE	F7CF	B7D2	37D5	B7D7	77D9	37DA	F7DB	B7DD	F7DE	37DF
54	7927	B929	F92A	392B	792D	392E	F92F	B932	3935	B937	7939	393A	F93B	B93D	F93E	393F
55	B967	7969	396A	F96B	B96D	F96E	396F	7972	F975	7977	B979	F97A	397B	797D	397E	F97F
56	B9C7	79C9	39CA	F9CB	B9CD	F9CE	39CF	79D2	F9D5	79D7	B9D9	F9DA	39DB	79DD	39DE	F9DF
57	7A47	BA49	FA4A	3A4B	7A4D	3A4E	FA4F	BA52	3A55	BA57	7A59	3A5A	FA5B	BA5D	FA5E	3A5F
58	BAA7	7AA9	3AAA	FAAB	BAAD	FAAE	3AAF	7AB2	FAB5	7AB7	BAB9	FABA	3ABB	7ABD	3ABE	FABF
59	7AE7	BAE9	FAEA	3AEB	7AED	3AEE	FAEF	BAF2	3AF5	BAF7	7AF9	3AFA	FAFB	BAFD	FAFE	3AFF
5A	BB47	7B49	3B4A	FB4B	BB4D	FB4E	3B4F	7B52	FB55	7B57	BB59	FB5A	3B5B	7B5D	3B5E	FB5F
5B	7BA7	BBA9	FBAA	3BAB	7BAD	3BAE	FBAF	BBB2	3BB5	BBB7	7BB9	3BBA	FBBB	BBBD	FBBE	3BBF
5C	BBE7	7BE9	3BEA	FBEB	BBED	FBEE	3BEF	7BF2	FBF5	7BF7	BBF9	FBFA	3BFB	7BFD	3BFE	FBFF
5D	BD27	7D29	3D2A	FD2B	BD2D	FD2E	3D2F	7D32	FD35	7D37	BD39	FD3A	3D3B	7D3D	3D3E	FD3F
5E	7D67	BD69	FD6A	3D6B	7D6D	3D6E	FD6F	BD72	3D75	BD77	7D79	3D7A	FD7B	BD7D	FD7E	3D7F
5F	7DC7	BDC9	FDCA	3DCB	7DCD	3DCE	FDCF	BDD2	3DD5	BDD7	7DD9	3DDA	FDDB	BDDD	FDDE	3DDF

This Sheet Has Been Replaced

Fig. 17

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
60	BE47	7E49	3E4A	FE4B	BE4D	FE4E	3E4F	7E52	FE55	7E57	BE59	FE5A	3E5B	7E5D	3E5E	FE5F
61	7EA7	BEA9	FEAA	3EAB	7EAD	3EAE	FEAF	BEB2	3EB5	BEB7	7EB9	3EBA	FEBB	BEBD	FEBE	3EBF
62	BEE7	7EE9	3EEA	FEEB	BEED	FEEE	3EEF	7EF2	FEF5	7EF7	BEF9	FEFA	3EFB	7EFD	3EFE	FEFF
63	7F47	BF49	FF4A	3F4B	7F4D	3F4E	FF4F	BF52	3F55	BF57	7F59	3F5A	FF5B	BF5D	FF5E	3F5F
64	BFA7	7FA9	3FAA	FFAB	BFAD	FFAE	3FAF	7FB2	FFB5	7FB7	BFB9	FFBA	3FBB	7FBD	3FBE	FFBF
65	7FE7	BFE9	FFEA	3FEB	7FED	3FEE	FFEF	BFF2	3FF5	BFF7	7FF9	3FFA	FFFB	BFFD	FFFE	3FFF
66	4A87	8A89	CA8A	0A8B	4A8D	0A8E	CA8F	8A92	0A95	8A97	4A99	0A9A	CA9B	8A9D	CA9E	0A9F
67	4F87	8F89	CF8A	0F8B	4F8D	0F8E	CF8F	8F92	0F95	8F97	4F99	0F9A	CF9B	8F9D	CF9E	0F9F
68	9087	5089	108A	D08B	908D	D08E	108F	5092	D095	5097	9099	D09A	109B	509D	109E	D09F
69	5487	9489	D48A	148B	548D	148E	D48F	9492	1495	9497	5499	149A	D49B	949D	D49E	149F
6A	5B87	9B89	DB8A	1B8B	5B8D	1B8E	DB8F	9B92	1B95	9B97	5B99	1B9A	DB9B	9B9D	DB9E	1B9F
6B	5E87	9E89	DE8A	1E8B	5E8D	1E8E	DE8F	9E92	1E95	9E97	5E99	1E9A	DE9B	9E9D	DE9E	1E9F
6C	A387	6389	238A	E38B	A38D	E38E	238F	6392	E395	6397	A399	E39A	239B	639D	239E	E39F
6D	A687	6689	268A	E68B	A68D	E68E	268F	6692	E695	6697	A699	E69A	269B	669D	269E	E69F
6E	6887	A889	E88A	288B	688D	288E	E88F	A892	2895	A897	6899	289A	E89B	A89D	E89E	289F
6F	AC87	6C89	2C8A	EC8B	AC8D	EC8E	2C8F	6C92	EC95	6C97	AC99	EC9A	2C9B	6C9D	2C9E	EC9F

This Sheet Has Been Replaced

Fig. 18

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
70	7387	B389	F38A	338B	738D	338E	F38F	B392	3395	B397	7399	339A	F39B	B39D	F39E	339F
71	7687	B689	F68A	368B	768D	368E	F68F	B692	3695	B697	7699	369A	F69B	B69D	F69E	369F
72	B887	7889	388A	F88B	B88D	F88E	388F	7892	F895	7897	B899	F89A	389B	789D	389E	F89F
73	7C87	BC89	FC8A	3C8B	7C8D	3C8E	FC8F	BC92	3C95	BC97	7C99	3C9A	FC9B	BC9D	FC9E	3C9F
74	0927	C869	892A	486B	092D	486E	892F	C872	4875	C877	0939	487A	893B	C87D	893E	487F
75	0AE7	0889	8AEA	888B	0AED	888E	8AEF	0892	8895	0897	0AF9	889A	8AFB	089D	8AFE	889F
76	0BA7	C8C9	8BAA	48CB	0BAD	48CE	8BAF	C8D2	48D5	C8D7	0BB9	48DA	8BBB	C8DD	8BBE	48DF
77	0D67	0969	8D6A	896B	0D6D	896E	8D6F	0972	8975	0977	0D79	897A	8D7B	097D	8D7E	897F
78	0EA7	C989	8EAA	498B	0EAD	498E	8EAF	C992	4995	C997	0EB9	499A	8EDB	C99D	8EBE	499F
79	0FE7	09C9	8FEA	89CB	0FED	89CE	8FEF	09D2	89D5	09D7	0FF9	89DA	8FFB	09DD	8FFE	89DF
7A	D0E7	0AA9	50EA	8AAB	D0ED	8AAE	50EF	0AB2	8AB5	0AB7	D0F9	8ABA	50FB	0ABD	50FE	8ABF
7B	D1A7	CB09	51AA	4B0B	D1AD	4B0E	51AF	CB12	4B15	CB17	D1B9	4B1A	51BB	CB1D	51BE	4B1F
7C	1227	0B49	922A	8B4B	122D	8B4E	922F	0B52	8B55	0B57	1239	8B5A	923B	0B5D	923E	8B5F
7D	D327	0BE9	532A	8BEB	D32D	8BEE	532F	0BF2	8BF5	0BF7	D339	8BFA	533B	0BFD	533E	8BFF
7E	14E7	0D29	94EA	8D2B	14ED	8D2E	94EF	0D32	8D35	0D37	14F9	8D3A	94FB	0D3D	94FE	9D3F
7F	15A7	0E49	95AA	8E4B	15AD	8E4E	95AF	0E52	8E55	0E57	15B9	8E5A	95BB	0E5D	95BE	8E5F

This Sheet Has Been Replaced

Fig. 19

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
80	D627	0EE9	562A	8EEB	D62D	82EE	562F	0EF2	8EF5	0EF7	D639	8EFA	563B	0EFD	563E	82FF
81	1727	0FA9	972A	8FAB	172D	8FAE	972F	0FB2	8FB5	0FB7	1739	8FBA	973B	0FBD	973E	8FBF
82	1967	D0A9	996A	50AB	196D	50AE	996F	D0B2	50B5	D0B7	1979	50BA	997B	D0BD	997E	50BF
83	1AA7	1109	9AAA	910B	1AAD	910E	9AAF	1112	9115	1117	1AB9	911A	9ABB	111D	9ABE	911F
84	1BE7	D149	9BEA	514B	1BED	514E	9BEF	D152	5155	D157	1BF9	515A	9BFB	D15D	9BFE	515F
85	DC27	D1E9	5C2A	51EB	DC2D	51EE	5C2F	D1F2	51F5	D1F7	DC39	51FA	5C3B	D1FD	5C3E	51FF
86	1D27	1269	9D2A	926B	1D2D	926E	9D2F	1272	9275	1277	1D39	927A	9D3B	127D	9D3E	927F
87	1EE7	D289	9EEA	528B	1EED	528E	9EEF	D292	5295	D297	1EF9	529A	9EFB	D29D	9EFE	529F
88	1FA7	12C9	9FAA	92CB	1FAD	92CE	9FAF	12D2	92D5	12D7	1FB9	92DA	9FBB	12DD	9FBE	92DF
89	E167	D369	616A	536B	E16D	536E	616F	D372	5375	D377	E179	537A	617B	D37D	617E	537F
8A	E2A7	1389	62AA	938B	E2AD	938E	62AF	1392	9395	1397	E2B9	939A	62BB	139D	62BE	939F
8B	E3E7	D3C9	63EA	53CB	E3ED	53CE	63EF	D3D2	53D5	D3D7	E3F9	53DA	63FB	D3DD	63FE	53DF
8C	2427	14A9	A42A	94AB	242D	94AE	A42F	14B2	94B5	14B7	2439	94BA	A43B	14BD	A43E	94BF
8D	E527	D509	652A	550B	E52D	550E	652F	D512	5515	D517	E539	551A	653B	D51D	653E	551F
8E	E6E7	1549	66EA	954B	E6ED	954E	66EF	1552	9555	1557	E6F9	955A	66FB	155D	66FE	955F
8F	E7A7	15E9	67AA	95EB	E7AD	95EE	67AF	15F2	95F5	15F7	E7B9	95FA	67BB	15FD	67BE	95FF

This Sheet Has Been Replaced

Fig. 20

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
90	28E7	D669	A8EA	566B	28ED	566E	A8EF	D672	5675	D677	28F9	567A	A8FB	D67D	A8FE	567F
91	29A7	1689	A9AA	968B	29AD	968E	A9AF	1692	9695	1697	29B9	969A	A9BB	169D	A9BE	969F
92	EA27	D6C9	6A2A	56CB	EA2D	56CE	6A2F	D6D2	56D5	D6D7	EA39	56DA	6A3B	D6DD	6A3E	56DF
93	2B27	1769	AB2A	976B	2B2D	976E	AB2F	1772	9775	1777	2B39	977A	AB3B	177D	AB3E	977F
94	ECE7	D789	6CEA	578B	ECED	578E	6CEF	D792	5795	D797	ECF9	579A	6CFB	D79D	6CFE	579F
95	EDA7	17C9	6DAA	97CB	EDAD	97CE	6DAF	17D2	97D5	17D7	EDB9	97DA	6DBB	17DD	6DBE	97DF
96	2E27	1929	AE2A	992B	2E2D	992E	AE2F	1932	9935	1937	2E39	993A	AE3B	193D	AE3E	993F
97	EF27	1A49	6F2A	9A4B	EF2D	9A4E	6F2F	1A52	9A55	1A57	EF39	9A5A	6F3B	1A5D	6F3E	9A5F
98	3167	1AE9	B16A	9AEB	316D	9AEE	B16F	1AF2	9AF5	1AF7	3179	9AFA	B17B	1AFD	B17E	9AFF
99	32A7	1BA9	B2AA	9BAB	32AD	9BAE	B2AF	1BB2	9BB5	1BB7	32B9	9BBA	B2BB	1BBD	B2BE	9BBF
9A	33E7	DC69	B3EA	5C6B	33ED	5C6E	B3EF	DC72	5C75	DC77	33F9	5C7A	B3FB	DC7D	B3FE	5C7F
9B	F427	1C89	742A	9C8B	F42D	9C8E	742F	1C92	9C95	1C97	F439	9C9A	743B	1C9D	743E	9C9F
9C	3527	DCC9	B52A	5CCB	352D	5CCE	B52F	DCD2	5CD5	DCD7	3539	5CDA	B53B	DCDD	B53E	5CDF
9D	36E7	1D69	B6EA	9D6B	36ED	9D6E	B6EF	1D72	9D75	1D77	36F9	9D7A	B6FB	1D7D	B6FE	9D7F
9E	37A7	DD89	B7AA	5D8B	37AD	5D8E	B7AF	DD92	5D95	DD97	37B9	5D9A	B7BB	DD9D	B7BE	5D9F
9F	F8E7	1DC9	78EA	9DCB	F8ED	9DCE	78EF	1DD2	9DD5	1DD7	F8F9	9DDA	78FB	1DDD	78FE	9DDF

This Sheet Has Been Replaced

/	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
A0	F9A71	EA979	AA979	EABF9	AD9EA	E79AF	1EB29	EB751	EB751	E9B77	F9B99	EBA79	BB1EB	D79BE	9EBF
A1	3A27D	F0F09	BA2A5	F0B3A	2D5F0	EBA2F	DF125	F1555	F1555	DF177	3A395	F1ABA	3BDF1	D5DBA	3E5F1	F
A2	FB271	F4979	B2A96	F4BFB	2D9F4	EB7B2	F1F52	9F552	9F552	F5577	FB395	F1ABA	7B3B1	F5D7B	3E9F5	F
A3	3CE71	FE99B	C2A99	FEBB3	CED9F	EBC2F	1FF52	9FF55	1FF55	1FF57	3CF99	FAB8C	FB1FF	5DBCF	E9FFF	F
A4	3DA7E	129BD	AA612	B3DAD	612EB	DAFE1	32626	2552F	5E13F	5E137	3DB96	13AB8	DBBE1	3DDBE	613F
A5	FE27E	2499E	2A624	BFE2D	624EE	25226	2E255	E2F55	E2F55	E2577	FE396	25A7E	3BE25	D7E3E	625F
A6	3F27E	2E99B	F2A62	4BFE2	D62EE	BF2FE	2F26F	E3B26	2F55E	3B577	0DF59	6249A	8F5BE	49D8F	5E649	F
A7	0A477	E3A91	A463A	B04D6	3AE8A	4FE24	D2A4D	5D711	459A4	DA945	B7D8D	DEA47	F
A8	0DC72	469D8	CAA46	B0DCD	A46E8	DCFE2	47226	5755E	5755E	5772D	9A478	DDB24	7D8DE	A47F
A9	0F477	E48F4	A648B	0F4D6	48EE8	F4FE2	59226	4955E	4955E	4970F	5971B	59A49	A8F5B	E49D8	F5E649	F
AA	1447	24C99	44A4C	B14DA	4CEE9	44F24	D2A4D	5D711	459A4	DA945	B7D8D	DEA47	F
AB	19C7E	5699C	A6569	B19CD	6569E	4AE61	CFE6B	2659A	2A595	D711E	5996B	A61DE	6BD6B	F
AC	1B472	558B4	A588B	1B4DA	558E9	B4F25	9E57D	2655D	5E6B5	E6B7E	1D96B	A61DE	6BD61	DE35E	A71F
AD	1E47E	5C99E	4A655	CB1E4	D65CE	9E4FE	5D265	D55E6	B26B7	E1D96	BA61D	E35EA	71F
AE	E1C7E	6A961	CA66A	BE1CD	66AE1	CFE6B	2659A	2A595	D711E	5996B	A61DE	6BD61	DE35E	A71F
AF	E3472	709634	AA70E	634F2	7125A	7152	7E359	A71A6	35B27	1D635	EA71F

Fig. 21

This Sheet Has Been Replace

Fig. 22

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
B0	E647	E749	664A	674B	E64D	674E	664F	E752	6755	E757	E659	675A	665B	E75D	665E	675F
B1	2847	E7E9	A84A	67EB	284D	67EE	A84F	E7F2	67F5	E7F7	2859	67FA	A85B	E7FD	A85E	67FF
B2	EC47	28A9	6C4A	A8AB	EC4D	A8AE	6C4F	28B2	A8B5	21B7	EC59	A8BA	6C5B	28BD	6C5E	A8BF
B3	31C7	E909	B1CA	690B	31CD	690E	B1CF	E912	6915	E917	31D9	691A	B1DB	E91D	B1CE	691F
B4	3347	2949	B34A	A94B	334D	A94E	B34F	2952	A955	2957	3359	A95A	B35B	295D	B35E	A95F
B5	3647	29E9	B64A	A9EB	364D	A9EE	B64F	29F2	A9F5	29F7	3659	A9FA	B65B	29FD	B65E	A9FF
B6	F847	EA69	784A	6A6B	F84D	6A6E	784F	EA72	6A75	EA77	F859	6A7A	785B	EA7D	785E	6A7F
B7	3C47	2A89	BC4A	AA8B	3C4D	AA8E	BC4F	2A92	AA95	2A97	3C59	AA9A	BC5B	2A9D	BC5E	AA9F
B8	0C87	EAC9	8C8A	6ACB	0C8D	6ACE	8C8F	EAD2	6AD5	EAD7	0C99	6ADA	8C9B	EADD	8C9E	6ADF
B9	1887	2B69	988A	AB6B	188D	AB6E	988F	2B72	AB75	2B77	1899	AB7A	989B	2B7D	989E	AB7F
BA	3087	EB89	B08A	6B8B	308D	6B8E	B08F	EB92	6B95	EB97	3099	6B9A	B09B	EB9D	B09E	6B9F
BB	4921	2BC9	C923	ABCB	8925	ABCE	C926	2BD2	ABD5	2BD7	0911	ABDA	8913	2BDD	8916	ABDF
BC	4AE1	ECA9	CAE3	6CAB	8AE5	6CAE	CAE6	ECB2	6CB5	ECB7	0A71	6CBA	8A73	ECBD	8A76	6CBF
BD	4BA1	2D09	CBA3	AD0B	8BA5	AD0E	CBA6	2D12	AD15	2D17	0AD1	AD1A	8AD3	2D1D	8AD6	AD1F
BE	4D61	ED49	CD63	6D4B	8D65	6D4E	CD66	ED52	6D55	ED57	0B91	6D5A	8B93	ED5D	8B96	6D5F
BF	4EA1	EDE9	CEA3	6DEB	8EA5	6DEE	CEA6	EDF2	6DF5	EDF7	0CB1	6DFA	8CB3	EDFD	8CB6	6DFF

This Sheet Has Been Replaced

/	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
C0	4FE1	2EE6	9CFE	3AE6	B8FE	5AE6	ECFE	62E7	2AE7	52E7	70D5	1AE7	8D73	2E7D	8D76	AE7F
C1	90E1	EE8	91OE	36EE	8B50	E56E	8E11	0E62	6EE9	5EE9	70DF	16E9	D93E	D8D9	6E96	E9FF
C2	91A1	2EC	91 1A	3AEC	B51A	55AE	C6ED	1A62	6ED7	2ED7	0E91	AED8	ED3E	D8ED	8AED	DFF7
C3	5225	21E	F69D	2236	F6B9	2255	6AF8	B532	4E56	F9D2	F711	6F8B	F93E	F8F7	D8F7	6F6F
C4	9932	1E	C99D	5A23	B4E9	5A5B	1246	B562	5A56	3711	D1B1	3A51	5133	1D51	3613	B13F
C5	5455	4E	1EC9	D4E3	6FCB	B12B	24B5	62E7	D526	3257	1D91	B13A	9925	D925	6B25	FF
C6	5559	6E	1EFC	9D4E	36FC	B95A	5B12	EB24	E756	3257	1D91	B25A	9933	2FD5	3F56	B2FF
C7	9621	32	16D7	2336	B2EB	2455	B24E	D726	3257	1D91	B2FA	9933	2FD5	3BD9	4B6B	3BF
C8	5721	32	E9D7	23B2	EB24	B2EE	D726	32F7	D311	B2FA	5933	2FD5	3349	D995	96B4	9FF
C9	5961	33	A9DD	963B	3AB9	96B3	AED9	6633	B714	7BA9	9473	3F47	D995	96B4	9FF
CA	5AA1	F4	69DA	AE37	46B9	AA55	B7E1	C266	F4D7	2B57	5933	4DD5	6D67	4DF
CB	5BE1	34	89DB	E37	4CB5	C255	B74C	E166	F4D7	2B57	5933	5F56	B67B	57F
CC	9C21	35	69DD	23B5	6B9D	255B	574C	E166	F4D7	2B57	5933	5757	D976	B59F
CD	5D21	35	69DD	EE37	58B9	EE57	58ED	E266	F4D7	2B57	5933	5F59	D976	759F
CE	5EE1	F5	89DE	E37	58B9	EE57	58ED	E266	F4D7	2B57	5933	5F59	D976	D5F
CF	5FA1	35	C9DF	A3B5	CB9F	A5B5	CEDF	A635	D2B5	D535	D719	51B5	DA99	D335	D996	B5DF

Fig. 23

This Sheet Has Been Replaced

/	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
D0	A161	36A9	2163	B6AB	6165	B6AE	2166	36B2	B6B5	36B7	19F1	B6BA	99F3	36BD	99F6	B6BF
D1	A2A1	F709	22A3	7709	B62A	5577	0EE2	2A6F	7127	715F	1A91	771A	9A93	F71D	9A96	771F
D2	A3E1	3749	23E3	B74B	63E5	B774	EE23	E637	5275	37F5	1B71	B75A	9B73	375D	9B76	B75F
D3	6421	37E9	42B3	B7EB	A425	5B78	AE25	26E6	3E91	37F7	1BD1	B7FA	9BD3	37FD	9BD6	B7FF
D4	A521	F8A9	2526	3789	B652	5E57	A257	6F8B	2778	B571	D113	F8BA	9D13	F8BD	9D16	78BF
D5	A6E1	3990	26E3	B90B	66E5	B904	EE26	3E91	7955	F91E	7191	BA7A	9E73	391D	9E76	B91F
D6	A7A1	F994	27A3	794B	B67A	4E57	A26F	6E95	5279	5711	ED17	95A9	ED3F	95DD	9ED6	795F
D7	68E1	F9EE	8E37	9EBA	8E57	9EEE	8E6F	9F27	9F71	F91F	7179	FA9F	9337	3FD9	F967	9FF
D8	69A1	3A69	E9A3	BA6B	A95B	A6EE	9A63	A72B	A755	3A77	E151	BA7A	6153	3A7D	6156	BA7F
D9	AA21	FA8A	2A23	7A8B	6DA2	57A8	EE2D	A697	A955	FA97	E1F1	7A9A	61F3	FA9D	61F6	7A9F
DA	B621	3AC9	EB23	BACB	ABE2	5BAC	FEB6	3AD2	BAD5	5FB7	7E29	1BAD	A629	33AD	D629	6BADF
DB	ACE1	FB69	2CE3	7B6B	6CE5	7B6E	E2CB	72B7	7B55	FB77	E371	7B7A	6337	3FB7	D637	67B7F
DC	ADA1	3B89	2DA3	BB8B	6DA5	BB8E	E2DA	63B9	2BB9	7E3D	1BB9	A633	D33B	9D63	D6BB	9F
DD	6EE1	FBC9	EEE3	7BCB	AEE5	7BCF	EE6F	BD27	BD5F	BD7E	51	7BDA	6651	3FBD	D667	BDF
DE	AFE1	3CA9	2FE3	BCAB	6FE5	BCAE	2FE6	3CB2	BCB5	3CB7	E671	BCBA	6673	3CBD	6676	BCBF
DF	7161	FD09	F163	7D0B	B165	7D0E	F166	FD12	7D15	FD17	E6D1	7D1A	663D	3FD1	D667	D1F

Fig. 24

This Sheet Has Been Replaced

/	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
E0	72A13D49F2A3BD4BB2A5BD4EF2A63D52BD557E791BD5A679335D5D679BD5F
EE1	73E13DE9F3E3BDEBB3E5BDEEF3E63DF2BDF57E72871BDFAA87335DFDA87BDFF
EE2	B421FEE69345237E6B74255B6E57E6EF6E63FE72BE9553E9772871BE9AA8D33E9DA996BE9F
EE3	7521EC9F69F52E37EC8BB52E57EC6EE6EF5263EED72BF553F97728D1BF7AA8D33FE1767F
EE4	76E1FEC9F8E3F6E37EC8BB6E57EC6EF6EF7263EED72BF553F97728D1BF7AA8D33FE1767F
EE5	77A13FF69F7A3BF6BB7A55BF6EE7A263F7272B1FBF7AAB1337EC71BF7AAB1337EC71BF7F
EE6	B8E1FF8E3F8E37F8BB78E57F8EE38E6FF9272BF553FF9772EC71F7F9A6C73FF9D6C76F9F
EE7	B9A13FC9F9E39A3BFCBB79A5BFCE39A63FD2BFD553FD772EC71F7F9A6C73FD6C76F9F
EE8	7A21909B1FA2310B3BA2551F6FDA63A1312132532232F4772EC71F7F9A6C73FD6C76F9F
EE9	BB21511311F3BDA5111F6FDA63A3B1234711E47332B4772EC71F7F9A6C73FD6C76F9F
EEA	7CE1991511FCE31153BCE5115629663E2646A2F1223B3232256622F4772EC71F7F9A6C73FD6C76F9F
EEB	7DA1991F1FDA3115F3BDA5115629663E2646A2F1223B3232256622F4772EC71F7F9A6C73FD6C76F9F
EEC	BE2152711E23D27337E2551296F2646A4912493232256622F4772EC71F7F9A6C73FD6C76F9F
EED	7F2199291F2312933BF2551296F2646A4912493232256622F4772EC71F7F9A6C73FD6C76F9F
EEE	0A2152D18A23D2D3BA455D2D6682646A4912493232256622F4772EC71F7F9A6C73FD6C76F9F
EEF	0CE1993711BCE31373BDC5137682646A4912493232256622F4772EC71F7F9A6C73FD6C76F9F

Fig. 25

This Sheet Has Been Replaced

/	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
F0	1DA15391	8DA3D393	8F45D396	8DA66591	E59633D1	B591B3D3	59633D35	96
F1	1F21193D	8F231D39	8F26A5D1	25D63511	75D1B51B	67331F5D	3B51B516	F5D6
F2	1421548B	942339E4	5D4B6946	A6B1E71B	26B32675	5D33B67B	67633F6B	67B6
F3	18E19551	98E31539	B45151C5	D55F6998	E66B7113	E71B6D33	71B6D633	7116
F4	19A15551	99A3D55F	36199E45	D5A6A751	26B32675	5D33B67B	67633F75	5676
F5	1B21559E	B23D55F3	61C55D55	F669B26A	7F132755	3E8B3E32	7F32F8B6	E8B1E8B6	3E32F766	3E8B3E32	7F32F766	3E32F766	3E32F766	3E32F766	3E32F766	3E32F766
F6	1E21569E	2313669B	2313669B	2313669B	2313669B	2313669B	2313669B	2313669B	2313669B	2313669B	2313669B	2313669B	2313669B	2313669B	2313669B	2313669B
F7	1A15691D	6A3D6916	4551C45D	5169966A	6A6A7513	2E9F1E9F	1E9F1E9F	1E9F1E9F	1E9F1E9F	1E9F1E9F	1E9F1E9F	1E9F1E9F	1E9F1E9F	1E9F1E9F	1E9F1E9F	1E9F1E9F
F8	1E32159D	6D163231	6D3A8451	6D663251	6A6A7513	2E9F1E9F	1E9F1E9F	1E9F1E9F	1E9F1E9F	1E9F1E9F	1E9F1E9F	1E9F1E9F	1E9F1E9F	1E9F1E9F	1E9F1E9F	1E9F1E9F
F9	1EAEC215	7D1B0E16	2313B1C5	179366C2	6AA7132A	7132A732	A732A732	A732A732	A732A732	A732A732	A732A732	A732A732	A732A732	A732A732	A732A732	A732A732
FA	1FBB3021	57D1B0E3	D7D3B345	D7D66B0E	66A91EA9	3EA93EA9	3EA93EA9	3EA93EA9	3EA93EA9	3EA93EA9	3EA93EA9	3EA93EA9	3EA93EA9	3EA93EA9	3EA93EA9	3EA93EA9
FB	1FC31A15	9931B1A3	D93364B4	5D936B1A	66AAD12A	D32AD32A	D32AD32A	D32AD32A	D32AD32A	D32AD32A	D32AD32A	D32AD32A	D32AD32A	D32AD32A	D32AD32A	D32AD32A
FC	1FD33215	5A51B323	DA537845	BC45DAF6	B26AB912	B932B91E	B932B91E	B932B91E	B932B91E	B932B91E	B932B91E	B932B91E	B932B91E	B932B91E	B932B91E	B932B91E
FD	1FE33615	AF1BB623	DAF3BC38	C6AB9163	F1BBD10E	1633BD30	E163BD68	E163BD68	E163BD68	E163BD68	E163BD68	E163BD68	E163BD68	E163BD68	E163BD68	E163BD68
FE	1FF33C21	5BB1BC23	DBB38C85	DBB66BC2	66BD1EBD	3EBD3EBD	3EBD3EBD	3EBD3EBD	3EBD3EBD	3EBD3EBD	3EBD3EBD	3EBD3EBD	3EBD3EBD	3EBD3EBD	3EBD3EBD	3EBD3EBD

Fig. 26

This Sheet Has Been Replaced

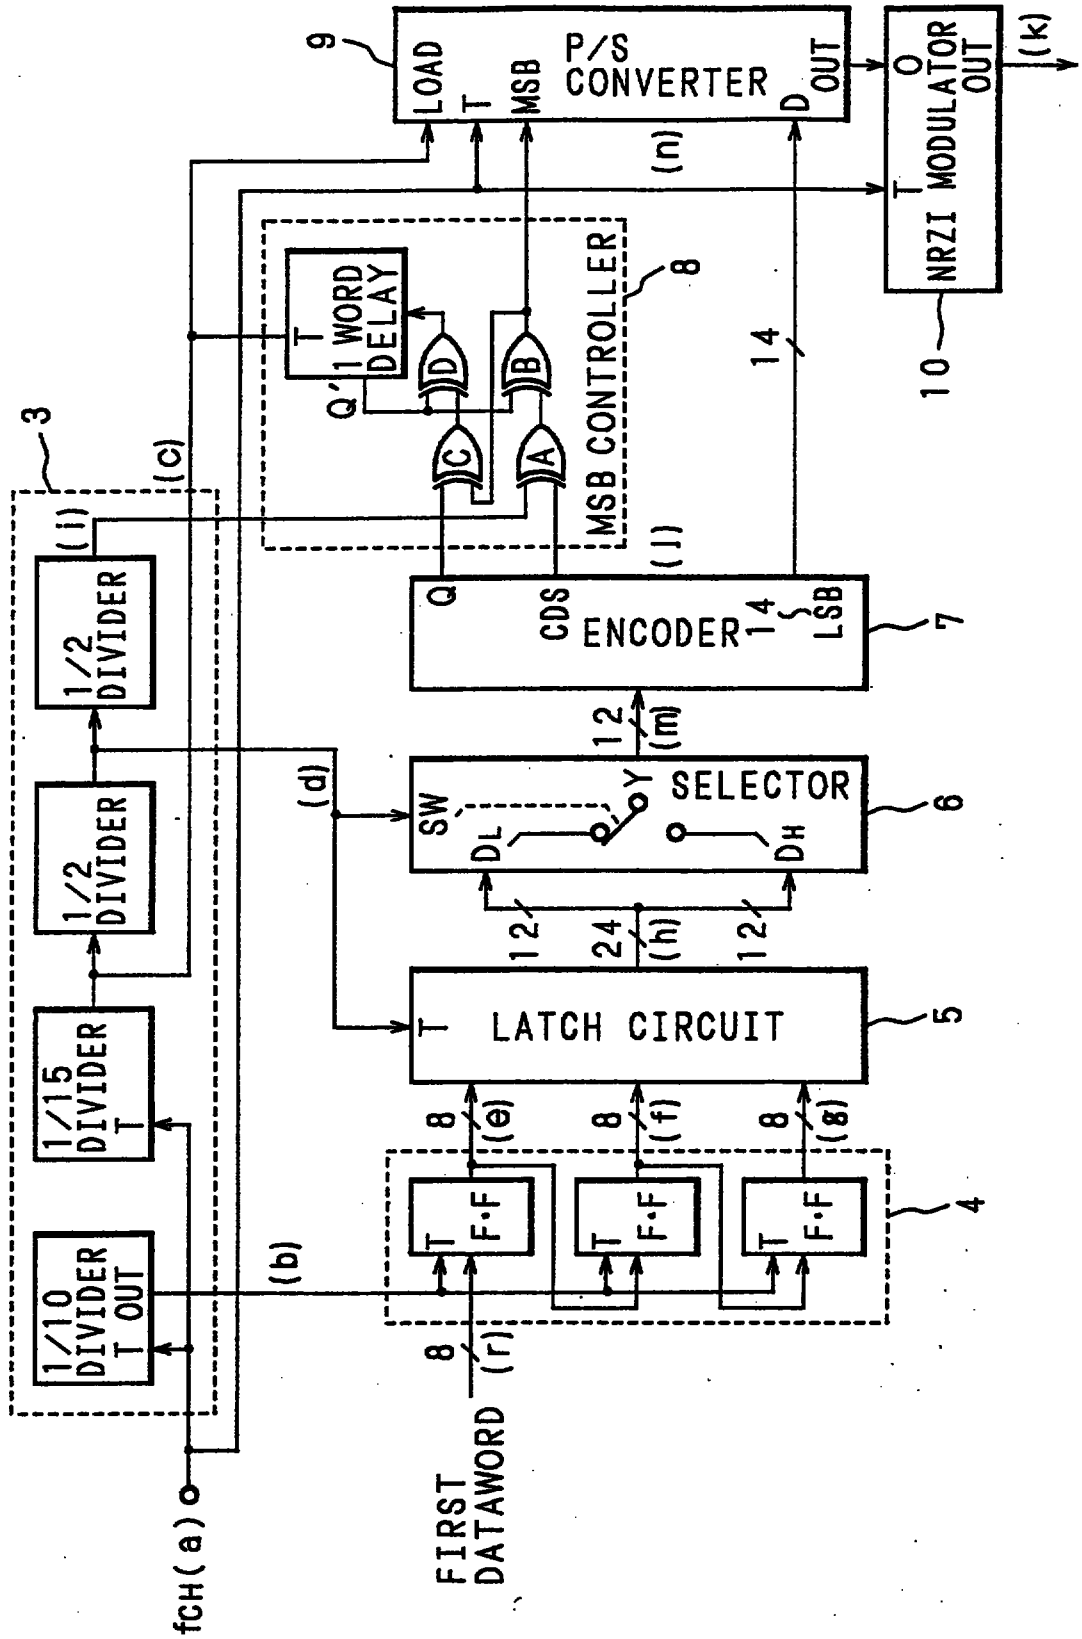

Fig. 27

This Sheet Has Been Replaced

Fig. 28(A)

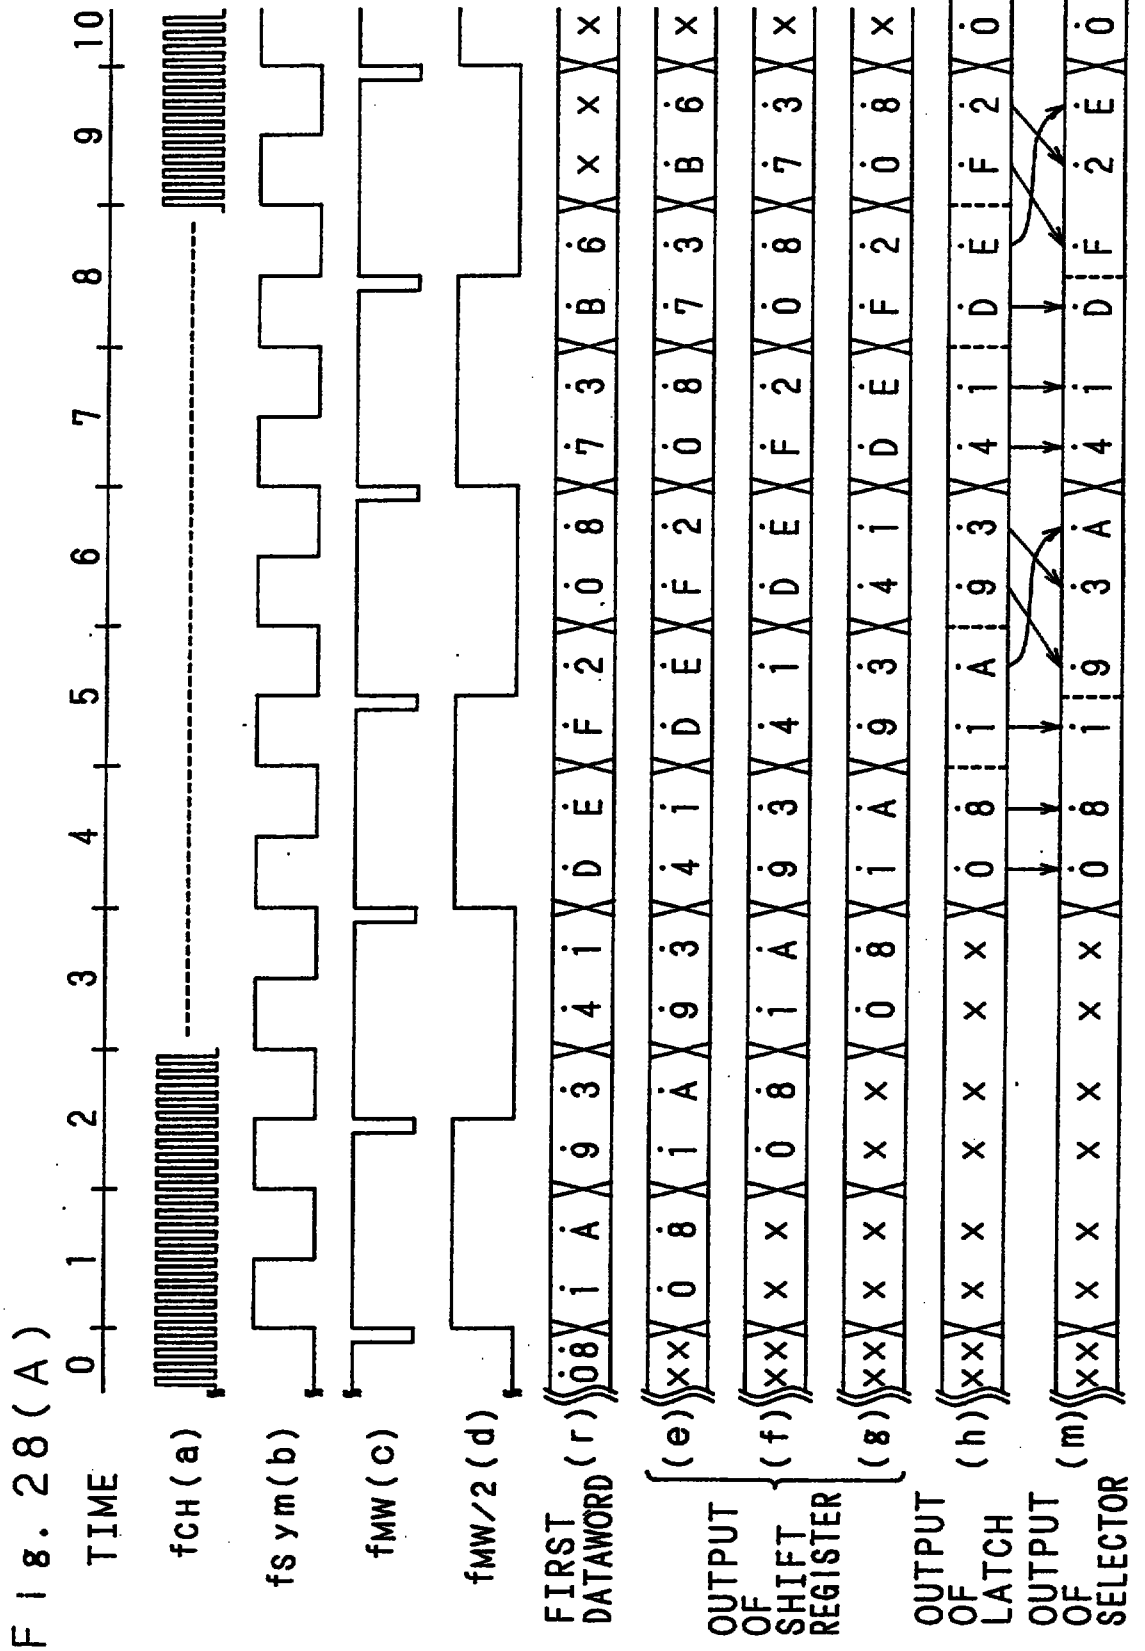

This Sheet Has Been Replaced

Fig. 28(B)

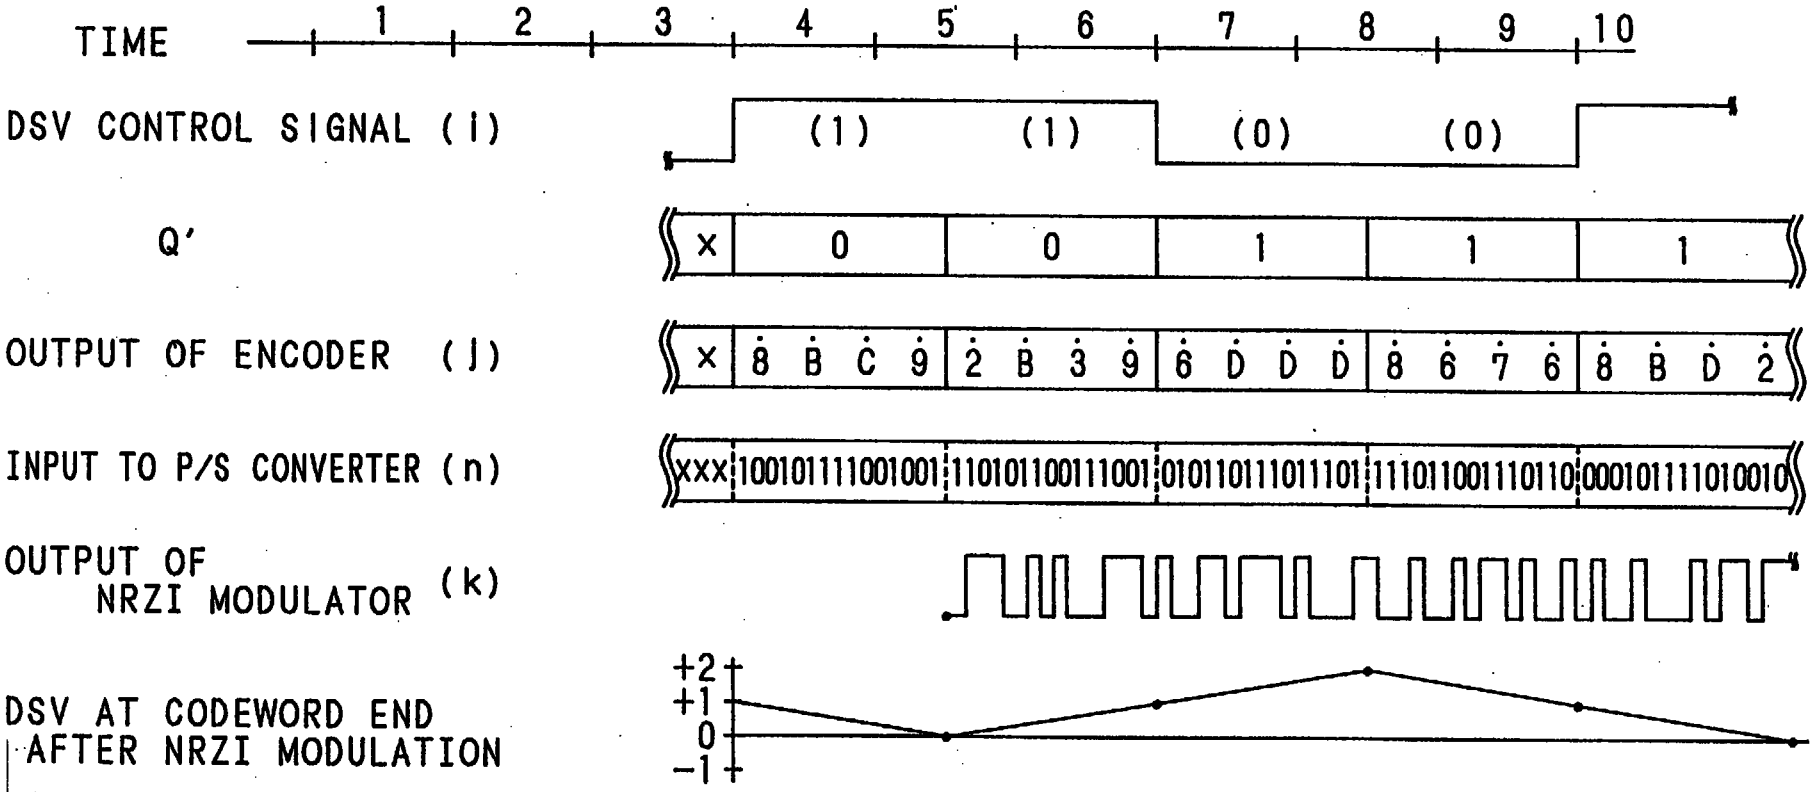

This Sheet Has Been Replaced

Fig. 29

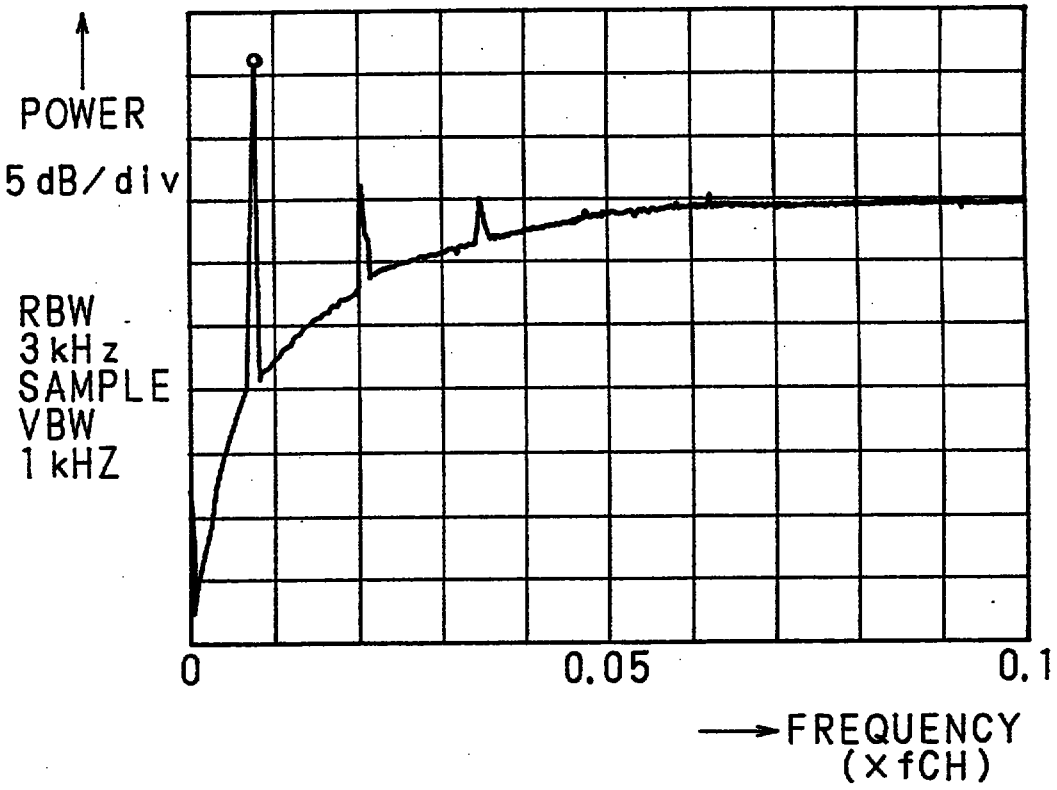

This Sheet Has Been Replaced

Fig. 30

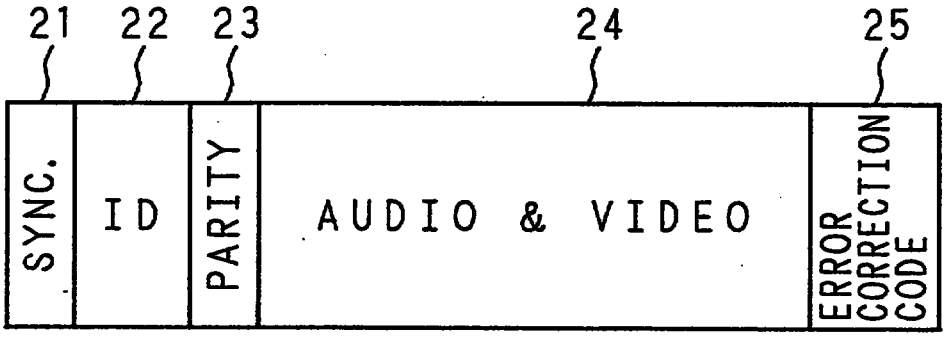

This Sheet Has Been Replaced

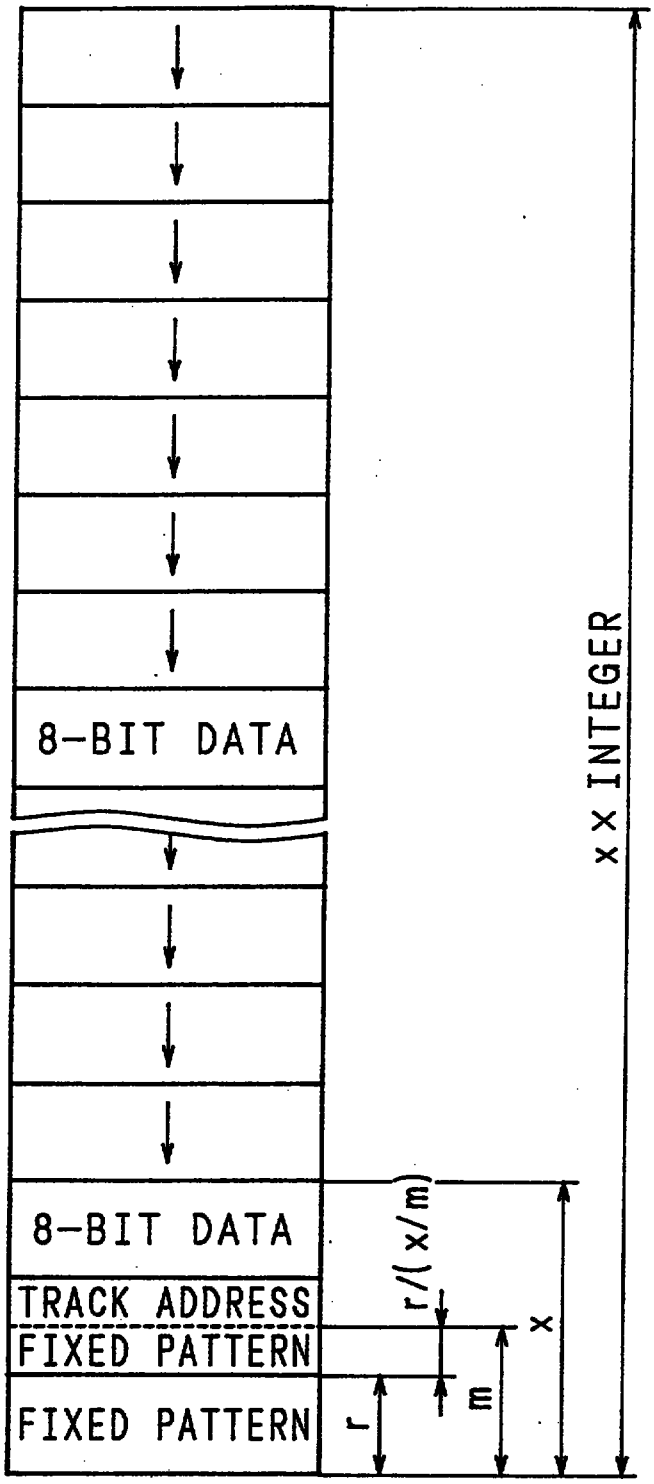

Fig. 31

This Sheet Has Been Replaced

Fig. 32

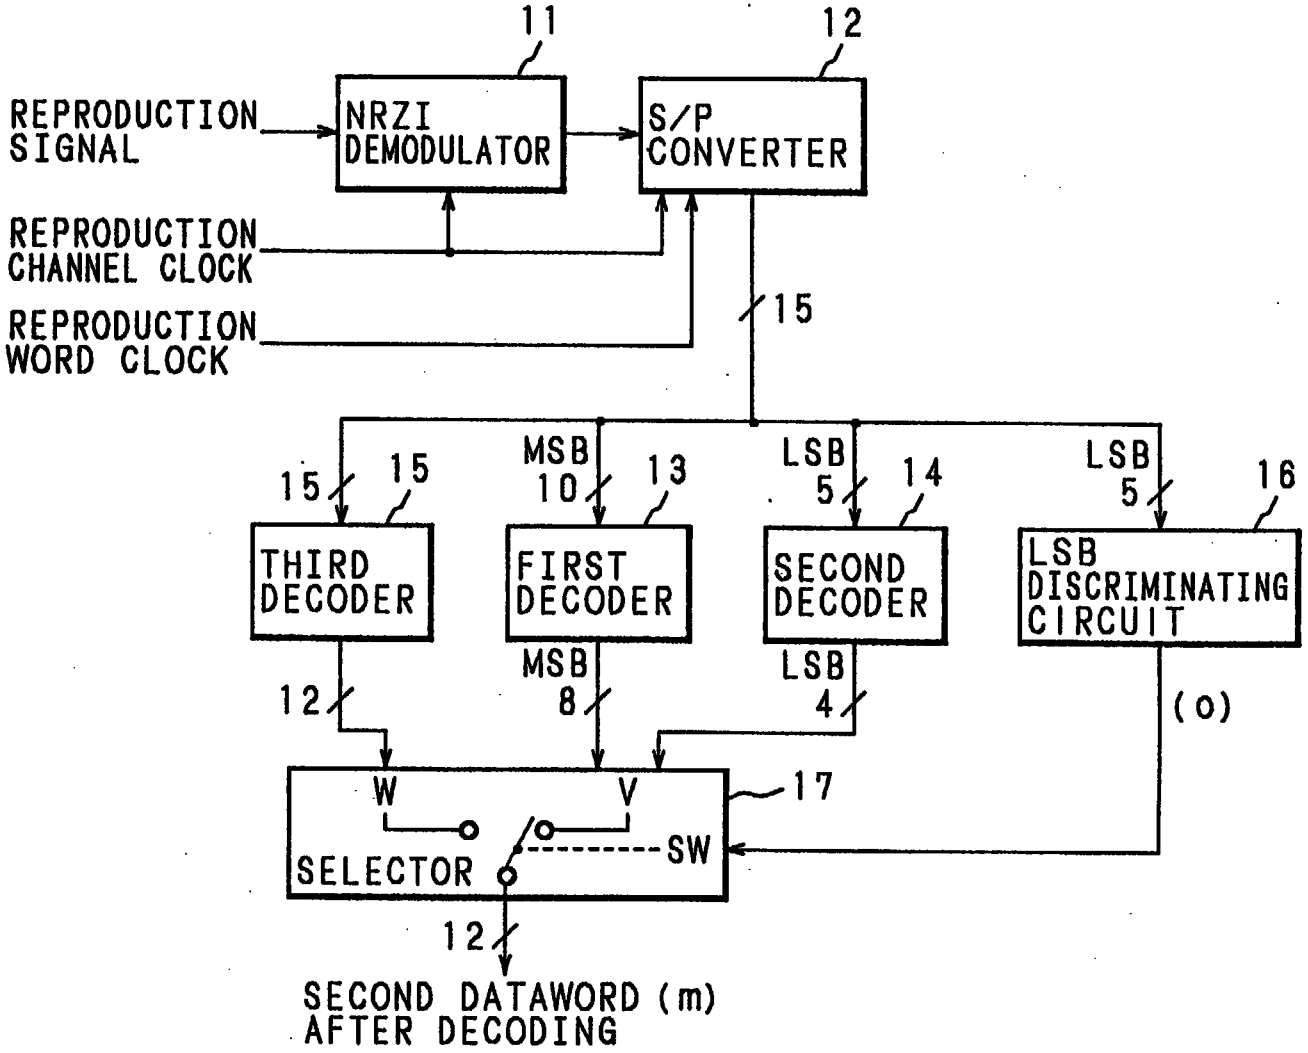

This Sheet Has Been Replaced

Fig. 33

n2 GROUP	m2 DATA 0 1 2 3 4 5 6 7 8 9 A B C D E F
1	07 09 0A 0B 0D 0E 0F 12 15 17 19 1A 1B 1D 1E 1F
2	01 03 05 06
3	11 13 16
4	11 13 16 | 11 13 16 | 11 13 16

This Sheet Has Been Replaced

Fig. 34(a)

$Q' = 0$

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
00	4E7B	4E7E	CEA1	4EA3	4EA6	CEC2	4EC5	CEC7	4ECA	CECD	4ECF	CED9	4EDB	4EDE	CEF1	4EF3
01	4EF6	4F43	4F46	4F85	CF87	4F8A	CF8D	4F8F	CF99	4F9B	4F9E	CFB1	4FB3	4FB6	CFE1	4FE3
02	4FE6	D0B9	50BB	50BE	D092	5095	D097	509A	D09D	509F	50A9	D0AB	D0AE	50B2	D0B5	50B7
03	D0BA	50BD	D0BF	50D1	D0D3	D0D6	50E2	D0E5	50E7	D0EA	50ED	D0EF	50F9	D0FB	D0FB	D011
04	5113	5116	D122	5125	D127	512A	D12D	512F	D139	513B	513E	5149	D14B	D14E	5152	D155
05	5157	D15A	515D	D15F	D169	516B	516E	D172	5175	D177	517A	D17D	517F	5191	D193	D196
06	51A2	D1A5	51A7	D1AA	51AD	D1AF	51B9	D1BB	D1BE	D1C9	51CB	51CE	D1D2	51D5	D1D7	51DA
07	D1DD	51DF	51E9	D1EB	D1EE	51F2	D1F5	51F7	D1FA	51FD	D1FF	D221	5223	5226	D242	5245
08	D247	524A	D24D	524F	D259	525B	525E	D271	5273	5286	5289	D28B	D28E	5292	D295	5297
09	D29A	529D	D29F	D2A9	52AB	52AE	D2B2	52B5	D2B7	52BA	D2BD	52BF	D2D1	52D3	52D6	D2E2
0A	52E5	D2E7	52EA	D2ED	D2EF	D2F9	52FB	52FE	5311	D313	D316	5322	D325	5327	D32A	532D
0B	D32F	5339	D33B	D33E	D349	534B	534E	D352	5355	D357	535A	D35D	535F	5369	D36B	D36E
0C	5372	D375	5377	D37A	537D	D37F	D391	5393	5396	D3A2	53A5	D3A7	53AA	D3AD	53AF	D3B9
0D	53BB	53BE	53C9	D3CB	D3CE	53D2	D3D5	53D7	D3DA	53DD	D3DF	D3E9	53EB	53EE	D3F2	53F5
0E	D3F7	53FA	D3FD	53FF	5443	5446	5485	D487	548A	D48D	548F	D499	549B	549E	D4B1	54B3
0F	54BB	D4E1	54E3	54E6	5509	D50B	D50E	5512	D515	5517	D51A	551D	D51F	D529	552B	552E

This Sheet Has Been Replaced

Fig. 34(b)

$Q' = 0$

/	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
10	D532557B	55356D56	D5375556	53AD5556	D53D5554	53FD5551	55155355	55355556	D562556D	56255CAD	56556556	D5675556	56AD5679	D56D5679	56FD5679	D5795679
11	5557B556	5557ED56	55A15556	A3556556	A6D55556	42555556	C5D55556	D5C75556	2DD62556	D5CD5556	FD55CD56	D5D95556	3BD63556	DED55556	D1555556	F3555556
12	55F66556	11D61356	6AE56556	D6A55556	2D655556	F5655556	9D665556	2AF65556	6BD66556	72D66556	9CF66556	3BD66556	E3D66556	49D66556	B5664556	4E665556
13	D6525665	5DD65665	7DD65665	AD665665	D6A65665	D5665665	69D65665	5AF65665	2DE65665	E2D65665	5CF65665	9DC65665	7A565665	D7D65665	2D665665	69165665
14	5569356D	5A2B5DCA	5DA75DCA	5A355DCA	5DA35DCA	5A3A5DCA	5A3D5DCA	5A3F5DCA	5A3C5DCA	5A3B5DCA	5A1A5DCA	5A1D5DCA	5A1E5DCA	5A1B5DCA	5A1C5DCA	5A1F5DCA
15	56D74255	BE155BE3	5AF355AF	7E255B43	DC255B46	5F555B85	C6955B87	5DC255C2	7DC255C2	2DC255C2	A3755C27	DC655C69	BDC655C6	2DC655C6	E3D655C6	49D655C6
16	D7455796	DC557DA7	95A7DC55	D5C55DC5	5C55DC55	AD655DC6	59655DC6	6AF55DC6	72D55DC6	9AD55DC6	7A155DC6	BDC55DC6	3ED55DC6	7DC55DC6	A5C55DC6	7DC55DC6
17	D7955745	5DA25DCA	75DCA25C	A55DCA25	CA55DCA2	5CAD5CAF	DCB95CBB	5CBE5CC9	DCCBDCCE	5CD2DCD5	5CD7DCD9	5CDBDCDA	5CDEDCDD	5CE1DCE0	5CE4DCE3	5CE7DCE6
18	5579D6D7	E2557E5D	7E757E75	D7E75E77	D7E85E79	D7EA5E7C	D7ED5E7F	D7F05E82	D7F35E85	D7F65E88	D7F95E8B	D7FC5E8E	D7FF5E91	D8025E94	D8055E97	D8085E9A
19	55D7E5D9	31593359	36D96D96	1559DA37	5AA15AA3	5AB45AA6	7DB85AA9	5AAC5AAD	5AAF5AB0	5AB35AB3	5AB65AB6	5AB95AB9	5ABC5ABC	5ABF5ABF	5AC25AC2	5AC55AC5
1A	5A2B5A6F	DA795AF3	5AF65B43	5B465B85	DB875B8A	DB8D5B8D	C2A55C27	DC2A5C2D	DC2D5C30	DC305C33	DC335C36	DC365C39	DC395C3C	DC3C5C3F	DC3F5C42	DC425C45
1B	5A6FDA79	5AF35AF6	5B435B46	5B855B87	5B8A5B8D	C2A55C2D	C2D55C30	C3055C33	C3355C36	C3655C39	C3955C3C	C3C55C3F	C3F55C42	C4255C45	C4555C48	C4855C4B
1C	DAF135AF	35BE3557	5C5ADC5D	5C5FDC6B	DC6FDC72	DC75DC78	DC7BDC7E	DC81DC84	DC87DC8A	DC8DDC90	DC93DC96	DC99DC9C	DC9FDCA2	DCA5DCA8	DCABDCAE	DCB1DCB4
1D	DBE135BE	3557C55A	DC55C5F5	C69DC6BD	CC6EE5C7	2DC75CB8	5CBB5CBE	5CC15CC4	5CC75CCA	5CCD5CD0	5CD35CD6	5CD95CDC	5CDF5CE2	5CE55CE8	5CEB5CEE	5CF15CF4
1E	5C96DCA2	5CA5DCA7	5CAADCAD	5CAFDCB3	5CB65CB9	5CBC5CBF	5CC25CC5	5CC85CCB	5CCE5CD1	5CD45CD7	5CDA5CDD	5CE05CE3	5CE65CE9	5CEC5CEF	5CF25CF5	5CF85CFB
1F	5C96DCA2	5CA5DCA7	5CAADCAD	5CAFDCB3	5CB65CB9	5CBC5CBF	5CC25CC5	5CC85CCB	5CCE5CD1	5CD45CD7	5CDA5CDD	5CE05CE3	5CE65CE9	5CEC5CEF	5CF25CF5	5CF85CFB

This Sheet Has Been Replaced

Fig. 35(a)

$Q' = 0$

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
20	DCDA	5CDD	DCDF	DCE5	5CEB	5CEE	DCF2	5CF5	DCF7	5CFA	DCFD	5CFF	DD21	5D23	5D26	DD42
21	5D45	DD47	5D4A	DD4D	5D4F	DD59	5D5B	5D5E	DD71	5D73	5D76	5D89	DD8B	DD8E	5D92	DD95
22	5D97	DD9A	5D9D	DD9F	DDA9	5DAB	5DAE	DDB2	5DB5	DDB7	5DBA	DDBD	5DBF	DDD1	5DD3	5DD6
23	DDE2	5DE5	DDE7	5DEA	DDED	5DEF	DDF9	5DFB	5DFE	5E43	5E46	5E85	DE87	5E8A	DE8D	5E8F
24	DE99	5E9B	5E9E	DED1	5ED3	5EB6	DEE1	5EE3	5EE6	5F09	DF0B	DF0E	5F12	DF15	5F17	DF1A
25	5F1D	DF1F	DF29	5F2B	5F2E	DF32	5F35	DF37	5F3A	DF3D	5F3F	DF51	5F53	5F56	DF62	5F65
26	DF67	5F64	DF6D	5F6F	DF79	5F7D	5F7E	DFA1	5FA3	5FA6	DFC2	5FC5	DFC7	5FCA	DFCD	5FCF
27	DFD9	5FDB	5FDE	DFF1	5FF3	5FF6	6843	6846	6885	E887	688A	E88D	688F	E899	689B	689E
28	E8B1	68B7	68B6	E8E1	68E3	68E6	6909	E90B	E90E	6912	E915	6917	E91A	691D	E91F	E929
29	692B	692E	E932	6935	E937	693A	E93D	693F	E951	6953	6956	E962	6965	E967	696A	E96D
2A	696F	E979	697B	697E	E9A1	69A3	69A6	E9C2	69C5	E9C7	69CA	E9CD	69CF	E9D9	69DB	69DE
2B	E9F1	69F3	69F6	6A11	EA13	EA16	6A22	EA25	6A27	EA2A	6A2D	EA2F	6A39	EA3B	EA3E	EA49
2C	6A4B	6A4E	EA52	6A55	EA57	6A5A	EA5D	6A5F	6A66	EA6B	EA6E	6A72	EA75	6A77	EA7A	6A7D
2D	EA7F	EA91	6A93	6A96	EAA2	6AA5	EAA7	6AAA	EAAD	6AAF	EAB9	6ABB	6ABE	6AC9	EACB	EACE
2E	6AD2	EAD5	6AD7	EADA	6ADD	EADF	EAE9	6AEB	6AEE	EAF2	6AF5	EAF7	6AFA	EAFD	6AFF	EB21
2F	6B23	6B26	EB42	6B45	EB47	6B4A	EB4D	6B4F	EB59	6B5B	6B5E	EB71	6B73	6B76	6B89	EB8B

This Sheet Has Been Replaced

Fig. 35(b)

$Q' = 0$

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
30	EBBE	6B92	EB95	6B97	6B9A	6B9D	EB9F	EBA9	6BAB	6BAE	EBB2	6BB5	EBB7	6BBA	EBBD	6BBF
31	EBD1	6BD3	6BD6	EBE2	EBE5	EBE7	6BEA	EBED	6BEF	EBF9	6BFB	6BFE	6C21	EC23	EC26	6C42
32	EC45	6C47	EC4A	6C4D	6C4F	6C59	EC5B	EC5E	6C71	EC73	EC76	EC89	6C8B	6C8E	EC92	6C95
33	EC97	6C9A	EC9D	6C9F	ECA9	ECAB	ECAE	6CB2	ECB5	6CB7	ECBA	6CBD	ECBF	6CD1	ECD3	ECD6
34	6CE2	ECE5	6CE7	ECEA	6CED	ECEF	6CF9	ECFB	ECFE	ED11	6D13	6D16	ED22	6D25	ED27	6D2A
35	ED2D	6D2F	ED39	6D3B	6D3E	6D49	ED4B	ED4E	6D52	ED55	6D57	ED5A	6D5D	ED5F	ED69	6D6B
36	6D6E	ED72	6D75	ED77	6D7A	ED7D	6D7F	6D91	ED93	ED96	6DA2	EDA5	6DA7	EDAA	6DAD	EDAF
37	6DB9	EDBB	EDBE	EDC9	6DCB	6DCE	EDD2	6DD5	EDD7	6DDA	EDDD	6DDF	6DE9	EDEB	EDEE	6DF2
38	EDF5	6DF7	EDFA	6DFD	EDFF	EE21	6E23	6E26	EE42	6E45	EE47	6E4A	EE4D	6E4F	EE59	6E5B
39	6E5E	EE71	6E73	6E76	6E89	EE8B	EE8E	6E92	EE95	6E97	EE95	6E9D	EE9F	EEA9	6EAB	6EAE
3A	EEB2	6EB5	EEB7	6EBA	EEBD	6EBF	EED1	6ED3	6ED6	EEE2	6EEA	EEE7	6EEA	EEED	6EEF	EEF9
3B	6EFB	6EFE	6F11	EF13	EF16	6F22	EF25	6F27	EF2A	6F2D	EF2F	6F39	EF3B	EF3E	EF49	6F4B
3C	6F4E	EF52	6F55	EF57	6F5A	EF5D	6F5F	6F69	EF6B	EF6E	6F72	EF75	6F77	EF7A	6F7D	EF7F
3D	EF91	6F93	6F9B	EFA2	6FA5	EFA7	6FAA	EFAD	6FAF	EFB9	6FBB	6FBE	6FC9	EFCB	EFCE	6FD2
3E	EFD5	6FD7	EFDA	6FDD	EFDF	EFE9	6FEB	6FEE	EFF2	6FF5	EFF7	6FFA	EFFD	6FFF	7086	710A
3F	F10D	710F	F119	711B	711E	F131	7133	7136	F161	7163	7166	71C3	71C6	7212	F215	7217

This Sheet Has Been Replaced

Fig. 36(a)

$Q' = 0$

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
40	F21A	721D	F21F	F229	722B	722E	F232	7235	F237	723A	F23D	723F	F251	F253	7256	F262
41	7265	F267	726A	F26D	726F	F279	727B	727E	F2A1	72A3	72A6	F2C2	72C5	72C7	72CA	F2CD
42	72CF	F2D9	72DB	72DE	F2F1	72F3	72F6	7343	7346	7385	F387	738A	F38D	738F	F399	739B
43	739E	F381	73B3	73B6	F3E1	73E3	73E6	7422	F425	7427	F42A	742D	F42F	7439	F43B	F43E
44	F449	744B	744E	F452	7455	F457	745A	F45D	745F	7469	F46B	F46E	7472	F475	7477	F47A
45	747D	F47F	F471	7493	7496	F4A2	74A5	F4A7	74AA	F4AD	74AF	F4B9	74BB	74CE	74C9	F4CB
46	F4CE	74D2	F4D5	74D7	F4DA	74DD	F4DF	F4E9	74EB	74EE	F4F2	74F5	F4F7	74FA	F4FD	74FF
47	F521	7523	7526	F542	7545	F547	754A	F54D	754F	F559	755B	755E	F571	7573	7576	7589
48	F58B	F58E	7582	F595	7597	F59A	759D	F59F	F5A9	75AB	75AE	F5B2	75B5	F5B7	75BA	F5BD
49	75BF	F5D1	75D3	75D6	F5E2	75E5	F5E7	75EA	F5ED	75EF	F5F9	75FB	75FE	7643	7646	7685
4A	F687	768A	F68D	768F	F699	769B	769E	F6B1	76B3	76B6	F6E1	76E3	76E6	7709	F70B	F70E
4B	7712	F715	7717	F71A	771D	F71F	F729	772B	772E	F732	7735	F737	773A	F73D	773F	F751
4C	7753	7756	F752	7765	F767	776A	F76D	776F	F776	777B	777E	F7A1	77A3	77C0	F7A2	77C5
4D	F7C7	77CA	F7CD	77CF	F7D9	77DB	77DE	F7F1	77F3	77F6	7842	F845	7847	F84A	784D	F84F
4E	7859	F85B	F85E	7871	F873	F876	F889	788B	788E	F892	7895	F897	789A	F89D	789F	78A9
4F	F8AB	F8AE	78A2	F8B5	78B7	F8BA	78BD	F8BF	78D1	F8D3	F8D6	78E2	F8E5	78E7	F8EA	78ED

This Sheet Has Been Replaced

Fig. 36(b)

Q'=0

/	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
50	8EF78	F9F8F	BF8FE	FE911	7913	7916	F9227	92579	25F92	7792A	F92D7	92FF9	39793	B793E		
51	7949F	94BF9	4E795	2EF99	3F99	5795	A7F99	5DF95	A7F99	6979A	DF9AF	79EB9	BF9BB	F9C97	79CBF	
52	EF97D	7997F	799D5	F99D7	79DA	F995	7A247	A2F99	6F99	AA7E9	EBF9E	EFA4D	7A4FA	AF9B7	AAB7A	AEFAF
53	79CEF	99D27	79D5F	9D779	DAF9	5795	7A9A7	FAE27	AE5FA	9A7A9	DFA9F	AE77A	EAFAE	7AB27	AB5FA	B7AFE
54	FA21F	A23E7	A926F	A42A7	45FA	9A77	A4AFA	4D7A4	FAA9F	AED7A	EFAF9	7B4BF	B7BFE	FB9B7	AEFAB	27FE7
55	FA8BF	A8E7A	92FA9	57A9	7AE2	7AE5	FAE77	AE5FA	9F7BB	3EFB4	9F7B4	BF7FE	FB91F	B4BF7	B27AB	5FAB7
56	7ABFE	AD17A	D37AD	6FAE	27AB	7DFA	9DF7A	E7AEF	AA9F7	AB7AA	EFAF9	7B4BF	B7FEB	91F7B	B7AFE	B7AFE
57	7B2FB	25F7B	27FB2	A2DFB	7B39	FB75	7BB7F	BFD7B	FBF7C	43F7C	46F7C	85FC8	7F7C8	7D12F	D157F	D1A7F
58	EB5D7	BF5F7	BB69F	BFB6B	E7BB	72FB7	57B7F	BC9FE	BCBEB	CE37C	E67D0	9FD0B	FD0E7	D1F7D	1F7D1	A7F7B
59	EFBA7	7BAAF	BAD7B	AF7BB	E7BB	97BB	B7E7C	B9FEB	CE37C	B67D3	5FED3	7D3AF	ED3D7	D3AF7	D3D7D	65F7D
5A	FBEB9	7BEB7	BEEFB	EFBF2	7BF5	5FBF	77BBF	AFBFD	7BFF7	C1E7D	35FED	A17DA	37DA6	FDC27	DC5FD	C7DCF
5B	EC997	C9B7C	9EFEC	B17CB	37CB	6FCE	17CE3	7D327	D35FE	DA17D	A37DA	6FDC2	7DC5F	DC7DC	AFDCD	7DCFD
5C	7D1DF	D1FFD	2977D	2B7D	2EFD	327D	35FED	7EFDA	17DA3	7DA6F	DC27D	C5FDC	7DCAF	DCDF7	7E39F	
5D	FD67D	76AFD	D6D7D	6FFD	797D	7B7D	7EFDA	17DA3	7DA6F	DC27D	C5FDC	7DCAF	DCDF7	7E39F		
5E	DD97D	DDB7D	DEFDF	17DF	37DF	6F7E	11FE1	3FE16	7E22F	E25F7	E5D7E	5FE69	FE6BF	E6E7E	72FE7	5
5F	E3BFE	3EFE4	97E4B	7E4E	FE55	27E5	5FE57	7E5AF	E5D7E	5FE69	FE6BF	E6E7E	72FE7	5		

This Sheet Has Been Replaced

Fig. 37(a)

$Q' = 0$

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
60	7E77	FE7A	7E7D	FE7F	FE91	7E93	7E96	FEA2	7EA5	FEA7	7EAA	FEAD	7EAF	FEB9	7EBB	7EBE
61	7EC9	FECB	FECE	7ED2	FED5	7ED7	FEDA	7EDD	FEDF	FEE9	7EEB	7EEE	FEF2	7EF5	FEF7	7EFA
62	FEFD	7EFF	FF21	7F23	7F26	FF42	7F45	FF47	7F4A	FF4D	7F4F	FF59	7F5B	7F5E	FF71	7F73
63	7F76	7F89	FF8B	FF8E	7F92	FF95	7F97	FF9A	7F9D	FF9F	FFA9	7FAB	7FAE	FFB2	7FB5	FFB7
64	7FBA	FFBD	7FBF	FFD1	7FD3	7FD8	FFE2	7FE5	FFE7	7FEA	FFED	7FEF	FFF9	7FFB	7FFB	8842
65	0845	8847	084A	884D	084F	8859	085B	085E	8871	0873	0876	0889	888B	888E	0892	8895
66	0897	889A	089D	889F	88A9	08AB	08AE	88B2	08B5	88B7	08BA	88BD	08BF	88D1	08D3	08D6
67	88E2	08E5	88E7	08EA	88ED	08EF	88F9	08FB	08FE	0911	8913	8916	0922	8925	0927	892A
68	092D	892F	0939	893B	893E	8949	094B	094E	8952	0955	8957	095A	895D	095F	0969	896B
69	896E	0972	8975	0977	897A	097D	897F	8991	0993	0996	89A2	09A5	89A7	09AA	89AD	09AF
6A	89B9	09BB	09BE	09C9	89CB	89CE	09D2	89D5	09D7	89DA	09DD	89DF	89E9	09EB	09EE	89F2
6B	09F5	89F7	09FA	89FD	09FF	0A21	8A23	8A26	0A42	8A45	0A47	8A4A	0A4D	8A4F	0A59	8A5B
6C	8A5E	0A71	8A73	8A76	8A89	0A8B	0A8E	8A92	0A95	8A97	0A9A	8A9B	0A9F	0AA9	8AAB	8AAE
6D	0AB2	8AB5	0AB7	8ABA	0AB0	8ABF	0AD1	8AD3	8AD6	0AE2	8AE5	0AE7	8AEA	0AED	8AEF	0AF9
6E	8AFB	8AFE	8B11	0B13	0B16	8B22	0B25	8B27	0B2A	8B2D	0B2F	8B39	0B3B	0B3E	0B49	8B4B
6F	8B4E	0B52	8B55	0B57	8B5A	0B5D	8B5F	8B69	0B6B	0B6E	8B72	0B75	8B77	0B7A	8B7D	0B7F

This Sheet Has Been Replaced

Fig. 37(b)

$Q' = 0$

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
70	0B91	8B93	8B96	0BA2	8BA5	0BA7	8BAA	0BAD	8BAF	0BB9	8BBB	8BBE	8BC9	0BCB	0BCE	8BD2
71	0BD5	8BD7	0BDA	8BDD	0BDF	0BE9	8BEB	8BEE	0BF2	8BF5	0BF7	8BFA	0BFD	8BFF	8B43	8B46
72	8C85	0C87	8C8A	0CBD	8C8F	0C99	8C9B	8C9E	0CB1	8CB3	8CB6	0CE1	8CE3	8CE6	8C09	0C0B
73	0D0E	8D12	0D15	8D17	0D1A	8D1D	0D1F	0D29	8D2B	8D2E	0D32	8D35	0D37	8D3A	0D3D	8D3F
74	0D51	8D53	8D56	0D62	8D65	0D67	8D6A	0D6D	8D6F	0D79	8D7B	8D7E	0DA1	8DA3	8DA6	0DC2
75	8DC5	0DC7	8DCA	0DCD	8DCF	0DD9	8DDB	8DDE	0DF1	8DF3	8DF6	8E11	0E13	0E16	8E22	0E25
76	8E27	0E2A	8E2D	0E2F	8E39	0E3B	0E3E	0E49	8E4B	8E4E	0E52	8E55	0E57	8E5A	0E5D	8E5F
77	8E69	0E6B	0E6E	8E72	0E75	8E77	0E7A	8E7D	0E7F	0E91	8E93	8E96	0EA2	8EA5	0EA7	8EAA
78	0EAD	8EAF	0EB9	8EBB	8EBE	8EC9	0ECB	0ECE	8ED2	0ED5	8ED7	0EDA	8EDD	0EDF	0EE9	8EEB
79	8EEE	0EF2	8EF5	0EF7	8EFA	0EFD	8EFF	0E21	8F23	8F26	0F42	8F45	0F47	8F4A	0F4D	8F4F
7A	0F59	8F5B	8F5E	0F71	8F73	8F76	8F8B	0F8B	0F8E	8F92	0F95	8F97	0F9A	8F9D	0F9F	0FA9
7B	8FAB	8FAE	0FB2	8FB5	0FB7	8FBA	0FBD	8FBF	0FD1	8FD3	8FD6	0FE2	8FE5	0FE7	8FEA	0FED
7C	8FEF	0FF9	8FFB	8FFE	1085	9087	108A	908D	108F	9099	109B	109E	90B1	10B3	10B6	90E1
7D	10E3	10E6	1109	910B	910E	1112	9115	1117	911A	111D	911F	9129	112B	112E	9132	1135
7E	9137	113A	013D	113F	9151	1153	1156	9162	1165	9167	116A	016D	116F	9179	117B	117E
7F	91A1	11A3	11A6	91C2	11C5	91C7	11CA	91CD	11CF	81D9	11DB	11DE	91F1	11F3	11F6	1211

This Sheet Has Been Replaced

Fig. 38(a)

$Q' = 0$

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
80	9213	9216	1222	0225	1227	922A	122D	022F	1239	923B	923E	9249	124B	124E	9252	1255
81	9257	125A	925D	125F	1269	926B	926E	1272	9275	1277	927A	127D	927F	9291	1293	1296
82	92A2	12A5	92A7	12AA	92AD	12AF	92B0	12BB	12BE	12C9	92CB	92CE	12D2	92D5	12D7	92DA
83	12DD	92DF	92E9	12EB	12EE	92F2	12F5	93F7	12FA	92FD	12FF	9321	1323	1326	9342	1345
84	9347	134A	934D	134F	9359	135B	135E	0371	1373	1376	1389	93BB	938E	1392	9395	1397
85	939A	139D	939F	93A9	13AB	13AE	93B2	13B5	93B7	13BA	938D	13BF	93D1	13D3	13D6	93E2
86	13E5	93E7	13EE	93ED	13EF	93F9	13FB	14FE	1421	0423	9426	1442	9445	1447	944A	144D
87	944F	1459	945D	945E	1471	9473	9476	9489	148B	148E	9492	1495	9497	149A	949D	149F
88	14A9	94AB	94AE	14B2	94B5	14B7	94BA	158D	94BF	14D1	94D3	94D6	14E2	94E5	14E7	94EA
89	14ED	94EF	14F9	94FB	94FE	9511	1513	1516	9522	1525	9527	152A	952D	152F	9539	153B
8A	153E	1549	9548	954E	1552	9555	1557	955A	155D	055F	9569	156B	156E	9572	1575	9577
8B	157A	957D	157F	1591	9593	9596	15A2	95A5	15A7	05AA	15AD	95AF	15B9	95BB	05BE	95C9
8C	15CB	15CE	95D2	15D5	95D7	15DA	95DD	15DF	15A9	05EB	95EE	15F2	95F5	15F7	95FA	15FD
8D	95FF	9621	1623	1626	0642	1645	0647	164A	964D	164F	9659	1658	165E	9671	1673	1676
8E	1689	9688	968E	169E	0695	1697	069A	169D	969F	96A9	16AB	16AE	96B2	16B5	06B7	16BA
8F	96BD	16B4	96D1	16D3	16D6	96E2	16E5	96E7	16EA	96ED	16EF	96F9	16FB	16FE	1711	9713

This Sheet Has Been Replaced

Fig. 38(b)

$Q' = 0$

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
90	9716	1722	9725	1727	972A	172D	972F	1739	973B	973E	9749	174B	174E	9752	1755	9757
91	175A	975D	175F	1769	976B	976E	1772	9775	1777	977A	177D	977F	9791	1793	1796	97A2
92	17A5	97A7	17AA	97AD	17AF	97B9	17BB	17BE	17C9	97CB	97CE	17D2	97D5	17D7	97DA	17DD
93	97DF	97E9	17EB	17EE	97F2	17F5	97F7	17FA	97FD	17FF	9843	98A6	9885	1887	988A	1B8D
94	988F	1899	989B	989E	18B1	98B3	98B6	18E1	98E3	98E6	9909	190B	190E	9912	1915	9917
95	191A	991D	191F	1929	992B	992E	1932	9935	1937	993A	193D	993F	1951	9953	9956	1962
96	9965	1967	996A	196D	996F	1979	997B	997E	19A1	99A3	99A6	19C2	99C5	19C7	99CA	19CD
97	09CF	19D9	99DB	99DE	19F1	99F3	99F6	9A11	1A13	1A16	9A22	1A25	9A27	1A2A	9A2D	1A2F
98	9A39	1A3B	1A3E	1A49	9A4B	9A4E	1A52	9A55	1A57	9A5A	1A5D	9A5F	9A65	1A6B	1A6E	9A72
99	1A75	9A77	1A7A	9A7D	1A7F	1A91	9A93	9A96	1AA2	9AA5	1AA7	9AAA	1AAD	9AAF	1AB9	9ABB
9A	0ABE	9AC9	1ACB	1ACE	0AD2	1AD5	9AD7	1ADA	9ADD	1ADF	1AE9	9AEB	9AEE	1AF2	9AF5	1AF7
9B	0AFA	1AFD	9AFF	1B21	0B23	0B26	1B42	9B45	1B47	0B4A	1B4D	0B4F	1B59	9B5B	0B5E	1B71
9C	0B73	9B76	9B89	1BBB	1B8E	0B92	1B95	9B97	1B9A	0B9D	1B9F	1BA9	8BAB	9BAE	1BB2	9BB5
9D	1BB7	0BBA	1BBD	9BBF	1BD1	0BD3	9BD6	1BE2	9BE5	1BE7	9BEA	1BED	0BEF	1BF9	9BFB	9BFE
9E	9C21	1C23	1C26	9C42	1C45	0C47	1C4A	9C4D	1C4F	0C55	1C5B	1C5E	0C71	1C73	1C76	1C89
9F	0C8B	0C8E	1C92	9C95	1C97	0C9A	1C9D	9C9F	9CA9	1CAB	1CAE	0CB2	1CB5	9CB7	1CBA	9CBD

This Sheet Has Been Replaced

Fig. 39(a)

$Q' = 0$

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
A0	1CBF	9CD1	1CD3	1CD6	9CE2	1CE5	9CE7	1CEA	9CED	1CEF	9CF9	1CFB	1CFE	1D11	9D13	9D16
A1	1D22	9D25	1D27	9D2A	1D2D	9D2F	1D39	9D3B	9D3E	9D49	1D4B	1D4E	9D52	1D55	9D57	1D5A
A2	9D5D	1D5F	1D69	9D6B	9D6E	1D72	9D75	1D77	9D7A	1D7D	9D7F	9D91	1D93	1D96	9DA2	1DA5
A3	9DA7	1DAA	9DAD	1DAF	9DB9	1DBB	1DBE	1DC9	9DCB	9DCE	1DD2	9DD5	1DD7	9DDA	1DDD	9DDF
A4	9DE9	1DEB	1DEE	9DF2	1DF9	9DF7	1DFA	9DFD	1DFF	1E21	9E23	9E26	1E42	9E45	1E47	9E4A
A5	1E4D	9E4F	1E59	9E5B	9E5B	1E71	9E73	9E76	9E89	1E8B	1E8E	9E92	1E95	9E97	1E9A	9E9D
A6	1E9F	1EA9	9EAB	9EAE	1EB2	9EB5	1EB7	9EBA	1EBD	9EBF	1ED1	9ED3	9ED6	1EE2	9EE5	1EE7
A7	9EEA	1EED	9EEF	1EF9	9EFB	9EFE	9F11	1F13	1F16	9F22	1F25	9F27	1F2A	9F2D	1F2F	9F39
A8	1F3B	1F3E	1F49	9F4B	9F4E	1F52	9F55	1F57	9F5A	1F5D	9F5F	9F69	1F6B	1F6E	9F72	1F7D
A9	9F77	1F7A	9F7D	1F7F	1F91	9F93	9F96	1FA2	9FA5	1FA7	9FAA	1FAD	9FAF	1FB9	9FBB	9FBE
AA	9FC9	1FCB	1FCE	9FD2	1FD5	9FD7	1FDA	9FDD	1FDF	1FE9	9FEB	9FEE	1FF2	9FF5	1FF7	9FFA
AB	1FFD	9FFF	210A	A10D	210F	A119	211B	211E	A131	2133	2136	A161	2163	2166	21C3	21C6
AC	2212	A215	2217	A21A	221D	A21F	A229	222B	222E	A232	2235	A237	223A	A23D	223F	A251
AD	2253	2256	A262	2265	A267	226A	A26D	226F	A279	227B	227E	A2A1	22A3	22A6	A2C2	22C5
AE	A2C7	22CA	A2CD	22CF	A2D9	22DB	22DE	A2F1	22F3	22F6	2343	2346	2385	A387	238A	A38D
AF	238F	A399	239B	239E	A3B1	23B3	23B6	A3E1	23E3	23E6	2422	A425	2427	A42A	242D	A42F

This Sheet Has Been Replaced

Fig. 39(b)

$Q' = 0$

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
B0	2439	A43B	A43E	A449	244B	244E	A452	2455	A457	245A	A45D	245F	2469	A46B	A46E	2472
B1	A475	2477	A47A	247D	A47F	A491	2493	2496	A4A2	24A5	A4A7	24AA	A4AD	24AF	A4B9	24BB
B2	24BE	24C9	A4C8	A4CE	24D2	A4D5	24D7	A4DA	24DD	A4DF	A4E9	24EB	24EE	A4F2	24F5	A4F7
B3	24FA	A4FD	24FF	A521	2523	2526	A542	2545	A547	254A	A54D	254F	A555	255B	255E	A571
B4	2573	2576	2589	A58B	A58E	2592	A595	2597	A59A	259D	A59F	A5A9	25AB	25AE	A5B2	25B5
B5	A5B7	25BA	A58D	25BF	A5D1	25D3	25D6	A5E2	25E5	A5E7	25EA	A5ED	25EF	A5F9	25FB	25FE
B6	2643	2646	2685	A687	268A	A68D	268F	A699	269B	269E	A6B1	26B3	26B6	A6E1	26E3	26E6
B7	2709	A70B	A70E	2712	A715	2717	A71A	271D	A71F	A729	272B	272E	A732	2735	A737	273A
B8	A73D	273F	A751	2753	2756	A762	2765	A767	276A	A76D	276F	A779	277B	277E	A7A1	27A3
B9	27A6	A7C2	27C5	A7C7	27CA	A7CD	27CF	A7D9	27DB	27DE	A7F1	27F3	27F6	2842	A845	2847
BA	A84A	284D	A84F	2859	A85B	A85E	2871	A873	A876	A889	288B	288E	A892	2895	A897	289A
BB	A89D	289F	28A9	A8AB	A8AE	28B2	A8B5	28B7	A8BA	28BD	A8BF	28D1	A8D3	A8D6	28E2	A8E5
BC	28E7	A8EA	28ED	A8EF	28F9	A8FB	A8FE	A911	2913	2916	A92E	2925	A927	292A	A92D	292F
BD	A939	293B	293E	2949	A94B	A94E	2952	A955	2957	A95A	295D	A95F	A969	296B	296E	A972
BE	2975	A977	297A	A97D	297F	2991	A993	A996	29A2	A9A5	29A7	A9AA	29AD	A9AF	29B9	A9BB
BF	A9BE	A9C9	29CB	29CE	A9D2	29D5	A9D7	29DA	A9DD	29DF	29E9	A9EB	A9EE	29F2	A9F5	29F7

This Sheet Has Been Replaced

Fig. 40(a)

$Q' = 0$

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
C0	A9FA	29FD	A9FF	AA21	2A23	2A26	AA42	2A45	AA47	2A4A	AA4D	2A4F	AA55	2A5B	2A5E	AA71
C1	2A73	2A76	2A89	AA8B	AA8E	2A92	AA95	2A97	AA9A	2A9D	AA9F	AA99	2AAB	2AAE	AAB2	2AB5
C2	AAB7	2ABA	AABD	2ABF	AAD1	2AD3	2AD0	AAE2	2AE5	AAE7	2AEA	AAAD	2AEF	AAF9	2AFB	2AFE
C3	2B11	AB13	AB16	2B22	AB25	2B27	AB2A	2B2D	AB2F	2B39	AB3B	AB3E	AB49	2B4B	2B4E	AB52
C4	2B55	AB57	2B5A	AB5D	2B5F	2B69	AB6B	AB6E	2B72	AB75	2B77	AB7A	2B7D	AB7F	AB91	2B93
C5	2B96	ABA2	2BA5	ABA7	2BAA	ABAD	2BAF	ABB9	2BBB	2BBE	2BC9	ABCB	ABCE	2BD2	ABD5	2BD7
C6	ABDA	2BDD	ABDF	ABE9	2BEB	2BEE	ABF2	2BF5	ABF7	2BFA	ABFD	2BFF	2C43	2C46	2C85	AC87
C7	2C8A	AC8D	2C8F	AC99	2C9B	2C9E	ACB1	2C83	2CB6	ACE1	2CE3	2CE6	2D09	AD0B	AD0E	2D12
C8	AD15	2D17	AD1A	2D1D	AD1F	AD29	2D2B	2D2E	AD32	2D35	AD37	2D3A	AD3D	2D3F	AD51	2D53
C9	2D56	AD62	2D65	AD67	2D6A	AD6D	2D6F	AD79	2D7B	2D7E	ADA1	2DA3	2DA6	ADC2	2DC5	ADC7
CA	2DCA	ADCD	2DCF	ADD9	2DDB	2DDE	ADF1	2DF3	2DF6	2E11	AE13	AE16	2E22	AE25	2E27	AE2A
CB	2E2D	AE2F	2E39	AE3B	AE3E	AE49	2E4B	2E4E	AE52	2E55	AE57	2E5A	AE5D	2E5F	2E69	AE6B
CC	AE6E	2E72	AE75	2E77	AE7A	2E7D	AE7F	AE91	2E93	2E96	AEA2	2EA5	AEA7	2EAA	AEAD	2EAF
CD	AE89	2EBB	2EBE	2EC9	AECB	AECE	2EB2	AED5	2ED7	AEDA	2EDD	AEDF	AEE9	2EEB	2EEE	AEF2
CE	2EF5	AEF7	2EFA	AEFD	2EFF	AF21	2F23	2F26	AF42	2F45	AF47	2F4A	AF4D	2F4F	AF59	2F5B
CF	2F5E	AF71	2F73	2F76	2F89	AF8B	AF8E	2F92	AF95	2F97	AF9A	2F9D	AF9F	AFA5	2FAB	2FAE

This Sheet Has Been Replaced

Fig. 40(b)

$Q' = 0$

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
D0	AFB2	2FB5	AFB7	2FBA	AFBD	2FBF	AFD1	2FD3	2FD6	AFE2	2FE5	AFE7	2FEA	AFED	2FEF	AFF9
D1	2FFB	2FFE	B085	3087	808A	308D	808F	3099	809B	809E	30B1	80B3	80B6	30E1	80E3	B0E6
D2	B109	310B	310E	8112	3115	8117	311A	811D	311F	3129	812B	812E	3132	B135	3137	813A
D3	313D	813F	3151	8153	8156	3162	8165	3167	816A	316D	816F	3179	817B	B17E	31A1	81A3
D4	81A6	31C2	81C5	31C7	81CA	31CD	81CF	31D9	81DB	81DE	31F1	81F3	81F6	B211	3213	3216
D5	8222	3225	8227	322A	822D	322F	8239	323B	323E	3249	824B	824E	3252	B255	3257	825A
D6	325D	825F	8269	326B	326E	8272	3275	8277	327A	827D	327F	3291	8293	B296	32A2	82A5
D7	32A7	82AA	32AD	82AF	3289	82BB	82BE	82C9	32CB	32CE	82D2	32D5	82D7	32DA	82DD	32DF
D8	32E9	82EB	82EE	32F2	82F5	32F7	82FA	32FD	82FF	3321	8323	8326	3342	B345	3347	834A
D9	334D	834F	3359	835B	835E	3371	8373	8376	8389	338B	338E	8392	3395	8397	339A	839D
DA	339F	33A9	83AB	83AE	33B2	83B5	33B7	83BA	33BD	83BF	33D1	83D3	83D6	33E2	8325	33E7
DB	83EA	33ED	83EF	33F9	83FB	83FE	8421	3423	3426	8442	3445	8447	344A	B44D	344F	8459
DC	345B	345E	8471	3473	3476	3489	848B	848E	3492	8495	3497	849A	349D	B49F	84A9	34AB
DD	34AE	84B2	34B5	84B7	34BA	84BD	34BF	84D1	34D3	34D6	84E2	34E5	84E7	34EA	84ED	34EF
DE	84F9	34FB	34FE	3511	8513	8516	3522	8525	3527	852A	352D	852F	3539	853B	853E	8549
DF	354B	354E	8552	3555	8557	355A	855D	355F	3569	856B	856E	3572	8575	3577	857A	357D

This Sheet Has Been Replace

Fig. 41(a)

$Q' = 0$

/	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
0	B57FB591359359635A235A5B5A735AAB5AD35AFB5BB35BB35BE35C9B5CBB5CE
1	35D2B5D535D7B5DA35DDB5DFB5E935EEB5EB35EEB5F235F5B5F735FAB5FD35FF362 1
2	B623B628B626364256364764DB64A364F36564E36B6BB6F7B6F7B6B6E3B6BD B6BF
3	8EB6892369569B6972D6936E2B6B5372FB6B7722FB6BB7722FB6BB7722FB6BB7722
4	68EB6923695B6972D6936E2B6B5372FB6B7722FB6BB7722FB6BB7722FB6BB7722
5	3368EB6923695B6972D6936E2B6B5372FB6B7722FB6BB7722FB6BB7722FB6BB7722
6	436D1B6D3B6D6B36E2B6B5372FB6B7722FB6BB7722FB6BB7722FB6BB7722FB6BB7722
7	B7A37ADB7AF37F2B7F538B3392EB9397B39F339F6339F6339F6339F6339F6339F6339F6
8	B7EBB7EE37F2B7F538B3392EB9397B39F339F6339F6339F6339F6339F6339F6339F6
9	389B389EB8B138B3392EB9397B39F339F6339F6339F6339F6339F6339F6339F6
A	B9169239693A4B3A4EBA523A5523A5523A5523A5523A5523A5523A5523A5523A5523A5
B	396AB96D39DEB9F139F339F6339F6339F6339F6339F6339F6339F6339F6339F6
C	39DB39DEB9F139F339F6339F6339F6339F6339F6339F6339F6339F6339F6339F6
D	BA32BA49A4B3A4EBA523A5523A5523A5523A5523A5523A5523A5523A5523A5523A5
E	3A7DBA7FBA91A9133A9633A9633A9633A9633A9633A9633A9633A9633A9633A96
F	BACEBAD2BAD53AD73ADDBADFBAE93AEB3AEEBAF23AF53AF53AF53AF53AF53AF53AF5

This Sheet Has Been Replac

Fig. 41(b)

$Q' = 0$

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
F0	3AFF	BB21	3B23	3B26	BB42	3B45	BB47	3B4A	BB4D	3B4F	BB59	3B5B	3B5E	BB71	3B73	3B76
F1	3B89	BB8B	BB8E	3B92	BB95	3B97	BB9A	3B9D	BB9F	BBA9	3BAB	3BAE	BBB2	3BB5	BBB7	3BBA
F2	BBBD	3BBF	BBD1	3BD3	3BD6	BBE2	3BE5	BBE7	3BEA	BBED	3BEF	BBF9	3BFB	3BFE	3C21	BC23
F3	BC26	3C42	BC45	3C47	BC4A	3C4D	BC4F	3C59	BC5B	BC53	3C71	BC73	BC76	BC89	3C8B	3C8E
F4	BC92	3C95	BC97	3C9A	BC9D	3C9F	3CA9	BCAB	BCAE	3CB2	BCB5	3CB7	BCBA	3CBD	BCBF	3CD1
F5	BCD3	BCD6	3CE2	BCE5	3CE7	BCDA	3CED	BCEF	3CF9	BCFB	BCFE	BD11	3D13	3D16	BD22	3D25
F6	BD27	3D2A	BD2D	3D2F	BD39	3D3B	3D3B	3D49	BD48	BD4E	3D52	BD55	3D57	BD5A	3D5D	BD5F
F7	BD69	3D6B	3D6E	BD72	3D75	BD77	3D7A	BD7D	3D7F	3D91	BD93	BD96	3DA2	BDA5	3DA7	BDAA
F8	3DAD	BDAF	3DB9	BDBB	BDBE	BDC9	3DCB	3DCE	BDD2	3DD5	BDD7	3DDA	BDDD	3DDF	3DE9	BDEB
F9	BDEE	3DF2	BDF5	3DF7	BDFA	3DFD	BDFF	BE21	3E23	3E26	BE42	3E45	BE47	3E4A	BE4D	3E4F
FA	BE59	3E5B	3E5E	BE71	3E73	3E76	3E89	BE8B	BE8E	3E92	BE95	3E97	BE9A	3E9D	BE9F	BEA9
FB	3EAB	3EAE	BEB2	3E85	BEB7	3EBA	BEBD	3EBF	BED1	3ED3	3ED6	BEE2	3EE5	BEE7	3EEA	BEED
FC	3EEF	BEF9	3EFB	3EFE	3F11	BF13	BF16	3F22	BF25	3F27	BF2A	3F2D	BF2F	3F39	BF3B	BF3E
FD	BF49	3F4B	3F4E	BF52	3F55	BF57	3F5A	BF5D	3F5F	3F69	BF6B	BF6E	3F72	BF75	3F77	BF7A
FE	3F7D	BF7F	BF91	3F93	3F96	BFA2	3FA5	BFA7	3FAA	BFAD	3FAF	BFB9	3FBB	3FBE	3FC9	BFCB
FF	BFCE	3FD2	BFD5	3FD7	BFDA	3FDD	BFDF	BFE9	3FEB	3FEE	BFF2	3FF5	BFF7	3FFA	BFFD	3FFF

This Sheet Has Been Replaced

Fig. 42(a)

$Q' = 1$

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
00	CCB5	4CB7	CCBA	4CBD	CCBF	4CD1	CCD3	CCD6	4CE2	CCE5	4CE7	CCEA	4CED	CCEF	4CF9	CCFB
01	CCFE	CD11	4D13	4D16	CD22	4D25	CD27	4D2A	CD2D	4D2F	CD39	4D3B	4D3E	4D49	CD4B	CD4E
02	4D52	CD55	4D57	CD5A	4D5D	CD5F	CD69	4D6B	4D66	CD72	4D75	CD77	4D7A	CD7D	4D7F	4D91
03	CD93	CD96	4DA2	CDA5	4DA7	CDAA	4DAD	CDAF	4DB9	CDBB	CDBE	CDC9	4DCB	4DCE	CDD2	4DD5
04	CDD7	4DDA	CDDD	4DDF	4DEB	CDEB	CDEE	4DF2	CDF5	4DF7	CDFA	4DFD	CDFF	CE21	4E23	4E26
05	CE42	4E45	CE47	4E4A	CE4D	4E4F	CE59	4E5B	4E5E	CE71	4E73	4E76	AE89	CE8B	CE8E	4E92
06	CE95	4E97	CE9A	4E9D	CE9F	CEA9	4EAB	4EAE	CEB2	4EB5	CEB7	4EBA	CEBD	4EBF	CED1	4ED3
07	4ED6	CEE2	4EE5	CEE7	4EEA	CEED	4EEF	CEF9	4EFB	4EFE	4F11	CF13	CF16	4F22	CF25	4F27
08	CF2A	4F2D	CF2F	4F39	CF3B	CF3E	CF49	4F4B	4F4E	CF52	4F55	CF57	4F5A	CF5D	4F5F	4F69
09	CF6B	CF6E	4F72	CF75	4F77	CF7A	4F7D	CF7F	CF91	4F93	4F96	CFA2	4FA5	CFA7	4FAA	CFAD
0A	4FAF	CFB9	4FBB	4FBB	4FC9	CFCB	CFCE	4FD2	CFD5	4FD7	CFAA	4FAD	CFDF	CFE9	4FEB	AFEE
0B	CFF2	4FF5	CFF7	4FFA	CFFD	4FFF	5086	510A	D10D	510F	D119	511B	511E	D131	5133	5136
0C	D161	5163	5166	51C3	51C6	5212	D215	5217	D21A	521D	D21F	D229	522B	522E	D232	5235
0D	D237	523A	D23D	523F	D251	5253	5256	D262	5265	D267	526A	D26D	526F	D279	527B	527E
0E	D2A1	52A3	52A6	D2C2	52C5	D2C7	52CA	D2CD	52CF	D2D9	52DB	52DE	D2F1	52F3	52F6	5343
0F	5346	5385	D387	538A	D38D	538F	D399	5396	539E	D3B1	53B3	53B6	D3E1	53E3	53E6	5422

This Sheet Has Been Replace

Fig. 42(b)

$Q' = 1$

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
10	D425	5427	D42A	542D	D42F	5439	D43B	D43E	D449	544B	544E	D452	5455	D457	545A	D45D
11	545F	5469	D46B	D46E	5472	D475	5477	D47A	547D	D47F	D491	5493	5498	D4A2	54A5	D4A7
12	54AA	D4AD	54AF	D4B9	54BB	54BE	54C9	D4CB	D4CE	54D2	D4D5	54D7	D4DA	54DD	D4DF	D4E9
13	54EB	54EE	D4F2	54F5	D4F7	54FA	D4FD	54FF	D521	5523	5526	D542	5545	D547	554A	D54D
14	554F	D559	555B	555E	D571	5573	5576	5589	D58B	D58E	5592	D595	5597	D59A	559D	D59F
15	D5A9	55AB	55AE	D5B2	55B5	D5B7	55BA	D5BD	558F	D5D1	55D3	55D6	D5E2	55E5	D5E7	55EA
16	D5ED	55EF	D5F9	55FB	55FE	5643	5646	5685	D687	568A	D68D	568F	D699	569B	569E	D6B1
17	56B3	56B8	D6E1	56E3	56E6	5709	D70B	D70E	5712	D715	5717	D71A	571D	D71F	D729	572B
18	572E	D732	5735	D737	573A	D73D	573F	D751	5753	5756	D762	5765	D767	576A	D76D	576F
19	D779	5778	577E	D7A1	57A3	57A6	D7C2	57C5	D7C7	57CA	D7CD	57CF	D7D9	57DB	57DE	D7F1
1A	57F3	57F6	5842	D845	5847	D84A	584D	D84F	5859	D85B	D85E	5871	D873	D876	D889	588B
1B	588E	D892	5895	D897	589A	D89D	589F	58A9	D8AB	D8AE	58B2	D8B5	5887	D8BA	58BD	D8BF
1C	58D1	D8D3	D8D6	58E2	D8E5	58E7	D8EA	58ED	D8EF	58F9	D8FB	D8FE	D911	5913	5916	D922
1D	5925	D927	592A	D92D	592F	D939	593B	593E	5949	D94B	D94E	5952	D955	5957	D95A	595D
1E	D95F	D969	596B	596E	D972	5975	D977	597A	D97D	597F	5991	D993	D996	59A2	D9A5	59A7
1F	D9AA	59AD	D9AF	59B9	D9BB	D9BE	D9C9	59CB	59CE	D9D2	59D5	D9D7	59DA	D9DD	59DF	59E9

This Sheet Has Been Replaced

Fig. 43(a)

$Q' = 1$

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
20	D9EB	D9EE	59F2	D9F5	59F7	D9FA	59FD	D9FF	DA21	5A23	5A26	DA42	5A45	DA47	5A4A	DA4D
21	5A4F	DA59	5A5B	5A5E	DA71	5A73	5A76	5A89	DA8B	DA8E	5A92	DA95	5A97	DA9A	5A9D	DA9F
22	DAA9	5AAB	5AAE	DAB2	5AB5	DAB7	5ABA	DABD	5ABF	DAD1	5AD3	5ADD	DAE2	5AE5	DAE7	5AEA
23	DAED	5AEF	DAF9	5AFB	5AFE	5B11	DB13	DB16	5B22	DB25	5B27	DB2A	5B2D	DB2F	5B39	DB3B
24	DB3E	DB49	5B4B	5B4E	DB52	5B55	DB57	5B5A	DB5D	5B5F	5B69	DB6B	DB6E	5B72	DB75	5B77
25	DB7A	5B7D	DB7F	DB91	5B93	5B96	DBA2	5BA5	DBA7	5BAA	DBAD	5BAF	DBB9	5BBB	5BBE	5BC9
26	DBCB	DBCE	5BD2	DBD5	5BD7	DBDA	5BDD	DBDF	DBE9	5BE8	5BEE	DBF2	5BF5	DBF7	5BFA	DBFD
27	5BFF	5C43	5C46	5C85	DC87	5C8A	DCBD	5C8F	DC99	5C9B	5C9E	DCB1	5CB3	5CB6	DCE1	5CE3
28	5CE6	5D09	DD0B	DD0E	5D12	DD15	5D17	DD1A	5D1D	DD1F	DD29	5D2B	5D2E	DD32	5D35	DD37
29	5D3A	DD3D	5D3F	DD51	5D53	5D56	DD62	5D65	DD67	5D6A	DD6D	5D6F	DD79	5D7B	5D7E	DDA1
2A	5DA3	5DA6	DDC2	5DC5	DDC7	5DCA	DDCD	5DCF	DDD9	5DDB	5DDE	DDF1	5DF3	5DF6	5E11	DE13
2B	DE16	5E22	DE25	5E27	DE2A	5E2D	DE2F	5E39	DE3B	DE3E	DE49	5E4B	5E4E	DE52	5E55	DE57
2C	5E5A	DE5D	5E5F	5E69	DE6B	DE6E	5E72	DE75	5E77	DE7A	5E7D	DE7F	DE91	5E93	5E96	DEA2
2D	5EA5	DEA7	5EAA	DEAD	5EAF	DEB9	5EBB	5EBE	5EC9	DECB	DECE	5ED2	DED5	5ED7	DEDA	5EDD
2E	DEDF	DEE9	5EEB	5EEE	DEF2	5EF5	DEF7	5EFA	DEFD	5EFF	DF21	5F23	5F26	DF42	5F45	DF47
2F	5F4A	DF4D	5F4F	DF59	5F5B	5F5E	DF71	5F73	5F76	5F89	DF8B	DF8E	5F92	DF95	5F97	DF9A

This Sheet Has Been Replaced

Fig. 43(b)

$Q' = 1$

/	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
30	5F9D	DF9F	DFA9	5FAB	5FAE	DFB2	5FB5	DF67	5F6A	DFBD	5FBF	DFD1	5FD3	5FD6	DFE2	5FE5
31	DFE7	5FEA	DFED	5FEF	DFF9	5FFB	5FFE	EE84	4B68	4E91	6889	6E96	8557	8A26	5E8A	5D68
32	6869	E86B	6E98	8B68	E887	2E87	5668	C9E8	CBE8	7DE8	7E91	6899	5E89	6E8D	8E96	85F8
33	E88A	D6B9	AFE9	AEE9	6B96	9B29	6998	BE99	BFE9	D569	D2E8	D6A6	8D7E	8DA6	8DFE	9E94
34	68EE	E8F2	68F5	E8F7	6899	7169	E99B	7699	D1E9	8E23	6992	6E99	4269	7699	4AE9	9D6E
35	E995	9695	B69E	E969	E99B	5E99	7699	BFE9	9D16	9E98	A876	A8AE	9D36	9E5E	99E7	69DE
36	6996	9AB6	99AE	E969	B2E9	9B3A	E699	9BFE	9D16	9E98	E8A8	D6AE	A936	9E59	9E7E	9969
37	6995	F6E9	AF96	9FE9	B7E9	9BFE	A876	A876	A8AE	A8D6	A8FE	A9B6	A9B6	A9E9	EAB1	6AD3
38	6AB6	EAE1	6AE3	6AEB	3D6B	3FEB	C26B	C76B	CAEB	CD6B	CFEB	6DB1	6DB6	6DE9	6EAB	2EB6
39	EB32	6B56	EB35	EB37	6B3D	6B3F	EBC2	6BC5	EBCA	EBD3	6ED3	6ED7	6EDB	6EDE	6EB2	6EB6
3A	6B7B	6BBA	6BBA	36BA	6D0F	ED19	6D1B	6D1E	D316	D32E	E32E	6B76	6BB9	6BDE	6BF1	6BF3
3B	6BF6	6C8E	E1A6	E1D0	DEE1	FEEE	29E2	B53E	D2B6	E2EE	6B6F	1636	3636	3636	DC36	DC36
3C	6E12	EE15	6EA6	5E67	6E1D	EE29	6E2B	6FEE	7B6E	3726	E3AE	E3D6	E3FE	E3EE	C36E	C51E
3D	E536	EE56	E5E6	5E67	6AEE	D96E	DB6E	D1EE	16EE	F36E	F636	F636	F636	F636	C26E	C56E
3E	C76E	CAEE	CD6E	CFEE	D96E	DB6E	DEEE	F16E	FE16	FE36	FE6F	4636	F46F	8576	F876	F8AE
3F	6F8E	FE9F	9B6F	9FEE	FB16	FB36	FB6E	E16F	E16F	E36F	E6F0	8B70	8EB7	0E92	7095	F097

This Sheet Has Been Replaced

Fig. 44(a)

Q′=1

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
40	709A	F09D	709F	70A9	F0AB	F0AE	70B2	F0B5	70B7	F0BA	70BD	F0BF	70D1	F0D3	F0D6	70E2
41	F0E5	70E7	F0EA	70ED	F0EF	70F9	F0FD	F0FE	F111	7113	7116	F122	7125	F127	712A	F12D
42	712F	F139	713B	713E	7149	F14B	F14E	7152	F155	7157	F15A	715D	F15F	F169	716B	716E
43	F172	7175	F177	717A	F17D	717F	7191	F193	F196	71A2	F1A5	71A7	F1AA	71AD	F1AF	71B9
44	F1BB	F1BE	F1C9	71CB	71CE	F1D2	71D5	F1D7	71DA	F1DD	71DF	71E9	F1EB	F1EE	71F2	F1F5
45	71F7	F1FA	71FD	F1FF	F221	7223	7226	F242	7245	F247	724A	F24D	724F	F259	725B	725E
46	F271	7273	7276	7289	F28B	F28E	7292	F295	7297	F29A	729D	F29F	F2A9	72AB	72AE	F2B2
47	72B5	F2B7	72BA	F2BD	72BF	F2D1	72D3	72D6	F2E2	72E5	F2E7	72EA	F2ED	72EF	F2F9	72FB
48	72FE	7311	F313	F316	7322	F325	7327	F32A	732D	F32F	7339	F33B	F33E	F349	734B	734E
49	F352	7355	F357	735A	F35D	735F	7369	F36B	F36E	7372	F375	7377	F37A	737D	F37F	F391
4A	7393	7396	F3A2	73A5	F3A7	73AA	F3AD	73AF	F389	73BB	73BE	73C9	F3CB	F3CE	73D2	F3D5
4B	73D7	F3DA	73DD	F3DF	F3E9	73EB	73EE	F3F2	73F5	F3F7	73FA	F3FD	73FF	7443	7446	7485
4C	F487	748A	F4BD	748F	F499	749B	749E	F4B1	74B3	74B6	F4E1	74E3	74E6	7509	F50B	F50E
4D	7512	F515	7517	F51A	751D	F51F	F529	7522	752A	F532	7535	F537	753A	F53D	753F	F551
4E	7553	7556	F562	7565	F567	756A	F56D	756F	F579	757B	757E	F5A1	75A3	75A6	F5C2	75C5
4F	F5C7	75CA	F5CD	75CF	F5D9	75DB	75DE	F5F1	75F3	75F6	7611	F613	F616	7622	F625	7627

This Sheet Has Been Replaced

Fig. 44(b)

$Q' = 1$

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
50	F62A	762D	F62F	7639	F63B	F63E	F649	764B	764E	F652	7655	F657	765A	F65D	765F	7669
51	F66B	F66E	7672	F675	7677	F67A	767D	F67F	F691	7693	7696	F6A2	76A5	F6A7	76AA	F6AD
52	76AF	F6B9	76BB	76BE	76C9	F6CB	F6CE	76D2	F6D5	76D7	F6DA	76DD	F6DF	F6E9	76EB	76EE
53	F6F2	76F5	F6F7	76FA	F6FD	76FF	F721	7723	7726	F742	7745	F747	774A	F74D	774F	F759
54	775B	775E	F771	7773	7776	7789	F78B	F78E	7792	F795	7797	F79A	779D	F79F	F7A9	77AB
55	77AE	F7B2	77B5	F7B7	77BA	F7BD	77BF	F7D1	77D3	77D6	F7E2	77E5	F7E7	77EA	F7ED	77EF
56	F7F9	77FB	77FE	7886	790A	F90D	790F	F915	791B	791E	F931	7933	7936	F961	7963	7966
57	79C3	79C6	7A12	FA15	7A17	FA1A	7A1D	FA1F	FA29	7A2B	7A2E	FA32	7A35	FA37	7A3A	FA3D
58	7A3F	FA51	7A53	7A56	FA62	7A65	FA67	7A6A	FA6D	7A6F	FA79	7A7B	7A7E	FAA1	7AA3	7AA6
59	FAC2	7AC5	FAC7	7ACA	FACD	7ACF	FAD9	7ADB	7ADE	FAF1	7AF3	7AF6	7B43	7B46	7B85	FB87
5A	7BBA	FB8D	7B8F	FB99	7B9B	7B9E	FBB1	7BB3	7BB6	FBE1	7BE3	7BE6	7C22	FC25	7C27	FC2A
5B	7C2D	FC2F	7C39	FC3B	FC3E	FC49	7C4B	7C4E	FC52	7C55	FC57	7C5A	FC5D	7C5F	7C69	FC6B
5C	FC6E	7C72	FC75	7C77	FC7A	7C7D	FC7F	FC91	7C93	7C96	FCA2	7CA5	FCA7	7CAA	FCAD	7CAF
5D	FCB9	7CBB	7CBE	7CC9	FCCB	FCCE	7CD2	FCD5	7CD7	FCDA	7CDD	FCDF	FCE9	7CEB	7CEE	FCF2
5E	7CF5	FCF7	7CFA	FCFD	7CFF	FD21	7D23	7D26	FD42	7D45	FD47	7D4A	FD4D	7D4F	FD59	7D5B
5F	7D5E	FD71	7D73	7D76	7D89	FD8B	FD8E	7D92	FD95	7D97	FD9A	7D9D	FD9F	FDA9	7DAB	7DAE

This Sheet Has Been Replaced

Fig. 45(a)

$Q' = 1$

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
60	FDB2	7DB5	FDB7	7DBA	FDBD	7DBF	FDD1	7DD3	7DD6	FDE2	7DE5	FDE7	7DEA	FDED	7DEF	FDF9
61	7DFB	7DFE	7E43	7E46	7E85	FE87	7E8A	FE8D	7E8F	FE99	7E9B	7E9E	FEB1	7EB3	7EB6	FEE1
62	7EE3	7EE6	7F09	FF0B	FF0E	7F12	FF15	7F17	FF1A	7F1D	FF1F	FF29	7F2B	7F2E	FF32	7F35
63	FF37	7F3A	FF3D	7F3F	FF51	7F53	7F56	FF62	7F65	FF67	7F6A	FF6D	7F6F	FF79	7F7B	7F7E
64	FFA1	7FA3	7FA6	FFC2	7FC5	FFC7	7FCA	FFCD	7FCF	FFD9	7FDB	7FDE	FFF1	7FF3	7FF6	0842
65	8845	0847	884A	084D	884F	0859	885B	885E	0871	8873	8876	8889	088B	088E	8892	0895
66	8897	089A	889D	089F	08A9	88AB	88AE	08B2	88B5	08B7	88BA	08BD	88BF	08D1	88D3	88D6
67	08E2	88E5	08E7	88EA	08ED	88EF	08F9	88FB	88FE	8911	0913	0916	8922	0925	8927	092A
68	892D	092F	8939	093B	093E	0949	894B	894E	0952	8955	0957	895A	095D	895F	8969	096B
69	096E	8972	0975	8977	097A	897D	097F	0991	8993	8996	09A2	89A5	09A7	89AA	09AD	89AF
6A	09B9	99BB	89BB	89C9	09CB	09CE	89D2	09D5	89D7	09DA	89DD	09DF	09E9	89EB	89EE	09F2
6B	89F5	09F7	89FA	09FD	89FF	8A21	0A23	0A26	8A42	0A45	8A47	0A4A	8A4D	0A4F	8A59	0A5B
6C	0A5E	8A71	0A73	0A76	0A89	8A8B	8A8E	0A92	8A95	0A97	8A9A	0A9D	8A9F	8AA9	0AA2	0AAE
6D	8AB2	0AB5	8AB7	0ABA	8ABD	0ABF	8AD1	0AD3	0AD6	8AE2	0AE5	8AE7	0AEA	8AED	0AEF	8AF9
6E	0AFB	0AFE	0B11	8B13	8B16	0B22	8B25	0B27	8B2A	0B2D	8B2F	0B39	8B3B	8B3E	8B49	0B4B
6F	0B4E	8B52	0B55	8B57	0B5A	8B5D	0B5F	0B69	8B6B	8B6E	0B72	8B75	0B77	8B7A	0B7D	8B7F

This Sheet Has Been Replaced

Fig. 45(b)

$Q' = 1$

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
70	8B91	0B93	0B96	8BA2	0BA5	8BA7	0BAA	8BAD	0BAF	8BB9	0BBB	0BBE	0BC9	8BCB	8BCE	0BD2
71	8BD5	0BD7	8BDA	0BDD	8BDF	8BE9	0BEB	0BEE	8BF2	0BF5	8BF7	0BFA	8BFD	0BFF	0B43	0B46
72	0C85	8C87	0C8A	8CBD	0C8F	8C99	0C9B	0C9E	8CB1	0CB3	0CB6	8CE1	0CE3	0CE6	0C09	8C0B
73	8D0E	0D12	8D15	0D17	8D1A	0D1D	9D1F	8D29	0D2B	0D2E	8D32	0D35	8D37	0D3A	8D3D	0D3F
74	8D51	0D53	0D56	8D62	0D65	8D67	0D6A	8D6D	0D6F	8D79	0D7B	0D7E	8DA1	0DA3	0DA6	8DC2
75	0DC5	8DC7	0DCA	8DCD	0DCF	8DD9	0DDB	0DDE	8DF1	0DF3	0DF6	0E11	8E13	8E16	0E22	8E25
76	0E27	8E2A	0E2D	8E2F	0E39	8E3B	8E3E	8E49	0E4B	0E4E	8E52	0E55	8E57	0E5A	8E5D	0E5F
77	0E69	8E6B	8E6E	0E72	8E75	0E77	8E7A	0E7D	8E7F	8E91	0E93	0E96	8EA2	0EA5	8EA7	0EAA
78	8EAD	0EAF	8EB9	0EBB	0EBE	0EC9	8ECB	8ECE	0ED2	8ED5	0ED7	8EDA	0EDD	8EDF	8EE9	0EEB
79	0EEE	8EF2	0EF5	8EF7	0EFA	8EFD	0EFF	8E21	0F23	0F26	8F42	0F45	8F47	0F4A	8F4D	0F4F
7A	8F59	0F5B	0F5E	8F71	0F73	0F76	0F8B	8F8B	8F8E	0F92	8F95	0F97	8F9A	0F9D	8F9F	8FA9
7B	0FAB	0FAE	8FB2	0FB5	8FB7	0FBA	8FBD	0FBF	8FD1	0FD3	0FD6	8FE2	0FE5	8FE7	0FEA	8FED
7C	0FEF	8FF9	0FFB	0FFE	9085	1087	908A	108D	908F	1099	909B	909E	10B1	90B3	90B6	10E1
7D	90E3	90E6	9109	110B	110E	9112	1115	9117	111A	911D	111F	1129	912B	912E	1132	9135
7E	1137	913A	113D	913F	1151	9153	9156	1162	9165	1167	916A	116D	916F	1179	917B	917E
7F	11A1	91A3	81A6	11C2	91C5	11C7	91CA	11CD	91CF	11D9	91DB	91DE	11F1	91F3	91F6	9211

This Sheet Has Been Replaced

Fig. 46(a)

Q′=1

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
80	1213	1216	9222	1225	9227	122A	922D	122F	9239	123B	123E	1249	924B	924E	1252	9255
81	1257	925A	125D	925F	9269	126B	126E	9272	1275	9277	127A	927D	127F	1291	9293	9296
82	12A2	92A5	12A7	92AA	12AD	92AF	12B0	92BB	92BE	92C9	12CB	12CE	92D2	12D5	92D7	12DA
83	92DD	12DF	12E9	92EB	92EE	12F2	92F5	13F7	92FA	12FD	92FF	1321	9323	9326	1342	9345
84	1347	934A	134D	934F	1359	935B	935E	1371	9373	9376	9389	13BB	138E	9392	1395	9397
85	139A	939D	139F	13A9	93AB	93AE	13B2	93B5	13B7	93BA	138D	93BF	13D1	93D3	93D6	13E2
86	93E5	13E7	93EE	13ED	93EF	13F9	93FB	94FE	9421	1423	1426	9442	1445	9447	144A	944D
87	144F	9459	145D	145E	9471	1473	1476	1489	948B	948E	1492	9495	1497	949A	149D	949F
88	94A9	14AB	14AE	94B2	14B5	94B7	14BA	958D	14BF	94D1	14D3	14D6	94E2	14E5	94E7	14EA
89	94ED	14EF	94F9	14FB	14FE	1511	9513	9516	1522	9525	1527	952A	152D	952F	1539	953B
8A	953E	9549	1548	154E	9552	1555	9557	155A	955D	155F	1569	956B	956E	1572	9575	1577
8B	957A	157D	957F	9591	1593	1596	95A2	15A5	95A7	15AA	95AD	15AF	95B9	15BB	15BE	15C9
8C	95CB	95CE	15D2	95D5	15D7	95DA	15DD	95DF	95A9	15EB	15EE	95F2	15F5	95F7	15FA	95FD
8D	15FF	1621	9623	9626	1642	9645	1647	964A	164D	964F	1659	9658	965E	1671	9673	9676
8E	9689	1688	168E	969E	1695	9697	169A	969D	169F	16A9	96AB	96AE	16B2	96B5	16B7	96BA
8F	16BD	96B4	16D1	96D3	96D6	16E2	96E5	16E7	96EA	16ED	96EF	16F9	96FB	96FE	9711	1713

This Sheet Has Been Replaced

Fig. 46(b)

$Q' = 1$

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
90	1716	9722	1725	9727	172A	972D	172F	9739	173B	173E	1749	974B	974E	1752	9755	1757
91	975A	175D	975F	9769	176B	176E	9772	1775	9777	177A	977D	177F	1791	9793	9796	17A2
92	97A5	17A7	97AA	17AD	97AF	17B9	97BB	97BE	97C9	17CB	17CE	97D2	17D5	97D7	17DA	97DD
93	17DF	17E9	97EB	97EE	17F2	97F5	17F7	97FA	17FD	97FF	1843	18A6	1885	9887	188A	9B8D
94	188F	9899	189B	189E	98B1	18B3	18B6	98E1	18E3	18E6	1909	990B	990E	1912	9915	1917
95	991A	191D	991F	9929	192B	192E	9932	1935	9937	193A	993D	193F	9951	1953	1956	9962
96	1965	9967	196A	996D	196F	9979	197B	197E	99A1	19A3	19A6	99C2	19C5	99C7	19CA	99CD
97	19CF	99D9	19DB	19DE	99F1	19F3	19F6	1A11	9A13	9A16	1A22	9A25	1A27	9A2A	1A2D	9A2F
98	1A39	9A3B	9A3E	9A49	1A4B	1A4E	9A52	1A55	9A57	1A5A	9A5D	1A5F	1A65	9A6B	9A6E	1A72
99	9A75	1A77	9A7A	1A7D	9A7F	9A91	1A93	1A96	9AA2	1AA5	9AA7	1AAA	9AAD	1AAF	9AB9	1ABB
9A	1ABE	1AC9	9ACB	9ACE	1AD2	9AD5	1AD7	9ADA	1ADD	9ADF	9AE9	1AEB	1AEE	9AF2	1AF5	9AF7
9B	1AFA	9AFD	1AFF	9B21	1B23	1B26	9B42	1B45	9B47	1B4A	9B4D	1B4F	9B59	1B5B	1B5E	9B71
9C	1B73	1B76	1B89	9BBB	9B8E	1B92	9B95	1B97	9B9A	1B9D	9B9F	9BA9	1BAB	1BAE	9BB2	1BB5
9D	9BB7	1BBA	9BBD	1BBF	9BD1	1BD3	1BD6	9BE2	1BE5	9BE7	1BEA	9BED	1BEF	9BF9	1BFB	1BFE
9E	1C21	9C23	9C26	1C42	9C45	1C47	9C4A	1C4D	9C4F	1C55	9C5B	9C5E	1C71	9C73	9C76	9C89
9F	1C8B	1C8E	9C92	1C95	9C97	1C9A	9C9D	1C9F	1CA9	9CAB	9CAE	1CB2	9CB5	1CB7	9CBA	1CBD

This Sheet Has Been Replaced

Fig. 47(a)

$Q' = 1$

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
A0	9CBF	1CD1	9CD3	9CD6	1CE2	9CE5	1CE7	9CEA	1CED	9CEF	1CF9	9CFB	9CFE	9D11	1D13	1D16
A1	9D22	1D25	9D27	1D2A	9D2D	1D2F	9D39	1D3B	1D3E	1D49	9D4B	9D4E	1D52	9D55	1D57	9D5A
A2	1D5D	9D5F	9D69	1D6B	1D6E	9D72	1D75	9D77	1D7A	9D7D	1D7F	1D91	9D93	9D96	1DA2	9DA5
A3	1DA7	9DAA	1DAD	9DAF	1DB9	9DBB	9DBE	9DC9	1DCB	1DCE	9DD2	1DD5	9DD7	1DDA	9DDD	1DDF
A4	1DE9	9DEB	9DEE	1DF2	9DF9	1DF7	9DFA	1DFD	9DFF	9E21	1E23	1E26	9E42	1E45	9E47	1E4A
A5	9E4D	1E4F	9E59	1E5B	1E5B	9E71	1E73	1E76	1E89	9E8B	9E8E	1E92	9E95	1E97	9E9A	1E9D
A6	9E9F	9EA9	1EAB	1EAE	9EB2	1EB5	9EB7	1EBA	9EBD	1EBF	9ED1	1ED3	1ED6	9EE2	1EE5	9EE7
A7	1EEA	9EED	1EEF	9EF9	1EFB	1EFE	1F11	9F13	9F16	1F22	9F25	1F27	9F2A	1F2D	9F2F	1F39
A8	9F3B	9F3E	9F49	1F4B	1F4E	9F52	1F55	9F57	1F5A	9F5D	1F5F	1F69	9F6B	9F6E	1F72	9F7D
A9	1F77	9F7A	1F7D	9F7F	9F91	1F93	1F96	9FA2	1FA5	9FA7	1FAA	9FAD	1FAF	9FB9	1FBB	1FBE
AA	1FC9	9FCB	9FCE	1FD2	9FD5	1FD7	9FDA	1FDD	9FDF	9FE9	1FEB	1FEE	9FF2	1FF5	9FF7	1FFA
AB	9FFD	1FFF	A10A	210D	A10F	2119	A11B	A11E	2131	A133	A136	2161	A163	A166	A1C3	A1C6
AC	A212	2215	A217	221A	A21D	221F	2229	A22B	A22E	2232	A235	2237	A23A	223D	A23F	2251
AD	A253	A256	2262	A265	2267	A26A	226D	A26F	2279	A27B	A27E	22A1	A2A3	A2A6	22C2	A2C5
AE	22C7	A2CA	22CD	A2CF	22D9	A2DB	A2DE	22F1	A2F3	A2F6	A343	A346	A385	2387	A38A	238D
AF	A38F	2399	A39B	A39E	23B1	A3B3	A3B6	23E1	A3E3	A3E6	A422	2425	A427	242A	A42D	242F

This Sheet Has Been Replaced

Fig. 47(b)

$Q' = 1$

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
B0	A439	243B	243E	2449	A44B	A44E	2452	A455	2457	A45A	245D	A45F	A469	246B	246E	A472
B1	2475	A477	247A	A47D	247F	2491	A493	A496	24A2	A4A5	24A7	A4AA	24AD	A4AF	24B9	A4BB
B2	A4BE	A4C9	24C8	24CE	A4D2	24D5	A4D7	24DA	A4DD	24DF	24E9	A4EB	A4EE	24F2	A4F5	24F7
B3	A4FA	24FD	A4FF	2521	A523	A526	2542	A545	2547	A54A	254D	A54F	2555	A55B	A55E	2571
B4	A573	A576	A589	258B	258E	A592	2595	A597	259A	A59D	259F	25A9	A5AB	A5AE	25B2	A5B5
B5	25B7	A5BA	258D	A5BF	25D1	A5D3	A5D6	25E2	A5E5	25E7	A5EA	25ED	A5EF	25F9	A5FB	A5FE
B6	A643	A646	A685	2687	A68A	268D	A68F	2699	A69B	A69E	26B1	A6B3	A6B6	26E1	A6E3	A6E6
B7	A709	270B	270E	A712	2715	A717	271A	A71D	271F	2729	A72B	A72E	2732	A735	2737	A73A
B8	273D	A73F	2751	A753	A756	2762	A765	2767	A76A	276D	A76F	2779	A77B	A77E	27A1	A7A3
B9	A7A6	27C2	A7C5	27C7	A7CA	27CD	A7CF	27D9	A7DB	A7DE	27F1	A7F3	A7F6	A842	2845	A847
BA	284A	A84D	284F	A859	285B	285E	A871	2873	2876	2889	A88B	A88E	2892	A895	2897	A89A
BB	289D	A89F	A8A9	28AB	28AE	A8B2	28B5	A8B7	28BA	A8BD	28BF	A8D1	28D3	28D6	A8E2	28E5
BC	A8E7	28EA	A8ED	28EF	A8F9	28FB	28FE	2911	A913	A916	292E	A925	2927	A92A	292D	A92F
BD	2939	A93B	A93E	A949	294B	294E	A952	2955	A957	295A	A95D	295F	2969	A96B	A96E	2972
BE	A975	2977	A97A	297D	A97F	A991	2993	2996	A9A2	29A5	A9A7	29AA	A9AD	29AF	A9B9	29BB
BF	29BE	29C9	A9CB	A9CE	29D2	A9D5	29D7	A9DA	29DD	A9DF	A9E9	29EB	29EE	A9F2	29F5	A9F7

This Sheet Has Been Replaced

Fig. 48(a)

$Q' = 1$

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
C0	29FA	A9FD	29FF	2A21	AA23	AA26	2A42	AA45	2A47	AA4A	2A4D	AA4F	2A55	AA5B	AA5E	2A71
C1	AA73	AA76	AA89	2A8B	2A8E	AA92	2A95	AA97	2A9A	AA9D	2A9F	2A99	AAAB	AAAE	2AB2	AAB5
C2	2AB7	AABA	2ABD	AABF	2AD1	AAD3	AAD0	2AE2	AAE5	2AE7	AAEA	2AAD	AAEF	2AF9	AAFB	AAFE
C3	AB11	2B13	2B16	AB22	2B25	AB27	2B2A	AB2D	2B2F	AB39	2B3B	2B3E	2B49	AB4B	AB4E	2B52
C4	AB55	2B57	AB5A	2B5D	AB5F	AB69	2B6B	2B6E	AB72	2B75	AB77	2B7A	AB7D	2B7F	2B91	AB93
C5	AB96	2BA2	ABA5	2BA7	ABAA	2BAD	ABAF	2BB9	ABBB	ABBE	ABC9	2BCB	2BCE	ABD2	2BD5	ABD7
C6	2BDA	ABDD	2BDF	2BE9	ABEB	ABEE	2BF2	ABF5	2BF7	ABFA	2BFD	ABFF	AC43	AC46	AC85	2C87
C7	AC8A	2C8D	AC8F	2C99	AC9B	AC9E	2CB1	AC83	ACB6	2CE1	ACE3	ACE6	AD09	2D0B	2D0E	AD12
C8	2D15	AD17	2D1A	AD1D	2D1F	2D29	AD2B	AD2E	2D32	AD35	2D37	AD3A	2D3D	AD3F	2D51	AD53
C9	AD56	2D62	AD65	2D67	AD6A	2D6D	AD6F	2D79	AD7B	AD7E	2DA1	ADA3	ADA6	2DC2	ADC5	2DC7
CA	ADCA	2DCD	ADCF	2DD9	ADDB	ADDE	2DF1	ADF3	ADF6	AE11	2E13	2E16	AE22	2E25	AE27	2E2A
CB	AE2D	2E2F	AE39	2E3B	2E3E	2E49	AE4B	AE4E	2E52	AE55	2E57	AE5A	2E5D	AE5F	AE69	2E6B
CC	2E6E	AE72	2E75	AE77	2E7A	AE7D	2E7F	2E91	AE93	AE96	2EA2	AEA5	2EA7	AEAA	2EAD	AEAF
CD	2E89	AEBB	AEBE	AEC9	2ECB	2ECE	AEB2	2ED5	AED7	2EDA	AEDD	2EDF	2EE9	AEEB	AEEE	2EF2
CE	AEF5	2EF7	AEFA	2EFD	AEFF	2F21	AF23	AF26	2F42	AF45	2F47	AF4A	2F4D	AF4F	2F59	AF5B
CF	AF5E	2F71	AF73	AF76	AF89	2F8B	2F8E	AF92	2F95	AF97	2F9A	AF9D	2F9F	2FA5	AFAB	AFAE

This Sheet Has Been Replace

Q'=1

/	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
D0	2FB2	AFB5	2FB7	AFBA	2FBD	AFBF	2FD1	AFD3	AFD6	2FE2	AFE5	2FE7	AFEA	2FED	AFEF	2FF9
D1	AFF8	FBAF	FE30	85B0	8D30	8AB0	8FB0	9930	9B30	9EB0	B1B0	30B3	0B60	B0E1	30E3	0E60
D2	3109	B10B	B105	1E31	1531	1C7B	1C31	7B31	1F31	6B31	2E31	B131	2EB1	3231	3537	B137
D3	B131	3DB1	3FB1	5131	5631	CAB1	6231	6B16	7316	AB16	D316	2FB1	7B93	1731	EB1A	1313
D4	3116	B1C2	31C5	B1C7	3115	3CAB	1C2D	1CFB	1C93	1DEB	2493	24B3	2EB2	5223	2557	B232
D5	3225	2D22	5F32	2A32	2F32	DB32	7B32	E32C	BB32	CE32	D732	4B32	5B32	A732	DB32	A532
D6	B225	D325	AB32	EB32	6B32	E532	7B32	FB32	FB32	7B32	FB32	6B32	9B32	9732	9A32	D732
D7	B2AE	7322	4B2A	F233	5B33	EB33	5B33	7633	8933	2733	8B33	2933	9533	9733	A133	D733
D8	B2E9	3222	DB2A	2633	5B33	2B33	7B33	BA33	8B33	BD33	8E33	D633	D633	E533	2533	B533
D9	B34D	3225	D3B2	6B33	5B33	5B33	7B33	8E33	9B33	8B33	9B33	7B33	9533	7B33	2533	E733
DA	B39F	AB33	EB33	4B33	FB33	7B33	7B33	D133	D333	F333	2B33	D333	6B33	2B33	5B33	E733
DB	33EA	BB33	4533	FB33	7B33	FB33	4233	4533	2633	4933	4533	4733	4433	4433	4B33	5933
DC	B345	BB34	E2B4	5B34	7B34	8B34	9B34	D634	B734	9534	E234	7B34	B934	D934	4934	AB34
DD	B4AE	3424	B5B4	FB34	8B34	BF34	D234	5B34	D734	B434	5234	EB34	5334	EA34	DB34	EF34
DE	34F9	B4FB	4533	EB34	2B35	1335	1B35	1B35	3735	2B35	FB35	3935	3B35	3E35	4935	6935
DF	B54B	B54E	3552	B552	B555	7B55	A355	DB55	FB56	9356	B356	EB57	2357	5B57	7357	AB57

Fig. 48(b)

This Sheet Has Been Replace

Fig. 49(a)

$Q' = 1$

/	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
E	03	59	91	59	63	5A	75	7A	5A	5A	5B	5B	5B	C9	5C	CE
E1	B5	D2	35	D5	B5	D7	35	DA	B5	E9	B5	F7	B5	FA	B5	F1
E2	36	23	62	B6	42	36	45	B6	47	36	4F	B6	5E	D3	68	9B
E3	B6	8E	36	92	B6	95	36	97	B6	9A	36	AB	6B	AB	6B	D3
E4	B6	D1	36	D3	6B	6D	36	E2	36	B5	6E	AB	6B	7E	37	23
E5	B7	25	37	27	B7	2A	37	2D	B7	2F	37	BB	73	E9	37	5A
E6	37	5F	37	69	B7	6B	B7	6B	B7	72	B7	77	B7	77	B7	75
E7	37	AB	7A	D3	7A	FB	B7	B9	37	BB	37	C9	B7	CB	B7	DA
E8	37	EB	37	EE	B7	F2	37	F5	B7	F6	37	FD	37	FF	B8	43
E9	B8	9B	B8	9E	38	B1	B8	B3	B8	B6	B8	E1	B8	E6	B9	0B
EA	39	1F	39	26	B9	2B	B9	2E	39	32	B9	35	39	37	B9	3A
EB	B9	DB	B9	DE	39	F1	B9	F3	B9	F6	BA	11	3A	13	3A	16
EC	B9	D3	A3	23	BA	4B	BA	4E	3A	52	BA	55	3A	57	BA	5A
ED	3A	37	AB	A7	D3	A7	F3	A9	1B	A9	3B	A9	63	AA	2B	AA
EE	3A	7A	BA	7D	3A	7F	3A	91	BA	93	BA	96	3A	A2	BA	A5
EF	3A	CB	3A	CE	BA	D2	3A	D5	BA	D7	3A	DA	BA	DD	3A	DF

This Sheet Has Been Replaced

Fig. 49(b)

Q'=1

/	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
F0	BA	B2	1B	B2	3B	B4	53	B4	7B	B4	DB	B5	B5	E3	B7	1B	B7	3B	B7	6
F1	B8	B3	8B	3B	8E	BB	9E	B3	A9	B9	F3	BA	B9	7B	B5	3B	B5	3B	B7	A
F2	3B	BD	BB	BF	3B	D1	BB	D3	BE	7B	BE	A3	BE	D3	BC	21	3C	23		
F3	3C	26	BC	42	3C	45	BC	47	3C	4F	BC	59	3C	53	B8	9B	C8	BE		
F4	33	C9	2B	C9	53	C9	7B	C9	A3	C9	DB	C9	7B	C7	33	C7	63	C8		
F5	3C	D3	3C	D6	BC	E2	3C	E5	BC	E7	3C	DA	BC	E7	3D	63	D2	BD		
F6	3D	27	BD	2A	3D	2D	BD	2F	3D	36	BD	4E	BD	52	3D	96	BD	A2		
F7	3D	69	BD	6B	BD	6E	3D	72	BD	75	3D	7B	BD	7F	BD	91	3D	93		
F8	BD	AD	3D	AF	BD	B9	3D	BB	3D	BE	3D	C9	BD	C7	3D	D5	BD	DB		
F9	3D	E5	9B	E5	BB	E5	3E	3F	BB	E7	3E	3F	BB	E7	3E	3F	BB	E7		
FA	3E	9B	EA	E3	EB	2B	EB	7B	EB	A3	EB	D3	EB	E7	BE	A3	EB	E7		
FB	BE	AB	BE	AE	3E	EB	2B	EB	7B	EB	A3	EB	D3	EB	E7	BE	A3	EB		
FC	BE	F4	9B	F4	BB	F4	E3	F5	3B	F5	63	F5	93	F5	C3	F5	F3	F5		
FD	3F	49	BF	4B	BF	4E	3F	52	BF	55	3F	5A	BF	5D	3F	61	BF	64		
FE	BF	7D	3F	7F	3F	91	BF	93	BF	96	3F	A2	BF	A5	3F	C9	3F	CB		
FF	3F	CE	BF	D2	3F	D5	BF	D7	3F	DA	BF	DD	3F	E9	2F	EB	BF	EE		

This Sheet Has Been Replaced

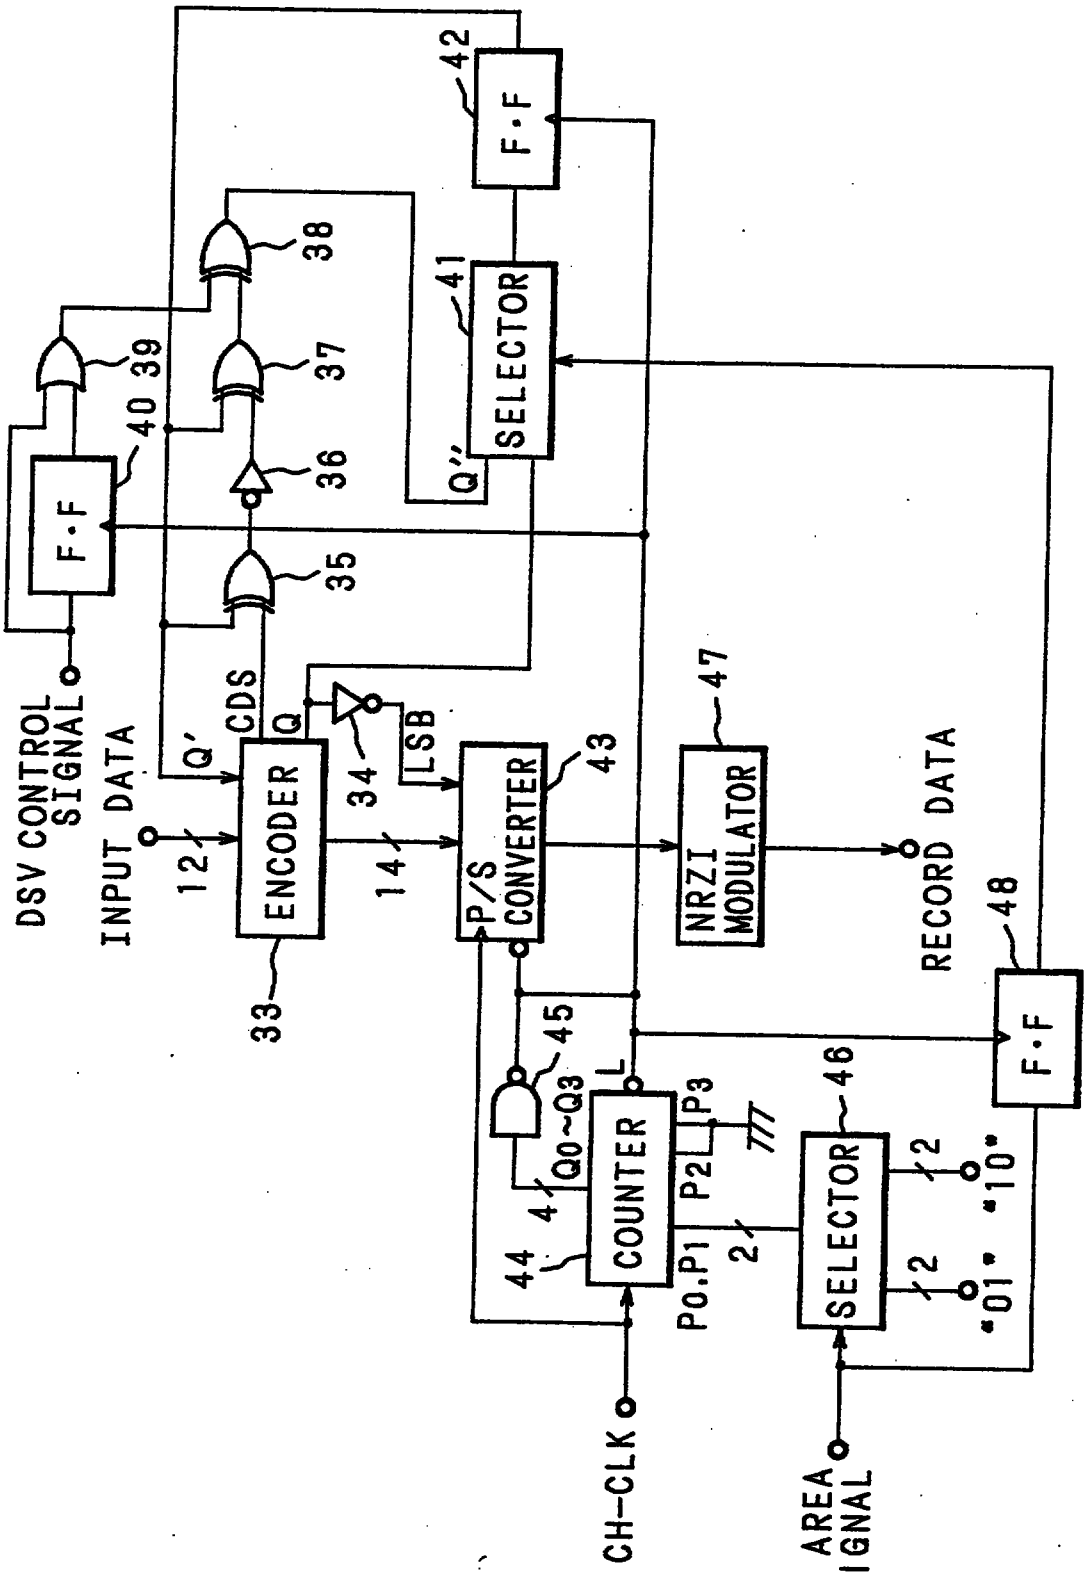

Fig. 50

This Sheet Has Been Replaced

DSV	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1
DSV'	0	0	0	0	0	1	1	1	1	0	0	0	0	1	1	1
Q'	0	0	1	1	0	0	1	1	0	0	1	1	0	0	1	1
CDS	0	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1
Q"	1	0	1	0	0	1	0	1	0	1	0	1	0	1	1	0

Fig. 51

This Sheet Has Been Replaced

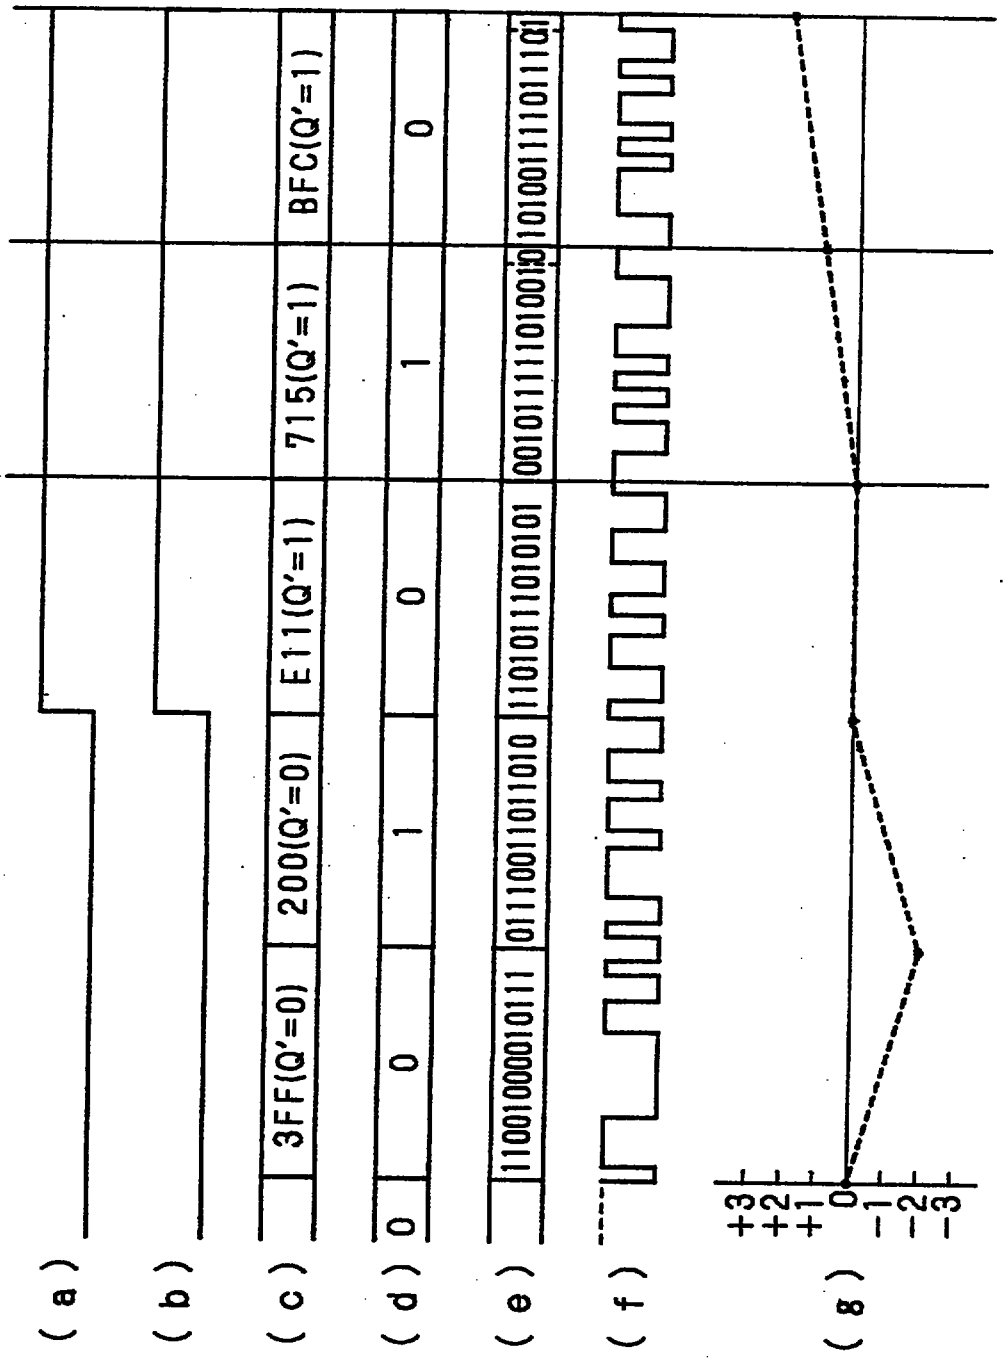

Fig. 52(A)

This Sheet Has Been Replaced

Fig. 52(B)

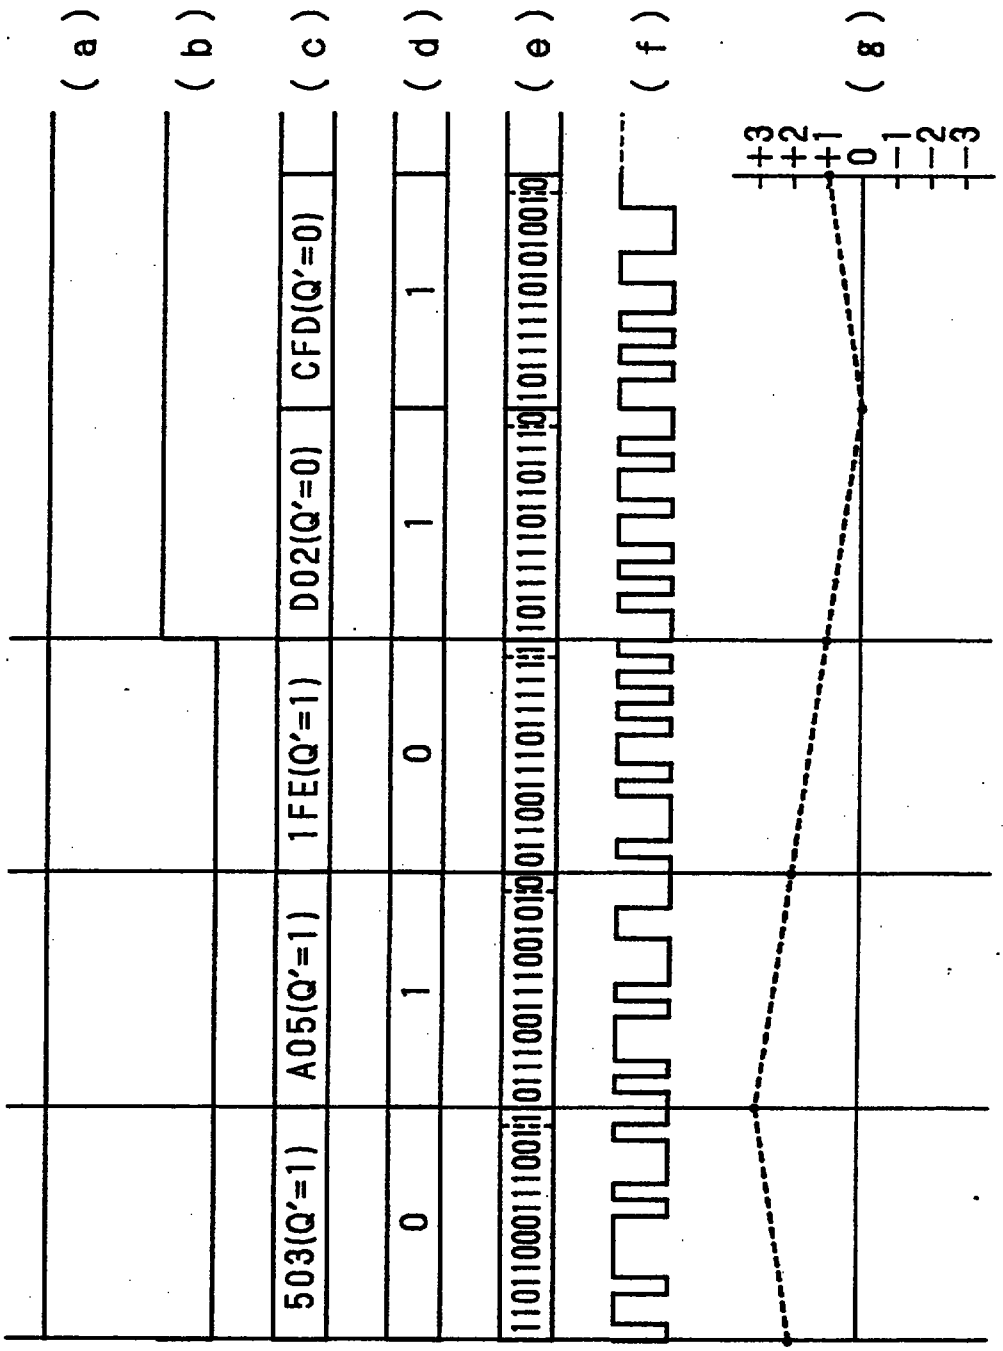

This Sheet Has Been Replaced

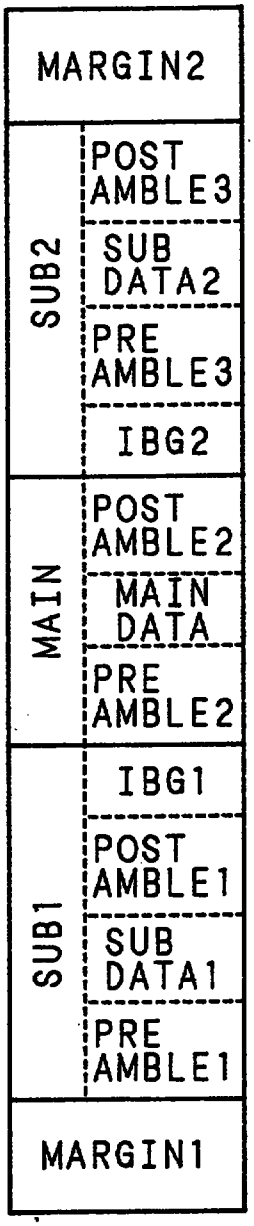

Fig. 53

This Sheet Has Been Replaced

9600801-1
IPOJ

REPLACEMENT SHEETS	SG
☑ Description	: paged 1 to paged 50
☑ Claim(s)	: paged 51 to paged 55
☑ Drawing(s)	: paged 1/71 to paged 71/71
☑ Abstract	: paged 56 to paged –

DATE OF RECEIPT 06/07/96

TITLE OF THE INVENTION

DATA CONVERSION METHOD AND RECORDING/REPRODUCING APPARATUS USING THE SAME

REPLACED SHEETS	SG
☑ Description	: paged 1 to paged 50
☑ Claim(s)	: paged 51 to paged 55
☑ Drawing(s)	: paged 1/71 to paged 71/71
☑ Abstract	: paged 56 to paged –

BACKGROUND OF THE INVENTION

Field of the Invention

The present invention relates to a data conversion method for converting digital data to signals suitable for the recording system or the transmission channel used when recording or transmitting the digital data onto magnetic tape, and a recording/reproducing apparatus employing the data conversion method.

Description of Related Art

Prior art data conversion methods employed in magnetic recording/reproducing apparatus include, for example, an 8/10 modulation method such as disclosed in "THE DAT CONFERENCE STANDARD" (issued June 1987). The 8/10 modulation method is a data conversion method in which digital data are partitioned into datawords of 8 bits each for conversion into 10-bit codewords. Fig. 1 is a circuit block diagram for explaining this data conversion method, and Fig. 2 is a data conversion table used for the same. In Fig. 1, the

This is the replacement sheet

Date: 06 JUL 1996

This Sheet Has Been Replaced

reference numeral 1 designates an encoder for accepting eight-bit digital data and a one-bit table select signal (Q') at its respective inputs and for outputting a total of 11 bits, i.e. a 10-bit codeword plus a one-bit signal (Q) for selecting the table for the next codeword. Further, the numeral 2 denotes a flip-flop for delaying the codeword table select signal by one dataword. The encoder 1 includes a read-only memory (ROM) or the like which contains the data conversion table shown in Fig. 2, wherein codewords of CDS (Codeword Digital Sum) = 0 are mapped on a one-to-one basis to 256 datawords from "00" to "FF" of hexadecimal numeral, while in the case of codewords of CDS $\neq$ 0, pairs of codewords, one with CDS = +2 and the other with CDS = -2, are each mapped to one dataword, the table of Q' = -1 consisting of codewords of CDS = +2 and the table of Q' = +1 consisting of codewords of CDS = -2. The table select signal (Q) is used to select the CDS (the table) having the direction that suppresses the dispersion of charges in the codeword sequence.

The operation of the above circuit will now be explained with reference to the timing diagram of Fig. 3. In Fig. 3, the reference signs (a), (Q), and (b) correspond to inputs/outputs at the respective parts shown in Fig. 1, and the reference signs (c) and (d) respectively represent an output signal from an NRZI

This Sheet Has Been Replaced

This is the replacement sheet

Date: 06 JUL 1996

converter (not shown) and a DSV (Digital Sum Variation) value at the end of codeword.

First, an eight-bit dataword "FF" is input to the encoder 1, along with the table select signal (Q') = -1, and consequently, the encoder 1 outputs a 10-bit codeword "1111101010" of CDS = +2 corresponding to "FF" for Q' = -1. At the same time, the table select signal Q = -1 is output for the next codeword. The parallel 10-bit signal is then converted to a serial signal, after which the signal is NRZI-modulated. As a result, the DSV value at the end of the codeword becomes +2.

Next, when "00" is input to the encoder 1, the encoder 1 outputs Q = 1 together with a 10-bit signal "0101010101" of CDS = 0 corresponding to "00" for Q' = -1 which is produced by introducing a one-symbol delay in the previous output Q = -1. As a result, the DSV value at the end of the codeword after NRZI modulation remains at +2.

Next, when "11" is input to the encoder 1, the encoder 1 outputs Q = -1 together with a 10-bit signal of CDS = -2 corresponding to "11" for Q' = 1. As a result, the DSV value at the end of the codeword after NRZI modulation becomes zero. In this manner, for each eight-bit dataword input to the encoder 1, a codeword to be output is selected

This is the replacement sheet

Date: 06 JUL 1996

This Sheet Has Been Replaced

from the table of either Q' = -1 or Q' = 1 corresponding to the dataword on the basis of the table select signal output previously. The DSV at the end of each codeword after NRZI modulation can only take the value 0, +2 or -2. This means that the DSV dispersion is suppressed, as a result of which DC-free data conversion is realized.

As described above, according to the prior art data conversion method, eight-bit data is converted to a 10-bit codeword of CDS = 0 or CDS = +2 or -2, and a DC-free signal is produced with the DSV dispersion suppressed, thereby minimizing intersymbol interference on the transmission channel and thus increasing the recording density per track. However, for recent digital magnetic recording/reproducing apparatus using a rotary head, a recording density as high as several square micrometers per bit is demanded, which necessitates not only increasing the recording density per track but also reducing the track width down to several micrometers. To implement such apparatus, it is essential to employ a dynamic tracking following (DTF) control system whereby pilot signals for tracking are recorded on the main track recorded by the rotary head and the playback head is controlled to follow the recorded track curves during playback. When the prior art data conversion method is employed in such apparatus for multiplex recording of the pilot signals, the digital signal spectral distribution has to be

This is the replacement sheet

Date: 06 JUL 1996

This Sheet Has Been Replaced

obtained down to ultra low frequency ranges although the recorded information signals contain no DC components; the resulting problem is that the pilot signals cause external disturbances, leading to increased errors in the detection of the digital signals.

One possible approach to overcoming the problem of the pilot signals causing external disturbances to the digital signals may be by generating pilot signals synchronized to the digital signals. However, the prior art data conversion method is effective only in suppressing the DSV dispersion and is not capable of actively controlling the DSV, and therefore, has the problem that it cannot generate pilot signals synchronized to the digital signals.

Fig. 4 shows a DAT recording format employed in a magnetic recording apparatus using the 8/10 modulation method. As shown, according to the format of Fig. 4, ATF areas for tracking control are provided in each of which a pilot signal for tracking control is recorded. Further, Fig. 5 shows a digital VTR recording format which is disclosed in Japanese Patent Application Laid Open No.3-217179 (1991). As shown, the track is divided into a video data area, an audio data area, a servo pilot area, and a sub code area, the pilot signal being recorded in the servo pilot area only.

This is the replacement sheet

Date: 06 JUL 1996

This Sheet Has Been Replaced

According to the above construction of the prior art, it is not possible to control the DSV in such a manner as desired, and a separate area has to be reserved for recording a pilot signal for tracking control. Accordingly, accurate tracking control cannot be realized without increasing the data amount and hence increasing the recording rate, which makes it difficult to achieve high density recording.

SUMMARY OF THE INVENTION

It is an object of the present invention to provide a data conversion method which, by suppressing low frequency components, can minimize intersymbol interference on the transmission channel, thus permitting increased per-track recording density, as in the prior art data conversion method, and which is capable of generating pilot signals synchronized to digital signals, which has not been possible with the prior art method, and thus achieves increased recording density with reduced track width.

It is another object of the present invention to provide a recording/reproducing apparatus optimized for the data conversion method capable of generating pilot signals synchronized to digital signals.

This is the replacement sheet

Date: 06 JUL 1996

This Sheet Has Been Replaced

It is a further object of the present invention to provide a data conversion method which is capable of generating pilot signals for tracking control and which involves hardly any increase in the recording rate and therefore permits high density recording, and a recording/reproducing apparatus using such a data conversion method.

According to the present invention, there is provided a data conversion method for word-converting an r-bit first dataword to an m-bit second dataword ($r < m$) and converting the word-converted m-bit second dataword to an n-bit codeword ($m < n$), in which, for r/m word-conversion, a sequence of first datawords is divided into groups of x bits where x is the least common multiple of r and m, an arbitrary first dataword selected from x/r groups of first datawords is divided into x/m, and r/(x/m)-bit data obtained by dividing the first dataword into x/m is appended to the LSB (or MSB) side of one or other of the non-divided first datawords to form the m-bit second dataword. The m-bit second dataword can thus be handled as r + (r/(x/m)) (or (r/(x/m)) + r). Therefore, if, in m/n conversion, the n-bit codeword is formed by dividing it into n1 and n2 bits, the data conversion can be performed by relating r to n1 and r/(x/m) to n2. This serves to reduce the possibility of error propagation due to a bit error that may occur in reverse data conversion.

This is the replacement sheet

Date: 06 JUL 1998

This Sheet Has Been Replaced

Furthermore, when converting the word-converted m-bit second dataword to the n-bit codeword, the number of successive 0s between a bit "1" and the next bit "1" in each n-bit codeword is limited to 4, and two codewords, one with CDS = +1 and the other with CDS = -1, are paired and related to the m-bit second dataword, the two codewords being selectively used in accordance with a DSV control signal. This enables the DSV to be controlled at a desired value for each codeword, thereby achieving spectrum suppression in a relatively low frequency range. Also, by controlling the CDS polarity in accordance with the DSV control signal, a pilot signal of the DSV variation cycle synchronized to digital data can be generated in the low frequency band where the digital data power spectrum exhibits an abrupt drop.

When the above data conversion method is employed in a recording/reproducing apparatus, the number of first datawords to be recorded in a data block where an error-correcting code and an error-detection code are appended for every synchronizing signal is set at an integral multiple of x/r. The recording/reproducing apparatus thus constructed achieves an efficient code format that does not require redundant bits.

This is the replacement sheet

Date: 06 JUL 1996

This Sheet Has Been Replaced

The recording/reproducing apparatus employing the above data conversion method has: decoding means for decoding n1 bits in the reproduced n-bit codeword into r bits, the reproduced n-bit codeword being divided into n1 bits and n2 bits for reverse conversion into the m-bit second dataword; decoding means for decoding the n2 bits into r/(x/m) bits; decoding means for decoding the n bits into the m bits; identifying means for identifying the type of bits at prescribed positions in the n-bit codeword and for outputting an identification signal designating the identified type; and means for selecting decoded data from the respective decoding means on the basis of the identification signal supplied from the identifying means and for outputting the decoded second dataword. This construction serves to reduce the possibility of the error propagation that may occur between decoded first datawords due to a single bit random error in the n-bit codeword.

Another recording/reproducing apparatus of the invention has: means for recording multiple kinds of data in partitioned areas; means for relating 14-bit codewords of CDS = 0 and pairs of codewords of CDS = ± 2 to respective 12-bit datawords when encoding and recording at least one of the multiple kinds of data and for encoding the data by selectively using these codewords; and means for appending one bit to each 14-bit codeword to form a pair of codewords,

This is the replacement sheet

Date: 06 JUL 1996

This Sheet Has Been Replaced

one with CDS = +1 and the other with CDS = -1, when encoding and recording at least one other of the multiple kinds of data and for encoding the data by selectively using these codewords.

In the above recording/reproducing apparatus, when encoding and recording at least one of the area-partitioned multiple kinds of data, either a 14-bit codeword of CDS = 0 or a pair of codewords differing only in MSB, one with CDS = +2 and the other with CDS = -2, are related to one dataword, and the dataword is encoded by selectively using these codewords, thus constructing a DC-free code of Tmin = 0.86T and Tmax = 4.29T; on the other hand, when encoding and recording at least one other of the multiple kinds of data, one bit is appended to each 14-bit codeword to form a pair of codewords, one with CDS = +1 and the other with CDS = -1, and the data is encoded by selectively using these codewords, thus constructing a code that provides the DSV coming round to the same value at prescribed intervals.

The above and further objects and features of the invention will more fully be apparent from the following detailed description with accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a diagram showing the circuit configuration

This is the replacement sheet

Date: 06 JUL 1996

This Sheet Has Been Replaced

of a prior art data converting apparatus.

Fig. 2 is a code conversion table according to a prior art data conversion method.

Fig. 3 is a diagram for explaining the operation of the data converting apparatus of Fig. 1.

Fig. 4 is a diagram showing a recording format of a prior art DAT.

Fig. 5 is a diagram showing a recording format of a prior art digital VTR.

Figs. 6 is a diagram showing the number of codewords for deriving codewords in accordance with a first embodiment of the invention.

Figs. 7 is a diagram showing the number of codewords for deriving codewords in accordance with a first embodiment of the invention.

Figs. 8 is a diagram for explaining the construction of code conversion tables according to the first embodiment of the invention.

Figs. 9 is a diagram for explaining the construction of code conversion tables according to the first embodiment of the invention.

Figs. 10 is a diagram for explaining the construction of code conversion tables according to the first embodiment of the invention.

Figs. 11 is a diagram showing code conversion according

This is the replacement sheet

Date: 06 JUL 1996

This Sheet Has Been Replaced

to the first embodiment of the invention.

Figs. 12 is a diagram showing code conversion according to the first embodiment of the invention.

Figs. 13 is a diagram showing code conversion according to the first embodiment of the invention.

Figs. 14 is a diagram showing code conversion according to the first embodiment of the invention.

Figs. 15 is a diagram showing code conversion according to the first embodiment of the invention.

Figs. 16 is a diagram showing code conversion according to the first embodiment of the invention.

Figs. 17 is a diagram showing code conversion according to the first embodiment of the invention.

Figs. 18 is a diagram showing code conversion according to the first embodiment of the invention.

Figs. 19 is a diagram showing code conversion according to the first embodiment of the invention.

Figs. 20 is a diagram showing code conversion according to the first embodiment of the invention.

Figs. 21 is a diagram showing code conversion according to the first embodiment of the invention.

Figs. 22 is a diagram showing code conversion according to the first embodiment of the invention.

Figs. 23 is a diagram showing code conversion according to the first embodiment of the invention.

This is the replacement sheet

Date: 06 JUL 1996

This Sheet Has Been Replaced

Figs. 24 is a diagram showing code conversion according to the first embodiment of the invention.

Figs. 25 is a diagram showing code conversion according to the first embodiment of the invention.

Figs. 26 is a diagram showing code conversion according to the first embodiment of the invention.

Fig. 27 is a diagram showing the circuit configuration of a data converting apparatus for implementing the code conversion method of the first embodiment.

Fig. 28 is a diagram for explaining the operation of the data converting apparatus of Fig. 27.

Fig. 29 is a power spectrum diagram showing the effect of the first embodiment.

Fig. 30 is a diagram showing the structure of a first dataword block recorded by a recording/reproducing apparatus employing the data conversion method of the first embodiment.

Fig. 31 is a diagram showing the structure of the first dataword block recorded by the recording/reproducing apparatus employing the data conversion method of the first embodiment along with the structure of the first datawords recorded at the top of the block.

Fig. 32 is a diagram showing the configuration of a circuit for implementing a decoding method in the

This is the replacement sheet

Date: 06 JUL 1996

This Sheet Has Been Replaced

recording/reproducing apparatus employing the data conversion method of the first embodiment.

Fig. 33 is a diagram showing classifications for 5-bit LSB codewords in the codewords of the first embodiment.

Figs. 34 is a diagram showing code conversion according to a second embodiment of the invention.

Figs. 35 is a diagram showing code conversion according to a second embodiment of the invention.

Figs. 36 is a diagram showing code conversion according to a second embodiment of the invention.

Figs. 37 is a diagram showing code conversion according to a second embodiment of the invention.

Figs. 38 is a diagram showing code conversion according to a second embodiment of the invention.

Figs. 39 is a diagram showing code conversion according to a second embodiment of the invention.

Figs. 40 is a diagram showing code conversion according to a second embodiment of the invention.

Figs. 41 is a diagram showing code conversion according to a second embodiment of the invention.

Figs. 42 is a diagram showing code conversion according to a second embodiment of the invention.

Figs. 43 is a diagram showing code conversion according to a second embodiment of the invention.

Figs. 44 is a diagram showing code conversion according

This is the replacement sheet

Date: 06 JUL 1996

This Sheet Has Been Replaced

to a second embodiment of the invention.

Figs. 45 is a diagram showing code conversion according to a second embodiment of the invention.

Figs. 46 is a diagram showing code conversion according to a second embodiment of the invention.

Figs. 47 is a diagram showing code conversion according to a second embodiment of the invention.

Figs. 48 is a diagram showing code conversion according to a second embodiment of the invention.

Figs. 49 is a diagram showing code conversion according to a second embodiment of the invention.

Fig. 50 is a diagram showing the circuit configuration of a data converting apparatus for implementing the data conversion method of the second embodiment.

Fig. 51 is a diagram showing a code select table according to the second embodiment.

Fig. 52 is a diagram for explaining the operation of the data converting apparatus of Fig. 50.

Fig. 53 is a diagram showing a recording format of a recording/reproducing apparatus according to the second embodiment.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

(Embodiment 1)

A first embodiment of the invention will now be

This is the replacement sheet

Date: 06 JUL 1996

This Sheet Has Been Replaced

described below with reference to accompanying drawings. Now suppose a first dataword length r = 8, a word-converted second dataword length m = 12, and a data-converted codeword length n = 15, to form a code with a modulation parameter Tmax/Tmin = 5. At this time, d = 0 and k = 4, where d is the minimum number of 0s between an arbitrary 1 and the next 1, and k is the maximum number of 0s between an arbitrary 1 and the next 1. The NRZI (F) rule is used to form the code. To achieve such a data conversion, the maximum number of successive 0s in each codeword is limited to 3 on the MSB side, 1 on the LSB side, and 4 within codeword. In this situation, the number of possible codewords having the MSB of 0 and satisfying the 0 run length condition is given in Fig. 6 for each CDS.

To form a DC-free code, 2^{12} pairs (4096 pairs) of codewords, each pair having codewords of different CDS polarities, should be provided. The numbers given in Fig. 6 are only for codewords whose MSB is 0; by converting the MSB to 1, codewords of reverse CDS polarity can be obtained while satisfying the 0 run length condition. Accordingly, of the codewords given in Fig. 6, only the codewords of CDS = ± 1 are enough to satisfy the minimum required number of second datawords = 2^{12} (4096 < number of codewords = 4650). Therefore, by using only the codewords of MSB = 0 and CDS = ± 1 and by setting the MSB to 0 or 1, it is possible to suppress

This is the replacement sheet

Date: 06 JUL 1996

This Sheet Has Been Replaced

REPLACEMENT SHEET
06 JUL 1996

the dispersion of DSV.

Fig. 7 shows possible combinations of codewords n1 and n2 when the codewords of CDS = ±1 given in Fig. 6 are each divided into n1 = 10 bits and n2 = 5 bits, n1 representing the 10 bits on the MSB side and n2 representing the 5 bits on the LSB side. In Fig. 7, Group A consists of n1 codewords of CDS = 0, Group B of n1 codewords of CDS = +2, Group C of n1 codewords of CDS = -2, Group D of n1 codewords of +4, and Group E of n1 codewords of CDS = -4. Each of the codeword groups A to E is subdivided in accordance with the 0 run length at codeword end resulting from the concatenation of the codewords n1 and n2.

First, we focus our attention on Group A. It can be seen that there are 18 different n2 codewords that can be paired with A1 while, of the 18 codewords, 17 codewords excluding the codeword "02" can also be paired with A2. Therefore, for Group A, 16 codewords, excluding the codewords "02" and "05", are used, and m = 12 bits are divided into m1 = 8 bits and m2 = 4 bits at the time of m/n conversion, to realize m1/n1 (8/10) conversion and m2/n2 (4/5) conversion, respectively. This coding technique serves to avoid propagation of errors between divided codewords at the time of decoding. To utilize this property, when 8-bit first datawords of length (r) supplied from an error-correcting circuit are word-converted to 12-bit second data-

This Sheet Has Been Replaced

REPLACEMENT SHEET
06 JUL 1996

words of length (m), four bits separated from the eight bits are mapped to m2, while non-divided 8 bits are mapped to m1. As a result, when a random error occurred to one bit in n bits during the reconstruction process, the error occurring to the first dataword after decoding is limited only to one dataword; the error is thus prevented from propagating between datawords.

In the first embodiment, 1s and 0s used to represent one-bit signals are binary numbers, a 1 representing a high level and a 0 a low level. On the other hand, "0" to "F" used to represent datawords, codewords, or parallel data bit sequences are hexadecimal numbers.

If the above coding method is provided in 256 pairs, a single bit error in n bits during the reconstruction process can be prevented from propagating between first datawords after decoding. However, as is apparent from Fig. 7, under the condition that satisfies the modulation parameter of the data conversion method of the first embodiment, the above coding method can be applied only to Group A, and cannot be applied to the other Groups B to E.

In view of the above situation, we now consider a method of coding, as shown in Figs. 8 to 10 wherein the m1/n1, m2/n2 coding method is divided into three major coding groups, i.e. the first coding group consisting only of Group A codewords corresponding to the first datawords m1

This Sheet Has Been Replaced

REPLACEMENT SHEET
06 JUL 1996

= "00" to "73", the second coding group consisting of Group B and Group C codewords corresponding to the first datawords m1 = "74" to "BA", and the third coding group consisting of the codewords in the other groups as well as the remaining codewords in Group B and Group C corresponding to the first datawords m1 = "BB" to "FF".

First, referring to the first coding group of Fig. 8 which consists only of Group A codewords, if an error occurred to one bit in n bits in the reconstruction process, the error occurring to the first dataword after decoding is limited only to one dataword and is thus prevented from propagating between datawords.

Next, in the second coding group shown in Fig. 9, there is provided a one-to-one correspondence for the m2/n2 conversion, but for the m1/n1 conversion, two n1 codewords are mapped to one m1. Therefore, of the encoded 15 bits, if the 10 bits mapped to n1 contains a single bit error, the error occurring to the first dataword after decoding is limited only to one dataword and is thus prevented from propagating between datawords. However, if there is an error in one bit out of the five bits mapped to n2, error propagation can occur between first datawords after decoding from the probability point of view.

Further, in the third encoding group shown in Fig. 10, one m1 is mapped to a plurality of n1 codewords for the

This Sheet Has Been Replaced

REPLACEMENT SHEET
06 JUL 1996

m1/n1 conversion, while for the m2/n2 conversion, a plurality of m2 codewords are mapped to one n2. Therefore, any one bit error can cause error propagation between first datawords after decoding from the probability point of view whether the error is in n1 or n2.

In the data conversion method wherein an 8-bit first dataword is word-converted to a 12-bit second dataword which is further converted to a 15-bit codeword, the above coding method has the effect of reducing the possibility of error propagation that may occur between first datawords after decoding due to a single bit detection error in the encoded 15 bits.

Code conversion tables thus constructed are shown in Figs. 11 to 26. The numbers given in Figs. 11 to 26 represent binary digital signals in hexadecimal notation; "0" to "F" in the uppermost row each correspond to the four bits on the LSB side of a 12-bit input codeword, and "00" to "FF" in the leftmost column each correspond to the eight bits on the MSB side of a 12-bit input codeword, each row and column intersection "XXXX" forming the resulting 16-bit codeword. For example, when a 12-bit dataword "15A" is input, a codeword "9539" is obtained from the intersection between the row of "15" and the column of "A" (see Fig. 12). For a 12-bit input codeword (the second codeword), the resulting codeword consists of 16 bits, of which the MSB

This Sheet Has Been Replaced

REPLACEMENT SHEET
06 JUL 1996

corresponds to a Q signal ("1" for a high level and "0" for a low level, representing the end level of an NRZI-modulated codeword when the MSB of the premodulation codeword is "0"), the 15th bit represents the CDS information ("1" for +1 and "0" for -1), and the remaining bits from the 14th bit to the LSB correspond to the bits from the 14th bit to the LSB of the 15-bit codeword to be NRZI-modulated. For the m/n (12/15) data conversion, the codeword output is selected as 16 bits because the codeword MSB control is performed by comparing the CDS information of the codeword to be converted with the end level of the previous NRZI-modulated codeword on the basis of a DSV control signal of 50% duty cycle derived by further dividing the data conversion rate signal.

Fig. 27 is a diagram showing an example of a circuit configuration implementing the first embodiment. The reference numeral 3 designates a clock generator circuit which generates, from a channel clock for transmitting a data-converted code, a symbol clock of fCH/10 for transmitting a first codeword (r), a clock (fMW/2) of fCH/30 (a value obtained by multiplying 24, the least common multiple of r and m, by n/m (10/8)) for word-converting the first dataword to the second dataword, a clock (fMW) for parallel-transmitting a converted n-bit codeword, and a DSV control signal (i) for determining the variation frequency of DSV.

This Sheet Has Been Replaced

REPLACEMENT SHEET
06 JUL 1996

The numeral 4 is a shift register constructed from three stages of flip-flops (F-F) for transmitting 8-bit first datawords in parallel at the symbol clock (fsym); 5 is a latch circuit that latches at the clock (fMW/2) the 24-bit parallel signal output from the shift register 4; 6 is a selector for word-converting the first datawords of 3 bytes to two second datawords by using the clock (fMW/2) as a select switch; 7 is an encoder for data-converting each 12-bit dataword to a codeword selected from the tables shown in Figs. 11 to 26; and 8 is an MSB controller for outputting the MSB of the codeword in accordance with the Q and CDS information supplied from the encoder 7 and the DSV control signal (i) supplied from the clock generator circuit 3, the MSB controller 8 having four EXOR circuits, A to D, and a one-word delay for delaying the end level of the previous NRZI-modulated codeword by one encoding cycle by using the clock (fMW). Further, the numeral 9 designates a parallel/serial converter for loading the encoded 15-bit parallel signal at the clock (fMW) and for converting the parallel signal to a serial signal which is transmitted at the channel clock (fCH), and the numeral 10 indicates an NRZI modulator for causing state inversion (high to low and low to high transitions) when signal "1" is input.

Fig. 28 is a timing diagram for explaining the operation of the circuit shown in Fig. 27. The reference

This Sheet Has Been Replaced

REPLACEMENT SHEET
06 JUL 1996

23

signs (a) to (k), (m), (n), and (r) correspond to the respective points designated by the same signs appearing at the inputs/outputs of the respective circuit sections.

The operation of the circuit will now be described in detail. 8-bit first datawords (r) fed from an error-correcting circuit section are shifted at the symbol clock (fsym) into and along the shift register 4 and are output as a 3-byte or 24-bit parallel signal. The 24-bit parallel signal is latched by the latch circuit 5 at the clock (fMW/2) of three-symbol cycle. That is, three bytes of signals "08", "1A", and "93" are latched by the latch circuit 5 at the rising edge, between times 3 and 4, of the clock (fMW/2) shown in Fig. 28. Of the three bytes of parallel signals, the first byte (8 bits) "08" is input to DH11 - DH4 of the selector 6, and the four bits of "1" on the MSB side of the second byte are input to DH3 - DH0 of the selector 6. Further, the last byte (8 bits) "93" is input to DL11 - DL4 of the selector 6, and the four bits of "A" on the LSB side of the second byte are input to DH3 - DH0, respectively. As a result, between time 4 and the first half of time 5 in Fig. 28, the selector 6 outputs a 12-bit parallel signal "081". Between the second half of time 5 and time 6, the selector 6 outputs a 12-bit parallel signal "93A".

With the above operation, the three 8-bit first

This Sheet Has Been Replaced

REPLACEMENT SHEET
06 JUL 1996

datawords "08", "1A", and "93" are word-converted to two 12-bit second datawords, "081" and "93", by dividing the second of the three first datawords into two and appending the respective halves to the LSBs of the first and third bytes of the first dataword. Likewise, the three bytes of the first dataword, "41", "DE", and "F2", latched by the latch circuit 5 at the rising edge, between times 6 and 7, of the clock (fMW/2) in Fig. 28, are word-converted by the selector 6 to two second datawords "41D" and "F2E".

Next, we will describe in detail the operation for converting the 12-bit second datawords to 15-bit codewords. For the convenience of explanation, it is assumed that, at time 4 in Fig. 28, the output Q' of the one-word delay in the MSB controller 8 is low, and that the DSV value for the codeword sequence up to the converted second dataword immediately preceding "081" is 0.

In this condition, when the second dataword "081" is input to the encoder 7 during the period from time 4 to the first half of time 5, the encoder 7 outputs a signal, 8BC9, in accordance with the conversion tables shown in Figs. 11 to 26, the signal having a total of 16 bits, i.e. a codeword formed from the LSB to the 14th bit and the CDS signal and Q signal, one bit each, associated with the codeword. To describe the contents of the signal, of the four bits "1000" corresponding to "8", the MSB represents the Q signal, "0"

This Sheet Has Been Replaced

REPLACEMENT SHEET
06 JUL 1996

for a low level and "1" for a high level. Further, of "1000" corresponding to "8", the bit immediately preceding the MSB represents the CDS signal for the codeword, "0" indicating CDS = -1 and a low level and "1" indicating CDS = +1 and a high level. The remaining two bits of the "1000" corresponding to "8", plus the 12 bits "BC9", a total of 14 bits, constitute the data-converted codeword which has 14 bits of "00101111001001" from the 14th bit to the LSB.

Of the signals thus created, the Q signal and the CDS signal are input, along with the DSV control signal (i), to the MSB controller 8 which then determines and outputs the MSB of the codeword in accordance with the operation hereinafter described. The DSV control signal (i) is set at "1" (high level) if the DSV is to be dispersed in the positive direction and at "0" (low level) if the DSV is to be dispersed in the negative direction. In the present embodiment, the DSV control signal is set at a high level for the duration of times 4, 5, and 6 and at a low level for the duration of times 7, 8, and 9, so that the CDS is controlled to give +1 for encoding the second datawords "081" and "93A" and -1 for encoding the second datawords "41D" and "F2E".

The operation of the MSB controller 8 will now be described in detail. First, using the EXOR circuit A, it is checked whether the CDS value of the codeword currently

This Sheet Has Been Replaced

REPLACEMENT SHEET
06 JUL 1996

output agrees with the direction in which the DSV is to be dispersed; if they agree, a 0 is output, and if they do not agree, a 1 is output, thereby making the CDS value of the codeword agree with the dispersing direction of the DSV. Note, however, that the above output condition is based on the assumption that encoding is performed with the start point of the codeword at a low level at the time of NRZI modulation. Also note that the MSB needs to be determined by referencing the Q' signal (a 0 for a low level and a 1 for a high level) indicating the end level of the previous NRZI-modulated codeword. The output of the EXOR circuit A and the Q' signal are both input to the EXOR circuit B, and when the Q' signal is "0" (indicating that the NRZI-modulated word level at the end of the previous codeword is low), the output level of the EXOR circuit A appears unchanged at the output of the EXOR circuit B. On the other hand, when the Q' signal is "1" (indicating that the NRZI-modulated word level at the end of the previous codeword is high), since the polarity of the CDS of the codeword is inverted after NRZI modulation, the output level of the EXOR circuit A appears inverted at the output of the EXOR circuit B. The output of the EXOR circuit B is supplied as the MSB of the codeword to the parallel/serial converter 9.

To describe the above operation as applied to the present embodiment, when the second dataword "081" is input

This Sheet Has Been Replaced

REPLACEMENT SHEET
06 JUL 1996

to the encoder 7, the CDS signal output from the encoder 7 is "0", and the DSV control signal (i) is at a high level ("1") that causes the DSV to disperse in the positive direction, as can be seen from Fig. 28, so that the EXOR circuit A outputs a high level signal ("1"). At this time, the Q' signal that indicates the end level of the previous NRZI-modulated codeword is at a low level ("0"), so that the EXOR circuit B outputs a 1 as the MSB of the codeword.

As a result, a 15-bit parallel signal "1001011101" is loaded into the parallel/serial converter 9 in the middle of time 5 when the clock (fMW) goes low. The loaded bits are then output serially at the channel clock (fCH) from the parallel/serial converter 9 to form a code sequence with the MSB at the top of the sequence. The code sequence output from the parallel/serial converter 9 is fed to the NRZI modulator 10 where the polarity of the signal is inverted each time a "1" is input, the resulting signal being shown in Fig. 28(k). Here, with +1 as a high level and -1 as a low level, the CDS can be calculated as +1, which indicates that the DSV of the code sequence is in the positive dispersing direction.

With the above operation, the 12-bit dataword is data-converted to the 15-bit codeword in accordance with the DSV control signal, but it is further necessary to check the end level of the NRZI-modulated codeword, as previously de-

This Sheet Has Been Replaced

REPLACEMENT SHEET
06 JUL 1996

scribed. This is accomplished by the following operation.

The Q signal from the encoder 7 and the MSB signal from the EXOR circuit B are input to the EXOR circuit C in the MSB controller 8. When the MSB is "0", the Q signal appears unchanged at the output of the EXOR circuit C. On the other hand, when the MSB is "1", the number of inversions that occur in the NRZI modulation increases by one as the number of 1s in the codeword increases by one, and therefore, the Q signal is inverted for output. During the NRZI modulation, the polarity is inverted between positive and negative in accordance with the level of the connected signal. Therefore, the output of the EXOR circuit C is input to the EXOR circuit D along with the Q' signal indicating the word end level of the previous NRZI-modulated codeword, and when the Q' signal is "0" (indicating the word end level after NRZI modulation is low), the output signal of the EXOR circuit C appears unchanged at the output of the EXOR circuit D. On the other hand, when the Q' signal is "1" (indicating the word end level after NRZI modulation is high), the output of the EXOR circuit C is inverted through the EXOR circuit D. The output of the EXOR circuit D is supplied to the one-word delay as a signal indicating the end level of the NRZI-modulated codeword for the immediately following data conversion.

To describe the above operation as applied to the

This Sheet Has Been Replaced

REPLACEMENT SHEET
06 JUL 1996

present embodiment, when the second dataword "081" is input to the encoder 7, the Q signal output from the encoder 7 is "1", and the MSB output from the EXOR circuit B is also "1", as can be seen from Fig. 28, so that the output of the EXOR circuit D is at a low level ("0"). At this time, the signal Q' that indicates the end level of the previous NRZI-modulated codeword is at a low level ("0"), and therefore, the EXOR circuit D outputs a signal "0" indicating that the end level of the NRZI-modulated codeword is low, the signal "0" being input at the clock (fMW) to the one-word delay through which the signal is delayed by one encoding cycle. By repeating the above operation for every m/n data conversion with one word delay at each time, the end level of each codeword can be checked correctly for continuous sequences of codewords.

As described above, the data that has been word-converted by the selector 6 from 8-bit first datawords to 12 bit second datawords is converted by the encoder 7 to a 16-bit codeword, which is further converted by the MSB controller 8 to a 15-bit codeword, capable of determining the dispersing direction of the DSV as desired by the DSV control signal (i), by converting the two bits on the MSB side of the 16-bit codeword to a one-bit signal that determines the polarity of the CDS. Likewise, subsequent second datawords "93A", "41D", and "F2E" are respectively input to the

This Sheet Has Been Replaced

REPLACEMENT SHEET
06 JUL 1996

encoder 7 and converted to the signal shown in Fig. 28(j), with their CDSs being controlled in accordance with the DSV control signal (i). As a result, the DSV value at the codeword end obtained at the output of the NRZI modulator 10 has a variation width p - p2 over four data conversion cycles as shown in Fig. 28(k), the resulting signal thus being made to synchronize with the DSV control signal.

The power spectrum of the digital signal is dependent on the state transition probability, and by keeping the DSV variation cycle at a constant value, the state transition occurring at the DSV variation cycle becomes high, thus making it possible to obtain a spectrum having high power at frequencies corresponding to the DSV variation cycle. In the present embodiment, the cycle of the DSV control signal is selected to be equal to four m/n data conversion cycles. However, if the signal cycle is set equal to about 10 data conversion cycles, it will be possible to obtain a relatively low frequency signal corresponding to the DSV variation cycle synchronized with the digital data, and such a low frequency signal can be used as a tracking pilot signal that will become necessary when the track width is reduced. Fig. 29 is a diagram illustrating the power spectrum obtained when first datawords constructed from 8-bit M-sequence random signals expressed as $X^{23} + X^5 + 1$ are input in a circuit constructed in accordance with the first

This Sheet Has Been Replaced

REPLACEMENT SHEET
06 JUL 1996

embodiment but with the cycle of the DSV control signal set equal to ten m/n data conversion cycles. As can be seen from Fig. 29, the resulting spectrum has no DC content (DC-free) and, at the same time, exhibits high power only at frequencies corresponding to the cycle of the DSV control signal.

We will now describe a digital magnetic recording/reproducing apparatus that can be constructed into a system optimized for the above-described data conversion method.

Digital magnetic recording/reproducing apparatus such as DAT, digital VTR, etc. have the characteristic of being insusceptible to system variation in the sense that degradation in the signal-to-noise ratio does not lead to degradation in the audio and video reproduction performance as long as 1s and 0s can be distinguished. On the other hand, there is some danger with such digital apparatus that only a single bit error in a large volume of information may entirely change the contents of the information. Therefore, in digital magnetic recording/reproducing apparatus, it is essential to employ error-correcting codes for correction of errors caused on the transmission channel. Usually, error-correcting codewords are recorded in error-correcting code blocks separated from one another by a synchronizing signal as shown in Fig. 30. In Fig. 30, the numeral 21 is the

This Sheet Has Been Replaced

REPLACEMENT SHEET
06 JUL 1996

synchronizing signal for separating one error-correcting code block from another, 22 is an ID signal for the block identified by the track number or the synchronizing signal, 23 is a parity-check codeword for checking whether the ID signal is correctly reproduced, 24 is an audio/video sector, and 25 is an error-correcting code. Rotary head type digital magnetic recording/reproducing apparatus usually have about 100 such blocks per track, each block being separated by the synchronizing signal.

The following description deals with a method of setting the amount of information for each block.

The synchronizing signal 21 serves not only as a signal for separating each error-correcting code block but also as a signal for executing word synchronization for decoding the codeword, encoded and recorded as previously described, into the original dataword. The synchronizing signal thus has a very important role, and therefore, a unique signal that does not usually appear in the recorded signal sequences is often used as the synchronizing signal. This unique signal can only be obtained by reconverting the data-converted codeword. According to the data conversion method of the first embodiment in which 8-bit first datawords are first converted to 12-bit second datawords and then converted to 15-bit codewords, the synchronizing signal length corresponds to 1.5 bytes in the original first datawords. There-

This Sheet Has Been Replaced

REPLACEMENT SHEET
06 JUL 1996

fore, if the synchronizing signal sector is constructed from one-byte synchronizing signal data plus 0.5 byte obtained by dividing the first dataword, these components would become separated at the time of decoding, so that the 0.5 byte in the synchronizing signal sector would cause a fixed error and therefore, the one byte data immediately following the synchronizing signal data would also cause a fixed error. This problem may be solved by inserting a dummy dataword of one byte immediately following the first dataword (which may be formed from a fixed pattern) used for the synchronizing signal.

However, it is not advantageous in terms of space utilization to add a dummy dataword in a limited package. Therefore, in the recording/reproducing apparatus employing the data conversion method of the first embodiment, the first dataword used for the synchronizing signal is constructed from a fixed pattern of one byte, and the immediately following first dataword is constructed from a fixed pattern of four bits on the MSB side and data (e.g., a cue signal, track address, etc.) of four or less bits on the LSB side. Ordinary 8-bit datawords are mapped starting with the first dataword of the third byte. The pattern of the synchronizing signal sector may be set in any pattern suitable for the reconversion performed after ordinary data conversion.

This Sheet Has Been Replaced

REPLACEMENT SHEET
06 JUL 1996

We will now describe a method of setting the number of first datawords for each block separated by the synchronizing signal. According to the data conversion method of the first embodiment, r-bit first datawords are first word-converted to m-bit second datawords and then data-converted to n-bit codewords. This requires word synchronization for every x bits, where x is the least common multiple of r and m. For example, in the present embodiment, r = 8 and m = 12, and hence the least common multiple is 24 bits, so that the first codewords are word-synchronized for every three bytes. Since word synchronization is performed for every three bytes in each block, as described above, if the number of first datawords in the block is not an integral multiple of 3, the first dataword remaining after dividing the number by 3 will cause a fixed error. Therefore, in the recording/reproducing apparatus employing the data conversion method of the first embodiment, the number of first datawords per block is selected to be equal to an integral multiple of x/r.

The following describes a method of converting the reproduced 15-bit codeword back to the original 12-bit second dataword in the recording/reproducing apparatus employing the above-described data conversion method.

Fig. 32 is a diagram illustrating an example of a circuit configuration for decoding the reproduced 15-bit

This Sheet Has Been Replaced

REPLACEMENT SHEET
06 JUL 1996

code-word into the original 12-bit second dataword (m), employed in the recording/reproducing apparatus using the data conversion method of the first embodiment. In Fig. 32, the reference numeral 11 is an NRZI demodulator for NRZI-demodulating the reproduction signal transmitted by a reproduction channel clock; 12 is a serial/parallel converter for converting the NRZI-demodulated serial signal, fed from the NRZI demodulator 11, to a 15-bit parallel signal by using a reproduction word clock which is word-synchronized by a synchronizing signal appended to the top of each block; 13 is a first decoder for accepting at its input the 10 bits n1 on the MSB side of the 15-bit codeword (n) output from the serial/parallel converter 12 and for decoding the n1 into a dataword that forms the eight bits on the MSB side of the second dataword; and 14 is a second decoder for accepting at its input the five bits n2 on the LSB side of the 15-bit codeword (n) output from the serial/parallel converter 12 and for decoding the n2 into a dataword that forms the four bits on the LSB side of the second dataword. The numeral 15 designates a third decoder for decoding the 15-bit codeword, output from the serial/parallel converter 12, into 12-bit decoded data. The third decoder 15 is constructed to perform one-to-one decoding when the five bits on the LSB side is of a prescribed type.

Furthermore, the reference numeral 16 indicates an LSB

This Sheet Has Been Replaced

REPLACEMENT SHEET
06 JUL 1996

discriminating circuit which accepts at its input the five bits on the LSB side of the 15-bit codeword output from the serial/parallel converter 12, and which discriminates the type of the codeword and outputs a control signal (o) designating the classification type; and 17 refers to a selector which selects either the 12-bit dataword having decoded data from the first decoder 13 and the second decoder 14 or the 12-bit dataword from the third decoder 15 by using the control signal supplied from the LSB discriminating circuit 17 as a select SW, and which generates the second dataword (m) after decoding.

The operation of this embodiment will now be described. The reproduction signal is NRZI-demodulated by the NRZI demodulator 11 and fed to the serial/parallel converter 12 through which the demodulated serial signal is converted to a 15-bit codeword (n). Of the 15 bits in the codeword (n), the 10 bits n1 on the MSB side are entered to the first demodulator 13, and the five bits n2 on the LSB side are fed to the second demodulator 14 as well as to the LSB discriminating circuit 16. On the other hand, all the 15 bits of the codeword (n) are loaded directly into the third demodulator 15.

We will now describe in detail the operation of decoders for decoding the 15-bit codeword back into the 12-bit second dataword. From Figs. 8 to 10, the five-bit codeword

This Sheet Has Been Replaced

REPLACEMENT SHEET
06 JUL 1996

n2 on the LSB side of the 15-bit codeword can be classified in relation to the demodulated 4-bit dataword m2, as shown in Fig. 33. The codewords classified as the first LSB code group in Fig. 33 correspond to the LSB codewords n2 in the first and second coding groups in Figs. 8 and 9 as well as in the first n1 group for m1 = "BB" to "E7" in the third coding group in Fig. 10, and each n1 in the n1 group is related to one decoding data m1 within the limits of the first LSB code group. Further, the codewords classified as the second LSB code group correspond to the LSB codewords classified as the second n1 group in the third coding group as well as the fourth n1 group for m1 = "EE" to "FF in the same coding group. The codewords classified as the third LSB code group correspond to the LSB codewords classified as the third n1 group, while the codewords classified as the fourth LSB code group correspond to the LSB codewords in the n1 group for m1 = "E8" to "FF". Note, however, that the n1 group in the second to the fourth LSB code groups overlaps with the n1 group in the first LSB code group, and that, in some cases, a plurality of m2 are mapped to one LSB codeword n2.

Now, the first decoder 13 decodes the 10 bits on the MSB side into an eight-bit dataword. In this case, the top bit in the 10-bit codeword is a control bit for controlling the DSV during demodulation and may therefore be disregarded

This Sheet Has Been Replaced

REPLACEMENT SHEET
06 JUL 1996

at the time of decoding. Thus, the remaining nine bits are decoded. The decoding is performed on the codewords in the first and second coding groups in Figs. 8 and 9 as well as in the first n1 group for m1 = "BB" to "E7" in the third coding group in Fig. 10, and the decoded 8-bit dataword is applied to V11 - V4 on the selector 17 as data representing the eight bits on the MSB side of the second dataword. On the other hand, the second decoder 14 decodes the five bits on the LSB side into a four-bit dataword. In this case, the decoding is performed on the codeword n2 in the first LSB code group. The decoded 4-bit dataword is applied to V3 - V0 on the selector 17 as data representing the four bits on the LSB side of the second dataword. The third decoder 15 decodes the input 15-bit codeword into a 12-bit dataword. In this case also, the top bit on the MSB side is excluded, as in the case of the first decoder 13, and the remaining 14 bits are decoded. The decoding is performed only when the five-bit LSB codeword falls in one of the second to the fourth LSB code groups, and the decoded 12-bit dataword is applied to W11 - W0 on the selector 17.

The selector 17 is switched to select either the dataword supplied from the first decoder 13 and second decoder 14 or the dataword supplied from the third decoder 15, and outputs the selected dataword as the decoded second dataword; the switching of the selector 17 is controlled by

This Sheet Has Been Replaced

REPLACEMENT SHEET
06 JUL 1996

a control signal supplied from the LSB discriminating circuit 16. Of the 15 bits in the codeword, the five bits n2 on the LSB side are input to the LSB discriminating circuit 16 to discriminate the type of the LSB codeword. For example, if the LSB codeword n2 is a codeword discriminated as belonging to one of the second to the fourth LSB code groups, the LSB discriminating circuit 16 outputs a control signal (o) indicating the discriminated type and applies it to the select SW on the selector 17. When no control signal (o) is received, the selector 17 selects the eight-bit MSB dataword V11 - V4 supplied from the first decoder 13 and the four-bit LSB dataword V3 - V0 supplied from the second decoder 14 and outputs the resulting 12-bit dataword V. On the other hand, when the control signal (o) is received, the selector 17 is switched to select the 12-bit dataword W decoded by the third decoder 15.

Thus, the selector 17 outputs the 12-bit dataword m obtained by reconverting the codeword that was encoded in accordance with the tables shown in Figs. 8 to 10. As described, the 15-bit codeword is decoded on a one-to-one basis to the 12-bit dataword only when the five-bit LSB codeword n2 is discriminated as belonging to one of the second to the fourth LSB code groups in Fig. 33; otherwise, the 15-bit codeword is decoded by dividing it into 10 bits on the MSB side and five bits on the LSB side. This con-

This Sheet Has Been Replaced

REPLACEMENT SHEET
06 JUL 1996

struction serves to reduce the possibility of the error propagation that may occur between decoded first datawords due to a single bit detection error in the 15-bit codeword.

In the above decoding method, the discrimination of the five-bit LSB codeword is determined by which of the two major groups, the first LSB code group or the second to fourth LSB code group, the LSB codeword belongs to. However, in an alternative method, the types of codeword may be classified into three major groups, for example, the first LSB code group, the second LSB code group, and the third/fourth LSB code group, and four decoders, i.e. the first to the fourth decoders, may be provided, the outputs of these decoders being selected accordingly by using a control signal from the LSB discriminating circuit. Such configuration may somewhat increase the circuit complexity compared to that of the above embodiment, but will serve to further reduce the possibility of error propagation between decoded first datawords.

Thus, according to the first embodiment, eight-bit first datawords are first word-converted to 12-bit second datawords, and then, the 12-bit second datawords are converted to 15-bit codewords, each having bits of CDS = +1 or -1, by executing word-synchronization for every two second datawords, which is the least common multiple of the first and second datawords. In the conversion process, the first

This Sheet Has Been Replaced

REPLACEMENT SHEET
06 JUL 1996

byte of the first dataword is mapped to the eight bits on the MSB side of the first of the two second datawords, and the four bits on the MSB side of the second byte of the first dataword are mapped to the four bits on the LSB side of the first of the two second datawords. For the second of the two second dataword, the third byte of the first dataword is mapped to the eight bits on the MSB side, while the four bits on the LSB side of the second byte of the first dataword are mapped to the four bits on the LSB side of the second of the two second datawords, thus accomplishing the 8/12 word-conversion. Thereafter, each 12-bit dataword is converted to a 15-bit codeword (12/15 data conversion). This encoding method permits the 8/10 encoding of non-divided first datawords and the 4/5 encoding of divided first datawords, which serves to reduce the possibility of the error propagation that may occur, due to a single bit error in the codeword, between first datawords during reverse conversion at the time of decoding. Furthermore, when this data conversion method is applied to a recording/reproducing apparatus, it is possible to construct a system capable of efficient recording of data without requiring redundant bits, the system being constructed such that the number of first datawords for each block separated by a synchronizing signal is set at a multiple of r/x and that the first dataword as the synchronizing signal at the beginning of the

This Sheet Has Been Replaced

REPLACEMENT SHEET
06 JUL 1996

block is formed from a fixed pattern and the immediately following first dataword is formed from a fixed pattern of four bits on the MSB side and data of four or less bits (e.g., cue signal, track address, etc.) on the LSB side.

On the other hand, when decoding the 15-bit codeword into the 12-bit second dataword, the 15-bit codeword is divided into 10 bits on the MSB side and five bits on the LSB side, and the 10 bits are decoded into eight bits by the first decoder and the five bits are decoded into four bits by the second decoder, while the 15 bits are decoded into 12 bits by the third decoder. The discriminating circuit discriminates the type of the five bits on the LSB side of the 15-bit codeword and outputs a control signal indicating the discriminated type, on the basis of which the decoded data from the decoders are selected to reconstruct the second dataword. Thus, the codeword is decoded by reverse conversion of 10/8 and 5/4, except when the LSB codeword falls under specific conditions. This has the effect of reducing the possibility of the error propagation that may occur between decoded first datawords due to a detection error in the codeword.

(Embodiment 2)

A second embodiment of the invention will now be described below. Suppose a code of dataword length = 12 and codeword length = 14 with one bit added to form a code with

This Sheet Has Been Replaced

REPLACEMENT SHEET
06 JUL 1996

Tmax/Tmin = 5. Here, let d = 0 and k = 4. The NRZI(F) rule is used to construct the code. To satisfy k = 4 in each codeword, the number of successive 0s in the codeword is limited to 4, and since one bit is inserted between codewords, the number of successive 0s is limited to 2 on the MSB side and 1 on the LSB side.

To form a DC-free code, 4096 pairs of codewords, each pair having codewords of different CDS polarities, should be provided. There are 2481 codewords with CDS = 0, 2169 codewords with CDS = +2, and 1888 codewords with CDS = -2, which satisfy the above conditions. Hence, 2481 codewords with CDS = 0 and 1615 pairs of codewords with CDS = ± 2, which differ only in MSB, are used to suppress the dispersion of DSV to achieve DC-free modulation. Code conversion tables thus constructed are shown in Figs. 34 to 49. The data given in Figs. 34 to 49 represent binary digital signals in hexadecimal notation. For every 12-bit input data (dataword), there are output a total of 16 bits, i.e. a 14-bit codeword, one-bit data (hereinafter represented by Q) indicating the number of inversions performed on the NRZI-modulated codeword, and the CDS (a zero or nonzero bit) of the codeword.

Fig. 50 is a diagram illustrating an example of a circuit configuration implementing the second embodiment. In Fig. 50, the reference numeral 33 is an encoder for

This Sheet Has Been Replaced

REPLACEMENT SHEET
06 JUL 1996

converting 12-bit digital data (dataword) to 16-bit digital data shown in Figs. 34 to 49; 34 and 36 are NOT gates; 35, 37, 38, and 39 are EXOR gates; 40, 42, and 48 are flip-flops; 41 and 46 are selectors; 43 is a parallel/serial converter for converting 14-bit or 15-bit parallel data to a serial data sequence; 44 is a counter; 45 is a four-input NAND gate; and 47 is an NRZI modulator for processing the codeword, converted to serial data, so that the signal polarity is inverted each time a 1 is input.

Fig. 51 shows a code select table used to determine a code to be selected in accordance with the current and the previous DSV control signal values, the CDS value of the codeword just selected, and the previous Q' signal.

Fig. 52 is a diagram illustrating code conversion and DSV value variation according to the second embodiment. In Fig. 52, (a) is a pilot signal (write at "1"), (b) is a DSV control signal (positive direction at "1"), (c) is input data (12 bits), (d) is a code select signal Q', (e) is a selected codeword, (f) is a signal waveform to be recorded, and (g) is a DSV value at the end of each codeword.

Fig. 53 is a diagram illustrating the recording format of a magnetic recording/reproducing apparatus according to the second embodiment. In Fig. 53, subcode signals, etc. are recorded in the subdata areas (SUB1, SUB2), and video and audio signals are recorded in the main

This Sheet Has Been Replaced

REPLACEMENT SHEET
06 JUL 1996

data area (MAIN). Pilot signals are recorded in the subdata areas (SUB1, SUB2).

The circuit operation of the second embodiment will now be described below with reference to Fig. 50.

First, when the pilot area signal output from the flip-flop 48 is "0", i.e. when data other than that for the subdata area is to be encoded for recording, 12-bit data is input to the encoder 33 where the 12-bit data is converted to a 14-bit codeword (parallel) by using the code select signal Q' supplied from the flip-flop 42. The resulting 14-bit codeword is supplied to the parallel/serial converter 43. The encoder 33 also outputs a Q signal which is supplied to the selector 41. On the other hand, the selector 46 selects "10" by the input pilot area signal "0", which sets the load value of the counter 14 to "0010", and the counter 14 outputs a load CLK of one CLK width to the parallel/serial converter 43 for every 14 CH-CLKs. The parallel/serial converter 43 converts the input 14-bit parallel codeword to serial data which is fed to the NRZI modulator 47. At this time, the output of the NOT gate 34, i.e. the LSB, is input to the parallel/serial converter 43, but since a load CLK is input for every 14 CH-CLKs, the LSB is not output from the parallel/serial converter 43. The serial codeword input to the NRZI modulator 47 is NRZI-modulated for output. The Q signal output from the encoder

This Sheet Has Been Replaced

REPLACEMENT SHEET
06 JUL 1996

33 is input to the selector 41 which selects the Q signal by the pilot area signal and supplies it to the flip-flop 42.

On the other hand, when the pilot area signal output from the flip-flop 48 is "1", i.e. when data for the subdata area is to be encoded for recording, 12-bit data is input to the encoder 33 which converts the 12-bit data to a 14-bit codeword (parallel) by using the code select signal Q' supplied from the flip-flop 42. The resulting 14-bit codeword is supplied to the parallel/serial converter 43. The encoder 33 also supplies a Q signal to the selector 41 and the NOT gate 34, and a CDS signal to the EXOR gate 35. The selector 46 selects "01" by the input pilot area signal "1", which sets the load value of the counter 14 to "0001", and the counter 14 supplies a load CLK of one CLK width to the parallel/serial converter 43 for every 15 CH-CLKs. The parallel/serial converter 43 converts the input 14-bit parallel codeword and LSB to serial data which is supplied to the NRZI modulator 47. The serial codeword input to the NRZI modulator 47 is NRZI-modulated for output. The DSV control signal is input to the flip-flop 40 and the EXOR gate 39, the output of the flip-flop 40 being coupled to the other input of the EXOR gate 39. The output of the EXOR gate 39, i.e. the exclusive OR sum of the current DSV control signal and the previous DSV control signal, is supplied to one input of the EXOR gate 38. The EXOR gate 35

This Sheet Has Been Replaced

REPLACEMENT SHEET
06 JUL 1996

EXORs the CDS signal output from the encoder 33 with the Q' signal. The output of the EXOR gate 35 is inverted through the NOT gate 36 and applied to one input of the EXOR gate 37. The EXOR gate 37 EXORs the output of the NOT gate 36 with the Q' signal and supplies the result to the other input of the EXOR gate 38. The EXOR gate 38 EXORs the outputs of the EXOR gates 37 and 39 and supplies the result to the other input of the selector 41. In this manner, the signal selected in accordance with the codeword select table is output as a Q" signal. The Q" signal is selected by the pilot area signal and is fed to the flip-flop 42 to form a code select signal Q' for the next coding.

Suppose, for example, that the pilot area signal is "0", the input data is "3FF", the previous polarity is "1", and the Q' signal is "0". In this case, the 14-bit codeword output from the encoder 33 is "11001000010111"; the CDS is -2 and the DSV is also -2. As a result, the Q signal "0" is output. Next, when data "200" is input, since the Q' signal, i.e. the previous Q signal, is "0", the selected codeword is "01110011011010"; the CDS is +2 and the DSV is 0. Next, when the pilot area signal and the DSV control signal both go to a "1" and data "E11" is input, since the Q' signal is "1", the output codeword is "11010111010101", and a Q signal of "0" and a CDS signal of "0" are output; CDS and DSV are both 0. When data "715" is input, since the Q'

This Sheet Has Been Replaced

REPLACEMENT SHEET
06 JUL 1996

signal is "1", the selected codeword is "00101111101001" and the LSB is "0"; CDS and DSV are both +1. Next, when data "BFC" is input, since the Q' signal is "1", the selected codeword is "10100111101110" and the LSB is "1"; CDS is +1 and DSV is +2. The above operation is repeated for the subdata areas where the pilot area signal is "1", thereby achieving a modulation method in which the DSV varies at the cycle of the DSV control signal.

Using the above-described modulation method, a tracking servo pilot signal is recorded at two places within one track. Therefore, in the subdata areas (SUB1, SUB2), one LSB bit is added to the 14-bit codeword to form a 15-bit codeword, as described previously, and modulation is performed on the codeword including the pilot signal, while for other areas, the 14-bit codeword is directly modulated.

According to the format shown in Fig. 53, two subdata areas are provided within one track, and the pilot signals are recorded in these areas. Alternatively, three or more pilot signal recording areas may be provided within one track in order to enhance the tracking accuracy with a narrower track. It will also be appreciated that the pilot signal may be recorded in any portion within the subdata areas.

As described, according to the second embodiment, 12-bit datawords are each converted to a 14-bit codeword which,

REPLACEMENT SHEET
06 JUL 1996

after NRZI modulation, has a succession of the same level, more than one bit long and five bits at maximum, and provides CDS = 0, +2 or -2, the CDS value being controlled to suppress the dispersion of DSV, thus accomplishing a DC-free modulation method. Furthermore, in areas where pilot signals are recorded, one bit is added to the 14-bit codeword to form codewords of CDS = ± 1, and the modulation is performed so that the DSV varies in synchronism with the DSV control signal to produce a tracking control pilot signal. This eliminates the need for ATF areas, the areas where only tracking control signals are recorded. Moreover, since one bit is added to the codeword and the pilot signal is recorded in a restricted area, it is not necessary to substantially raise the recording rate, and therefore, high density recording is achieved. Furthermore, since the modulation method is basically the same for both the pilot signal areas and other areas, the configuration does not involve any appreciable increase in the circuit complexity.

As this invention may be embodied in several forms without departing from the spirit of essential characteristics thereof, the present embodiment is therefore illustrative and not restrictive, since the scope of the invention is defined by the appended claims rather than by the description preceding them, and all changes that fall within metes and bounds of the claims, or equivalence of

This Sheet Has Been Replaced

such metes and bounds thereof are therefore intended to be embraced by the claims.

REPLACEMENT SHEET
06 JUL 1996

This Sheet Has Been Replaced

REPLACEMENT SHEET
06 JUL 1996
51

THIS SHEET HAS BEEN REPLACED

CLAIMS

1. A data conversion method for word-converting an r-bit first dataword to an m-bit second dataword (r < m) and converting the word-converted m-bit second dataword to an n-bit codeword (m < n), comprising the steps of:

dividing a sequence of first datawords into groups of x bits where x is the least common multiple of r and m;

dividing into x/m an arbitrary first dataword selected from a group which consists of x/r first datawords; and

forming the m-bit second dataword by appending r/(x/m)-bit data, obtained by dividing the first dataword into x/m, to the LSB or MSB side of one or other of the non-divided first datawords.

2. A recording/reproducing apparatus employing the data conversion method of claim 1, comprising:

means for formatting blocks so that each block separated by a synchronizing signal contains the first datawords of the number equal to an integral multiple of x/r.

3. A recording/reproducing apparatus employing the data conversion method of claim 1, comprising:

means for mapping r bits and r/(x/m) bits to a second dataword corresponding to a synchronizing signal; and

means for mapping the remaining bits of the divided

This Sheet Has Been Replaced

THIS SHEET HAS BEEN REPLACED

first dataword to a signal, other than the synchronizing signal, that can complete as data with the remaining bits alone.

4. A recording/reproducing apparatus employing the data conversion method of claim 1, comprising:

first decoding means for decoding n1 bits in the reproduced n-bit codeword into r bits, the reproduced n-bit codeword being divided into n1 bits and n2 bits for reverse conversion into the m-bit second dataword;

second decoding means for decoding the n2 bits into r/(x/m) bits;

third decoding means for decoding the n bits into the m bits;

identifying means for identifying the type of bits at prescribed positions in the n-bit codeword and for outputting an identification signal designating the identified type; and

means for selecting decoded data from the first, second, or third decoding means on the basis of the identification signal supplied from the identifying means and for outputting the decoded second dataword.

5. A data converting apparatus for word-converting an r-bit first dataword to an m-bit second dataword (r < m) and converting the word-converted m-bit second dataword to an n-

REPLACEMENT SHEET
06 JUL 1996

This Sheet Has Been Replaced

* C L M S *

THIS SHEET HAS BEEN REPLACED

bit codeword (m < n), comprising:

means for dividing a sequence of first datawords into groups of x bits where x is the least common multiple of r and m;

means for dividing into x/m an arbitrary first dataword selected from a group which consists of x/r first datawords; and

means for forming the m-bit dataword by appending r/(x/m)-bit data, obtained by dividing the first dataword into x/m, to the LSB or MSB side of one or other of the non-divided first datawords.

6. A data conversion method for converting an m-bit dataword to a codeword consisting of a greater number of bits than m, comprising the steps of:

a first data conversion process wherein the m-bit dataword is converted to an n-bit codeword having a finite digital sum variation (DSV); and

a second data conversion process wherein the DSV is controlled at a desired value by appending one bit to the n-bit codeword obtained by the first data conversion process.

7. A data conversion method for dividing digital data first into 12-bit datawords and then converting the 12-bit datawords to 14-bit codewords,

wherein the number of successive 0s between a 1 and a 1 in each of the codewords is limited to 4 within the codeword

REPLACEMENT SHEET
06 JUL 1996

This Sheet Has Been Replaced

* C L M S *

THIS SHEET HAS BEEN REPLACED

and to 3 between codewords, and codewords having a codeword digital sum (CDS) of 0 are directly related to the 12-bit data, while for codewords having a CDS of +2 or -2, two codewords that differ only in MSB are paired and related to the 12-bit data, the two codewords being switched selectively by using polarity signals of the respective codewords.

8. A data conversion method for dividing digital data first into 12-bit datawords and then converting the 12-bit datawords to 15-bit codewords,

wherein one bit is appended to a 14-bit codeword converted in accordance with the data conversion method of claim 7, to form a pair of codewords, one having a CDS of +1 and the other having a CDS of -1, with the number of successive 0s between a 1 and a 1 in the code sequence being limited to 4, and one or other of the pair of codewords is selected in accordance with a DSV control signal with the DSV being made to vary in synchronism with the DSV control signal.

9. A magnetic recording/reproducing apparatus for recording multiple kinds of data in partitioned areas, wherein

when converting digital data to codewords for recording, the data conversion method of claim 8 is used for

REPLACEMENT SHEET
06 JUL 1996

This Sheet Has Been Replaced

* C L M S *

THIS SHEET HAS BEEN REPLACED

recording one or more areas within one track and the data conversion method of claim 7 is used for recording the other areas in the same track.

10. A data converting apparatus for converting an m-bit dataword to a codeword consisting of a greater number of bits than m, comprising:

means for converting the m-bit data to an n-bit codeword having a finite digital sum variation (DSV) as a first data conversion process; and

means for controlling the DSV at a desired value by appending one bit to the n-bit codeword obtained by the first data conversion process as a second data conversion process.

11. A data conversion method for word-converting first datawords, the method comprising, for each group of n first datawords, dividing x of the datawords by (n-x) and adding each divided part to a respective one of the other datawords in the group to form respective second datawords, and converting the second datawords to codewords of greater length.

This Sheet Has Been Replaced

* C L M S *

REPLACEMENT SHEET

06 JUL 1996

THIS SHEET HAS BEEN REPLACED

Data Conversion Method

Recording / Reproducing Apparatus Using The Same

ABSTRACT OF THE DISCLOSURE

A data conversion method, wherein a sequence of first r-bit datawords is divided into groups of x bits where x is the least common multiple of r and m, an arbitrary first dataword selected from x/r groups of first datawords is divided into x/m, an m-bit second dataword is formed by appending r/(x/m)-bit data, obtained by dividing the first dataword into x/m, to the LSB or MSB side of one or other of the non-divided first datawords, and the word-converted m-bit second dataword is converted to an n-bit codeword ($m < n$).

FIGURE 27

This Sheet Has Been Replaced

REPLACEMENT SHEET

06 JUL 1996

Fig. 1
Prior Art

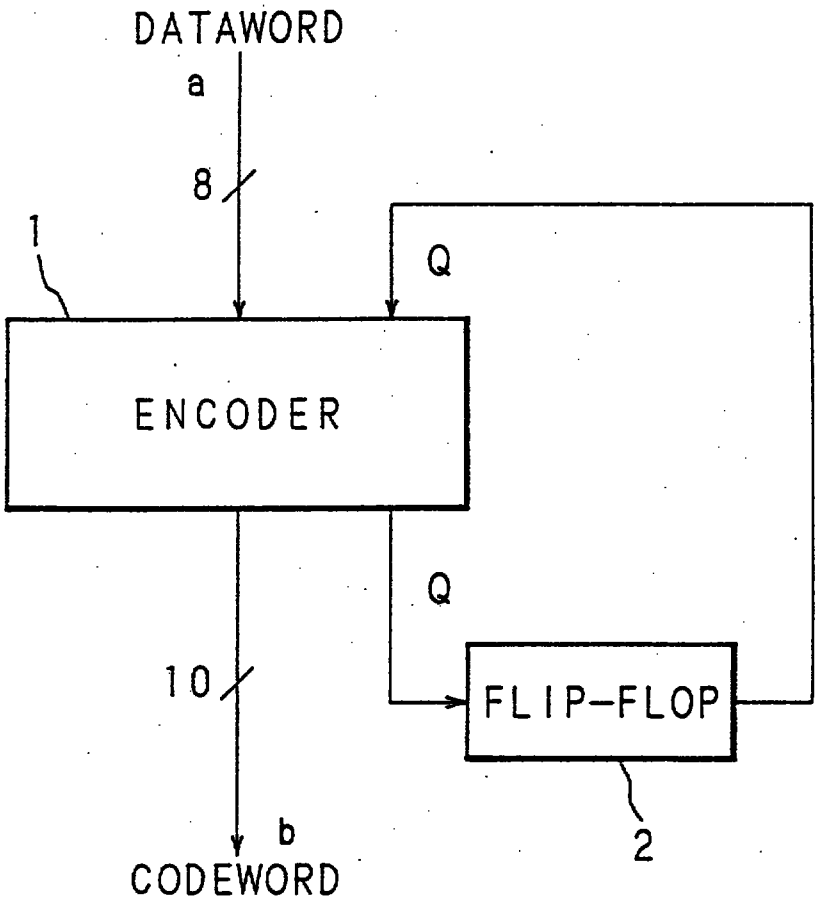

REPLACEMENT SHEET
06 JUL 1996

This Sheet Has Been Replaced

Fig. 2
Prior Art

		Q'=−1			Q'=1		
	DATAWORD (MSB-LSB)	CODEWORD (MSB-LSB)	DC	Q	CODEWORD (MSB-LSB)	DC	Q
00	00000000	0101010101	0	1	0101010101	0	−1
01	00000001	0101010111	0	−1	0101010111	0	1
02	00000010	0101011101	0	−1	0101011101	0	1
03	00000011	0101011111	0	1	0101011111	0	−1
04	00000100	0101001001	0	−1	0101001001	0	1
05	00000101	0101001011	0	1	0101001011	0	−1
06	00000110	0101001110	0	1	0101001110	0	−1
07	00000111	0101011010	0	1	0101011010	0	−1
08	00001000	0101110101	0	−1	0101110101	0	1
09	00001001	0101110111	0	1	0101110111	0	−1
0A	00001010	0101111101	0	1	0101111101	0	−1
0B	00001011	0101111111	0	−1	0101111111	0	1
0C	00001100	0101101001	0	1	0101101001	0	−1
0D	00001101	0101101011	0	−1	0101101011	0	1
0E	00001110	0101101110	0	−1	0101101110	0	1
0F	00001111	0101111010	0	−1	0101111010	0	1
.	.	.	.	.	.	.	.
.	.	.	.	.	.	.	.
.	.	.	.	.	.	.	.
.	.	.	.	.	.	.	.
.	.	.	.	.	.	.	.
.	.	.	.	.	.	.	.
.	.	.	.	.	.	.	.
.	.	.	.	.	.	.	.
F0	11110000	1101010101	0	−1	1101010101	0	1
F1	11110001	1101010111	0	1	1101010111	0	−1
F2	11110010	1101011101	0	1	1101011101	0	−1
F3	11110011	1101011111	0	−1	1101011111	0	1
F4	11110100	1101001001	0	1	1101001001	0	−1
F5	11110101	1101001011	0	−1	1101001011	0	1
F6	11110110	1101001110	0	−1	1101001110	0	1
F7	11110111	1101011010	0	−1	1101011010	0	1
F8	11111000	1111100101	2	−1	0111100101	−2	−1
F9	11111001	1111100111	2	1	0111100111	−2	1
FA	11111010	1111101101	2	1	0111101101	−2	1
FB	11111011	1111101111	2	−1	0111101111	−2	−1
FC	11111100	1111111001	2	1	0111111001	−2	1
FD	11111101	1111111011	2	−1	0111111011	−2	−1
FE	11111110	1111111110	2	−1	0111111110	−2	−1
FF	11111111	1111101010	2	−1	0111101010	−2	−1

REPLACEMENT SHEET
06 JUL 1996

This Sheet Has Been Replaced

Fig. 3
Prior Art

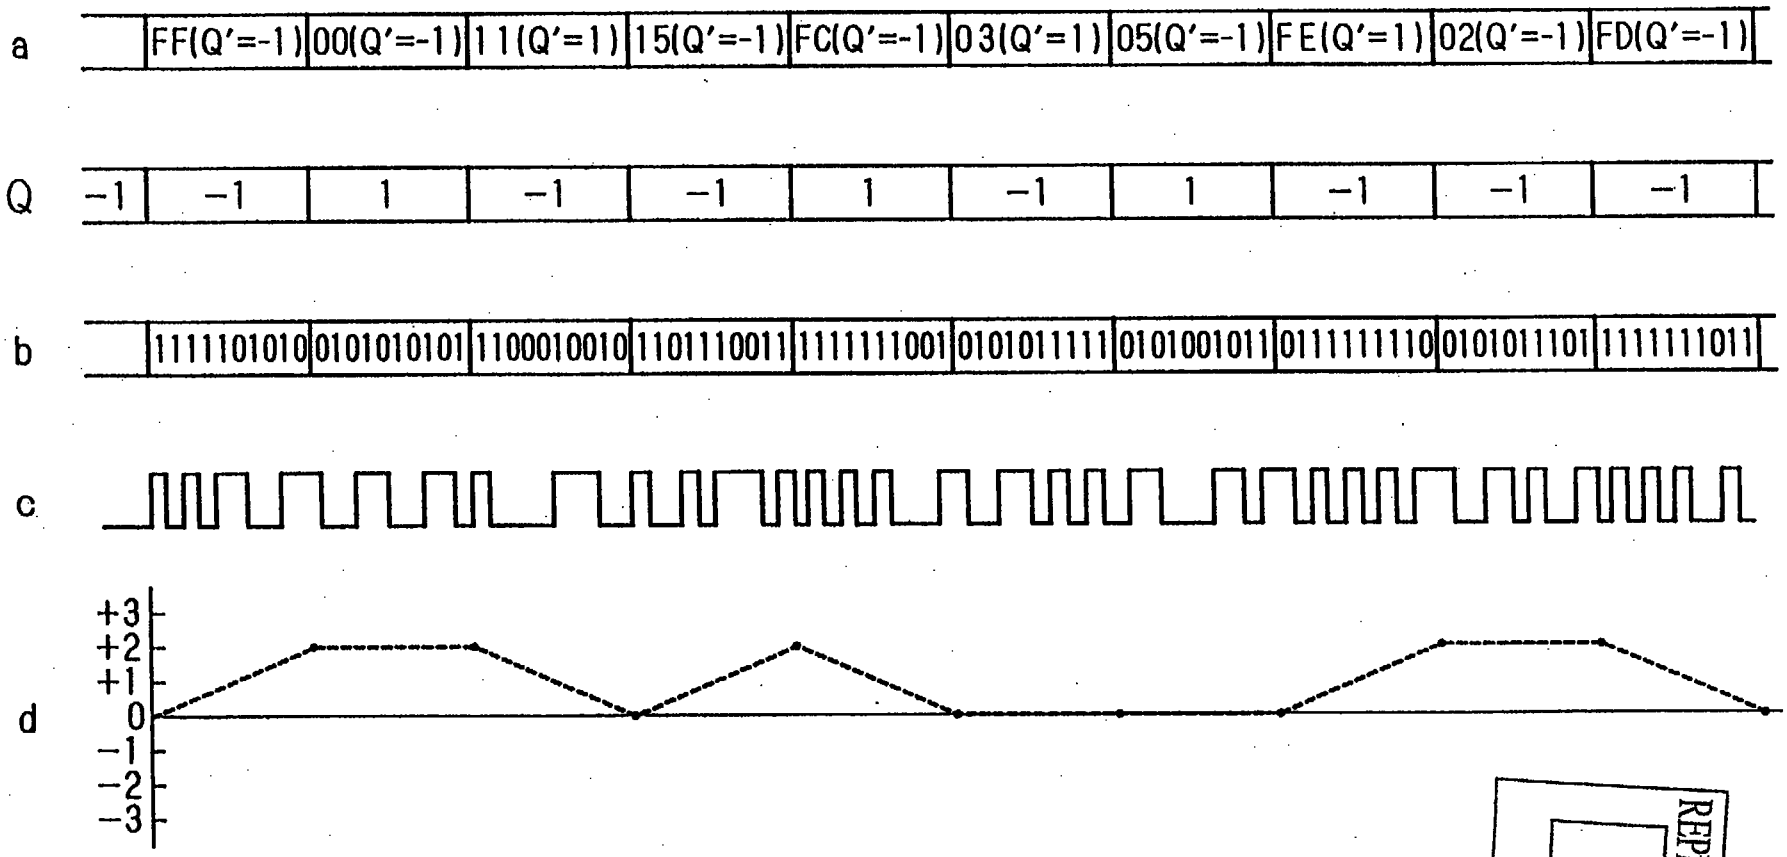

This Sheet Has Been Replaced

REPLACEMENT SHEET
06 JUL 1996

REPLACEMENT SHEET
06 JUL 1996

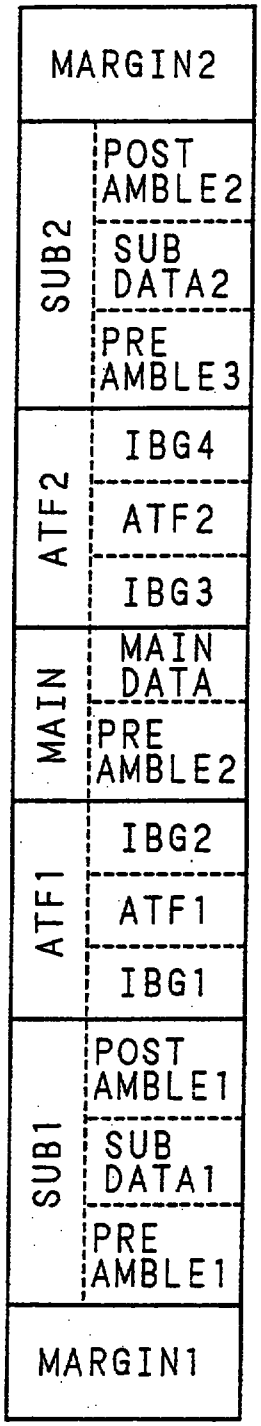

Fig. 4
Prior Art

This Sheet Has Been Replaced

REPLACEMENT SHEET
06 JUL 1996

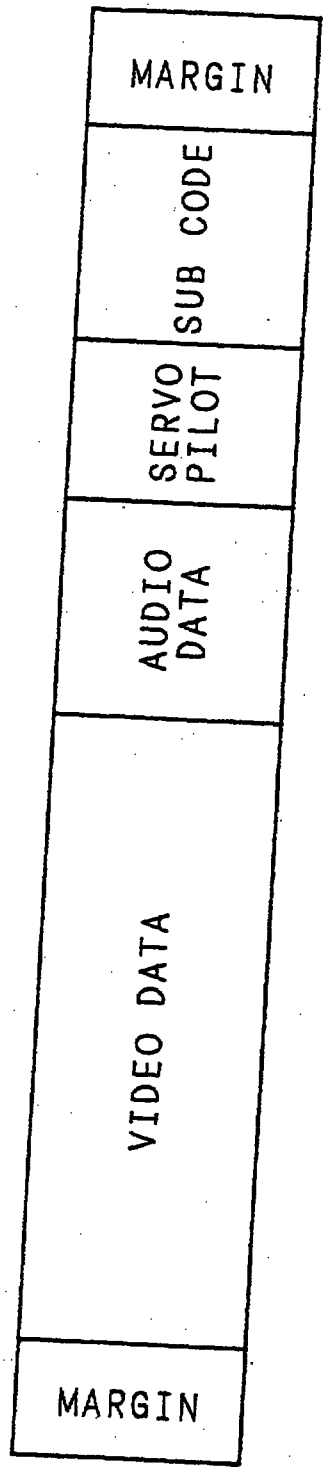

Fig. 5
Prior Art

This Sheet Has Been Replaced

REPLACEMENT SHEET
06 JUL 1996

Fig. 6

CDS	−1	+1	−3	+3	−5	+5
NUMBER OF CODEWORDS	2481	2169	1888	1231	909	410

This Sheet Has Been Replaced

REPLACEMENT SHEET
06 JUL 1996

Fig. 7

CONDITION OF n1	A CDS=0			B CDS=+2			C CDS=-2		D CDS=+4		E CDS=-4	
	A1	A2	A3	B1	B2	B3	C1	C2	D1	D2	E1	
NUMBER OF n1 CODEWORDS	102	14	4	51	17	3	116	4	18	2	68	
n2 CODEWORD MATCHING WITH n1	02			02	02							
	05	05		05	05	05						
	07	07		07	07	07						
	09	09	09				09					
	0A	0A	0A	0A	0A	0A						
	0B	0B	0B				0B					
	0D	0D	0D	0D	0D	0D						
	0E	0E	0E				0E					
	0F	0F	0F	0F	0F	0F						
	12	12	12				12	12				
	15	15	15				15	15				
	17	17	17				17	17				
	19	19	19	19	19	19						
	1A	1A	1A				1A	1A				
	1B	1B	1B	1B	1B	1B						
	1D	1D	1D				1D	1D				
	1E	1E	1E	1E	1E	1E						
	1F	1F	1F				1F	1F				
				01					01			
				03	03				03	03		
				06	06	06			06	06		
							11	11			11	
							13	13			13	
							16	16			16	

NOTE : SUBDIVISIONS OF A TO E GROUPS ARE EXECUTED FOR EACH n1 GROUP IN ACCORDANCE WITH "0" RUN-LENGTH AT LSB SIDE OF n1.

This Sheet Has Been Replaced

REPLACEMENT SHEET
06 JUL 1996

Fig. 8

	m1 DATAWORD	n1 GROUP	n2 CODEWORD m2 0 1 2 3 4 5 6 7 8 9 A B C D E F
1	00~73	A GROUP (A1,A2)	07 09 0A 0B 0D 0E 0F 12 15 17 19 1A 1B 1D 1E 1F

This Sheet Has Been Replaced

REPLACEMENT SHEET
06 JUL 1996

Fig. 9

	m1 DATAWORD	n1 GROUP	n2 CODEWORD m2 0 1 2 3 4 5 6 7 8 9 A B C D E F
2	74~BA	1st n1 GROUP C1	09 0B 0E 121517 1A 1D1E
		2nd n1 GROUP B1	07 0A 0D 0F 19 1B 1F

This Sheet Has Been Replaced

REPLACEMENT SHEET
06 JUL 1996

Fig. 10

	m1 DATAWORD	n1 GROUP	n2 CODEWORD m2 0 1 2 3 4 5 6 7 8 9 A B C D E F
3	BB~E7	1st n1 GROUP C1	09 0B 0E 121517 1A 1D1E
		2nd n1 GROUP B1	01 03 05 06
		3rd n1 GROUP E1	11 13 16
	E8~ED	1st n1 GROUP C1	11 13 16 111316 11 1316
		2nd n1 GROUP B1	01 03 05 06
		3rd n1 GROUP E1	11 13 16
	EE~FF	1st n1 GROUP C1	11 13 16 111316 11 1316
		2nd n1 GROUP D1	01 03 06
		3rd n1 GROUP E1,C2	11 13 16
		4th n1 GROUP B2,B3	05

This Sheet Has Been Replaced

/	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
00	88474849084AC84B884DC84E084F485220855485748590C85A085D485D085EC85F
01	48A78849C8AA08AB84B84AD08AEC8AF88B208B5888B74B8F88F2C8F489F2098F2
02	88E748E908EAC8EB88ED8EC8EE08EF88F2C8F489F2098F2C8F489F2098F2C8F4
03	49478949C94A094B84D094EC94F89528F489F2098F2C8F489F2098F2C8F489F2
04	89A74949A909AAC99AB899ADC99AE09AF489528F489F2098F2C8F489F2098F2
05	49E789E99EA09EB49ED09EEC9EF89528F489F2098F2C8F489F2098F2C8F489F2
06	8B27490B2ACB2B8B2DCB2E0B2F489528F489F2098F2C8F489F2098F2C8F489F2
07	4BB67B69CBB6A0B6B4BB6D0B6ECB6F8BB7209528F489F2098F2C8F489F2098F2
08	4BC78BC9CBCA0BCBCB4BCD0BCECBCF8BD2095528F489F2098F2C8F489F2098F2
09	8E27490E2ACE2B8E2DCE2E0E2F489528F489F2098F2C8F489F2098F2C8F489F2
0A	4E67890E2ACE6A0E6B4E6D0E6ECE6F8E6F489528F489F2098F2C8F489F2098F2
0B	4EC78EC9CECA0ECECB4ECD0ECECECF8ED2095528F489F2098F2C8F489F2098F2
0C	51279129D12A11216AD16B916DD16EE11CF489528F489F2098F2C8F489F2098F2
0D	91675169116AD16B916DD16EE11CF489528F489F2098F2C8F489F2098F2C8F489
0E	91C751C9111CAD11CB91CDD11CE11CF489528F489F2098F2C8F489F2098F2C8F4
0F	52479249D24A124B524D124ED24F489528F489F2098F2C8F489F2098F2C8F489F2

Fig. 11

REPLACEMENT SHEET
06 JUL 1996

This Sheet Has Been Replaced

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
0	92A75	52A91	12AAD	2AB92	ADD92	D2AE1	2AF52	2B752	D2B55	2B752	2B952	D2BA1	2BB52	D2BD1	2BED2	BDF52
1	52E79	92E9D	2EA11	2EB52	ED152	D12EE	D2EF9	2F752	12F55	92F75	52F91	2FA1D	2FB92	2FDD2	FE12F	F12FF
2	9347	9134A	D34A1	34B95	3DD53	E13EE	134F5	3B521	3B559	3B753	13BAD	3BA1D	3BB93	BDD3B	E13BF	13BFF
3	53A79	D3AA1	3AB53	AD152	AD156	D1556	F9552	1B755	3F559	3F753	13FAD	3FA15	3FB53	FD153	ED153	D53FF
4	3E791	3E9D5	EAD3E	B9552	B5561	55CB5	5CF95	5D215	D6555	5D755	D5A15	D5B57	D5D57	DD557	E1557	157FF
5	52791	52C95	6AD52	B9564	DD64E	1564F	5D215	2D653	7D215	7D559	D65A1	D65B5	D65D1	65ED6	5FE15	DF5FF
6	5679D	56C95	6AA15	6AB56	AD16A	EE16E	D6AF9	6B221	6BB56	6B956	D6BA1	D6BB9	D6BD1	6BE16	BF6FF	D6FFF
7	56A79	56496	4AD64	B9674	DD64E	D16EE	D6AF9	6B221	6BB56	6B956	D6BA1	D6BB9	D6BD1	6BE16	BF6FF	D6FFF
8	56E79	56E91	6EAD6	EB964	ED16E	D16EE	D6AF9	6B221	6BB56	6B956	D6BA1	D6BB9	D6BD1	6BE16	BF6FF	D6FFF
9	5749D	7491D	74A11	74B57	4D174	ED174	EF975	2175F	5599F	7559F	9F6A1	6F975	9F6D1	6FE16	FF6FF	E175F
A	57A79	57A91	7AAD7	AB97A	DD7AE	E17AF	5B721	D7B55	7B559	7B979	D7BA1	7BB57	B97D1	7BED7	BF7FF	D7BFF
B	57E79	D7EA1	7EB57	EB97E	D17EE	D7EF9	7F215	7F559	7F579	1757F	9175A	D7FB9	7FDD7	FE17F	FF7FF	E17FF
C	5A279	1A2DA	2B95A	2DDA2	EE1A2	F5A32	DA355	5A379	DA3A1	A3B5A	3D1A3	ED1A7	EDA7E	1A7FF		
D	5A679	DA6A1	A6B5A	6D1A6	EDA6F	9A721	A7559	A7759	A7DA7	B9A7D	DA7E1	A7FF				
E	5A679	DA6A1	A6B5A	6D1A6	EDA6F	9A721	A7559	A7759	A7DA7	B9A7D	DA7E1	A7FF				
F	5A679	DA6A1	A6B5A	6D1A6	EDA6F	9A721	A7559	A7759	A7DA7	B9A7D	DA7E1	A7FF				

Fig. 12

REPLACEMENT SHEET

06 JUL 1996

This Sheet Has Been Replaced

Fig. 13

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
20	5AC7	9AC9	DACA	1ACB	5ACD	1ACE	DACF	9AD2	1AD5	9AD7	5AD9	1ADA	DADB	9ADD	DADE	1ADF
21	9C47	5C49	1C4A	DC4B	9C4D	DC4E	1C4F	5C52	DC55	5C57	9C59	DC5A	1C5B	5C5D	1C5E	DC5F
22	5CA7	9CA9	DCAA	1CAB	5CAD	1CAE	DCAF	9CB2	1CB5	9CB7	5CB9	1CBA	DCBB	9CBD	DCBE	1CBF
23	9CE7	5CE9	1CEA	DCEB	9CED	DCEE	1CEF	5CF2	DCF5	5CF7	9CF9	DCFA	1CFB	5CFD	1CFE	DCFF
24	5D47	9D49	DD4A	1D4B	5D4D	1D4E	DD4F	9D52	1D55	9D57	5D59	1D5A	DD5B	9D5D	DD5E	1D5F
25	9DA7	5DA9	1DAA	DDAB	9DAD	DDAE	1DAF	5DB2	DDB5	5DB7	9DB9	DDBA	1DDB	5DBD	1DBE	DDBF
26	5DE7	9DE9	DDEA	1DEB	5DED	1DEE	DDEF	9DF2	1DF5	9DF7	5DF9	1DFA	DDFB	9DFD	DDFE	1DFF
27	9F27	5F29	1F2A	DF2B	9F2D	DF2E	1F2F	5F32	DF35	5F37	9F39	DF3A	1F3B	5F3D	1F3E	DF3F
28	5F67	9F69	DF6A	1F6B	5F6D	1F6E	DF6F	9F72	1F75	9F77	5F79	1F7A	DF7B	9F7D	DF7E	1F7F
29	5FC7	9FC9	DFCA	1FCB	5FCD	1FCE	DFCF	9FD2	1FD5	9FD7	5FD9	1FDA	DFDB	9FDD	DFDE	1FDF
2A	6227	A229	E22A	222B	622D	222E	E22F	A232	2235	A237	6239	223A	E23B	A23D	E23E	223F
2B	A267	6269	226A	E26B	A26D	E26E	226F	6272	E275	6277	A279	E27A	227B	627D	227E	E27F
2C	A2C7	62C9	22CA	E2CB	A2CD	E2CE	22CF	62D2	E2D5	62D7	A2D9	E2DA	22DB	62DD	22DE	E2DF
2D	6447	A449	E44A	244B	644D	244E	E44F	A452	2455	A457	6459	245A	E45B	A45D	E45E	245F
2E	A4A7	64A9	24AA	E4AB	A4AD	E4AE	24AF	64B2	E4B5	64B7	A4B9	E4BA	24DB	64BD	24BE	E4BF
2F	64E7	A4E9	E4EA	24EB	64ED	24EE	E4EF	A4F2	24F5	A4F7	64F9	24FA	E4FB	A4FD	E4FE	24FF

This Sheet Has Been Replaced

REPLACEMENT SHEET
06 JUL 1996

REPLACEMENT SHEET
06 JUL 1996

/	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
30	A547	6549	254A	E54B	A54D	E54E	54F6	552F	E556	557A	5597	E55A	255B	655D	55E2	55FE
31	65A7	A59E	5AA2	5AB6	5AD2	5AE2	5AFA	5B22	5B5A	65B7	6597	25BA	E5BB	A5BD	E5BE	25BF
32	A5E7	6579	E72A	272B	72D2	72E2	72FA	7322	735A	7377	A579	E5FA	25FB	65FD	25FE	E5FF
33	67A7	29E7	2AE7	2AEB	2B42	2B4E	EB4A	EB52	2BB5	2BE7	7A93	73AE	73BA	73DE	73E2	73FE
34	A767	6929	76AE	76BA	76DE	76E2	76FA	7722	E755	6777	A779	E77A	277B	77D2	77E2	77FE
35	A7C7	6929	27CA	E792	BA7C	DE72	CBA7	CEE7	D256	7D7A	7D9E	7DA2	7DB6	7DD2	7DE2	DE7F
36	A927	6929	2AE9	2A96	A929	DE92	BA92	E932	E935	693A	9397	E93A	293B	693D	293E	E93F
37	6967	A969	9E92	96B6	9696	D296	FA97	2297	5A97	7769	9E97	AE97	BA97	DA97	E297	97F6
38	69C7	A9C9	E9CA	29CB	69CD	29CE	E9CF	A9D2	29D5	A9D7	69D9	DAE9	DBA9	DDE9	97E2	DF6A
39	A476	A492	A4AE	A4BA	A4DE	A4E2	A4F6	A552	EA55	6A57	AA59	EA5A	25B6	A5D2	A5E2	A5F6
3A	6AA7	AA9E	2AA2	AAB6	AAD2	AAE2	AFAA	AB52	2AB5	AB57	6AB9	2ABA	EABB	AABD	EABE	ABF6
3B	AAE7	6AE9	2AEA	EAB6	AED2	AEE2	EF6A	AF52	EAF5	6AF7	AAF9	EAFA	2AFB	6AFD	2AFE	EAFF
3C	6B47	AB49	EB4A	2B46	B4D2	B4E2	EB4F	AB52	2BB5	6B57	6B59	2B5A	EB5B	AB5D	EB5E	2B5F
3D	ABA7	6BA9	2BAA	EBA6	BAD2	BAE2	BAF6	BB52	EBB5	6BB7	ABB9	EBBA	2BBB	6BBD	2BBE	EBBF
3E	6BE7	ABE9	EBEA	2BE6	BED2	BEE2	EBF6	ABF2	2BF5	ABF7	6BF9	2BFA	EBFB	ABFD	EBFE	2BFF
3F	6D27	AD29	ED2A	2D26	D2D2	D2E2	ED2F	AD32	2D35	AD37	6D39	2D3A	ED3B	AD3D	ED3E	2D3F

Fig. 14

This Sheet Has Been Replaced

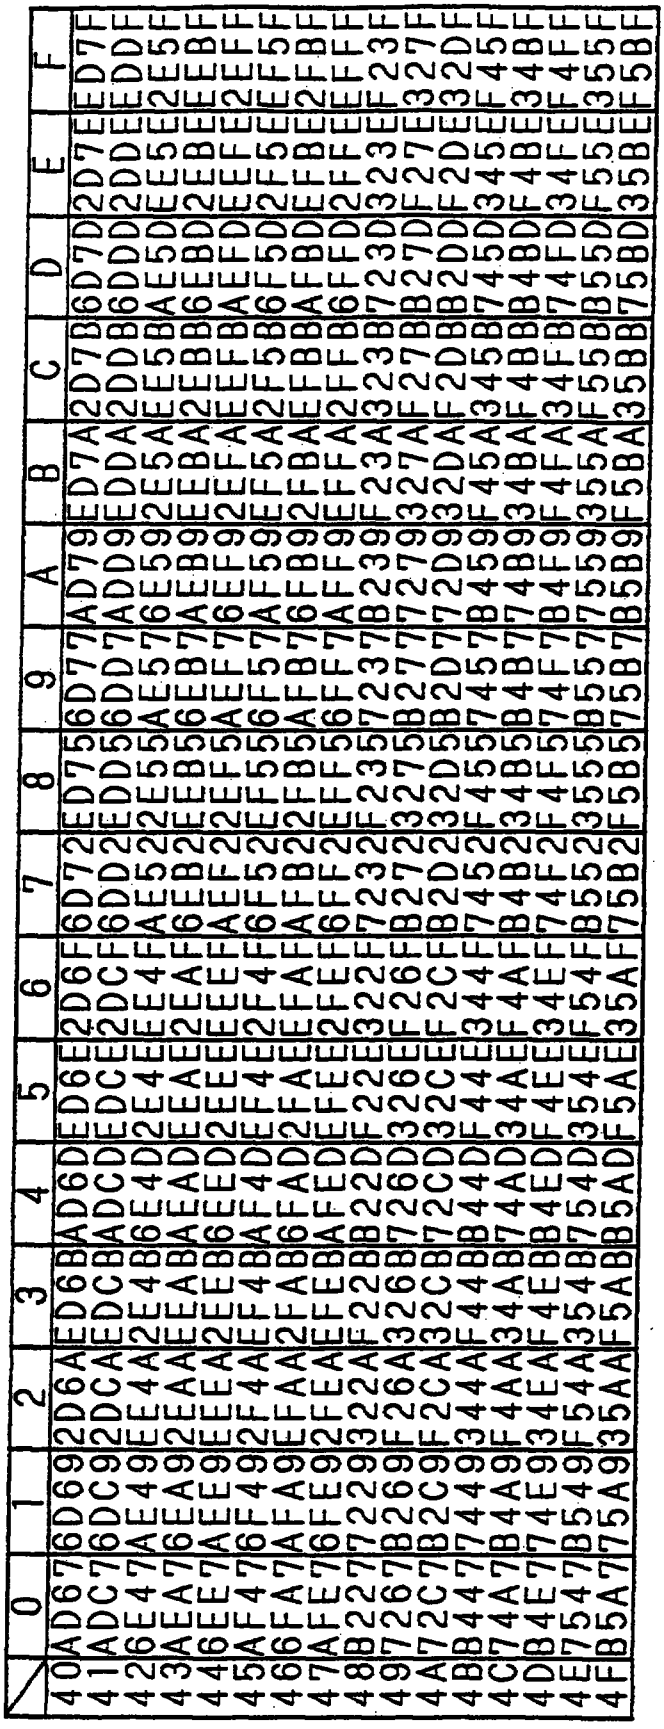

Fig. 15

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
40	AD67	6D69	2D6A	ED6B	AD6D	ED6E	2D6F	6D72	ED75	6D77	AD79	ED7A	2D7B	6D7D	2D7E	ED7F
41	ADC7	6DC9	2DCA	EDCB	ADCD	EDCE	2DCF	6DD2	EDD5	6DD7	ADD9	EDDA	2DDB	6DDD	2DDE	EDDF
42	6E47	AE49	EE4A	2E4B	6E4D	2E4E	EE4F	AE52	2E55	AE57	6E59	2E5A	EE5B	AE5D	EE5E	2E5F
43	AEA7	6EA9	2EAA	EEAB	AEAD	EEAE	2EAF	6EB2	EEB5	6EB7	AEB9	EEBA	2EBB	6EBD	2EBE	EEBF
44	6EE7	AEE9	EEEA	2EEB	6EED	2EEE	EEEF	AEF2	2EF5	AEF7	6EF9	2EFA	EEFB	AEFD	EEFE	2EFF
45	AF47	6F49	2F4A	EF4B	AF4D	EF4E	2F4F	6F52	EF55	6F57	AF59	EF5A	2F5B	6F5D	2F5E	EF5F
46	6FA7	AFA9	EFAA	2FAB	6FAD	2FAE	EFAF	AFB2	2FB5	AFB7	6FB9	2FBA	EFBB	AFBD	EFBE	2FBF
47	AFE7	6FE9	2FEA	EFEB	AFED	EFEE	2FEF	6FF2	EFF5	6FF7	AFF9	EFFA	2FFB	6FFD	2FFE	EFFF
48	B227	7229	322A	F22B	B22D	F22E	322F	7232	F235	7237	B239	F23A	323B	723D	323E	F23F
49	7267	B269	F26A	326B	726D	326E	F26F	B272	3275	B277	7279	327A	F27B	B27D	F27E	327F
4A	72C7	B2C9	F2CA	32CB	72CD	32CE	F2CF	B2D2	32D5	B2D7	72D9	32DA	F2DB	B2DD	F2DE	32DF
4B	B447	7449	344A	F44B	B44D	F44E	344F	7452	F455	7457	B459	F45A	345B	745D	345E	F45F
4C	74A7	B4A9	F4AA	34AB	74AD	34AE	F4AF	B4B2	34B5	B4B7	74B9	34BA	F4BB	B4BD	F4BE	34BF
4D	B4E7	74E9	34EA	F4EB	B4ED	F4EE	34EF	74F2	F4F5	74F7	B4F9	F4FA	34FB	74FD	34FE	F4FF
4E	7547	B549	F54A	354B	754D	354E	F54F	B552	3555	B557	7559	355A	F55B	B55D	F55E	355F
4F	B5A7	75A9	35AA	F5AB	B5AD	F5AE	35AF	75B2	F5B5	75B7	B5B9	F5BA	35BB	75BD	35BE	F5BF

REPLACEMENT SHEET
06 JUL 1996

This Sheet Has Been Replaced

Fig. 16

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
50	75E7	B5E9	F5EA	35EB	75ED	35EE	F5EF	B5F2	35F5	B5F7	75F9	35FA	F5FB	B5FD	F5FE	35FF
51	B727	7729	372A	F72B	B72D	F72E	372F	7732	F735	7737	B739	F73A	373B	773D	373E	F73F
52	7767	B769	F76A	376B	776D	376E	F76F	B772	3775	B777	7779	377A	F77B	B77D	F77E	377F
53	77C7	B7C9	F7CA	37CB	77CD	37CE	F7CF	B7D2	37D5	B7D7	77D9	37DA	F7DB	B7DD	F7DE	37DF
54	7927	B929	F92A	392B	792D	392E	F92F	B932	3935	B937	7939	393A	F93B	B93D	F93E	393F
55	B967	7969	396A	F96B	B96D	F96E	396F	7972	F975	7977	B979	F97A	397B	797D	397E	F97F
56	B9C7	79C9	39CA	F9CB	B9CD	F9CE	39CF	79D2	F9D5	79D7	B9D9	F9DA	39DB	79DD	39DE	F9DF
57	7A47	BA49	FA4A	3A4B	7A4D	3A4E	FA4F	BA52	3A55	BA57	7A59	3A5A	FA5B	BA5D	FA5E	3A5F
58	BAA7	7AA9	3AAA	FAAB	BAAD	FAAE	3AAF	7AB2	FAB5	7AB7	BAB9	FABA	3ABB	7ABD	3ABE	FABF
59	7AE7	BAE9	FAEA	3AEB	7AED	3AEE	FAEF	BAF2	3AF5	BAF7	7AF9	3AFA	FAFB	BAFD	FAFE	3AFF
5A	BB47	7B49	3B4A	FB4B	BB4D	FB4E	3B4F	7B52	FB55	7B57	BB59	FB5A	3B5B	7B5D	3B5E	FB5F
5B	7BA7	BBA9	FBAA	3BAB	7BAD	3BAE	FBAF	BBB2	3BB5	BBB7	7BB9	3BBA	FBBB	BBBD	FBBE	3BBF
5C	BBE7	7BE9	3BEA	FBEB	BBED	FBEE	3BEF	7BF2	FBF5	7BF7	BBF9	FBFA	3BFB	7BFD	3BFE	FBFF
5D	BD27	7D29	3D2A	FD2B	BD2D	FD2E	3D2F	7D32	FD35	7D37	BD39	FD3A	3D3B	7D3D	3D3E	FD3F
5E	7D67	BD69	FD6A	3D6B	7D6D	3D6E	FD6F	BD72	3D75	BD77	7D79	3D7A	FD7B	BD7D	FD7E	3D7F
5F	7DC7	BDC9	FDCA	3DCB	7DCD	3DCE	FDCF	BDD2	3DD5	BDD7	7DD9	3DDA	FDDB	BDDD	FDDE	3DDF

REPLACEMENT SHEET
06 JUL 1996

This Sheet Has Been Replaced

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
60	BE477E49	3E4AFE4B	BE4DFE4E	3E4AFE4B	BE4DFE4E	3E4AFE4B	BE4DFE4E	3E4AFE4B	BE4DFE4E	3E4AFE4B	BE4DFE4E	3E4AFE4B	BE4DFE4E	3E4AFE4B	BE4DFE4E	3E4AFE4B
61	7EA7BEA9	FEEAA3EA	B7EADFEE	AB7EADFE	EAB7EADF	EEAB7EAD	FEEAB7EA	DFEEAB7E	ADFEEAB7	EADFEEAB	7EADFEEA	BEADFEEA	7EADFEEA	BEADFEEA	7EADFEEA	BEADFEEA
62	BEE77EE9	3EEAFEEA	BEEDFEED	3FEABEEB	7FEDBEEB	7FEDBEEB	7FEDBEEB	7FEDBEEB	7FEDBEEB	7FEDBEEB	7FEDBEEB	7FEDBEEB	7FEDBEEB	7FEDBEEB	7FEDBEEB	7FEDBEEB
63	7F47BF49	9FE4A3F4	8A3F4D8D	0A8B4A8B	548D1B8B	5E8D1E8B	A38DE268	BA68DE26	8AE8DE26	8AE8DE26	8AE8DE26	8AE8DE26	8AE8DE26	8AE8DE26	8AE8DE26	8AE8DE26
64	BFA77FE7	BFA99FE9	3FAA8A9C	F8A0F8AD	08B9048B	5048B1B8	B5E8B1E8	B5E8B1E8	B5E8B1E8	B5E8B1E8	B5E8B1E8	B5E8B1E8	B5E8B1E8	B5E8B1E8	B5E8B1E8	B5E8B1E8
65	7FE7BFE9	9FEAA8A9	CA8A0A8B	4A8D08B9	08AD08B9	08AD08B9	08AD08B9	08AD08B9	08AD08B9	08AD08B9	08AD08B9	08AD08B9	08AD08B9	08AD08B9	08AD08B9	08AD08B9
66	4A87F887	A8F89C8A	8A0F8A0A	8A1488A1	D488A148	D488A148	D488A148	D488A148	D488A148	D488A148	D488A148	D488A148	D488A148	D488A148	D488A148	D488A148
67	4F877508	9A8F8908	F8A0F8A0	F8A1B8B5	0F8B5B8B	5B8B5B8B	5B8B5B8B	5B8B5B8B	5B8B5B8B	5B8B5B8B	5B8B5B8B	5B8B5B8B	5B8B5B8B	5B8B5B8B	5B8B5B8B	5B8B5B8B
68	9087548	79489BB8	9DB8A1B8	8A1E8B5E	8B5BA38B	5E8B1E8B	5E8B1E8B	5E8B1E8B	5E8B1E8B	5E8B1E8B	5E8B1E8B	5E8B1E8B	5E8B1E8B	5E8B1E8B	5E8B1E8B	5E8B1E8B
69	5488798B	9D48A148	8AE38BBA	6E8BAC8B	AE268AE2	68AE2C8A	E268AE26	8AE26C8A	E268AE26	8AE26C8A	E268AE26	8AE26C8A	E268AE26	8AE26C8A	E268AE26	8AE26C8A
6A	5B87B9E8	7B66B9E8	7B66B9E8	7B66B9E8	7B66B9E8	7B66B9E8	7B66B9E8	7B66B9E8	7B66B9E8	7B66B9E8	7B66B9E8	7B66B9E8	7B66B9E8	7B66B9E8	7B66B9E8	7B66B9E8
6B	5E87E9E8	7B66B9E8	7B66B9E8	7B66B9E8	7B66B9E8	7B66B9E8	7B66B9E8	7B66B9E8	7B66B9E8	7B66B9E8	7B66B9E8	7B66B9E8	7B66B9E8	7B66B9E8	7B66B9E8	7B66B9E8
6C	A387E9E8	7B66B9E8	7B66B9E8	7B66B9E8	7B66B9E8	7B66B9E8	7B66B9E8	7B66B9E8	7B66B9E8	7B66B9E8	7B66B9E8	7B66B9E8	7B66B9E8	7B66B9E8	7B66B9E8	7B66B9E8
6D	A687E9E8	7B66B9E8	7B66B9E8	7B66B9E8	7B66B9E8	7B66B9E8	7B66B9E8	7B66B9E8	7B66B9E8	7B66B9E8	7B66B9E8	7B66B9E8	7B66B9E8	7B66B9E8	7B66B9E8	7B66B9E8
6E	687E9E8A	8B66B9E8	7B66B9E8	7B66B9E8	7B66B9E8	7B66B9E8	7B66B9E8	7B66B9E8	7B66B9E8	7B66B9E8	7B66B9E8	7B66B9E8	7B66B9E8	7B66B9E8	7B66B9E8	7B66B9E8
6F	AC87E9E8	7B66B9E8	7B66B9E8	7B66B9E8	7B66B9E8	7B66B9E8	7B66B9E8	7B66B9E8	7B66B9E8	7B66B9E8	7B66B9E8	7B66B9E8	7B66B9E8	7B66B9E8	7B66B9E8	7B66B9E8

Fig. 17

REPLACEMENT SHEE
06 JUL 1996

This Sheet Has Been Replaced

Fig. 18

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
70	7387	B389	F38A	338B	738D	338E	F38F	B392	3395	B397	7399	339A	F39B	B39D	F39E	339F
71	7687	B689	F68A	368B	768D	368E	F68F	B692	3695	B697	7699	369A	F69B	B69D	F69E	369F
72	B887	7889	388A	F88B	B88D	F88E	388F	7892	F895	7897	B899	F89A	389B	789D	389E	F89F
73	7C87	BC89	FC8A	3C8B	7C8D	3C8E	FC8F	BC92	3C95	BC97	7C99	3C9A	FC9B	BC9D	FC9E	3C9F
74	0927	C869	892A	486B	092D	486E	892F	C872	4875	C877	0939	487A	893B	C87D	893E	487F
75	0AE7	0889	8AEA	888B	0AED	888E	8AEF	0892	8895	0897	0AF9	889A	8AFB	089D	8AFE	889F
76	0BA7	C8C9	8BAA	48CB	0BAD	48CE	8BAF	C8D2	48D5	C8D7	0BB9	48DA	8BBB	C8DD	8BBE	48DF
77	0D67	0969	8D6A	896B	0D6D	896E	8D6F	0972	8975	0977	0D79	897A	8D7B	097D	8D7E	897F
78	0EA7	C989	8EAA	498B	0EAD	498E	8EAF	C992	4995	C997	0EB9	499A	8EDB	C99D	8EBE	499F
79	0FE7	09C9	8FEA	89CB	0FED	89CE	8FEF	09D2	89D5	09D7	0FF9	89DA	8FFB	09DD	8FFE	89DF
7A	D0E7	0AA9	50EA	8AAB	D0ED	8AAE	50EF	0AB2	8AB5	0AB7	D0F9	8ABA	50FB	0ABD	50FE	8ABF
7B	D1A7	CB09	51AA	4B0B	D1AD	4B0E	51AF	CB12	4B15	CB17	D1B9	4B1A	51BB	CB1D	51BE	4B1F
7C	1227	0B49	922A	8B4B	122D	8B4E	922F	0B52	8B55	0B57	1239	8B5A	923B	0B5D	923E	8B5F
7D	D327	0BE9	532A	8BEB	D32D	8BEE	532F	0BF2	8BF5	0BF7	D339	8BFA	533B	0BFD	533E	8BFF
7E	14E7	0D29	94EA	8D2B	14ED	8D2E	94EF	0D32	8D35	0D37	14F9	8D3A	94FB	0D3D	94FE	9D3F
7F	15A7	0E49	95AA	8E4B	15AD	8E4E	95AF	0E52	8E55	0E57	15B9	8E5A	95BB	0E5D	95BE	8E5F

REPLACEMENT SHEET
06 JUL 1996

This Sheet Has Been Replaced

/	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
80	D6	27	0E	E9	56	2A	8E	EB	D6	2D	82	EE	56	2F	0E	F2
81	17	27	0F	A9	97	2A	8F	AB	17	2D	8F	AE	97	2F	0F	B2
82	19	67	D0	A9	99	6A	50	AB	19	6D	50	AE	99	6F	D0	B2
83	1A	A7	11	09	9A	AA	91	0B	1A	AD	91	0E	9A	AF	11	12
84	1B	E7	D1	49	9B	EA	51	4B	1B	ED	51	4E	9B	EF	D1	52
85	DC	27	D1	E9	5C	2A	51	EB	DC	2D	51	EE	5C	2F	D1	F2
86	1D	27	12	69	9D	2A	96	B1	D2	DD	92	E6	9D	2F	12	72
87	1E	E7	D2	89	9E	EA	52	8B	1E	ED	52	8E	9E	EF	D2	92
88	1F	A7	12	C9	9F	AA	92	CB	1F	AD	92	CE	9F	AF	12	D2
89	E1	67	D3	69	61	6A	53	6B	E1	6D	53	6E	61	6F	D3	12
8A	E2	A7	13	89	62	AA	93	8B	E2	AD	93	8E	62	AF	13	52
8B	E3	E7	D3	C9	63	EA	53	CB	E3	ED	53	CE	63	EF	D3	92
8C	24	27	14	A9	42	4A	B2	4A	B2	4D	94	AE	A4	2F	14	B2
8D	E5	27	D5	09	65	2A	55	0B	E5	2D	55	0E	65	2F	D5	12
8E	E6	E7	15	49	66	EA	95	4B	E6	ED	95	4E	66	EF	15	52
8F	E7	A7	15	E9	67	AA	95	EB	E7	AD	95	EE	67	AF	15	F2

Fig. 19

REPLACEMENT SHE
06 JUL 1996

This Sheet Has Been Replaced

Fig. 20

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
90	28E7	D669	A8EA	566B	28ED	566E	A8EF	D672	5675	D677	28F9	567A	A8FB	D67D	A8FE	567F
91	29A7	1689	A9AA	968B	29AD	968E	A9AF	1692	9695	1697	29B9	969A	A9BB	169D	A9BE	969F
92	EA27	D6C9	6A2A	56CB	EA2D	56CE	6A2F	D6D2	56D5	D6D7	EA39	56DA	6A3B	D6DD	6A3E	56DF
93	2B27	1769	AB2A	976B	2B2D	976E	AB2F	1772	9775	1777	2B39	977A	AB3B	177D	AB3E	977F
94	ECE7	D789	6CEA	578B	ECED	578E	6CEF	D792	5795	D797	ECF9	579A	6CFB	D79D	6CFE	579F
95	EDA7	17C9	6DAA	97CB	EDAD	97CE	6DAF	17D2	97D5	17D7	EDB9	97DA	6DBB	17DD	6DBE	97DF
96	2E27	1929	AE2A	992B	2E2D	992E	AE2F	1932	9935	1937	2E39	993A	AE3B	193D	AE3E	993F
97	EF27	1A49	6F2A	9A4B	EF2D	9A4E	6F2F	1A52	9A55	1A57	EF39	9A5A	6F3B	1A5D	6F3E	9A5F
98	3167	1AE9	B16A	9AEB	316D	9AEE	B16F	1AF2	9AF5	1AF7	3179	9AFA	B17B	1AFD	B17E	9AFF
99	32A7	1BA9	B2AA	9BAB	32AD	9BAE	B2AF	1BB2	9BB5	1BB7	32B9	9BBA	B2BB	1BBD	B2BE	9BBF
9A	33E7	DC69	B3EA	5C6B	33ED	5C6E	B3EF	DC72	5C75	DC77	33F9	5C7A	B3FB	DC7D	B3FE	5C7F
9B	F427	1C89	742A	9C8B	F42D	9C8E	742F	1C92	9C95	1C97	F439	9C9A	743B	1C9D	743E	9C9F
9C	3527	DCC9	B52A	5CCB	352D	5CCE	B52F	DCD2	5CD5	DCD7	3539	5CDA	B53B	DCDD	B53E	5CDF
9D	36E7	1D69	B6EA	9D6B	36ED	9D6E	B6EF	1D72	9D75	1D77	36F9	9D7A	B6FB	1D7D	B6FE	9D7F
9E	37A7	DD89	B7AA	5D8B	37AD	5D8E	B7AF	DD92	5D95	DD97	37B9	5D9A	B7BB	DD9D	B7BE	5D9F
9F	F8E7	1DC9	78EA	9DCB	F8ED	9DCE	78EF	1DD2	9DD5	1DD7	F8F9	9DDA	78FB	1DDD	78FE	9DDF

REPLACEMENT SHEET
06 JUL 1996

This Sheet Has Been Replaced

REPLACEMENT SHEET
06 JUL 1996

/	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
A0	F9A71	EA979	AA979	EABF9	ADF9A	EAE79	AF1EB	29EB5	1EB7F	9B739	EBA79	BB1EB	D79BE	9EBF
A1	3A27D	F09BA	2A5F0	B3A2D	5F0EB	A2FDF	1259F	15DF1	73A39	5F1AB	A3BDF	1DBA3	E5F1F
A2	FB271	F497B	2A9F4	BFB2D	9F4EE	7B2FF	1F529	F55F5	7FB39	9F5A7	B3BCF	B1FFD	BCFE9	FFFE
A3	3CE71	FE9BC	2A9FE	B3CED	9FEEB	C2FF1	FF529	F55F5	7F73C	F999F	FABCF	B1FF5	D7B3E	9F5F
A4	3DA7E	129BD	AA612	B3DAD	612EE	BDAFE	132G6	255E2	5F73F	39624	7E3BD	B961	3ABDB	BE13D	D7E3E	625F
A5	FE27E	2497E	2A624	BFE2D	624EE	7E252	6255E	257FE	39624	7FA5B	E396	25A7E	3BE25	D7E3E	625F
A6	3F27E	E2E9B	F2A62	EB3F2	D62EE	BF2FE	2FEE2	F73F3	9624F	A8BF3	BE2FD	BF3EE	625F
A7	0A47E	3A91A	4A63A	B0A4D	63AEE	8A4FE	3B263	B5E3B	7070A	596	3BA8A	5BE3B	D8A5E	E63BF
A8	0DC72	469	8DCAA	46B0D	CDA46	E8DCF	2472A	4755E	4970D	D59A	4784D	DB247	D8DEA	47F
A9	0F47E	4898	F4A64	8B0F4	D64E4	8EB4F	E259E	4970F	596	49A8F	5BE49	D8E5E	649F
AA	144	72	4C99	44AA4	CB144	DA4CE	99CFE	E57265	7119D	965	57A99	DBE57	D99DE	657F
AB	19C	7E56	999CA	6561	9CD65	6E99B	4FE25	9A559	5D55E	E57	719B5	9A59A	4DA99	B5EA	59F
AC	1B47	2589	9B4AA	58B1	B4DA5	8E9B4	FE259	7119B	559	7E59A	4DA94	5EA4	DE
AD	1E47	E5C99	E4A65	CB1E4	D65CE	9E4FE	E5D26	5D55E	E57	1E596	5DA9E	5EA4	DE
AE	E1C7	E6A96	1CA66	ABE1C	D66AE	61CFE	6B26	B5E6B	7E1D9	66BA	61DBE	6BD6	1DE66	BF
AF	E347	2709	634AA	70BE3	4DA70	E634F	2712	A7152	717E	359A	71A63	5B271	D635	EA71F

Fig. 21

This Sheet Has Been Replaced

Fig. 22

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
B0	E647	E749	664A	674B	E64D	674E	664F	E752	6755	E757	E659	675A	665B	E75D	665E	675F
B1	2847	E7E9	A84A	67EB	284D	67EE	A84F	E7F2	67F5	E7F7	2859	67FA	A85B	E7FD	A85E	67FF
B2	EC47	28A9	6C4A	A8AB	EC4D	A8AE	6C4F	28B2	A8B5	21B7	EC59	A8BA	6C5B	28BD	6C5E	A8BF
B3	31C7	E909	B1CA	690B	31CD	690E	B1CF	E912	6915	E917	31D9	691A	B1DB	E91D	B1CE	691F
B4	3347	2949	B34A	A94B	334D	A94E	B34F	2952	A955	2957	3359	A95A	B35B	295D	B35E	A95F
B5	3647	29E9	B64A	A9EB	364D	A9EE	B64F	29F2	A9F5	29F7	3659	A9FA	B65B	29FD	B65E	A9FF
B6	F847	EA69	784A	6A6B	F84D	6A6E	784F	EA72	6A75	EA77	F859	6A7A	785B	EA7D	785E	6A7F
B7	3C47	2A89	BC4A	AA8B	3C4D	AA8E	BC4F	2A92	AA95	2A97	3C59	AA9A	BC5B	2A9D	BC5E	AA9F
B8	0C87	EAC9	8C8A	6ACB	0C8D	6ACE	8C8F	EAD2	6AD5	EAD7	0C99	6ADA	8C9B	EADD	8C9E	6ADF
B9	1887	2B69	988A	AB6B	188D	AB6E	988F	2B72	AB75	2B77	1899	AB7A	989B	2B7D	989E	AB7F
BA	3087	EB89	B08A	6B8B	308D	6B8E	B08F	EB92	6B95	EB97	3099	6B9A	B09B	EB9D	B09E	6B9F
BB	4921	2BC9	C923	ABCB	8925	ABCE	C926	2BD2	ABD5	2BD7	0911	ABDA	8913	2BDD	8916	ABDF
BC	4AE1	ECA9	CAE3	6CAB	8AE5	6CAE	CAE6	ECB2	6CB5	ECB7	0A71	6CBA	8A73	ECBD	8A76	6CBF
BD	4BA1	2D09	CBA3	AD0B	8BA5	AD0E	CBA6	2D12	AD15	2D17	0AD1	AD1A	8AD3	2D1D	8AD6	AD1F
BE	4D61	ED49	CD63	6D4B	8D65	6D4E	CD66	ED52	6D55	ED57	0B91	6D5A	8B93	ED5D	8B96	6D5F
BF	4EA1	EDE9	CEA3	6DEB	8EA5	6DEE	CEA6	EDF2	6DF5	EDF7	0CB1	6DFA	8CB3	EDFD	8CB6	6DFF

REPLACEMENT SHE
06 JUL 1996

This Sheet Has Been Replaced

Fig. 23

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
C0	4FE1	2E69	CFE3	AE6B	8FE5	AE6E	CFE6	2E72	AE75	2E77	0D51	AE7A	8D73	2E7D	8D76	AE7F
C1	90E1	EE89	10E3	6E8B	50E5	6E8E	10E6	EE92	6E95	EE97	0DF1	6E9A	8D93	EE9D	8D96	6E9F
C2	91A1	2EC9	11A3	AECB	51A5	AECE	11A6	2ED2	AED5	2ED7	0E91	AEDA	8ED3	2EDD	8ED6	AEDF
C3	5221	EF69	D223	6F6B	9225	6F6E	D226	EF72	6F75	EF77	0F71	6F7A	8F73	EF7D	8F76	6F7F
C4	9321	2F89	1323	AF8B	5325	AF8E	1326	2F92	AF95	2F97	0FD1	AF9A	8F93	2F9D	8F96	AF9F
C5	54E1	EFC9	D4E3	6FCB	94E5	6FCE	D4E6	EFD2	6FD5	EFD7	D0D1	6FDA	50D3	EFDD	50D6	6FDF
C6	55A1	3129	D5A3	B12B	95A5	B12E	D5A6	3132	B135	3137	D191	B13A	5133	313D	5136	B13F
C7	9621	3249	1623	B24B	5625	B24E	1626	3252	B255	3257	1211	B25A	9253	325D	9256	B25F
C8	5721	32E9	D723	B2EB	9725	B2EE	D726	32F2	B2F5	32F7	D311	B2FA	53F3	32FD	53F6	B2FF
C9	5961	33A9	D963	B3AB	9965	B3AE	D966	33B2	B3B5	33B7	1471	B3BA	94B3	33BD	94B6	B3BF
CA	5AA1	F469	DAA3	746B	9AA5	746E	DAA6	F472	7475	F477	14D1	747A	9473	F47D	9476	747F
CB	5BE1	3489	DBE3	B48B	9BE5	B48E	DBE6	3492	B495	3497	1591	B49A	9593	349D	9596	B49F
CC	9C21	F4C9	1C23	74CB	5C25	74CE	1C26	F4D2	74D5	F4D7	D611	74DA	56D3	F4DD	56D6	74DF
CD	5D21	3569	DD23	B56B	9D25	B56E	DD26	3572	B575	3577	1711	B57A	9773	357D	9776	B57F
CE	5EE1	F589	DEE3	758B	9EE5	758E	DEE6	F592	7595	F597	18B1	759A	9893	F59D	9896	759F
CF	5FA1	35C9	DFA3	B5CB	9FA5	B5CE	DFA6	35D2	B5D5	35D7	1951	B5DA	99D3	35DD	99D6	B5DF

REPLACEMENT SHEET
06 JUL 1996

This Sheet Has Been Replaced

Fig. 24

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
D0	A161	36A9	2163	B6AB	6165	B6AE	2166	36B2	B6B5	36B7	19F1	B6BA	99F3	36BD	99F6	B6BF
D1	A2A1	F709	22A3	770B	62A5	770E	22A6	F712	7715	F717	1A91	771A	9A93	F71D	9A96	771F
D2	A3E1	3749	23E3	B74B	63E5	B74E	23E6	3752	B755	3757	1B71	B75A	9B73	375D	9B76	B75F
D3	6421	37E9	E423	B7EB	A425	B7EE	E426	37F2	B7F5	37F7	1BD1	B7FA	9BD3	37FD	9BD6	B7FF
D4	A521	F8A9	2523	78AB	6525	78AE	2526	F8B2	78B5	F8B7	1D11	78BA	9D13	F8BD	9D16	78BF
D5	A6E1	3909	26E3	B90B	66E5	B90E	26E6	3912	B915	3917	1E71	B91A	9E73	391D	9E76	B91F
D6	A7A1	F949	27A3	794B	67A5	794E	27A6	F952	7955	F957	1ED1	795A	9ED3	F95D	9ED6	795F
D7	68E1	F9E9	E8E3	79EB	A8E5	79EE	E8E6	F9F2	79F5	F9F7	1F91	79FA	9F93	F9FD	9F96	79FF
D8	69A1	3A69	E9A3	BA6B	A9A5	BA6E	E9A6	3A72	BA75	3A77	E151	BA7A	6153	3A7D	6156	BA7F
D9	AA21	FA89	2A23	7A8B	6A25	7A8E	2A26	FA92	7A95	FA97	E1F1	7A9A	61F3	FA9D	61F6	7A9F
DA	6B21	3AC9	EB23	BACB	AB25	BACE	EB26	3AD2	BAD5	3AD7	E291	BADA	6293	3ADD	6296	BADF
DB	ACE1	FB69	2CE3	7B6B	6CE5	7B6E	2CE6	FB72	7B75	FB77	E371	7B7A	6373	FB7D	6376	7B7F
DC	ADA1	3B89	2DA3	BB8B	6DA5	BB8E	2DA6	3B92	BB95	3B97	E3D1	BB9A	63D3	3B9D	63D6	BB9F
DD	6EE1	FBC9	EEE3	7BCB	AEE5	7BCE	EEE6	FBD2	7BD5	FBD7	E511	7BDA	6513	FBDD	6516	7BDF
DE	AFE1	3CA9	2FE3	BCAB	6FE5	BCAE	2FE6	3CB2	BCB5	3CB7	E671	BCBA	6673	3CBD	6676	BCBF
DF	7161	FD09	F163	7D0B	B165	7D0E	F166	FD12	7D15	FD17	E6D1	7D1A	66D3	FD1D	66D6	7D1F

REPLACEMENT SHEET
06 JUL 1996

This Sheet Has Been Replaced

/	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
E0	72	D4	F2	BD	B2	BD	F2	63	D5	57	E7	D5	A6	79	33	D5	D6	79	6B	D5	F
E1	73	E1	3E	B3	E5	B4	E6	3D	52	B6	91	A5	87	33	DF	DA	87	6B	DF	F
E2	B4	21	F6	B4	25	5B	E6	3E	63	D2	71	F2	A8	D3	E7	DA	8D	67	E7	E
E3	75	21	3E	8B	B5	2B	E6	3E	52	7D	71	25	A8	D3	E7	DA	8D	67	E7	E
E4	76	E1	FE	C9	F6	E5	2B	E6	3E	52	6D	71	A9	99	3E	9D	A9	96	BE	9F
E5	77	A1	3F	C9	F6	E5	2B	E6	3E	52	6D	71	A9	99	3E	9D	A9	96	BE	9F
E6	B8	E1	FE	F8	9F	6E	5B	F6	3E	52	6D	71	AB	16	BF	7D	AB	16	BF	7F
E7	B9	A1	3F	C9	F6	E5	2B	E6	3E	52	6D	71	A6	C7	6F	9D	6C	76	7F	9F
E8	7A	21	90	B1	FA	23	10	B6	FA	26	A6	3F	CD	3F	DD	6C	D6	BF	DF	E
E9	BB	21	51	13	B2	3D	11	63	B2	6A	25	1F	9D	33	F1	33	6D	96	F1	3F
EA	7C	E1	91	51	FC	E3	11	5B	CE	25	11	72	51	AE	1F	25	3A	E1	6F	25
EB	7D	A1	91	F1	FD	A3	11	F3	BD	A5	11	F6	FD	A6	A3	B1	73	B1	6F	2F
EC	BE	21	52	71	3E	23	D2	73	7E	25	D2	76	3E	26	64	71	B4	71	B0	B6	F3	BF
ED	7F	21	92	91	FF	23	12	93	BF	25	12	96	F2	6A	49	1E	4D	3B	15	63	47	F
EE	0A	21	52	D1	8A	23	D2	D3	BA	45	D2	D6	8A	26	64	D1	E4	D3	B2	96	34	DF
EF	0C	E1	99	37	18	CE	31	37	3B	DC	51	37	6C	6A	57	12	57	3B	37	6F	57	F

Fig. 25

REPLACEMENT SHEET
06 JUL 1996

This Sheet Has Been Replaced

/	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
F0	1DA15	5391	8DA3D	3939	8F45	D396	8DA66	5911	E593	E596	33D1	B591	B3D3	3593	B3D6	3596
F1	11F21	93D1	8F231	3D39	44513	D68B	8F26A	5D12	5D32	5D63	5135	1D1B	5133	F5D3	B516	F5D6
F2	1421	54B1	9423	D4B3	98C5	D4B6	9426	A6B1	26B3	26B6	3671	76B1	B671	3F67	6B37	F6B6
F3	18E19	9511	98E31	5139	B455	1516	98E66	711E	7133	E71B	6D36	71B7	1B6D	3371	3B6D	6376
F4	19A15	5551	99A3D	5553	9E45	5D55	99A6A	7512	7532	7563	7D1B	7751	7B79	3E75	3B79	F756
F5	1B215	5F19	9B23D	5F36	1C55	D5F6	9B26A	7F12	7F32	7F66	F8B1	7F17	7878	F7F3	7878	B6B6
F6	1E21	9671	9E231	67369	3455	1676	9E261	6A91	1E291	6F39	D1B8	B191	7D38	8D63	8D63	8B66
F7	1A15	6911	9A231	6D369	4551	6D69	9A661	A691	1E295	6F39	E1B9	1791	7991	3E99	6F91	6F91
F8	1D215	9671	9D231	6D377	9C45	D779	6C231	7933	B1C5	1C79	3BA1	B951	BA13	3951	BA13	9556
F9	1621	5791	9623	1D377	9C45	D779	6231	7933	B1C5	1C79	3BA1	B9F1	7B13	39F3	7B13	9F56
FA	1E215	5791	9C231	7933	B1C5	1C79	3B1C	5179	3BA1	B9F1	7A71	BC73	EA73	BC73	EA73	BC76
FB	1C215	5D91	9C231	7D3B	B345	D7D6	B0E6	6A91	EA93	6A91	BA91	BCD3	3A93	BCD6	3A93	BA96
FC	31A15	5931	B1A3D	9337	B645	D936	B1A66	AD12	AD32	AD63	D91B	D93D	9E13	3BD9	6FAD	6376
FD	3321	55A51	B3231	DA53	7845	DA56	B3266	B712	EB73	EB76	FE11	BB71	7E13	3B73	7E16	3B76
FE	3621	5AF1	B6231	DAF3	BC45	DAF6	B626	AB91	2B93	2B96	3F11	7B91	BF13	FB93	BF16	FB96
FF	3C21	5BB1	BC23	DBB3	8C85	DBB6	BC26	BD1E	BD3E	BD68	E11B	BD10	E13	BD30	E163	BD6

Fig. 26

REPLACEMENT SHEET

06 JUL 1996

This Sheet Has Been Replaced

REPLACEMENT SHEET
06 JUL 1996

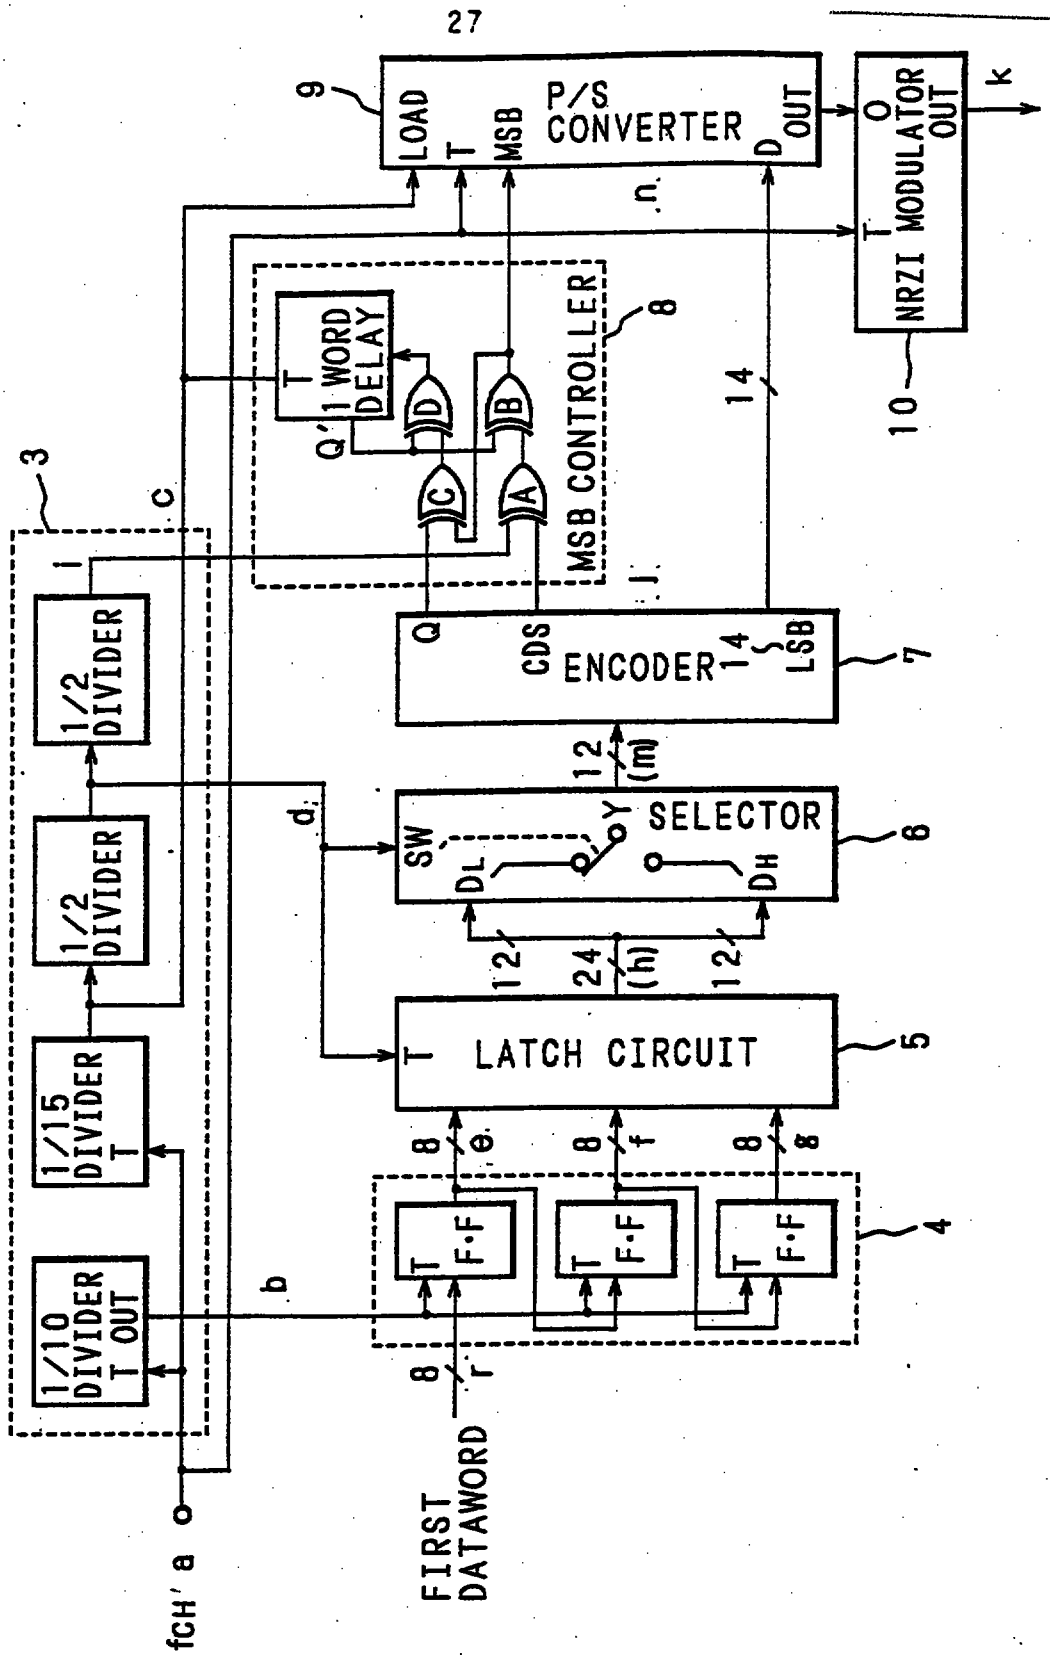

Fig. 27

This Sheet Has Been Replaced

Fig. 28 A

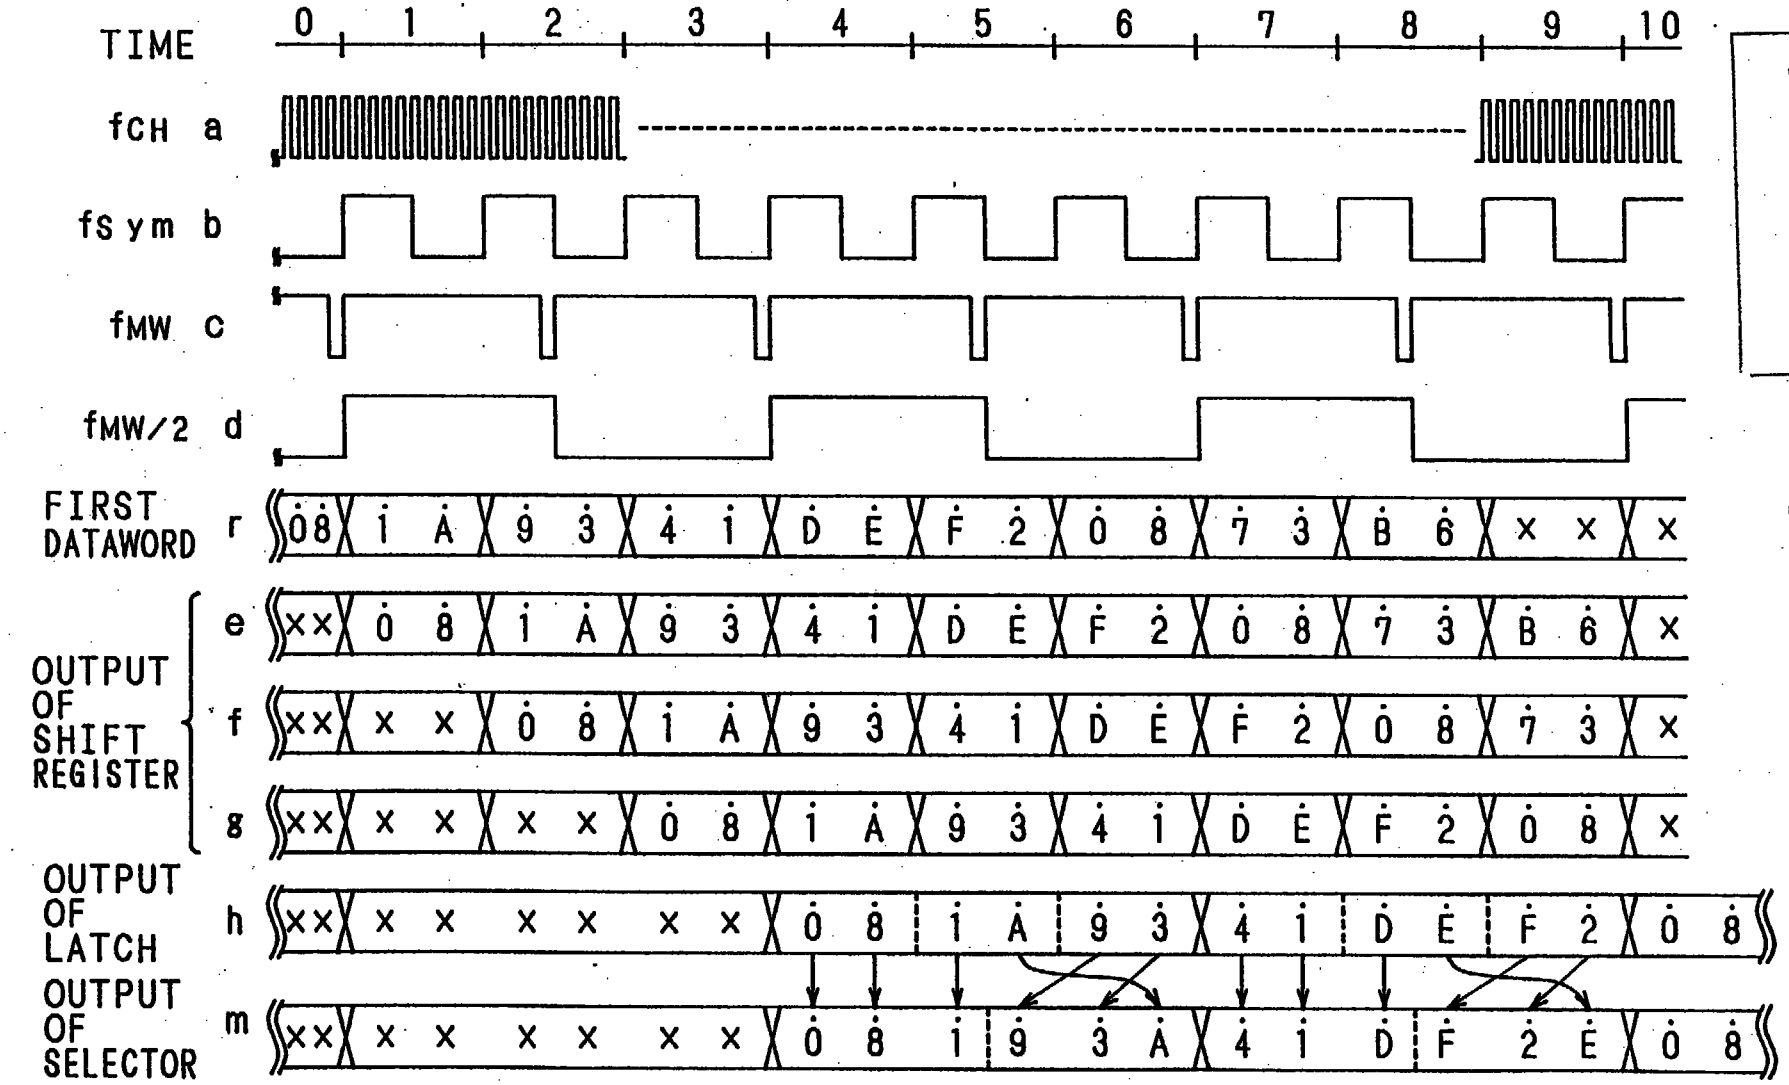

REPLACEMENT SHEET
06 JUL 1996

This Sheet Has Been Replaced

Fig. 28 B

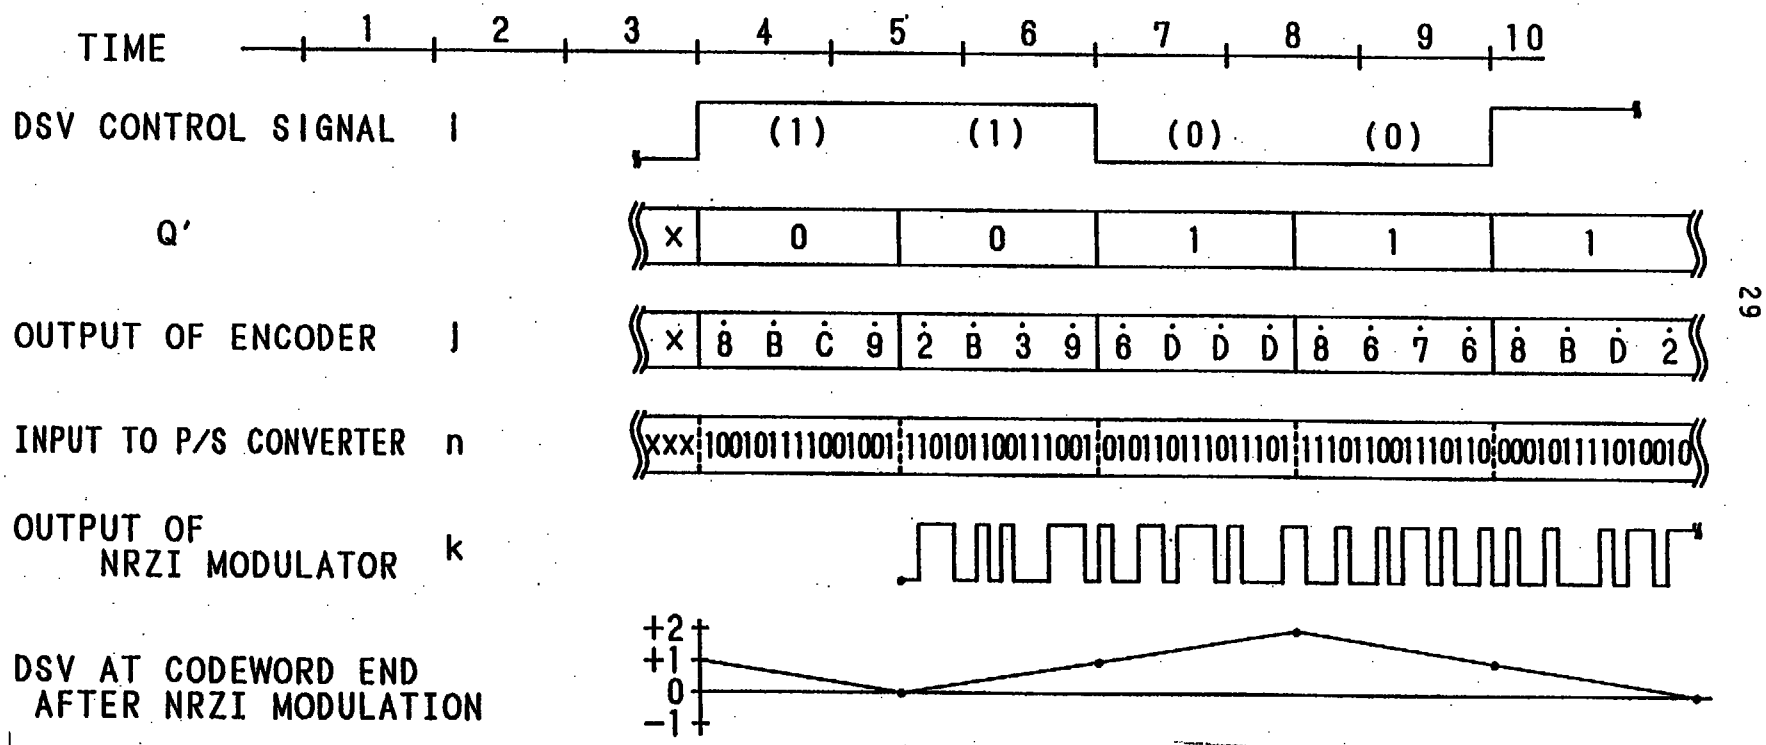

29

This Sheet Has Been Replaced

REPLACEMENT SHEET
06 JUL 1996

REPLACEMENT SHEET
06 JUL 1996

Fig. 29

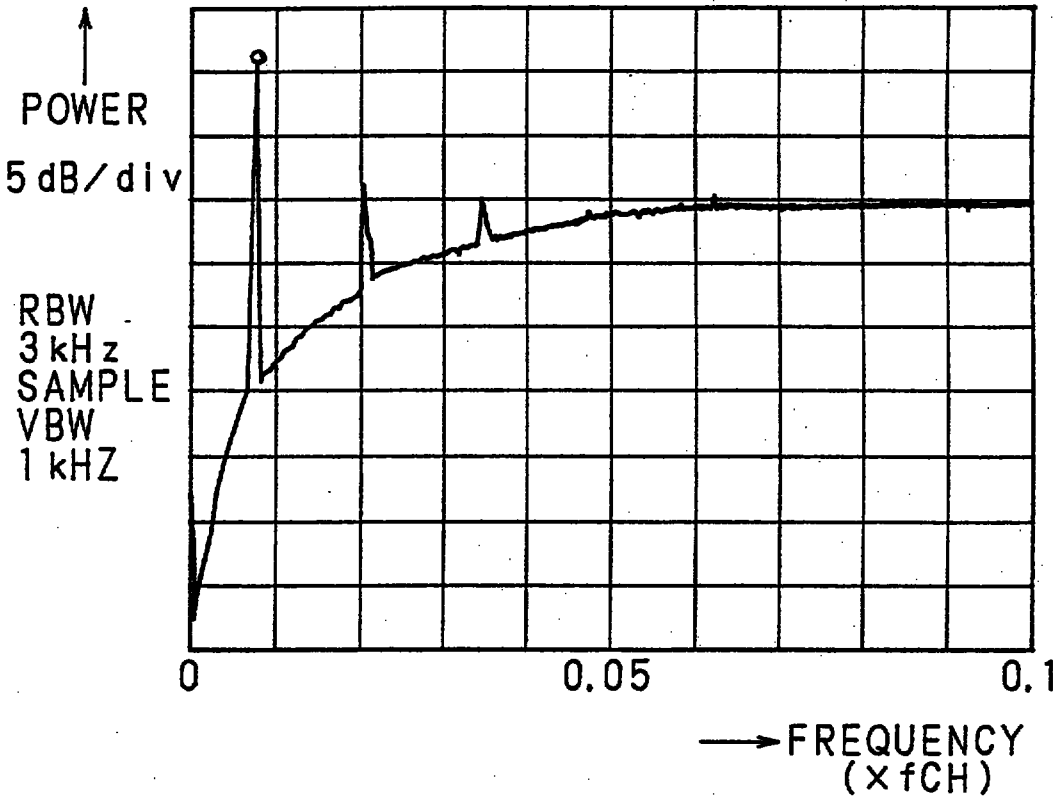

REPLACEMENT SHEET
06 JUL 1996

This Sheet Has Been Replaced

REPLACEMENT SHEET
06 JUL 1996

Fig. 30

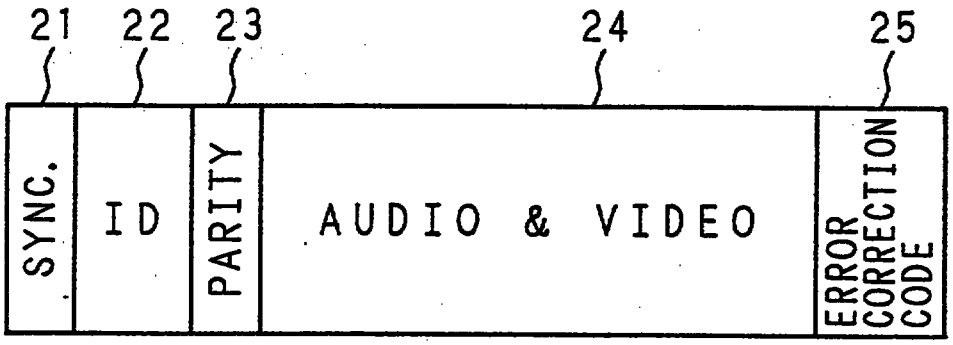

This Sheet Has Been Replaced

REPLACEMENT SHEET
06 JUL 1996

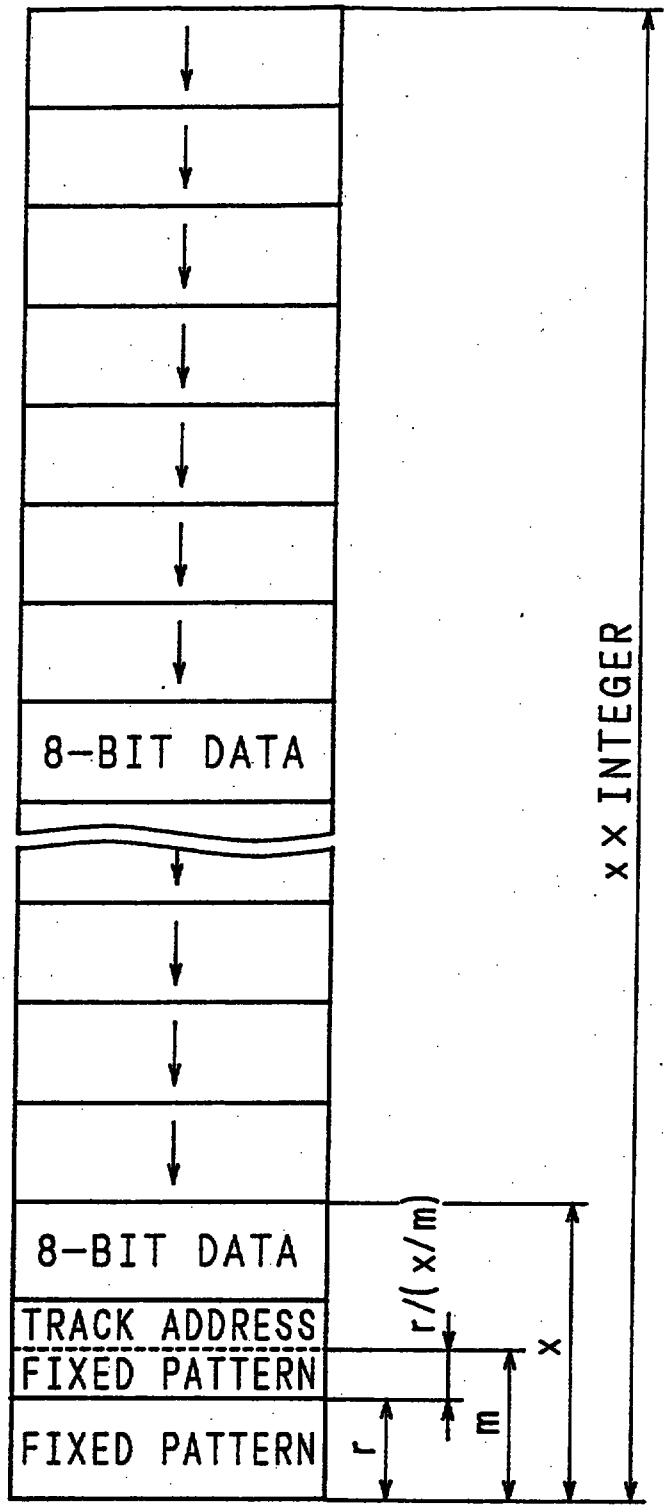

Fig. 31

This Sheet Has Been Replaced

REPLACEMENT SHEET
06 JUL 1996

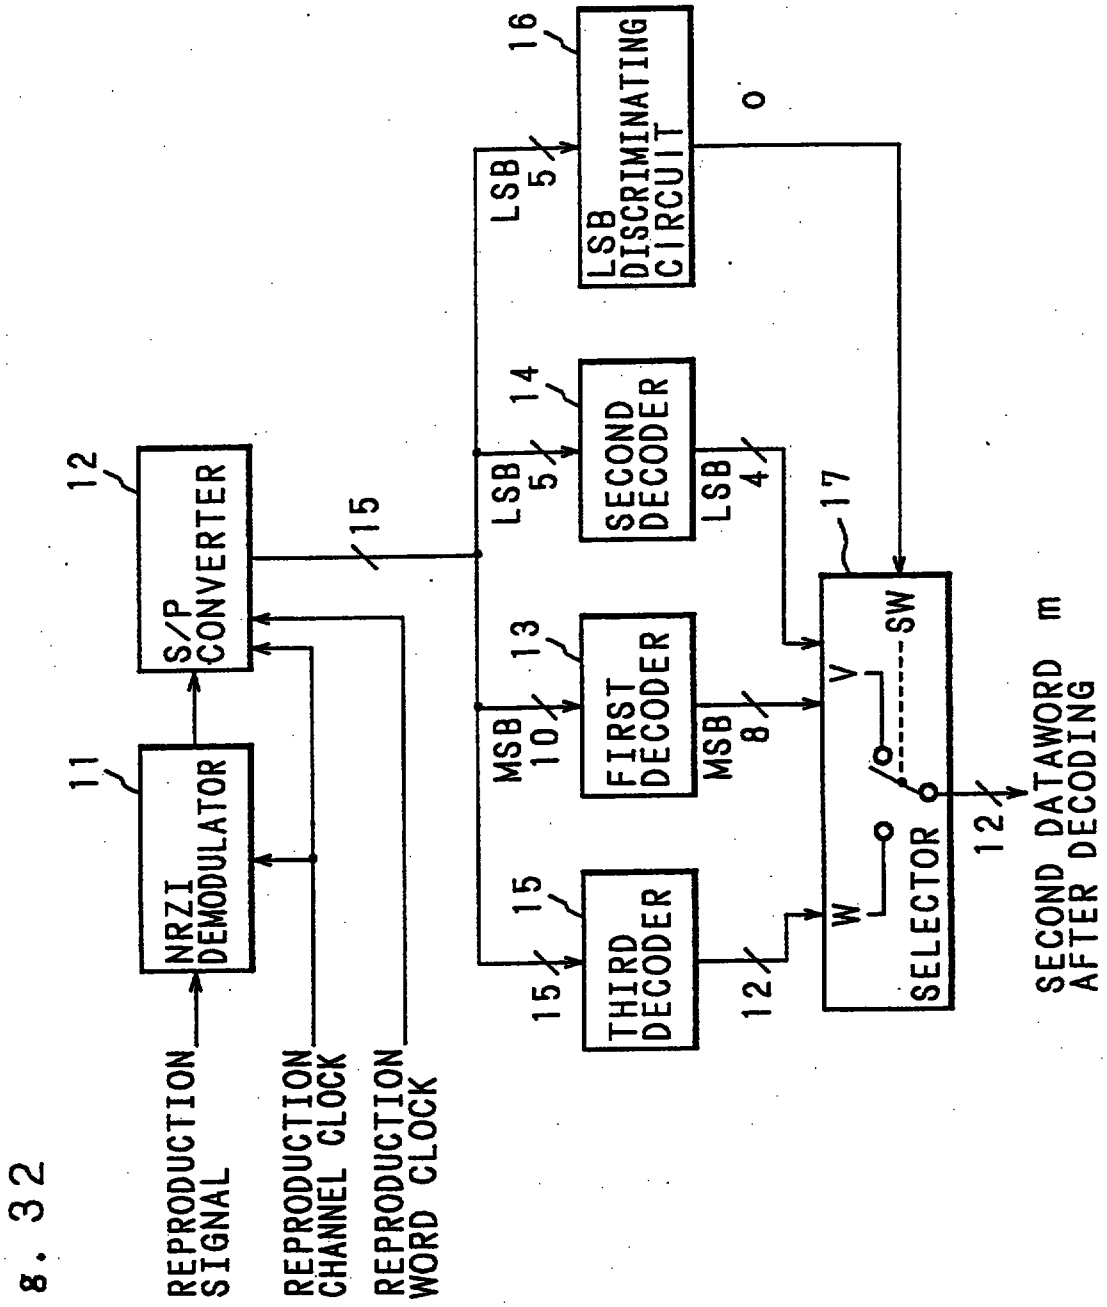

Fig. 32

This Sheet Has Been Replaced

REPLACEMENT SHEET
06 JUL 1996

Fig. 33

n2 GROUP	m2 DATA 0 1 2 3 4 5 6 7 8 9 A B C D E F
1	07 09 0A 0B 0D 0E 0F 12 15 17 19 1A 1B 1D 1E 1F
2	01 03 05 06
3	11 13 16
4	11 13 16 | 11 13 16 | 11 13 16

This Sheet Has Been Replaced

Fig. 34 a

$Q' = 0$

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
00	4E7B	4E7E	CEA1	4EA3	4EA6	CEC2	4EC5	CEC7	4ECA	CECD	4ECF	CED9	4EDB	4EDE	CEF1	4EF3
01	4EF6	4F43	4F46	4F85	CF87	4F8A	CF8D	4F8F	CF99	4F9B	4F9E	CFB1	4FB3	4FB6	CFE1	4FE3
02	4FE6	D0B9	50BB	50BE	D092	5095	D097	509A	D09D	509F	50A9	D0AB	D0AE	50B2	D0B5	50B7
03	D0BA	50BD	D0BF	50D1	D0D3	D0D6	50E2	D0E5	50E7	D0EA	50ED	D0EF	50F9	D0FB	D0FB	D011
04	5113	5116	D122	5125	D127	512A	D12D	512F	D139	513B	513E	5149	D14B	D14E	5152	D155
05	5157	D15A	515D	D15F	D169	516B	516E	D172	5175	D177	517A	D17D	517F	5191	D193	D196
06	51A2	D1A5	51A7	D1AA	51AD	D1AF	51B9	D1BB	D1BE	D1C9	51CB	51CE	D1D2	51D5	D1D7	51DA
07	D1DD	51DF	51E9	D1EB	D1EE	51F2	D1F5	51F7	D1FA	51FD	D1FF	D221	5223	5226	D242	5245
08	D247	524A	D24D	524F	D259	525B	525E	D271	5273	5286	5289	D28B	D28E	5292	D295	5297
09	D29A	529D	D29F	D2A9	52AB	52AE	D2B2	52B5	D2B7	52BA	D2BD	52BF	D2D1	52D3	52D6	D2E2
0A	52E5	D2E7	52EA	D2ED	D2EF	D2F9	52FB	52FE	5311	D313	D316	5322	D325	5327	D32A	532D
0B	D32F	5339	D33B	D33E	D349	534B	534E	D352	5355	D357	535A	D35D	535F	5369	D36B	D36E
0C	5372	D375	5377	D37A	537D	D37F	D391	5393	5396	D3A2	53A5	D3A7	53AA	D3AD	53AF	D3B9
0D	53BB	53BE	53C9	D3CB	D3CE	53D2	D3D5	53D7	D3DA	53DD	D3DF	D3E9	53EB	53EE	D3F2	53F5
0E	D3F7	53FA	D3FD	53FF	5443	5446	5485	D487	548A	D48D	548F	D499	549B	549E	D4B1	54B3
0F	54BB	D4E1	54E3	54E6	5509	D50B	D50E	5512	D515	5517	D51A	551D	D51F	D529	552B	552E

REPLACEMENT SHEET
06 JUL 1996

This Sheet Has Been Replaced

REPLACEMENT SHEET
06 JUL 1996

Q' = 0

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
10	D532	5535	D537	5537	D53A	553F	D551	5553	5556	D562	5565	D567	5568	D56D	556F	D579
11	5557	B557	ED5A	155A	355A	D542	55C5	D55C	7555	CAD5	5CFD	5D95	5D63	BD63	ED64	9564
12	55F6	5561	1D61	3D61	6556	2D62	5556	27D6	62AD	5562	DD62	F562	7D67	4A56	7D67	DD69
13	D652	5665	5D65	7565	AD65	D655	6E95	5675	BD66	BD66	E566	B956	BB56	C9D6	CBD6	D5D6
14	5693	5696	D6AE	56A5	D6A7	5674	AD79	F5D7	A955	7ABD	7AED	7B25	7B57	BAD7	BE78	E579
15	56D7	D6DA	56DD	D6DF	D6E9	5674	FD74	0D79	7A95	7EAD	7ED5	7E56	FAD6	FD56	FFD6	2156
16	D742	5745	D747	5574	AD74	D579	D7A9	57AB	D759	6DD7	5675	BD77	1557	7357	7B57	BAD7
17	D795	5797	D79A	5579	DD79	F5D7	E757	EAD7	EDA3	5AA6	DAC2	5AC5	DAC7	5575	5C77	DC7A
18	57D6	D7E2	557E	5D79	3596	D961	5963	5A3A	D5A3	FDA5	1C59	C35A	1255	A156	DA62	5A65
19	591E	D931	5933	5936	D961	5963	5AA3	5AA6	DB85	B875	B8AD	B8D5	B8FD	B9C3	5B9B	9B5B
1A	5A2B	5A2E	DA32	5A35	DA37	55AA	15AA	35AA	6B46	5B43	5B4E	5B5E	5B9E	DBB1	55BB	35BB
1B	5A6F	DA79	5A7B	5A7E	DAA1	55F5	C69D	C6BD	C6E5	5C72	DC75	55C7	7DC7	A5C7	DCCE	5CD2
1C	DAF1	5AF3	5AF6	5C22	DC25	55C2	7DC2	A5C2	DD5C	2F5C	39DC	3EDC	49C4	B5C4	EDC5	91C9
1D	DBE1	5BE3	5BE6	5C2A	DC5D	5C5F	5C69	DC6B	DC6E	5C72	DC7A	5C7D	DCC7	FDC9	15C9	3CD7
1E	5C55	DC57	55C5	ADC5	D5C5	F5C6	9DC6	BDC6	E5C7	2DC7	A5C7	DCCB	DCCE	5CD2	DCD5	5CD7
1F	5C96	DCA2	5CA5	DCA7	5CAA	DCAD	5CAF	DCB9	5CBB	5CBE	5CC9	DCCB	DCCE	5CD2	DCD5	5CD7

Fig. 34 b

This Sheet Has Been Replaced

REPLACEMENT SHEET
26 JUL 1996

Q'=0

/	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
20	DCDA5CDD	DCDF5CEB	DCDF5CEB	DCE55CEB	5CEB5CEB	5CEB5CEB	DCF25CEB	5CF55CEB	DCF75CFA	DCFA5CFA	DCFD5CFF	DD215D23	DD215D23	5D235D26	5D265D42	
21	5D455DD4	7D475DD4	5D4A5DD4	DD4D5DD4	FDD45DD4	DD595DD5	B5D55DB5	EDD75DD5	1DD75DD7	3DD75DD7	6DB75DDB	8DD88DD8	9DD88DD8	E5D92DD9	5DD95DD9	
22	5D975DD9	A5D95DD9	E5DD5DDE	7D5DDED1	5EDA9DDA	B5DAEDDB	25DB5DDB	5DFEDDB7	5DFBDDB5	5EE35DDB	5DAEDDB5	DFBADDB5	5DBFDDB5	DDB15DD3	5DD35DD6	
23	DDE25DE9	5DE95DE9	7DE95DE9	DEAD5DE9	DED55DE9	EB5DEFDE	95DFE9DE	95DFA1DE	55F3ADE3	5FA35DE6	55F09DE5	EA46DE87	5E855E87	5E965E87	5E8D5E8F	
24	DE995E96	FDB55E96	5F2E5E96	D3555E96	F7955E96	5FF35E96	8E365E96	8E375E96	8E595E96	8E885E96	8DF05E96	8FE05E96	8FE15E96	8FE25E96	8FE75E96	
25	5F1D5F67	5FDB5F64	DF2955F6	4DF6D5F6	4DF7955F	6DFA155F	6DFA355F	6DFA155F	3ADF3D5F	3D5F3D5F	3DFC255F	C755F1255	DFC755F1	5FCAD5F1	55FCD5F1	
26	DF6755F6	4B6925E9	3E9325E9	3E9325E9	3E9325E9	3E9325E9	3E9325E9	3E9325E9	3E9325E9	3E9325E9	3E9325E9	3E9325E9	3E9325E9	3E9325E9	3E9325E9	
27	DFD95FDB	76F95FDB	5FDB5FDB	5FDB5FDB	5FDB5FDB	5FDB5FDB	5FDB5FDB	5FDB5FDB	5FDB5FDB	5FDB5FDB	5FDB5FDB	5FDB5FDB	5FDB5FDB	5FDB5FDB	5FDB5FDB	
28	E8B168B7	6E9F369F	369F369F	369F369F	369F369F	369F369F	369F369F	369F369F	369F369F	369F369F	369F369F	369F369F	369F369F	369F369F	369F369F	
29	6926B692	EE936926	9736B692	EE936926	9736B692	EE936926	9736B692	EE936926	9736B692	EE936926	9736B692	EE936926	9736B692	EE936926	9736B692	
2A	69F6FE97	9796F697	B69F6E97	B69F6E97	B69F6E97	B69F6E97	B69F6E97	B69F6E97	B69F6E97	B69F6E97	B69F6E97	B69F6E97	B69F6E97	B69F6E97	B69F6E97	
2B	E9F169F3	69F369F3	69F369F3	69F369F3	69F369F3	69F369F3	69F369F3	69F369F3	69F369F3	69F369F3	69F369F3	69F369F3	69F369F3	69F369F3	69F369F3	
2C	6A4B6A4E	EA526A52	6A556A52	6A556A52	6A556A52	6A556A52	6A556A52	6A556A52	6A556A52	6A556A52	6A556A52	6A556A52	6A556A52	6A556A52	6A556A52	
2D	EA7FEA91	6A936A96	EAA26AA5	EAA76AA5	EAA96AA5	EAA96AA5	EAA96AA5	EAA96AA5	EAA96AA5	EAA96AA5	EAA96AA5	EAA96AA5	EAA96AA5	EAA96AA5	EAA96AA5	
2E	6AD2EAD5	6AD7EADA	6ADDEADF	EAE96AEB	6AEEEAF2	6AF5EAFB	6AFEEB59	6B4FEB4A	EB6AEB4D	6B4AEB4C	EB6AEB4D	6B4AEB4D	6B4AEB4D	6B4AEB4D	6B4AEB4D	
2F	6B236B26	B4526B45	EB476B45	EB476B45	EB476B45	EB476B45	EB476B45	EB476B45	EB476B45	EB476B45	EB476B45	EB476B45	EB476B45	EB476B45	EB476B45	

Fig. 35 a

This Sheet Has Been Replaced

REPLACEMENT SHEET
06 JUL 1996

Fig. 35 b

$Q' = 0$

/	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
30	EBBE6	B92E6	B956E	B976B	9A6B9	DEB9F	EBA96	BAEBA	BAB6B	AEBB2	6BB5E	BB76B	BAE6B	BBAEB	BBD66	BBF2E
31	EBD16	BD36B	D6EBE	2EBE5	EBE76	BEAEB	ED6BE	BED6B	EBEFE	BF96B	FBE6C	21EC6	23EC2	66C42	66C95	D6A2E
32	EC456	C47EC	4A6C4	D6C9F	ECA96	CEDEC	AEC6C	EBED4	BE6CB	2EECF	BE6C8	B6C8E	EC8EE	C926C	95D6A	DB6BF
33	EC976	C9AEC	9D6C9	D6C9F	ECA96	CEDEC	AEC6C	EBED4	BE6CB	2EECF	BE6C8	B6C8E	EC8EE	C926C	95D6A	DB6BF
34	6CE2E	CE56C	E7EC9	EA6CE	9EC6C	AEC6C	EBED4	BE6CB	2EECF	BE6C8	B6C8E	EC8EE	C926C	95D6A	DB6BF	
35	ED2D6	D2FED	396D3	7ED75	EDBEE	DBEDC	96DCB	6DD5E	EDD26	D6DAE	EDD6D	F6DE9	EDD25	FED69	6DADE	DAFED
36	6EED6	D72D6	D75ED	7D6D7	AED7D	6DCEE	DD26D	D5EED	D6DAE	EDD6D	F6DE9	EDD25	FED69	6DADE	DAFED	
37	6DB9E	DBBED	BEEDD	C96DC	BEEBD	6EEBF	EEDD6	EEE26	EE426	E956E	E96EE	26DEF	6EAEE	D6EEF	EEF96	EF4BF
38	EDBF5	6DF71	6EE73	6E736	E76EE	8BEE8	6EED1	6E237	6EE45	EE976	EE26E	2DEF6	EF72E	EF6AE	EF39E	F75E6
39	6EE5E	E71E6	B5EEB	76EBA	EEB6E	8EE96	EED36	EE27E	F2A6F	6BEF6	E6E72	EF6FB	B96FB	E6FBE	6FC9E	F776E
3A	EEB26	EEFB6	EEF52	6EF93	6EFA2	6FAE7	6EF56	F69EF	F26FA	EFEFB	96FBB	6FBE6	FC9EF	CBEFC	E6F6F	F7A6F
3B	6EFB6	EEF52	6EF93	6EFA2	6FAE7	6EF56	F69EF	F26FA	EFEFB	96FBB	6FBE6	FC9EF	CBEFC	E6F6F	F7A6F	
3C	6F4EE	F916F	D756F	D7EFD	A6FDD	EFDFE	F5D6F	5AEF5	7EFFA	EFFAE	F76EF	F7076	EEFAE	EFD6E	EF3EE	F49EF
3D	EF916	F936F	D756F	D7EFD	A6FDD	EFDFE	F5D6F	5AEF5	7EFFA	EFFAE	F76EF	F7076	EEFAE	EFD6E	EF3EE	F49EF
3E	EFFD5	6FD7E	FDA6F	DDEFD	FEF5E	F6F5E	6F5AE	F57EF	A5EFE	6F9EF	F7086	7EFFF	D6FFA	EFEEF	7DEF7	FB6D2
3F	10D71	0FF11	9711B	711EF	13137	13613	3716F	1617	1637	1663	71C3	71C6	7212F	2157	2172	17

This Sheet Has Been Replaced

Fig. 36 a

Q′=0

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
40	F21A	721D	F21F	F229	722B	722E	F232	7235	F237	723A	F23D	723F	F251	F253	7256	F262
41	7265	F267	726A	F26D	726F	F279	727B	727E	F2A1	72A3	72A6	F2C2	72C5	72C7	72CA	F2CD
42	72CF	F2D9	72DB	72DE	F2F1	72F3	72F6	7343	7346	7385	F387	738A	F38D	738F	F399	739B
43	739E	F381	73B3	73B6	F3E1	73E3	73E6	7422	F425	7427	F42A	742D	F42F	7439	F43B	F43E
44	F449	744B	744E	F452	7455	F457	745A	F45D	745F	7469	F46B	F46E	7472	F475	7477	F47A
45	747D	F47F	F471	7493	7496	F4A2	74A5	F4A7	74AA	F4AD	74AF	F4B9	74BB	74CE	74C9	F4CB
46	F4CE	74D2	F4D5	74D7	F4DA	74DD	F4DF	F4E9	74EB	74EE	F4F2	74F5	F4F7	74FA	F4FD	74FF
47	F521	7523	7526	F542	7545	F547	754A	F54D	754F	F559	755B	755E	F571	7573	7576	7589
48	F58B	F58E	7582	F595	7597	F59A	759D	F59F	F5A9	75AB	75AE	F5B2	75B5	F5B7	75BA	F5BD
49	75BF	F5D1	75D3	75D6	F5E2	75E5	F5E7	75EA	F5ED	75EF	F5F9	75FB	75FE	7643	7646	7685
4A	F687	768A	F68D	768F	F699	769B	769E	F6B1	76B3	76B6	F6E1	76E3	76E6	7709	F70B	F70E
4B	7712	F715	7717	F71A	771D	F71F	F729	772B	772E	F732	7735	F737	773A	F73D	773F	F751
4C	7753	7756	F752	7765	F767	776A	F76D	776F	F776	777B	777E	F7A1	77A3	77C0	F7A2	77C5
4D	F7C7	77CA	F7CD	77CF	F7D9	77DB	77DE	F7F1	77F3	77F6	7842	F845	7847	F84A	784D	F84F
4E	7859	F85B	F85E	7871	F873	F876	F889	788B	788E	F892	7895	F897	789A	F89D	789F	78A9
4F	F8AB	F8AE	78A2	F8B5	78B7	F8BA	78BD	F8BF	78D1	F8D3	F8D6	78E2	F8E5	78E7	F8EA	78ED

REPLACEMENT SHEET
06 JUL 1996
This Sheet Has Been Replaced

Fig. 36 b

Q′=0

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
50	F8EF	78F9	F8FB	F8FE	F911	7913	7916	F922	7925	F927	792A	F92D	792F	F939	793B	793E
51	7949	F94B	F94E	7952	F955	7957	F95A	795D	F95F	F969	796B	796E	F972	7975	F977	797A
52	F97D	797F	7991	F993	F996	79A2	F9A5	79A7	F9AA	79AD	F9AF	79B9	F9BB	F9BB	F9C9	79CB
53	79CE	F9D2	79D5	F9D7	79DA	F9DD	79DF	79E9	F9EB	F9EE	79F2	F9F5	79F7	F9FA	79FD	F9FF
54	FA21	7A23	7A26	FA42	7A45	FA47	7A4A	FA4D	7A4F	FA59	7A5B	7A5E	FA71	7A73	7A76	7A89
55	FA8B	FA8E	7A92	FA95	7A97	FA9A	7A9D	FA9F	FAA9	7AAB	7AAE	FAB2	7AB5	FAB7	7ABA	FABD
56	7ABF	FAD1	7AD3	7AD6	FAE2	7AE5	FAE7	7AEA	FAED	7AEF	FAF9	7AFB	7AFE	7B11	FB13	FB16
57	7B22	FB25	7B27	FB2A	7B2D	FB2F	7B39	FB3B	FB3E	FB49	7B4B	7B4F	FB52	7B55	FB57	7B5A
58	FB5D	7B5F	7B69	FB6B	FB6E	7B72	FB75	7B77	FB7A	7B7D	FB7F	FB91	7B93	7B96	FBA2	7BA5
59	FBA7	7BAA	FBAD	7BAF	FBB9	7BBB	7BBE	7BC9	FBCB	FBCE	7BD2	FBD5	7BD7	FBDA	7BDD	FBDF
5A	FBE9	7BEB	7BEE	FBF2	7BF5	FBF7	7BFA	FBFD	7BFF	7C43	7C46	7C85	FC87	7C8A	FC8D	7C8F
5B	FC99	7C9B	7C9E	FCB1	7CB3	7CB6	FCE1	7CE3	7CE6	7D09	FD0B	FD0E	7D12	FD15	7D17	FD1A
5C	7D1D	FD1F	FD29	7D2B	7D2E	FD32	7D35	FD37	7D3A	FD3D	7D3F	FD51	7D53	7D56	FD62	7D65
5D	FD67	7D6A	FD6D	7D6F	FD79	7D7B	7D7E	FDA1	7DA3	7DA6	FDC2	7DC5	FDC7	7DCA	FDCD	7DCF
5E	FDD9	7DDB	7DDE	FDF1	7DF3	7DF6	7E11	FE13	FE16	7E22	FE25	7E27	FE2A	7E2D	FE2F	7E39
5F	FE3B	FE3E	FE49	7E4B	7E4E	FE52	7E55	FE57	7E5A	FE5D	7E5F	7E69	FE6B	FE6E	7E72	FE75

40

This Sheet Has Been Replaced

REPLACEMENT SHEET

06 JUL 1996

REPLACEMENT SHEET
06 JUL 1996

Fig. 37 a

Q'=0

/	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
60	7E	7A	7E	FE	E9	7E	96	EA	EA	FA	7E	AD	EA	EB	7E	BE
61	7E	EC	9F	EC	BF	ED	7E	D2	7E	D5	7E	D7	FE	DA	7E	DF
62	2F	EF	EF	EF	21	7F	23	7F	E2	6F	F4	5F	F9	2F	F9	7F
63	7F	76	7F	89	FF	8E	7F	9E	7F	92	FF	8F	7F	9A	7F	9D
64	7F	BA	FF	BD	7F	BF	8E	7F	BF	D7	FF	8E	7F	9A	7F	9D
65	08	45	88	47	08	84	7F	D1	7F	D3	7F	D7	FE	5F	FE	5F
66	08	89	78	89	A0	89	D8	89	F8	8A	90	8A	B0	8E	08	B5
67	88	8E	E2	08	8E	E5	88	E7	08	EA	88	EF	08	FB	08	FE
68	09	2D	89	2F	09	39	89	3B	89	3E	89	49	09	4B	09	4E
69	89	96	E0	97	28	97	50	97	89	7A	09	7D	89	7F	08	B5
6A	89	B9	09	BB	09	BE	09	C9	89	CB	89	CE	09	D2	89	D5
6B	09	F5	89	F7	09	FA	89	FD	09	FF	0A	21	8A	23	8A	26
6C	8A	5E	0A	71	8A	73	8A	76	8A	89	0A	8B	0A	8E	8A	92
6D	0A	B2	8A	B5	0A	B7	8A	BA	0A	BB	08	BF	0A	D1	8A	D3
6E	8A	FB	8A	FE	8B	10	B1	30	B1	68	B2	0B	25	8B	27	0B
6F	8B	4E	0B	52	8B	55	0B	57	8B	5A	0B	5D	8B	5F	8B	69

This Sheet Has Been Replaced

Fig. 37 b

$Q' = 0$

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
70	0B91	8B93	8B96	0BA2	8BA5	0BA7	8BAA	0BAD	8BAF	0BB9	8BBB	8BBE	8BC9	0BCB	0BCE	8BD2
71	0BD5	8BD7	0BDA	8BDD	0BDF	0BE9	8BEB	8BEE	0BF2	8BF5	0BF7	8BFA	0BFD	8BFF	8B43	8B46
72	8C85	0C87	8C8A	0CBD	8C8F	0C99	8C9B	8C9E	0CB1	8CB3	8CB6	0CE1	8CE3	8CE6	8C09	0C0B
73	0D0E	8D12	0D15	8D17	0D1A	8D1D	0D1F	0D29	8D2B	8D2E	0D32	8D35	0D37	8D3A	0D3D	8D3F
74	0D51	8D53	8D56	0D62	8D65	0D67	8D6A	0D6D	8D6F	0D79	8D7B	8D7E	0DA1	8DA3	8DA6	0DC2
75	8DC5	0DC7	8DCA	0DCD	8DCF	0DD9	8DDB	8DDE	0DF1	8DF3	8DF6	8E11	0E13	0E16	8E22	0E25
76	8E27	0E2A	8E2D	0E2F	8E39	0E3B	0E3E	0E49	8E4B	8E4E	0E52	8E55	0E57	8E5A	0E5D	8E5F
77	8E69	0E6B	0E6E	8E72	0E75	8E77	0E7A	8E7D	0E7F	0E91	8E93	8E96	0EA2	8EA5	0EA7	8EAA
78	0EAD	8EAF	0EB9	8EBB	8EBE	8EC9	0ECB	0ECE	8ED2	0ED5	8ED7	0EDA	8EDD	0EDF	0EE9	8EEB
79	8EEE	0EF2	8EF5	0EF7	8EFA	0EFD	8EFF	0E21	8F23	8F26	0F42	8F45	0F47	8F4A	0F4D	8F4F
7A	0F59	8F5B	8F5E	0F71	8F73	8F76	8F8B	0F8B	0F8E	8F92	0F95	8F97	0F9A	8F9D	0F9F	0FA9
7B	8FAB	8FAE	0FB2	8FB5	0FB7	8FBA	0FBD	8FBF	0FD1	8FD3	8FD6	0FE2	8FE5	0FE7	8FEA	0FED
7C	8FEF	0FF9	8FFB	8FFE	1085	9087	108A	908D	108F	9099	109B	109E	90B1	10B3	10B6	90E1
7D	10E3	10E6	1109	910B	910E	1112	9115	1117	911A	111D	911F	9129	112B	112E	9132	1135
7E	9137	113A	013D	113F	9151	1153	1156	9162	1165	9167	116A	016D	116F	9179	117B	117E
7F	91A1	11A3	11A6	91C2	11C5	91C7	11CA	91CD	11CF	81D9	11DB	11DE	91F1	11F3	11F6	1211

REPLACEMENT SHEET
06 JUL 1996

This Sheet Has Been Replaced

Fig. 38 a

$Q' = 0$

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
80	9213	9216	1222	0225	1227	922A	122D	022F	1239	923B	923E	9249	124B	124E	9252	1255
81	9257	125A	925D	125F	1269	926B	926E	1272	9275	1277	927A	127D	927F	9291	1293	1296
82	92A2	12A5	92A7	12AA	92AD	12AF	92B0	12BB	12BE	12C9	92CB	92CE	12D2	92D5	12D7	92DA
83	12DD	92DF	92E9	12EB	12EE	92F2	12F5	93F7	12FA	92FD	12FF	9321	1323	1326	9342	1345
84	9347	134A	934D	134F	9359	135B	135E	0371	1373	1376	1389	93BB	938E	1392	9395	1397
85	939A	139D	939F	93A9	13AB	13AE	93B2	13B5	93B7	13BA	938D	13BF	93D1	13D3	13D6	93E2
86	13E5	93E7	13EE	93ED	13EF	93F9	13FB	14FE	1421	0423	9426	1442	9445	1447	944A	144D
87	944F	1459	945D	945E	1471	9473	9476	9489	148B	148E	9492	1495	9497	149A	949D	149F
88	14A9	94AB	94AE	14B2	94B5	14B7	94BA	158D	94BF	14D1	94D3	94D6	14E2	94E5	14E7	94EA
89	14ED	94EF	14F9	94FB	94FE	9511	1513	1516	9522	1525	9527	152A	952D	152F	9539	153B
8A	153E	1549	9548	954E	1552	9555	1557	955A	155D	055F	9569	156B	156E	9572	1575	9577
8B	157A	957D	157F	1591	9593	9596	15A2	95A5	15A7	05AA	15AD	95AF	15B9	95BB	05BE	95C9
8C	15CB	15CE	95D2	15D5	95D7	15DA	95DD	15DF	15A9	05EB	95EE	15F2	95F5	15F7	95FA	15FD
8D	95FF	9621	1623	1626	0642	1645	0647	164A	964D	164F	9659	1658	165E	9671	1673	1676
8E	1689	9688	968E	169E	0695	1697	069A	169D	969F	96A9	16AB	16AE	96B2	16B5	06B7	16BA
8F	96BD	16B4	96D1	16D3	16D6	96E2	16E5	96E7	16EA	96ED	16EF	96F9	16FB	16FE	1711	9713

REPLACEMENT SHEET
06 JUL 1996

This Sheet Has Been Replaced

REPLACEMENT SHEET
06 JUL 1996

Q'=0

/	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
90	9716	1722	9725	1727	9972	A172	D972	F173	9973	B973	E974	9174	B174	E975	2175	5975	7
91	175A	9775	D175	F176	9976	B976	E172	9177	5177	7977	A177	D977	F977	9179	1179	3179	6
92	17A5	9917	A991	D191	F199	9619	7299	B997	E199	3519	9A19	3D99	3F19	5199	3995	6199	6
93	97DF	917E	9917	EB17	EE97	AF21	7B61	8E18	CB17	FF98	4398	A699	8501	8879	8A1B	8D17	7
94	9988	F189	9989	B989	E18B	1989	F199	DE19	F1A7	F1AD	2105	0B23	0B8E	0AD2	1C45	0C47	1
95	1991	A991	D199	F199	DB99	DE1A	3E1A	4991	A4B9	A4E1	A521	0AD5	9B21	0BD3	9BD6	1BE2	9
96	9965	1967	9996	A196	D999	F199	F199	7E19	A119	9A39	A2D1	A5D9	A5F1	AA79	AAA1	AED0	B
97	09CF	119D	9991	A3B1	A3E1	A7A9	A7D1	ACE0	AD21	ACB1	ACB1	ACB1	ACB1	ACB1	ACB1	ACB1	C
98	9A39	1A75	9A77	1A7A	9A7D	1A49	99A4	7F1A	9119	A3E1	A5F9	A5A1	A5D9	A5A6	5199	C599	C
99	91A7	59A7	71A7	A9A7	D1AC	E0AD	21C4	5021	C471	C4A9	C4D1	C4F0	C551	C5B1	C5E0	C711	C
9A	0ABE	9AC9	1ACB	1ACE	0AD2	1AD5	9AD7	1ADA	9AD8	1ADF	1AE9	9AEB	9AEE	1AF2	9AF5	1AF7	1
9B	0AFA	1AFD	9AFF	1B21	0B23	0B26	1B42	9B45	1B47	0B4A	1B4D	0B4F	1BA9	8BAB	9BAE	1BB2	9
9C	0B73	9B76	9BB8	91BB	B1BB	F1BD	10BD	39BD	61BE	29BE	51BE	79BE	A1BE	D0BE	F1BF	99BF	B
9D	1BB7	0BBA	1BBD	9BBF	1BD1	0BD3	9BD6	1BE2	9BE5	1BE7	9BEA	1BED	0BEF	1BF9	9BFB	9BFE	9
9E	9C21	1C23	1C26	9C42	1C45	0C47	1C4A	9C4D	1C4F	0C51	C551	C5B1	C5E0	C711	C731	C761	C
9F	0C8B	0C8E	1C92	9C95	1C97	0C9A	1C9D	9C9F	9CA9	1CAB	1CAE	0CB2	1CB5	9CB7	1CBA	9CBD	9

Fig. 38 b

This Sheet Has Been Replaced

REPLACEMENT SHEET
06 JUL 1996

Fig. 39 a

Q'=0

/	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
A0	1CBF	9CD1	1CD3	1CD6	9CE2	1CE5	9CE7	1CEA	9CED	1CEF	9CF9	1CFB	1CFE	1D11	9D13	9D16
A1	1D22	99D2	51D2	79D2	A1D2	D9D2	F1D3	99D3	B9D3	E9D4	91D4	B1D4	E9D5	21D5	59D5	71D5	A
A2	99D5	D1D5	F1D6	99D6	E1D7	29D7	51D7	7	99DC	B9DC	E1DF	D1DF	A1E0	7	9DA2	1DA5
A3	99DA	71DA	A99D	AD1D	AF9D	B91D	BE1D	C99E	5B9E	AE1E	B99E	F4B9	F4E1	F919	F921	A221	DA39	7	1F3	9F7	1F7	A9F7	D1F7	CE9F	D21F	4A9F	10D2	10FA	1192	11B2	1FA2	29FD	71FD	A9FD	D1FE	A131	2132	2EA2	3227	9227	B227	E6	2342	3234	6A16	1A23	7223	A322	A1	2242	3A38	7238	AA38	D
A4	99DE	91DE	B1DE	E99E	AB9E	AE1E	B99E	F1EA	2199	E2A2	1D27	1E2A	2165	2E9F	6E9F	7E9F	B9E9	F9E9	FBB9	FBE
A5	1E4D	9E4F	1E5F	1E6E	1E7E	1E8E	1E9E	1EAE	1EBE	1ECE	1EDE	1EEE	1EF2	1F62	1F72	1F92	1FB2	1FE2	1FF5	1FF7	9E9F	E9DA	21DD	D9DF
A6	1E9F	1EA9	9EAB	9EAE	1EB2	9EBB	9EBE	1EC2	1ED1	9EE2	1EE5	1EE9	1EF2	1F2A	9F2D	1F2F	9E39	7
A7	9EEA	11EE	D9EE	F1EE	F99E	FB9E	FE1F	1F11	F131	F1F5	79F5	A1F5	D9F6	2F6B	1F6E	9F6F	91F6	F9F7	21F7	D
A8	1F3B	1F3E	1F49	9F4B	9F4E	1F51	F579	F5A1	F5D9	F5F9	1F6E	9F6F	91F6	F9F7	21F7	D
A9	9F77	1F7A	9F7D	1F7F	7F11	F719	F921	FA29	FA51	FA79	FAA1	FAD9	FAF1	FB99	FBB9	FBE
AA	9FC9	1FCB	1FCE	9FD2	1FD5	9FD7	1FDA	9FDD	1FDF	1FE9	9FEB	9FEE	1FF2	9FF5	1FF7	9FFA
AB	1FFD	9FFF	2107	AA10	D210	FA11	9211	B211	EA13	1213	3213	6A16	1216	3213	6A16	21C6
AC	2212	A215	2217	A21A	2212	1DA2	1FA2	2926	AA26	D226	EA27	9227	B227	E623	4323	4623	7223	A123	D223	FA25	1
AD	2253	2256	A262	2265	A267	2269	2DB2	2DEA	2F12	2F32	2E67	2E9A	2C22	C5
AE	A2C7	22CA	A2CD	22CF	A2D9	22DB	22DE	A2F1	22F3	22E6	2343	2346	2385	A387	238A	A38D
AF	238F	A399	239B	239E	A3B1	23B3	23B6	A3E1	23E3	23E6	2422	A425	2427	A42A	242D	A42F

This Sheet Has Been Replaced

Fig. 39 b

$Q' = 0$

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
B0	2439	A43B	A43E	A449	244B	244E	A452	2455	A457	245A	A45D	245F	2469	A46B	A46E	2472
B1	A475	2477	A47A	247D	A47F	A491	2493	2496	A4A2	24A5	A4A7	24AA	A4AD	24AF	A4B9	24BB
B2	24BE	24C9	A4C8	A4CE	24D2	A4D5	24D7	A4DA	24DD	A4DF	A4E9	24EB	24EE	A4F2	24F5	A4F7
B3	24FA	A4FD	24FF	A521	2523	2526	A542	2545	A547	254A	A54D	254F	A555	255B	255E	A571
B4	2573	2576	2589	A58B	A58E	2592	A595	2597	A59A	259D	A59F	A5A9	25AB	25AE	A5B2	25B5
B5	A5B7	25BA	A58D	25BF	A5D1	25D3	25D6	A5E2	25E5	A5E7	25EA	A5ED	25EF	A5F9	25FB	25FE
B6	2643	2646	2685	A687	268A	A68D	268F	A699	269B	269E	A6B1	26B3	26B6	A6E1	26E3	26E6
B7	2709	A70B	A70E	2712	A715	2717	A71A	271D	A71F	A729	272B	272E	A732	2735	A737	273A
B8	A73D	273F	A751	2753	2756	A762	2765	A767	276A	A76D	276F	A779	277B	277E	A7A1	27A3
B9	27A6	A7C2	27C5	A7C7	27CA	A7CD	27CF	A7D9	27DB	27DE	A7F1	27F3	27F6	2842	A845	2847
BA	A84A	284D	A84F	2859	A85B	A85E	2871	A873	A876	A889	288B	288E	A892	2895	A897	289A
BB	A89D	289F	28A9	A8AB	A8AE	28B2	A8B5	28B7	A8BA	28BD	A8BF	28D1	A8D3	A8D6	28E2	A8E5
BC	28E7	A8EA	28ED	A8EF	28F9	A8FB	A8FE	A911	2913	2916	A92E	2925	A927	292A	A92D	292F
BD	A939	293B	293E	2949	A94B	A94E	2952	A955	2957	A95A	295D	A95F	A969	296B	296E	A972
BE	2975	A977	297A	A97D	297F	2991	A993	A996	29A2	A9A5	29A7	A9AA	29AD	A9AF	29B9	A9BB
BF	A9BE	A9C9	29CB	29CE	A9D2	29D5	A9D7	29DA	A9DD	29DF	29E9	A9EB	A9EE	29F2	A9F5	29F7

46

This Sheet Has Been Replaced

REPLACEMENT SHEET
06 JUL 1996

Fig. 40 a

$Q' = 0$

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
C0	A9FA	29FD	A9FF	AA21	2A23	2A26	AA42	2A45	AA47	2A4A	AA4D	2A4F	AA55	2A5B	2A5E	AA71
C1	2A73	2A76	2A89	AA8B	AA8E	2A92	AA95	2A97	AA9A	2A9D	AA9F	AA99	2AAB	2AAE	AAB2	2AB5
C2	AAB7	2ABA	AABD	2ABF	AAD1	2AD3	2AD0	AAE2	2AE5	AAE7	2AEA	AAAD	2AEF	AAF9	2AFB	2AFE
C3	2B11	AB13	AB16	2B22	AB25	2B27	AB2A	2B2D	AB2F	2B39	AB3B	AB3E	AB49	2B4B	2B4E	AB52
C4	2B55	AB57	2B5A	AB5D	2B5F	2B69	AB6B	AB6E	2B72	AB75	2B77	AB7A	2B7D	AB7F	AB91	2B93
C5	2B96	ABA2	2BA5	ABA7	2BAA	ABAD	2BAF	ABB9	2BBB	2BBE	2BC9	ABCB	ABCE	2BD2	ABD5	2BD7
C6	ABDA	2BDD	ABDF	ABE9	2BEB	2BEE	ABF2	2BF5	ABF7	2BFA	ABFD	2BFF	2C43	2C46	2C85	AC87
C7	2C8A	AC8D	2C8F	AC99	2C9B	2C9E	ACB1	2C83	2CB6	ACE1	2CE3	2CE6	2D09	AD0B	AD0E	2D12
C8	AD15	2D17	AD1A	2D1D	AD1F	AD29	2D2B	2D2E	AD32	2D35	AD37	2D3A	AD3D	2D3F	AD51	2D53
C9	2D56	AD62	2D65	AD67	2D6A	AD6D	2D6F	AD79	2D7B	2D7E	ADA1	2DA3	2DA6	ADC2	2DC5	ADC7
CA	2DCA	ADCD	2DCF	ADD9	2DDB	2DDE	ADF1	2DF3	2DF6	2E11	AE13	AE16	2E22	AE25	2E27	AE2A
CB	2E2D	AE2F	2E39	AE3B	AE3E	AE49	2E4B	2E4E	AE52	2E55	AE57	2E5A	AE5D	2E5F	2E69	AE6B
CC	AE6E	2E72	AE75	2E77	AE7A	2E7D	AE7F	AE91	2E93	2E96	AEA2	2EA5	AEA7	2EAA	AEAD	2EAF
CD	AE89	2EBB	2EBE	2EC9	AECB	AECE	2EB2	AED5	2ED7	AEDA	2EDD	AEDF	AEE9	2EEB	2EEE	AEF2
CE	2EF5	AEF7	2EFA	AEFD	2EFF	AF21	2F23	2F26	AF42	2F45	AF47	2F4A	AF4D	2F4F	AF59	2F5B
CF	2F5E	AF71	2F73	2F76	2F89	AF8B	AF8E	2F92	AF95	2F97	AF9A	2F9D	AF9F	AFA5	2FAB	2FAE

REPLACEMENT SHEET
06 JUL 1996

This Sheet Has Been Replaced

REPLACEMENT SHEET

06 JUL 1996

Q'=0

/	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
D0	AFB2	2FB5	AFB7	2FBA	AFBD	2FBF	AFD1	2FD3	2FD6	AFE2	2FE5	AFE7	2FEA	AFED	2FEF	AFF9
D1	12FF	B2FF	EB08	5308	7B08	A308	D808	F309	9B09	E309	B109	E30B	1809	E180	E3B0	E6B1
D2	B109	310B	310E	8115	3811	7311	A811	D311	F312	9811	2B81	2E31	3213	2B13	7813	7A81
D3	313D	813F	3151	8153	8156	3162	8165	3167	8167	A316	D816	F317	9816	B17E	31A1	81A3
D4	81A6	31C2	81C5	31C7	81CA	31CD	81CF	31D9	81DB	81DE	31F1	81F3	81F6	B211	3321	3216
D5	8225	D822	5822	7322	A822	F326	B326	D932	7327	E327	A832	7D32	9B29	6329	2A28	2A5A
D6	3259	8259	8269	3269	B269	E327	5827	3232	CB32	4932	7D32	4B24	E325	2B25	5332	5782
D7	32A7	8825	F82A	D82A	F328	9832	BB2B	E82C	9328	CE32	D232	D832	9329	3B29	6332	A282
D8	32E9	82EB	82EE	32F2	8235	B83A	E32F	5332	F782	FF33	2383	2683	3342	B345	3347	8334
D9	334D	8234	F335	9883	AE33	B83F	9833	7683	8938	B839	2E83	9739	5833	9739	A833	9D39
DA	339F	33A9	83AB	83F3	3F98	3FE3	7B37	6837	BA33	BD83	BF33	D183	D338	3D63	3E28	3253
DB	83EA	33ED	83EF	3347	3347	6B34	8B34	8E34	8D13	4D34	9549	8447	3449	AB44	D349	F844
DC	345B	345E	8471	3384	B584	B734	BA84	BD34	BF84	D134	D334	D684	E234	E584	E734	EA84
DD	34AE	84B2	34B5	84B7	34BA	84BD	34BF	84D1	34D3	34D6	84E2	34E5	84E7	34EA	84ED	34EF
DE	84F9	34FB	34FE	3511	8513	8516	3522	8525	3527	8529	8529	5329	8539	853B	853E	8549
DF	354B	354E	8552	3555	8557	355A	8559	355F	3569	8569	8569	E357	2857	5377	857A	357D

Fig. 40 b

This Sheet Has Been Replaced

REPLACEMENT SHEET
06 JUL 1996

Fig. 41 a

Q'=0

/	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
E0	B57F	B591	3593	3596	B5A2	35A5	B5A7	35AA	B5AD	35AF	B5BB	35BB	35BE	35C9	B5CB	B5CE
E1	35D2	B5D5	35D7	B5DA	35DD	B5DF	B5E9	35EB	B5EE	B5F2	35F5	B5F7	35FA	B5FD	35FF	3621
E2	B623	B626	3642	B645	3647	B64A	364D	B64F	3655	BB65	B65E	3671	B673	B676	B689	368B
E3	3688	EBB6	9223	6995	B697	369A	B69D	369F	36A9	B6AB	B6AE	36B2	B6B5	36B7	B6BA	36BD
E4	36D1	B6D3	B6D6	3637	2B64	B5B6	36E7	B6EA	36ED	B6EF	36F9	B6FB	B6FE	B711	3713	3716
E5	3725	B727	3729	3732	AB72	D372	FB73	9373	B373	E373	7493	B749	B74B	B74E	3752	B755
E6	B75F	B769	3769	3776	BB37	6B77	2B77	5B77	7B77	DB77	CB37	E3B7	7D37	7B37	DB37	E3B7
E7	B7AA	37AD	B7AF	37B9	B7BB	B7BE	B7C9	37C9	37CB	37CE	B7D2	37D5	B7D7	37DA	B7DD	37DF
E8	B7EB	B7EE	B737	F2B7	F5B7	FA37	FDB7	FF38	4338	4638	5B85	B887	3812	BAB8	8D38	8FB8
E9	3889	B8B1	3892	EB39	7939	F339	F639	A11B	A13B	A139	A16B	A19B	A1BB	A1E3	9A1B	A1D3
EA	B91F	B929	3926	FB97	B397	EB97	B397	BB39	7A39	AA39	A5BA	AAD3	AAFB	AB93	ABE3	ABF7
EB	3967	ABB9	6D39	6F13	9F33	A933	A96B	AA23	AA5B	AAE9	3AEB	3ADD	BADF	BAE9	3AEB	AF23	AF5B	AF73	AFAB	AFD3
EC	39DB	39DE	B9F1	39F3	9F63	A155	BA57	3A5A	BA5D	3A5F	3A69	BA6B	BA6E	3A72	BA75	3A77
ED	BA32	BA49	3A4B	3A4E	BA52	3A55	BA5A	23AA	5BAA	23AA	7BAA	23AA	FBAB	93AB	E3AB	E3AC	9AC9
EE	BA7A	3A7D	BA7F	BA91	3A93	3A96	BAA2	3AD7	BADA	3ADD	BADF	BAE9	3AEB	3AF5	BAF7	3AFA	BAFD
EF	BACB	BACE	3AD2	BAD5	3AD7	BADA	3ADD	BADF	BAE9	3AEB	3AEE	BAF2	3AF5	BAF7	3AFA	BAFD

This Sheet Has Been Replaced

Fig. 41 b

$Q' = 0$

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
F0	3AFF	BB21	3B23	3B26	BB42	3B45	BB47	3B4A	BB4D	3B4F	BB59	3B5B	3B5E	BB71	3B73	3B76
F1	3B89	BB8B	BB8E	3B92	BB95	3B97	BB9A	3B9D	BB9F	BBA9	3BAB	3BAE	BBB2	3BB5	BBB7	3BBA
F2	BBBD	3BBF	BBD1	3BD3	3BD6	BBE2	3BE5	BBE7	3BEA	BBED	3BEF	BBF9	3BFB	3BFE	3C21	BC23
F3	BC26	3C42	BC45	3C47	BC4A	3C4D	BC4F	3C59	BC5B	BC53	3C71	BC73	BC76	BC89	3C8B	3C8E
F4	BC92	3C95	BC97	3C9A	BC9D	3C9F	3CA9	BCAB	BCAE	3CB2	BCB5	3CB7	BCBA	3CBD	BCBF	3CD1
F5	BCD3	BCD6	3CE2	BCE5	3CE7	BCDA	3CED	BCEF	3CF9	BCFB	BCFE	BD11	3D13	3D16	BD22	3D25
F6	BD27	3D2A	BD2D	3D2F	BD39	3D3B	3D3B	3D49	BD48	BD4E	3D52	BD55	3D57	BD5A	3D5D	BD5F
F7	BD69	3D6B	3D6E	BD72	3D75	BD77	3D7A	BD7D	3D7F	3D91	BD93	BD96	3DA2	BDA5	3DA7	BDAA
F8	3DAD	BDAF	3DB9	BDBB	BDBE	BDC9	3DCB	3DCE	BDD2	3DD5	BDD7	3DDA	BDDD	3DDF	3DE9	BDEB
F9	BDEE	3DF2	BDF5	3DF7	BDFA	3DFD	BDFF	BE21	3E23	3E26	BE42	3E45	BE47	3E4A	BE4D	3E4F
FA	BE59	3E5B	3E5E	BE71	3E73	3E76	3E89	BE8B	BE8E	3E92	BE95	3E97	BE9A	3E9D	BE9F	BEA9
FB	3EAB	3EAE	BEB2	3E85	BEB7	3EBA	BEBD	3EBF	BED1	3ED3	3ED6	BEE2	3EE5	BEE7	3EEA	BEED
FC	3EEF	BEF9	3EFB	3EFE	3F11	BF13	BF16	3F22	BF25	3F27	BF2A	3F2D	BF2F	3F39	BF3B	BF3E
FD	BF49	3F4B	3F4E	BF52	3F55	BF57	3F5A	BF5D	3F5F	3F69	BF6B	BF6E	3F72	BF75	3F77	BF7A
FE	3F7D	BF7F	BF91	3F93	3F96	BFA2	3FA5	BFA7	3FAA	BFAD	3FAF	BFB9	3FBB	3FBE	3FC9	BFCB
FF	BFCE	3FD2	BFD5	3FD7	BFDA	3FDD	BFDF	BFE9	3FEB	3FEE	BFF2	3FF5	BFF7	3FFA	BFFD	3FFF

REPLACEMENT SHEET
06 JUL 1996

This Sheet Has Been Replaced

REPLACEMENT SHEE
06 JUL 1996

Q'=1

/	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
0	CCB5	4CB7	CCBA	4CBD	CCBF	4CD1	CCD3	CCD6	4CE2	CCE5	4CE7	CCEA	4CED	CCEF	4CF9	CCFB
1	CCFE	CD11	4D13	4D16	CCD2	24D2	5CD6	9CD8	4D2A	CD2D	4D39	4D3B	4D3E	4D49	CD4B	CD4E
2	4D52	CD55	4D57	CD5A	4D5D	CD5F	CD69	4D6B	4D66	CD72	4D75	CD77	4D7A	CD7D	4D7F	4D91
3	CD93	CD96	4DA2	CDA5	4DA7	CDAA	4DAD	CDAF	4DB9	CDBB	CDBE	CDC9	4DCB	CDCF	CDD2	4DD5
4	CDD7	4DDA	CDDD	4DDF	4DE4	CDE7	4DEB	CDEE	4DF4	CDF7	4DFA	4DFD	CE01	CE03	CE06	CE09
5	CE0C	4E24	E45C	E97C	E9A4	E9A7	CEAA	CEED	4EF4	CEFA	9F0C	E0F2	4F13	CF16	4F1B	CF1E
6	4F21	CF24	4F27	CF2A	4F2D	CF30	4F33	CF36	4F39	CF3C	4F3F	CF42	4F45	CF48	4F4E	CF51
7	4F54	CF57	4F5A	CF5D	4F60	CF63	4F66	CF69	4F6C	CF6F	4F72	CF75	4F78	CF7B	4F7E	CF81
8	4F87	CF8A	4F8D	CF90	4F93	CF96	4F99	CF9C	4F9F	CFA2	4FA5	CFA8	4FAB	CFAE	4FB1	CFB4
9	4FB7	CFBA	4FBD	CFC0	4FC3	CFC6	4FC9	CFCC	4FCF	CFD2	4FD5	CFD8	4FDB	CFDE	4FE1	CFE4
A	4FE7	CFEA	4FED	CFF0	4FF3	CFF6	4FF9	CFFC	5002	D005	5008	D00B	500E	D011	5014	D017
B	501A	D01D	5020	D023	5026	D029	502C	D02F	5032	D035	5038	D03B	503E	D041	5044	D047
C	504A	D04D	5050	D053	5056	D059	505C	D05F	5062	D065	5068	D06B	506E	D071	5074	D077
D	507A	D07D	5080	D083	5086	D089	508C	D08F	5092	D095	5098	D09B	509E	D0A1	50A4	D0A7
E	50AA	D0AD	50B0	D0B3	50B6	D0B9	50BC	D0BF	50C2	D0C5	50C8	D0CB	50CE	D0D1	50D4	D0D7
F	50DA	D0DD	50E0	D0E3	50E6	D0E9	50EC	D0EF	50F2	D0F5	50F8	D0FB	50FE	D101	5104	D107

Fig. 42 a

This Sheet Has Been Replaced

REPLACEMENT SHEET
06 JUL 1996

Q'=1

/	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
10	D42	542	7D4	2A5	42D	439	D43	BD4	3ED	449	544	BD4	525	457	545	AD4
11	545	F54	69D	46B	DE5	472	D47	557	A47	DD4	7D4	557	5D4	7DA	254	A5D
12	54A	AD5	4AD	54A	FD4	BB5	4C9	D4C	BDD	58E	554	D47	DA5	47D	A25	4D4
13	54E	BD5	4EE	D4F	254	F5D	4FD	54F	FD5	21D	523	557	545	547	DDA	A7E
14	55F	D55	59F	D55	5EF	D55	6B8	D56	B85	5D6	8E5	596	D54	255	597	D59
15	D55	A95	55A	B55	AED	5B2	55B	5D5	B75	5BA	D55	8FD	5D1	55D	35D	5E2	55E	5D5	E75	5EA
16	D5E	D55	5EF	D55	6E1	56E	356	435	646	568	5D6	87D	70B	D70	E55	71D	759	569	B56	9ED	6B1
17	56B	356	B8D	6E1	56E	356	E37	557	3AD	735	D73	757	5D5	71A	557	1DD	757	6AD	76D	572	B5F
18	572	ED7	325	737	557	8D6	558	9AD	558	9AD	8AB	D8B	558	7ED	991	1D9	93D	996	59D	A2D	9A5	59A	7A9
19	D77	957	785	77E	D7A	155	7A3	57A	6D7	C25	57C	5D7	C75	3C7	557	7CA	D8E	F58	F9D	94B	D94	E5D	759	DAD	9DD	59D	F59	E9
1A	57F	357	F65	842	D84	A55	847	D84	A55	84D	D58	9F5	8A9	D8A	BDD	8EF	59D	85B	D85	E58	F9D	8FB	D85	E58	7D8	7DB	57D	E7F	1D9	5A5	995	D59	A7E
1B	588	EDD	892	589	D89	755	8E2	D8E	2D5	93E	593	E59	49D	947	D97	597	F59	91D	993	D87	6D8	895	88B	8DD	8BF	59D	F59	E9
1C	58D	1D8	D3D	865	8D6	5E7	DA6	D7C	257	C5D	7C7	557	CAD	7CD	557	CFD	7D9	57D	B57	DED	7F1	6D9	225	5D4	5A7	5D4	A7E	9
1D	592	5D9	275	92A	D92	D59	2FD	992	7D5	975	D97	759	5D9	759	5A5	995	D5D	9
1E	D96	95F	D96	959	96B	596	ED9	725	975	D97	759	5AD	9BB	D9B	ED9	C95	9CB	59C	ED9	D25	95D	5D9	1DD	759	DAD	9DD	59D	F59	E9
1F	D9A	A59	ADD	9AF	59B	9D9	BED	9C9	5CB	59C	ED9	D25	9D5	D9D	759	DAD	9DD	59D	F59	E9

Fig. 42 b

This Sheet Has Been Replaced

Fig. 43 a

Q' = 1

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
20	D9EB	D9EE	59F2	D9F5	59F7	D9FA	59FD	D9FF	DA21	5A23	5A26	DA42	5A45	DA47	5A4A	DA4D
21	5A4F	DA59	5A5B	5A5E	DA71	5A73	5A76	5A89	DA8B	DA8E	5A92	DA95	5A97	DA9A	5A9D	DA9F
22	DAA9	5AAB	5AAE	DAB2	5AB5	DAB7	5ABA	DABD	5ABF	DAD1	5AD3	5ADD	DAE2	5AE5	DAE7	5AEA
23	DAED	5AEF	DAF9	5AFB	5AFE	5B11	DB13	DB16	5B22	DB25	5B27	DB2A	5B2D	DB2F	5B39	DB3B
24	DB3E	DB49	5B4B	5B4E	DB52	5B55	DB57	5B5A	DB5D	5B5F	5B69	DB6B	DB6E	5B72	DB75	5B77
25	DB7A	5B7D	DB7F	DB91	5B93	5B96	DBA2	5BA5	DBA7	5BAA	DBAD	5BAF	DBB9	5BBB	5BBE	5BC9
26	DBCB	DBCE	5BD2	DBD5	5BD7	DBDA	5BDD	DBDF	DBE9	5BE8	5BEE	DBF2	5BF5	DBF7	5BFA	DBFD
27	5BFF	5C43	5C46	5C85	DC87	5C8A	DCBD	5C8F	DC99	5C9B	5C9E	DCB1	5CB3	5CB6	DCE1	5CE3
28	5CE6	5D09	DD0B	DD0E	5D12	DD15	5D17	DD1A	5D1D	DD1F	DD29	5D2B	5D2E	DD32	5D35	DD37
29	5D3A	DD3D	5D3F	DD51	5D53	5D56	DD62	5D65	DD67	5D6A	DD6D	5D6F	DD79	5D7B	5D7E	DDA1
2A	5DA3	5DA6	DDC2	5DC5	DDC7	5DCA	DDCD	5DCF	DDD9	5DDB	5DDE	DDF1	5DF3	5DF6	5E11	DE13
2B	DE16	5E22	DE25	5E27	DE2A	5E2D	DE2F	5E39	DE3B	DE3E	DE49	5E4B	5E4E	DE52	5E55	DE57
2C	5E5A	DE5D	5E5F	5E69	DE6B	DE6E	5E72	DE75	5E77	DE7A	5E7D	DE7F	DE91	5E93	5E96	DEA2
2D	5EA5	DEA7	5EAA	DEAD	5EAF	DEB9	5EBB	5EBE	5EC9	DECB	DECE	5ED2	DED5	5ED7	DEDA	5EDD
2E	DEDF	DEE9	5EEB	5EEE	DEF2	5EF5	DEF7	5EFA	DEFD	5EFF	DF21	5F23	5F26	DF42	5F45	DF47
2F	5F4A	DF4D	5F4F	DF59	5F5B	5F5E	DF71	5F73	5F76	5F89	DF8B	DF8E	5F92	DF95	5F97	DF9A

REPLACEMENT SHEET
06 JUL 1996
This Sheet Has Been Replaced

REPLACEMENT SHEET
06 JUL 1996

Fig. 43 b

$Q' = 1$

/	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
30	5F9DDF9FDFA95FABFAEDFB25FB5DF67F6ADFBD5FBFDFD15FD35FD6DFE25FE5															
31	DFE75FEADFED5FEFDFF95F5FEE8496849B6E87DE8CE6892169236992E8D56															
32	6869E886AFE86BEE8B6B8BE87568B6C9E8FD6E8FAE9B769BAE9A436A4EB0															
33	E8AD6E8AFE8F26F9F96AE1656EE56ECAEEECD6EF9B6F9B6F9961EEFB16FB															
34	6869EE8F2668F5E8F7699711699B5E9B7699FE6A436B09EB0EBB3D6B3EEB															
35	E9595B6995B6995E9B2699FB69FE36AE3769B3A6EB3A16BBA36BA6EE1A6E															
36	6995FE9F9695B5E9B7699FE6A436B09EB0EBB3D6B3EEB5116FEE1DEE1F6E															
37	6995FE9F9695B5E9B7699FE6A436B09EB0EBB3D6B3EEB5116FEE1DEE1F6E															
38	86AB6EAE1656EE56ECAEEECD6EF9B6F9B6F9961EEFB16FB3D6EB0EBB6EDB															
39	EB326EE1656EE56ECAEEECD6EF9B6F9B6F9961EEFB16FB3D6EB0EBB6EDB															
3A	6B7B6BC8656EE56ECAEEECD6EF9B6F9B6F9961EEFB16FB3D6EB0EBB6EDB															
3B	6BF6E1256EE56ECAEEECD6EF9B6F9B6F9961EEFB16FB3D6EB0EBB6EDB															
3C	6E1256EE56ECAEEECD6EF9B6F9B6F9961EEFB16FB3D6EB0EBB6EDB															
3D	6E5536EC76EECAEEECD6EF9B6F9B6F9961EEFB16FB3D6EB0EBB6EDB															
3E	EEC76EECAEEECD6EF9B6F9B6F9961EEFB16FB3D6EB0EBB6EDB															
3F	6F8FEF996F9B6F9961EEFB16FB3D6EB0EBB6EDB															

This Sheet Has Been Replaced

Fig. 44 a

$Q' = 1$

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
40	709A	F09D	709F	70A9	F0AB	F0AE	70B2	F0B5	70B7	F0BA	70BD	F0BF	70D1	F0D3	F0D6	70E2
41	F0E5	70E7	F0EA	70ED	F0EF	70F9	F0FD	F0FE	F111	7113	7116	F122	7125	F127	712A	F12D
42	712F	F139	713B	713E	7149	F14B	F14E	7152	F155	7157	F15A	715D	F15F	F169	716B	716E
43	F172	7175	F177	717A	F17D	717F	7191	F193	F196	71A2	F1A5	71A7	F1AA	71AD	F1AF	71B9
44	F1BB	F1BE	F1C9	71CB	71CE	F1D2	71D5	F1D7	71DA	F1DD	71DF	71E9	F1EB	F1EE	71F2	F1F5
45	71F7	F1FA	71FD	F1FF	F221	7223	7226	F242	7245	F247	724A	F24D	724F	F259	725B	725E
46	F271	7273	7276	7289	F28B	F28E	7292	F295	7297	F29A	729D	F29F	F2A9	72AB	72AE	F2B2
47	72B5	F2B7	72BA	F2BD	72BF	F2D1	72D3	72D6	F2E2	72E5	F2E7	72EA	F2ED	72EF	F2F9	72FB
48	72FE	7311	F313	F316	7322	F325	7327	F32A	732D	F32F	7339	F33B	F33E	F349	734B	734E
49	F352	7355	F357	735A	F35D	735F	7369	F36B	F36E	7372	F375	7377	F37A	737D	F37F	F391
4A	7393	7396	F3A2	73A5	F3A7	73AA	F3AD	73AF	F389	73BB	73BE	73C9	F3CB	F3CE	73D2	F3D5
4B	73D7	F3DA	73DD	F3DF	F3E9	73EB	73EE	F3F2	73F5	F3F7	73FA	F3FD	73FF	7443	7446	7485
4C	F487	748A	F4BD	748F	F499	749B	749E	F4B1	74B3	74B6	F4E1	74E3	74E6	7509	F50B	F50E
4D	7512	F515	7517	F51A	751D	F51F	F529	7522	752A	F532	7535	F537	753A	F53D	753F	F551
4E	7553	7556	F562	7565	F567	756A	F56D	756F	F579	757B	757E	F5A1	75A3	75A6	F5C2	75C5
4F	F5C7	75CA	F5CD	75CF	F5D9	75DB	75DE	F5F1	75F3	75F6	7611	F613	F616	7622	F625	7627

REPLACEMENT SHEET
06 JUL 1996

This Sheet Has Been Replaced

REPLACEMENT SHEET
06 JUL 1996

Fig. 44 b

$Q' = 1$

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
50	F62A	762D	F62F	7639	F63B	F63E	F649	764B	764E	F652	7655	F657	765A	F65D	765F	7669
51	F66B	F66E	7672	F675	7677	F67A	767D	F67F	F691	7693	7696	F6A2	76A5	F6A7	76AA	F6AD
52	76AF	F6B9	76BB	76BE	76C9	F6CB	F6CE	76D2	F6D5	76D7	F6DA	76DD	F6DF	F6E9	76EB	76EE
53	F6F2	76F5	F6F7	76FA	F6FD	76FF	F721	7723	7726	F742	7745	F747	774A	F74D	774F	F759
54	775B	775E	F771	7773	7776	7789	F78B	F78E	7792	F795	7797	F79A	779D	F79F	F7A9	77AB
55	77AE	F7B2	77B5	F7B7	77BA	F7BD	77BF	F7D1	77D3	77D6	F7E2	77E5	F7E7	77EA	F7ED	77EF
56	F7F9	77FB	77FE	7886	790A	F90D	790F	F915	791B	791E	F931	7933	7936	F961	7963	7966
57	79C3	79C6	7A12	FA15	7A17	FA1A	7A1D	FA1F	FA29	7A2B	7A2E	FA32	7A35	FA37	7A3A	FA3D
58	7A3F	FA51	7A53	7A56	FA62	7A65	FA67	7A6A	FA6D	7A6F	FA79	7A7B	7A7E	FAA1	7AA3	7AA6
59	FAC2	7AC5	FAC7	7ACA	FACD	7ACF	FAD9	7ADB	7ADE	FAF1	7AF3	7AF6	7B43	7B46	7B85	FB87
5A	7BBA	FB8D	7B8F	FB99	7B9B	7B9E	FBB1	7BB3	7BB6	FBE1	7BE3	7BE6	7C22	FC25	7C27	FC2A
5B	7C2D	FC2F	7C39	FC3B	FC3E	FC49	7C4B	7C4E	FC52	7C55	FC57	7C5A	FC5D	7C5F	7C69	FC6B
5C	FC6E	7C72	FC75	7C77	FC7A	7C7D	FC7F	FC91	7C93	7C96	FCA2	7CA5	FCA7	7CAA	FCAD	7CAF
5D	FCB9	7CBB	7CBE	7CC9	FCCB	FCCE	7CD2	FCD5	7CD7	FCDA	7CDD	FCDF	FCE9	7CEB	7CEE	FCF2
5E	7CF5	FCF7	7CFA	FCFD	7CFF	FD21	7D23	7D26	FD42	7D45	FD47	7D4A	FD4D	7D4F	FD59	7D5B
5F	7D5E	FD71	7D73	7D76	7D89	FD8B	FD8E	7D92	FD95	7D97	FD9A	7D9D	FD9F	FDA9	7DAB	7DAE

This Sheet Has Been Replaced

REPLACEMENT SHEET
06 JUL 1996

Q' = 1

/	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
60	FDB27DB58847FFA17FEE37F37E3FF377	DB5FDB77E43708E2D8E50AFB0AB20B55	7DFB7DFE7E4377FA6FFC27FC5FF517F3	DBAFDB77E4670BFF0E7F1557F56FFC7A	FDBD7DBFFD8559885B8E08F98B4E0885	DBFFDD17DD37DD6FE8D7FF1A7F1DFF6A	FFDD17DD37DD6FE8D7FF1A7F1DFF6AFF	DD17DD37DD6FE8D7FF1A7F1DFF6AFF1F	D17DD37DD6FE8D7FF1A7F1DFF6AFF1FE	17DD37DD6FE8D7FF1A7F1DFF6AFF1FEB	7DD37DD6FE8D7FF1A7F1DFF6AFF1FEB7	DD37DD6FE8D7FF1A7F1DFF6AFF1FEB7E	D37DD6FE8D7FF1A7F1DFF6AFF1FEB7E9	37DD6FE8D7FF1A7F1DFF6AFF1FEB7E9B	7DD6FE8D7FF1A7F1DFF6AFF1FEB7E9B7	DD6FE8D7FF1A7F1DFF6AFF1FEB7E9B7E
61	7DFB7DFE7E4377FA6FFC27FC5FF517F3	DB5FDB77E43708E2D8E50AFB0AB20B55	7DFB7DFE7E4377FA6FFC27FC5FF517F3	DBAFDB77E4670BFF0E7F1557F56FFC7A	FDBD7DBFFD8559885B8E08F98B4E0885	DBFFDD17DD37DD6FE8D7FF1A7F1DFF6A	FFDD17DD37DD6FE8D7FF1A7F1DFF6AFF	DD17DD37DD6FE8D7FF1A7F1DFF6AFF1F	D17DD37DD6FE8D7FF1A7F1DFF6AFF1FE	17DD37DD6FE8D7FF1A7F1DFF6AFF1FEB	7DD37DD6FE8D7FF1A7F1DFF6AFF1FEB7	DD37DD6FE8D7FF1A7F1DFF6AFF1FEB7E	D37DD6FE8D7FF1A7F1DFF6AFF1FEB7E9	37DD6FE8D7FF1A7F1DFF6AFF1FEB7E9B	7DD6FE8D7FF1A7F1DFF6AFF1FEB7E9B7	DD6FE8D7FF1A7F1DFF6AFF1FEB7E9B7E
62	7EE37EE67F09FF0BFF0E7F1557F56FFC	E37EE67F09FF0BFF0E7F1557F56FFC7A	EE67F09FF0BFF0E7F1557F56FFC7A7F	E67F09FF0BFF0E7F1557F56FFC7A7F1F	67F09FF0BFF0E7F1557F56FFC7A7F1FE	7F09FF0BFF0E7F1557F56FFC7A7F1FEB	F09FF0BFF0E7F1557F56FFC7A7F1FEB7	09FF0BFF0E7F1557F56FFC7A7F1FEB7E	9FF0BFF0E7F1557F56FFC7A7F1FEB7E9	FF0BFF0E7F1557F56FFC7A7F1FEB7E9B	F0BFF0E7F1557F56FFC7A7F1FEB7E9B7	0BFF0E7F1557F56FFC7A7F1FEB7E9B7E	BFF0E7F1557F56FFC7A7F1FEB7E9B7E9	FF0E7F1557F56FFC7A7F1FEB7E9B7E9B	F0E7F1557F56FFC7A7F1FEB7E9B7E9B7	0E7F1557F56FFC7A7F1FEB7E9B7E9B7E
63	FF377F3AFF3D7FA6FFC27FC5FF517F3F	F377F3AFF3D7FA6FFC27FC5FF517F3FE	77F3AFF3D7FA6FFC27FC5FF517F3FEB	7F3AFF3D7FA6FFC27FC5FF517F3FEB7F	F3AFF3D7FA6FFC27FC5FF517F3FEB7F1	3AFF3D7FA6FFC27FC5FF517F3FEB7F1F	AFF3D7FA6FFC27FC5FF517F3FEB7F1FE	FF3D7FA6FFC27FC5FF517F3FEB7F1FEB	F3D7FA6FFC27FC5FF517F3FEB7F1FEB7	3D7FA6FFC27FC5FF517F3FEB7F1FEB7E	D7FA6FFC27FC5FF517F3FEB7F1FEB7E9	7FA6FFC27FC5FF517F3FEB7F1FEB7E9B	FA6FFC27FC5FF517F3FEB7F1FEB7E9B7	A6FFC27FC5FF517F3FEB7F1FEB7E9B7E	6FFC27FC5FF517F3FEB7F1FEB7E9B7E9	FFC27FC5FF517F3FEB7F1FEB7E9B7E9B
64	FFA17FA37E8847A8E288E50AFB0AB20B	FA17FA37E8847A8E288E50AFB0AB20B5	A17FA37E8847A8E288E50AFB0AB20B55	17FA37E8847A8E288E50AFB0AB20B558	7FA37E8847A8E288E50AFB0AB20B5588	FA37E8847A8E288E50AFB0AB20B55885	A37E8847A8E288E50AFB0AB20B558858	37E8847A8E288E50AFB0AB20B5588585	7E8847A8E288E50AFB0AB20B55885858	E8847A8E288E50AFB0AB20B558858588	8847A8E288E50AFB0AB20B5588585885	847A8E288E50AFB0AB20B55885858858	47A8E288E50AFB0AB20B558858588585	7A8E288E50AFB0AB20B5588585885858	A8E288E50AFB0AB20B55885858858588	8E288E50AFB0AB20B558858588585885
65	8450847A8E288E50AFB0AB20B5588585	5084708E2D8E50AFB0AB20B558858588	0847A8E288E50AFB0AB20B5588585885	847A8E288E50AFB0AB20B55885858858	7A8E288E50AFB0AB20B558858588585	A8E288E50AFB0AB20B5588585885858	8E288E50AFB0AB20B55885858858588	E288E50AFB0AB20B558858588585885	288E50AFB0AB20B5588585885858858	88E50AFB0AB20B55885858858588585	8E50AFB0AB20B558858588585885858	E50AFB0AB20B5588585885858858588	50AFB0AB20B55885858858588585885	0AFB0AB20B558858588585885858858	AFB0AB20B5588585885858858588585	FB0AB20B55885858858588585885858
66	8897088E2D8E50AFB0AB20B5588585	8970897A8E288E50AFB0AB20B558858588	7089708E2D8E50AFB0AB20B5588585885	8970897A8E288E50AFB0AB20B55885858858	7089708E2D8E50AFB0AB20B558858588585	8970897A8E288E50AFB0AB20B5588585885858	7089708E2D8E50AFB0AB20B55885858858588	8970897A8E288E50AFB0AB20B558858588585885	7089708E2D8E50AFB0AB20B5588585885858858	8970897A8E288E50AFB0AB20B55885858858588585	7089708E2D8E50AFB0AB20B558858588585885858	8970897A8E288E50AFB0AB20B5588585885858858588	7089708E2D8E50AFB0AB20B55885858858588585885	8970897A8E288E50AFB0AB20B558858588585885858858	7089708E2D8E50AFB0AB20B5588585885858858588585	8970897A8E288E50AFB0AB20B55885858858588585885858
67	0897089E2D8E50AFB0AB20B5588585	9708970897A8E288E50AFB0AB20B558858588	8970897A8E288E50AFB0AB20B5588585885	9708970897A8E288E50AFB0AB20B55885858858	8970897A8E288E50AFB0AB20B558858588585	9708970897A8E288E50AFB0AB20B5588585885858	8970897A8E288E50AFB0AB20B55885858858588	9708970897A8E288E50AFB0AB20B558858588585885	8970897A8E288E50AFB0AB20B5588585885858858	9708970897A8E288E50AFB0AB20B55885858858588585	8970897A8E288E50AFB0AB20B558858588585885858	9708970897A8E288E50AFB0AB20B5588585885858858588	8970897A8E288E50AFB0AB20B55885858858588585885	9708970897A8E288E50AFB0AB20B558858588585885858858	8970897A8E288E50AFB0AB20B5588585885858858588585	9708970897A8E288E50AFB0AB20B55885858858588585885858
68	8892D8E50AFB0AB20B5588585885858	8970897A8E288E50AFB0AB20B558858588	7089708E2D8E50AFB0AB20B5588585885	8970897A8E288E50AFB0AB20B55885858858	7089708E2D8E50AFB0AB20B558858588585	8970897A8E288E50AFB0AB20B5588585885858	7089708E2D8E50AFB0AB20B55885858858588	8970897A8E288E50AFB0AB20B558858588585885	7089708E2D8E50AFB0AB20B5588585885858858	8970897A8E288E50AFB0AB20B55885858858588585	7089708E2D8E50AFB0AB20B558858588585885858	8970897A8E288E50AFB0AB20B5588585885858858588	7089708E2D8E50AFB0AB20B55885858858588585885	8970897A8E288E50AFB0AB20B558858588585885858858	7089708E2D8E50AFB0AB20B5588585885858858588585	8970897A8E288E50AFB0AB20B55885858858588585885858
69	8809096E8897208BB89C9FD89FE8A210A230A266A420A458A978A950A928A9E0AD30AD68AE20AE58AB02F08B39A4708A4A9D8A9F0DF09E9A2895A5095710913016A8D8BD88BF08B2209D5F8995A0957889A5095D8A9F8AE70AEA8A4D0A4F8AA90AA20AAE8AF9	6A09B99BB89C9FD89FE8A210A230A266A420A458A978A950A928A9E0AD30AD68AE20AE58AB02F08B39A4708A4A9D8A9F0DF09E9A2895A5095710913016A8D8BD88BF08B2209D5F8995A0957889A5095D8A9F8AE70AEA8A4D0A4F8AA90AA20AAE8AF9B	6B89F5099F78B9FA09FD89FE8A210A230A266A420A458A978A950A928A9E0AD30AD68AE20AE58AB02F08B39A4708A4A9D8A9F0DF09E9A2895A5095710913016A8D8BD88BF08B2209D5F8995A0957889A5095D8A9F8AE70AEA8A4D0A4F8AA90AA20AAE8AF9B7	6BC0A5E8A710A730A760A98A8E0A9A2D8A458A978A950A928A9E0AD30AD68AE20AE58AB02F08B39A4708A4A9D8A9F0DF09E9A2895A5095710913016A8D8BD88BF08B2209D5F8995A0957889A5095D8A9F8AE70AEA8A4D0A4F8AA90AA20AAE8AF9B7E	6D8ABA8ABD0ABF8AD10AD30AD68AE20AE58AB02F08B39A4708A4A9D8A9F0DF09E9A2895A5095710913016A8D8BD88BF08B2209D5F8995A0957889A5095D8A9F8AE70AEA8A4D0A4F8AA90AA20AAE8AF9B7E9	6E0AFB0AFE0B118B138B160B228B250B278B2A0B2D8B2F0B398B3B8B3E8B490B4B8B4E8B528B558B5A8B5D0B5F0B698B6B8B6E0B728B750B788B7A0B7D8B7F
6A	09B99BB89C9FD89FE8A210A230A266A420A458A978A950A928A9E0AD30AD68AE20AE58AB02F08B39A4708A4A9D8A9F0DF09E9A2895A5095710913016A8D8BD88BF08B2209D5F8995A0957889A5095D8A9F8AE70AEA8A4D0A4F8AA90AA20AAE8AF9B	B99BB89C9FD89FE8A210A230A266A420A458A978A950A928A9E0AD30AD68AE20AE58AB02F08B39A4708A4A9D8A9F0DF09E9A2895A5095710913016A8D8BD88BF08B2209D5F8995A0957889A5095D8A9F8AE70AEA8A4D0A4F8AA90AA20AAE8AF9B7	99BB89C9FD89FE8A210A230A266A420A458A978A950A928A9E0AD30AD68AE20AE58AB02F08B39A4708A4A9D8A9F0DF09E9A2895A5095710913016A8D8BD88BF08B2209D5F8995A0957889A5095D8A9F8AE70AEA8A4D0A4F8AA90AA20AAE8AF9B7E	9BB89C9FD89FE8A210A230A266A420A458A978A950A928A9E0AD30AD68AE20AE58AB02F08B39A4708A4A9D8A9F0DF09E9A2895A5095710913016A8D8BD88BF08B2209D5F8995A0957889A5095D8A9F8AE70AEA8A4D0A4F8AA90AA20AAE8AF9B7E9	BB89C9FD89FE8A210A230A266A420A458A978A950A928A9E0AD30AD68AE20AE58AB02F08B39A4708A4A9D8A9F0DF09E9A2895A5095710913016A8D8BD88BF08B2209D5F8995A0957889A5095D8A9F8AE70AEA8A4D0A4F8AA90AA20AAE8AF9B7E9B
6B	89F5099F78B9FA09FD89FE8A210A230A266A420A458A978A950A928A9E0AD30AD68AE20AE58AB02F08B39A4708A4A9D8A9F0DF09E9A2895A5095710913016A8D8BD88BF08B2209D5F8995A0957889A5095D8A9F8AE70AEA8A4D0A4F8AA90AA20AAE8AF9B7	9F5099F78B9FA09FD89FE8A210A230A266A420A458A978A950A928A9E0AD30AD68AE20AE58AB02F08B39A4708A4A9D8A9F0DF09E9A2895A5095710913016A8D8BD88BF08B2209D5F8995A0957889A5095D8A9F8AE70AEA8A4D0A4F8AA90AA20AAE8AF9B7E	5099F78B9FA09FD89FE8A210A230A266A420A458A978A950A928A9E0AD30AD68AE20AE58AB02F08B39A4708A4A9D8A9F0DF09E9A2895A5095710913016A8D8BD88BF08B2209D5F8995A0957889A5095D8A9F8AE70AEA8A4D0A4F8AA90AA20AAE8AF9B7E9	099F78B9FA09FD89FE8A210A230A266A420A458A978A950A928A9E0AD30AD68AE20AE58AB02F08B39A4708A4A9D8A9F0DF09E9A2895A5095710913016A8D8BD88BF08B2209D5F8995A0957889A5095D8A9F8AE70AEA8A4D0A4F8AA90AA20AAE8AF9B7E9B
6C	0A5E8A710A730A760A98A8E0A9A2D8A458A978A950A928A9E0AD30AD68AE20AE58AB02F08B39A4708A4A9D8A9F0DF09E9A2895A5095710913016A8D8BD88BF08B2209D5F8995A0957889A5095D8A9F8AE70AEA8A4D0A4F8AA90AA20AAE8AF9B7E	5E8A710A730A760A98A8E0A9A2D8A458A978A950A928A9E0AD30AD68AE20AE58AB02F08B39A4708A4A9D8A9F0DF09E9A2895A5095710913016A8D8BD88BF08B2209D5F8995A0957889A5095D8A9F8AE70AEA8A4D0A4F8AA90AA20AAE8AF9B7E9	8A710A730A760A98A8E0A9A2D8A458A978A950A928A9E0AD30AD68AE20AE58AB02F08B39A4708A4A9D8A9F0DF09E9A2895A5095710913016A8D8BD88BF08B2209D5F8995A0957889A5095D8A9F8AE70AEA8A4D0A4F8AA90AA20AAE8AF9B7E9B	A710A730A760A98A8E0A9A2D8A458A978A950A928A9E0AD30AD68AE20AE58AB02F08B39A4708A4A9D8A9F0DF09E9A2895A5095710913016A8D8BD88BF08B2209D5F8995A0957889A5095D8A9F8AE70AEA8A4D0A4F8AA90AA20AAE8AF9B7E9B7
6D	8ABA8ABD0ABF8AD10AD30AD68AE20AE58AB02F08B39A4708A4A9D8A9F0DF09E9A2895A5095710913016A8D8BD88BF08B2209D5F8995A0957889A5095D8A9F8AE70AEA8A4D0A4F8AA90AA20AAE8AF9B7E9	ABA8ABD0ABF8AD10AD30AD68AE20AE58AB02F08B39A4708A4A9D8A9F0DF09E9A2895A5095710913016A8D8BD88BF08B2209D5F8995A0957889A5095D8A9F8AE70AEA8A4D0A4F8AA90AA20AAE8AF9B7E9B	BA8ABD0ABF8AD10AD30AD68AE20AE58AB02F08B39A4708A4A9D8A9F0DF09E9A2895A5095710913016A8D8BD88BF08B2209D5F8995A0957889A5095D8A9F8AE70AEA8A4D0A4F8AA90AA20AAE8AF9B7E9B7	A8ABD0ABF8AD10AD30AD68AE20AE58AB02F08B39A4708A4A9D8A9F0DF09E9A2895A5095710913016A8D8BD88BF08B2209D5F8995A0957889A5095D8A9F8AE70AEA8A4D0A4F8AA90AA20AAE8AF9B7E9B7E
6E	0AFB0AFE0B118B138B160B228B250B278B2A0B2D8B2F0B398B3B8B3E8B490B4B8B4E8B528B558B5A8B5D0B5F0B698B6B8B6E0B728B750B788B7A0B7D8B7F	AFB0AFE0B118B138B160B228B250B278B2A0B2D8B2F0B398B3B8B3E8B490B4B8B4E8B528B558B5A8B5D0B5F0B698B6B8B6E0B728B750B788B7A0B7D8B7F9	FB0AFE0B118B138B160B228B250B278B2A0B2D8B2F0B398B3B8B3E8B490B4B8B4E8B528B558B5A8B5D0B5F0B698B6B8B6E0B728B750B788B7A0B7D8B7F9B	B0AFE0B118B138B160B228B250B278B2A0B2D8B2F0B398B3B8B3E8B490B4B8B4E8B528B558B5A8B5D0B5F0B698B6B8B6E0B728B750B788B7A0B7D8B7F9B7	0AFE0B118B138B160B228B250B278B2A0B2D8B2F0B398B3B8B3E8B490B4B8B4E8B528B558B5A8B5D0B5F0B698B6B8B6E0B728B750B788B7A0B7D8B7F9B7E	AFE0B118B138B160B228B250B278B2A0B2D8B2F0B398B3B8B3E8B490B4B8B4E8B528B558B5A8B5D0B5F0B698B6B8B6E0B728B750B788B7A0B7D8B7F9B7E9	FE0B118B138B160B228B250B278B2A0B2D8B2F0B398B3B8B3E8B490B4B8B4E8B528B558B5A8B5D0B5F0B698B6B8B6E0B728B750B788B7A0B7D8B7F9B7E9B

Fig. 45 a

This Sheet Has Been Replaced

REPLACEMENT SHEET
06 JUL 1996

Q'=1

/	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
70	8B91	0B93	0B96	8BA2	0BA5	8BA7	0BAA	8BAD	0BAF	8BB9	0BBB	0BBE	0BC9	8BCB	8BCE	0BD2
71	8BD5	0BD7	8BDA	0BDD	8BDF	8BE9	0BEB	0BEE	8BF2	0BF5	8BF7	0BFA	8BFD	0BFF	0B43	0B46
72	0C85	8C87	0C8A	8CBD	0C8F	8C99	0C9B	0C9E	8CB1	0CB3	0CB6	8CE1	0CE3	0CE6	0C09	8C0B
73	8D0E	0D12	8D15	0D17	8D1A	0D1D	9D1F	8D29	0D2B	0D2E	8D32	0D35	8D37	0DA3	8D3D	0D3F
74	8D51	0D53	0D56	8D62	0D65	8D67	0D6A	8D6D	0D6F	8D79	0D7B	0D7E	8DA1	0DA3	0D68	8DC2
75	0DC5	8DC7	0DCA	8DCD	0DCF	8DD9	0DDB	0DDE	8DF1	0DF3	0E4E	8E91	0E93	0E96	8E25	0E28
76	0E27	8E2A	0E2D	8E2F	0E39	8E3B	8E3E	8E49	0E4B	0E4E	8E52	0E55	8E57	0E5A	8E5D	0E5F
77	0E69	8E6B	8E6E	0E72	8E75	0E77	8E7A	0E7D	8E7F	8E91	0E93	0E96	8E9A	0E9D	8E9F	8EA2
78	8EAD	0EAF	8EB9	0EBB	0EBE	8EC9	8ECB	8ECE	0ED2	8ED5	0ED7	8EDA	0EDD	8EDF	8EE9	0EEB
79	0EEE	8EF2	0EF5	8EF7	0F10	8F21	0F23	0F26	8F42	0F45	8F47	0F4A	8F4D	0F4F	8F61	0F64
7A	8F68	0F5B	0F5E	8F71	0F73	0F76	8F8B	8F8E	0F92	8F95	0F97	8F9A	0F9D	8F9F	8FA9	0FAB
7B	0FAE	8FB2	0FB5	8FB7	0FBA	8FBD	0FBF	8FD1	0FD3	0FD6	8FE2	0FE5	8FE7	0FEA	8FED	0FF1
7C	0FFF	8FFB	0FFE	9008	5108	7900	8A10	8D90	8F10	9909	0B90	9E10	B190	3B90	B610	E113
7D	9E39	0E69	1091	1011	0B11	0E91	1511	7911	11A9	11D1	1F11	1129	912B	912E	1132	9135
7E	1379	13A1	13D9	13F1	1519	1539	1561	1629	1651	1679	16A1	16D9	1916	1179	17B9	17E9
7F	11A1	9A38	1A61	1C29	1C51	1C79	1CA1	1CD9	1CF1	1D99	1DB9	1DE1	1F19	1F39	1F69	2111

Fig. 45 b

This Sheet Has Been Replaced

REPLACEMENT SHEET
06 JUL 1996

Q'=1

/	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
80	21	216	22	225	227	22A	22D	22F	239	23B	23E	249	24B	24E	252	255
81	25	25A	25D	25F	269	26B	26E	27F	27B	27E	27A	27D	27F	29E	29B	296
82	2A	2A5	2A7	2AA	2AD	2AF	2B0	2B2	2BE	2C9	2CB	2CE	2D2	2D5	2D9	2DA
83	2D	2DF	2E9	2EB	2EE	2F2	2F5	2F7	2FA	2FD	2FF	321	323	329	32D	345
84	34	34A	34D	34F	359	35B	35E	371	379	376	389	38B	38E	393	396	397
85	39	39D	39F	3A9	3AB	3AE	3B2	3B5	3B7	3BA	3D1	3D3	3D9	3E2	3E5	3E7
86	3E	3E7	3ED	3F1	3F3	3F9	3FB	3FE	421	423	426	429	42B	42E	431	434
87	43	439	43B	43E	441	445	447	449	44D	44F	451	454	457	459	45B	45E
88	46	469	46B	46E	471	473	476	478	48B	48E	491	495	497	499	49D	49F
89	4A	4AB	4AE	4B2	4B5	4B7	4BA	4BF	4D1	4D4	4D6	4D9	4E2	4E5	4E7	4EA
8A	4D	4D9	4DB	4DE	4E1	4E3	4E6	4E8	4F5	4F7	4FA	4FD	4FF	521	523	529
8B	52	527	529	52D	531	534	536	539	53D	53F	541	544	546	549	54D	54F
8C	55	559	55B	55E	561	563	566	568	57B	57E	581	585	587	589	58D	58F
8D	15	15A	15D	15F	169	16B	16E	171	179	176	189	18B	18E	193	196	197
8E	96	89	168	181	168	1E5	196	1D9	1B7	1A9	1D6	1B9	1B5	1E2	1E5	1E7
8F	16	BD	96	B4	16	D1	96	E5	16	EA	16	D9	16	F1	171	173

FIG. 46 a

This Sheet Has Been Replaced

Fig. 46 b

$Q' = 1$

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
90	1716	9722	1725	9727	172A	972D	172F	9739	173B	173E	1749	974B	974E	1752	9755	1757
91	975A	175D	975F	9769	176B	176E	9772	1775	9777	177A	977D	177F	1791	9793	9796	17A2
92	97A5	17A7	97AA	17AD	97AF	17B9	97BB	97BE	97C9	17CB	17CE	97D2	17D5	97D7	17DA	97DD
93	17DF	17E9	97EB	97EE	17F2	97F5	17F7	97FA	17FD	97FF	1843	18A6	1885	9887	188A	9B8D
94	188F	9899	189B	189E	98B1	18B3	18B6	98E1	18E3	18E6	1909	990B	990E	1912	9915	1917
95	991A	191D	991F	9929	192B	192E	9932	1935	9937	193A	993D	193F	9951	1953	1956	9962
96	1965	9967	196A	996D	196F	9979	197B	197E	99A1	19A3	19A6	99C2	19C5	99C7	19CA	99CD
97	19CF	99D9	19DB	19DE	99F1	19F3	19F6	1A11	9A13	9A16	1A22	9A25	1A27	9A2A	1A2D	9A2F
98	1A39	9A3B	9A3E	9A49	1A4B	1A4E	9A52	1A55	9A57	1A5A	9A5D	1A5F	1A65	9A6B	9A6E	1A72
99	9A75	1A77	9A7A	1A7D	9A7F	9A91	1A93	1A96	9AA2	1AA5	9AA7	1AAA	9AAD	1AAF	9AB9	1ABB
9A	1ABE	1AC9	9ACB	9ACE	1AD2	9AD5	1AD7	9ADA	1ADD	9ADF	9AE9	1AEB	1AEE	9AF2	1AF5	9AF7
9B	1AFA	9AFD	1AFF	9B21	1B23	1B26	9B42	1B45	9B47	1B4A	9B4D	1B4F	9B59	1B5B	1B5E	9B71
9C	1B73	1B76	1B89	9BBB	9B8E	1B92	9B95	1B97	9B9A	1B9D	9B9F	9BA9	1BAB	1BAE	9BB2	1BB5
9D	9BB7	1BBA	9BBD	1BBF	9BD1	1BD3	1BD6	9BE2	1BE5	9BE7	1BEA	9BED	1BEF	9BF9	1BFB	1BFE
9E	1C21	9C23	9C26	1C42	9C45	1C47	9C4A	1C4D	9C4F	1C55	9C5B	9C5E	1C71	9C73	9C76	9C89
9F	1C8B	1C8E	9C92	1C95	9C97	1C9A	9C9D	1C9F	1CA9	9CAB	9CAE	1CB2	9CB5	1CB7	9CBA	1CBD

REPLACEMENT SHEET
06 JUL 1996

This Sheet Has Been Replaced

Fig. 47 a

Q′=1

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
A0	9CBF	1CD1	9CD3	9CD6	1CE2	9CE5	1CE7	9CEA	1CED	9CEF	1CF9	9CFB	9CFE	9D11	1D13	1D16
A1	9D22	1D25	9D27	1D2A	9D2D	1D2F	9D39	1D3B	1D3E	1D49	9D4B	9D4E	1D52	9D55	1D57	9D5A
A2	1D5D	9D5F	9D69	1D6B	1D6E	9D72	1D75	9D77	1D7A	9D7D	1D7F	1D91	9D93	9D96	1DA2	9DA5
A3	1DA7	9DAA	1DAD	9DAF	1DB9	9DBB	9DBE	9DC9	1DCB	1DCE	9DD2	1DD5	9DD7	1DDA	9DDD	1DDF
A4	1DE9	9DEB	9DEE	1DF2	9DF9	1DF7	9DFA	1DFD	9DFF	9E21	1E23	1E26	9E42	1E45	9E47	1E4A
A5	9E4D	1E4F	9E59	1E5B	1E5B	9E71	1E73	1E76	1E89	9E8B	9E8E	1E92	9E95	1E97	9E9A	1E9D
A6	9E9F	9EA9	1EAB	1EAE	9EB2	1EB5	9EB7	1EBA	9EBD	1EBF	9ED1	1ED3	1ED6	9EE2	1EE5	9EE7
A7	1EEA	9EED	1EEF	9EF9	1EFB	1EFE	1F11	9F13	9F16	1F22	9F25	1F27	9F2A	1F2D	9F2F	1F39
A8	9F3B	9F3E	9F49	1F4B	1F4E	9F52	1F55	9F57	1F5A	9F5D	1F5F	1F69	9F6B	9F6E	1F72	9F7D
A9	1F77	9F7A	1F7D	9F7F	9F91	1F93	1F96	9FA2	1FA5	9FA7	1FAA	9FAD	1FAF	9FB9	1FBB	1FBE
AA	1FC9	9FCB	9FCE	1FD2	9FD5	1FD7	9FDA	1FDD	9FDF	9FE9	1FEB	1FEE	9FF2	1FF5	9FF7	1FFA
AB	9FFD	1FFF	A10A	210D	A10F	2119	A11B	A11E	2131	A133	A136	2161	A163	A166	A1C3	A1C6
AC	A212	2215	A217	221A	A21D	221F	2229	A22B	A22E	2232	A235	2237	A23A	223D	A23F	2251
AD	A253	A256	2262	A265	2267	A26A	226D	A26F	2279	A27B	A27E	22A1	A2A3	A2A6	22C2	A2C5
AE	22C7	A2CA	22CD	A2CF	22D9	A2DB	A2DE	22F1	A2F3	A2F6	A343	A346	A385	2387	A38A	238D
AF	A38F	2399	A39B	A39E	23B1	A3B3	A3B6	23E1	A3E3	A3E6	A422	2425	A427	242A	A42D	242F

61

This Sheet Has Been Replaced

REPLACEMENT SHEET
06 JUL 1996

Fig. 47 b

$Q' = 1$

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
B0	A439	243B	243E	2449	A44B	A44E	2452	A455	2457	A45A	245D	A45F	A469	246B	246E	A472
B1	2475	A477	247A	A47D	247F	2491	A493	A496	24A2	A4A5	24A7	A4AA	24AD	A4AF	24B9	A4BB
B2	A4BE	A4C9	24C8	24CE	A4D2	24D5	A4D7	24DA	A4DD	24DF	24E9	A4EB	A4EE	24F2	A4F5	24F7
B3	A4FA	24FD	A4FF	2521	A523	A526	2542	A545	2547	A54A	254D	A54F	2555	A55B	A55E	2571
B4	A573	A576	A589	258B	258E	A592	2595	A597	259A	A59D	259F	25A9	A5AB	A5AE	25B2	A5B5
B5	25B7	A5BA	258D	A5BF	25D1	A5D3	A5D6	25E2	A5E5	25E7	A5EA	25ED	A5EF	25F9	A5FB	A5FE
B6	A643	A646	A685	2687	A68A	268D	A68F	2699	A69B	A69E	26B1	A6B3	A6B6	26E1	A6E3	A6E6
B7	A709	270B	270E	A712	2715	A717	271A	A71D	271F	2729	A72B	A72E	2732	A735	2737	A73A
B8	273D	A73F	2751	A753	A756	2762	A765	2767	A76A	276D	A76F	2779	A77B	A77E	27A1	A7A3
B9	A7A6	27C2	A7C5	27C7	A7CA	27CD	A7CF	27D9	A7DB	A7DE	27F1	A7F3	A7F6	A842	2845	A847
BA	284A	A84D	284F	A859	285B	285E	A871	2873	2876	2889	A88B	A88E	2892	A895	2897	A89A
BB	289D	A89F	A8A9	28AB	28AE	A8B2	28B5	A8B7	28BA	A8BD	28BF	A8D1	28D3	28D6	A8E2	28E5
BC	A8E7	28EA	A8ED	28EF	A8F9	28FB	28FE	2911	A913	A916	292E	A925	2927	A92A	292D	A92F
BD	2939	A93B	A93E	A949	294B	294E	A952	2955	A957	295A	A95D	295F	2969	A96B	A96E	2972
BE	A975	2977	A97A	297D	A97F	A991	2993	2996	A9A2	29A5	A9A7	29AA	A9AD	29AF	A9B9	29BB
BF	29BE	29C9	A9CB	A9CE	29D2	A9D5	29D7	A9DA	29DD	A9DF	A9E9	29EB	29EE	A9F2	29F5	A9F7

62

This Sheet Has Been Replaced

REPLACEMENT SHEET
06 JUL 1996

Fig. 48 a

$Q' = 1$

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
C0	29FA	A9FD	29FF	2A21	AA23	AA26	2A42	AA45	2A47	AA4A	2A4D	AA4F	2A55	AA5B	AA5E	2A71
C1	AA73	AA76	AA89	2A8B	2A8E	AA92	2A95	AA97	2A9A	AA9D	2A9F	2A99	AAAB	AAAE	2AB2	AAB5
C2	2AB7	AABA	2ABD	AABF	2AD1	AAD3	AAD0	2AE2	AAE5	2AE7	AAEA	2AAD	AAEF	2AF9	AAFB	AAFE
C3	AB11	2B13	2B16	AB22	2B25	AB27	2B2A	AB2D	2B2F	AB39	2B3B	2B3E	2B49	AB4B	AB4E	2B52
C4	AB55	2B57	AB5A	2B5D	AB5F	AB69	2B6B	2B6E	AB72	2B75	AB77	2B7A	AB7D	2B7F	2B91	AB93
C5	AB96	2BA2	ABA5	2BA7	ABAA	2BAD	ABAF	2BB9	ABBB	ABBE	ABC9	2BCB	2BCE	ABD2	2BD5	ABD7
C6	2BDA	ABDD	2BDF	2BE9	ABEB	ABEE	2BF2	ABF5	2BF7	ABFA	2BFD	ABFF	AC43	AC46	AC85	2C87
C7	AC8A	2C8D	AC8F	2C99	AC9B	AC9E	2CB1	AC83	ACB6	2CE1	ACE3	ACE6	AD09	2D0B	2D0E	AD12
C8	2D15	AD17	2D1A	AD1D	2D1F	2D29	AD2B	AD2E	2D32	AD35	2D37	AD3A	2D3D	AD3F	2D51	AD53
C9	AD56	2D62	AD65	2D67	AD6A	2D6D	AD6F	2D79	AD7B	AD7E	2DA1	ADA3	ADA6	2DC2	ADC5	2DC7
CA	ADCA	2DCD	ADCF	2DD9	ADDB	ADDE	2DF1	ADF3	ADF6	AE11	2E13	2E16	AE22	2E25	AE27	2E2A
CB	AE2D	2E2F	AE39	2E3B	2E3E	2E49	AE4B	AE4E	2E52	AE55	2E57	AE5A	2E5D	AE5F	AE69	2E6B
CC	2E6E	AE72	2E75	AE77	2E7A	AE7D	2E7F	2E91	AE93	AE96	2EA2	AEA5	2EA7	AEAA	2EAD	AEAF
CD	2E89	AEBB	AEBE	AEC9	2ECB	2ECE	AEB2	2ED5	AED7	2EDA	AEDD	2EDF	2EE9	AEEB	AEEE	2EF2
CE	AEF5	2EF7	AEFA	2EFD	AEFF	2F21	AF23	AF26	2F42	AF45	2F47	AF4A	2F4D	AF4F	2F59	AF5B
CF	AF5E	2F71	AF73	AF76	AF89	2F8B	2F8E	AF92	2F95	AF97	2F9A	AF9D	2F9F	2FA5	AFAB	AFAE

REPLACEMENT SHEET
06 JUL 1996

This Sheet Has Been Replaced

REPLACEMENT SHEET
06 JUL 1996

Fig. 48 b

Q' = 1

/	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
D0	2FB2	AFB5	2FB7	AFBA	2FBD	AFBF	2FD1	AFD3	AFD6	2FE2	AFE5	2FE7	AFEA	2FED	AFEF	2FF9
D1	AFFB	AFFE	3085	B087	308A	B08D	308F	B099	309B	309E	B0B1	30B3	30B6	B0E1	30E3	30E6
D2	3109	B10B	B10E	3112	B115	3116	B117	B11A	311D	B1F	B129	312B	312E	B131	3135	B137
D3	B13D	313F	B151	3153	3156	B162	3165	B167	3168	B16D	3173	B179	317B	317E	B1A1	31A3
D4	31A6	B1C2	31C5	B1C7	31CA	B1CD	31CF	B1D9	31DB	31DE	B1F1	31F3	31F6	3211	B213	B216
D5	3225	22B2	2532	27B2	2A32	DB22	F323	9B23	BB23	EB24	9324	B324	EB25	2325	5B25	7325
D6	B25D	3257	B259	3259	B25E	3261	B263	3263	B266	B269	3273	2B27	5327	7B27	A327	DB27
D7	B2A7	32AA	B2AD	32AF	B2B2	32B5	B2B7	32BB	32BE	32C9	B2CB	32CE	32D2	B2D5	32D7	B2DA
D8	B2E9	32EB	32ED	33F1	B2F2	32F5	B2F7	32FA	B2FD	32FF	B321	3323	3326	B329	3329	3296
D9	B34D	3347	B359	3359	B33A	B33D	3373	3376	3378	B38B	B38E	3392	B395	3397	B39A	3396
DA	B39F	B3A9	33AB	33AE	B3B2	33B5	B3B7	33BA	B3BD	33BF	B3D1	33D3	33D6	B3E2	3325	B3E7
DB	3EAB	3ED3	33EF	B347	1B47	3FB3	F93F	B347	6B4A	3B44	5B34	7B44	A344	DB44	F345	9B4A
DC	B45B	B45E	3471	B473	B476	B4A3	4BDB	4BF3	4D1B	4D3B	4D63	4AB4	9D34	9F34	A9B4	AB4E
DD	B4AE	34B2	B4B5	34B7	B4BA	34BD	B4BF	34D1	B4D3	B4D6	34E2	B4E5	3E23	3E25	B3E7	EF4E
DE	34F9	B4FB	B4FE	B513	5135	1635	B522	3525	B527	3527	B52A	B52D	3529	3539	3B53	E354
DF	B54B	B54E	3552	B553	5535	7B55	A355	DB55	FB56	9356	B356	EB57	2B57	5B57	7357	AB57

This Sheet Has Been Replaced

Fig. 49 a

$Q' = 1$

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
E0	357F	3591	B593	B596	35A2	B5A5	35A7	B5AA	35AD	B5AF	35BB	B5BB	B5BE	B5C9	35CB	35CE
E1	B5D2	35D5	B5D7	35DA	B5DD	35DF	35E9	B5EB	B5EE	35F2	B5F5	35F7	B5FA	35FD	B5FF	B621
E2	3623	3626	B642	3645	B647	364A	B64D	364F	B659	365B	365E	B671	3673	3676	3689	B68B
E3	B68E	3692	B695	3697	B69A	369D	B69F	B6A9	36AB	36AE	B6B2	36B5	B6B7	36BA	B6BD	36BF
E4	B6D1	36D3	36D6	B6E2	36B5	B6E7	36EA	B6ED	36EF	B6F9	36FB	36FE	3711	B713	B716	3722
E5	B725	3727	B72A	372D	B72F	3739	B73B	B73E	B749	374B	374E	B752	3755	B757	375A	B75D
E6	375F	3769	B76B	B76B	3772	B775	3777	B77A	377D	B77F	B791	3793	3796	B7A2	37A5	B7A7
E7	37AA	B7AD	37AF	B7B9	37BB	37BE	37C9	B7CB	B7CE	37D2	B7D5	37D7	B7DA	37DD	B7DF	B7D9
E8	37EB	37EE	B7F2	37F5	B7F7	37FA	B7FD	37FF	B843	B846	B885	3887	B8BA	388D	B88F	3899
E9	B89B	B89E	38B1	B8B3	B8B6	38E1	B8B3	B8E6	B909	390B	390E	B912	3915	B917	391A	B91D
EA	391F	3929	B92B	B92E	3932	B935	3937	B93A	393D	B93F	3951	B953	B956	3962	B965	3967
EB	B96A	396D	B96F	3979	B97B	B97E	39A1	B9A3	B9A6	39C2	B9C5	39C7	B9CA	39CD	B9CF	39D9
EC	B9DB	B9DE	39F1	B9F3	B9F6	BA11	3A13	3A16	BA22	3A25	BA27	3A2A	BA2D	3A2F	BA39	3A3B
ED	3A32	3A49	BA4B	BA4E	3A52	BA55	3A57	BA5A	3A5D	BA5F	BA69	3A6B	3A6E	BA72	3A75	BA77
EE	3A7A	BA7D	3A7F	3A91	BA93	BA96	3AA2	BAA5	3AA7	BAAA	3AAD	BAAF	3AB9	BABB	BABE	BAC9
EF	3ACB	3ACE	BAD2	3AD5	BAD7	3ADA	BADD	3ADF	3AE9	BAEB	BAEE	3AF2	BAF5	3AF7	BAFA	3AFD

REPLACEMENT SHEET
06 JUL 1996
This Sheet Has Been Replaced

REPLACEMENT SHEET
06 JUL 1996

Q' = 1

/	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
F0	BAFF3B21BB23BB263B42BB453B47BB4A3B4DBB4F3B59BB5BBB5E3B71BB73BB76
F1	BB893B83B8EBB9235B95BB973B9ABB9D3B9FBB9F3BA9BBAB3BB2BBBA3BB7BBA
F2	3BBD3BBD1BBD63BE53BE23BE43BE73BCE53BE93BCA3BCE73CDA3BC93BCB3BE7
F3	33C2633C4523C4233C4A3C4D3C4F3C5933C5B3C5D3C6F3C7133C7333C7633C7B
F4	43C92BC95C97BC9A3C9D3C9F3CA93CAB3CAE3CB23CB53CB73CBA3CBC3CBF3CC3
F5	53CD33CD63CDB3CE23CE53CEB3CF33CFB3CFE3D123D153D183D1B3D1E3D213D24
F6	63D273BD2A3D2D3D303D333D363D393D3C3D3F3D423D453D483D4B3D4E3D513D54
F7	73D693BD6A3DAF3DB23DB53DB83DBB3DBE3DC13DC43DC73DCA3DCD3DD03DD33D
F8	8BDAD3DAF3DDB3DDE3DE13DE43DE73DEA3DED3DF03DF33DF63DF93DFC3E023E
F9	93DEE3E593E8B3E8E3E913E943E973E9A3E9D3EA03EA33EA63EA93EAC3EAF3E
FA	3E593E8B3E8E3E913E943E973E9A3E9D3EA03EA33EA63EA93EAC3EAF3EB23EB
FB	BEAEBEF3EF93EF43EF73EFA3EFD3F003F033F063F093F0C3F0F3F123F153F18
FC	BEEF3EF93EF43EF73EFA3EFD3F003F033F063F093F0C3F0F3F123F153F183F1B
FD	3F493F4B3F4E3F513F543F573F5A3F5D3F603F633F663F693F6C3F6F3F723F75
FE	BF7D3F7F3F823F853F883F8B3F8E3F913F943F973F9A3F9D3FA03FA33FA63FA9
FF	3FCE3FD23FD53FD83FDB3FDE3FE13FE43FE73FEA3FED3FF03FF33FF63FF93FFC

Fig. 49 b

This Sheet Has Been Replaced

REPLACEMENT SHEET
06 JUL 1996

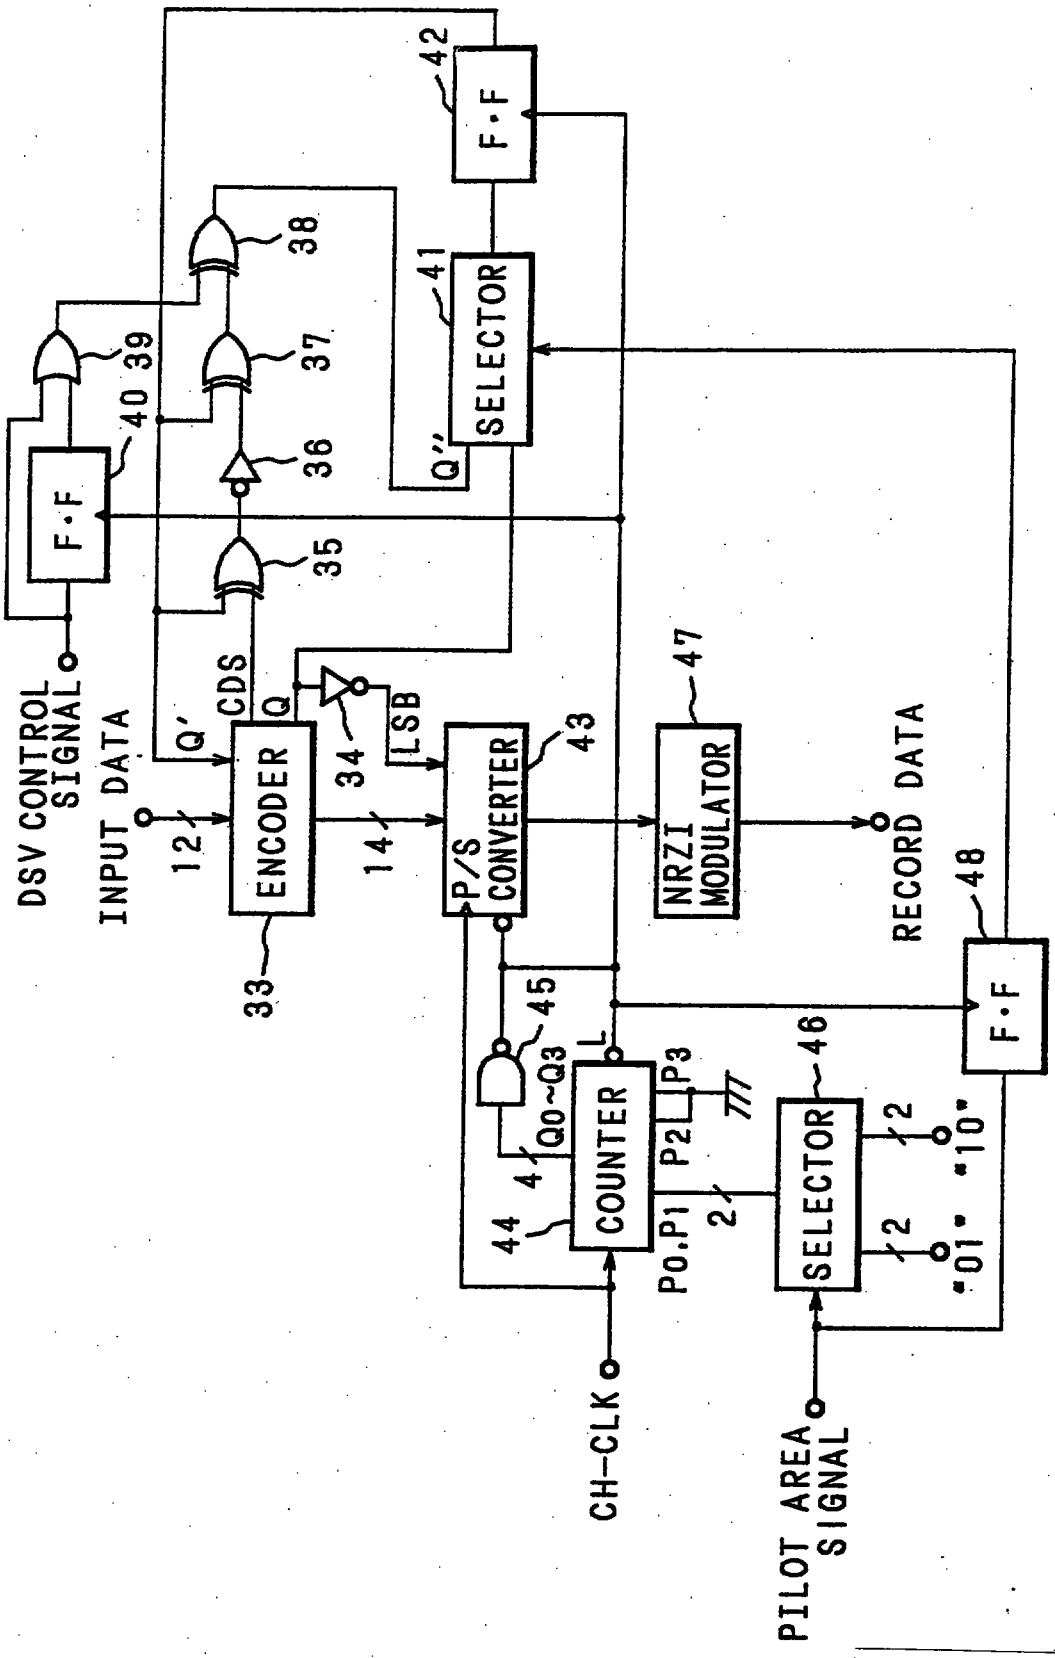

Fig. 50

This Sheet Has Been Replaced

REPLACEMENT SHEET
06 JUL 1996

DSV	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
DSV'	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
Q'	0	0	1	1	0	0	1	1	0	0	1	1	0	0	1	1
CDS	0	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1
Q"	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1	0

Fig. 51

This Sheet Has Been Replaced

REPLACEMENT SHEET
06 JUL 1996

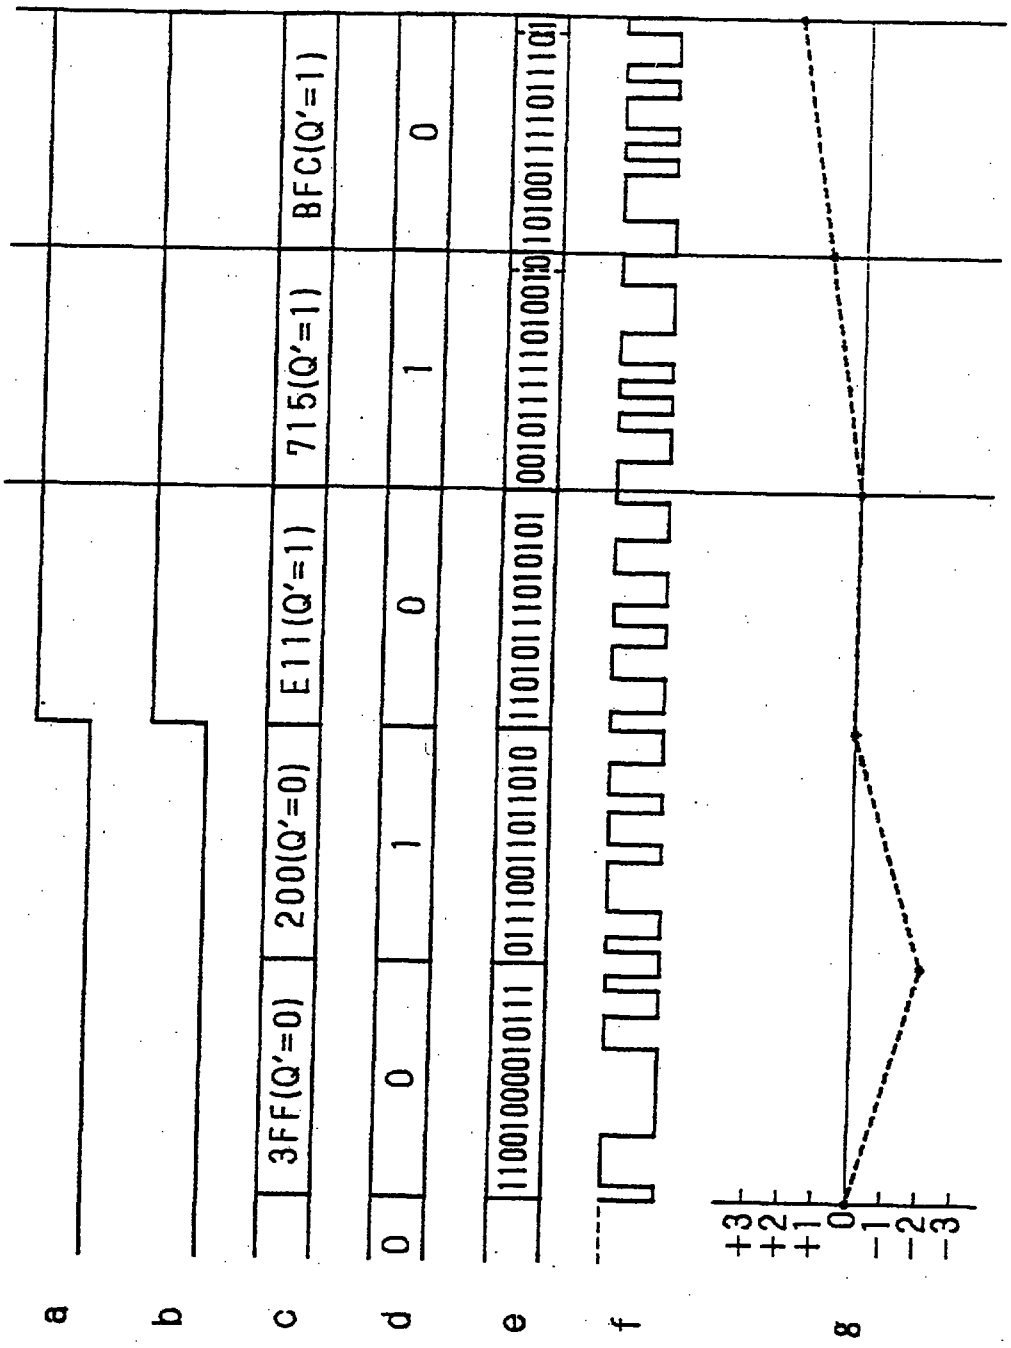

Fig. 52 A

This Sheet Has Been Replaced

REPLACEMENT SHEET
06 JUL 1996

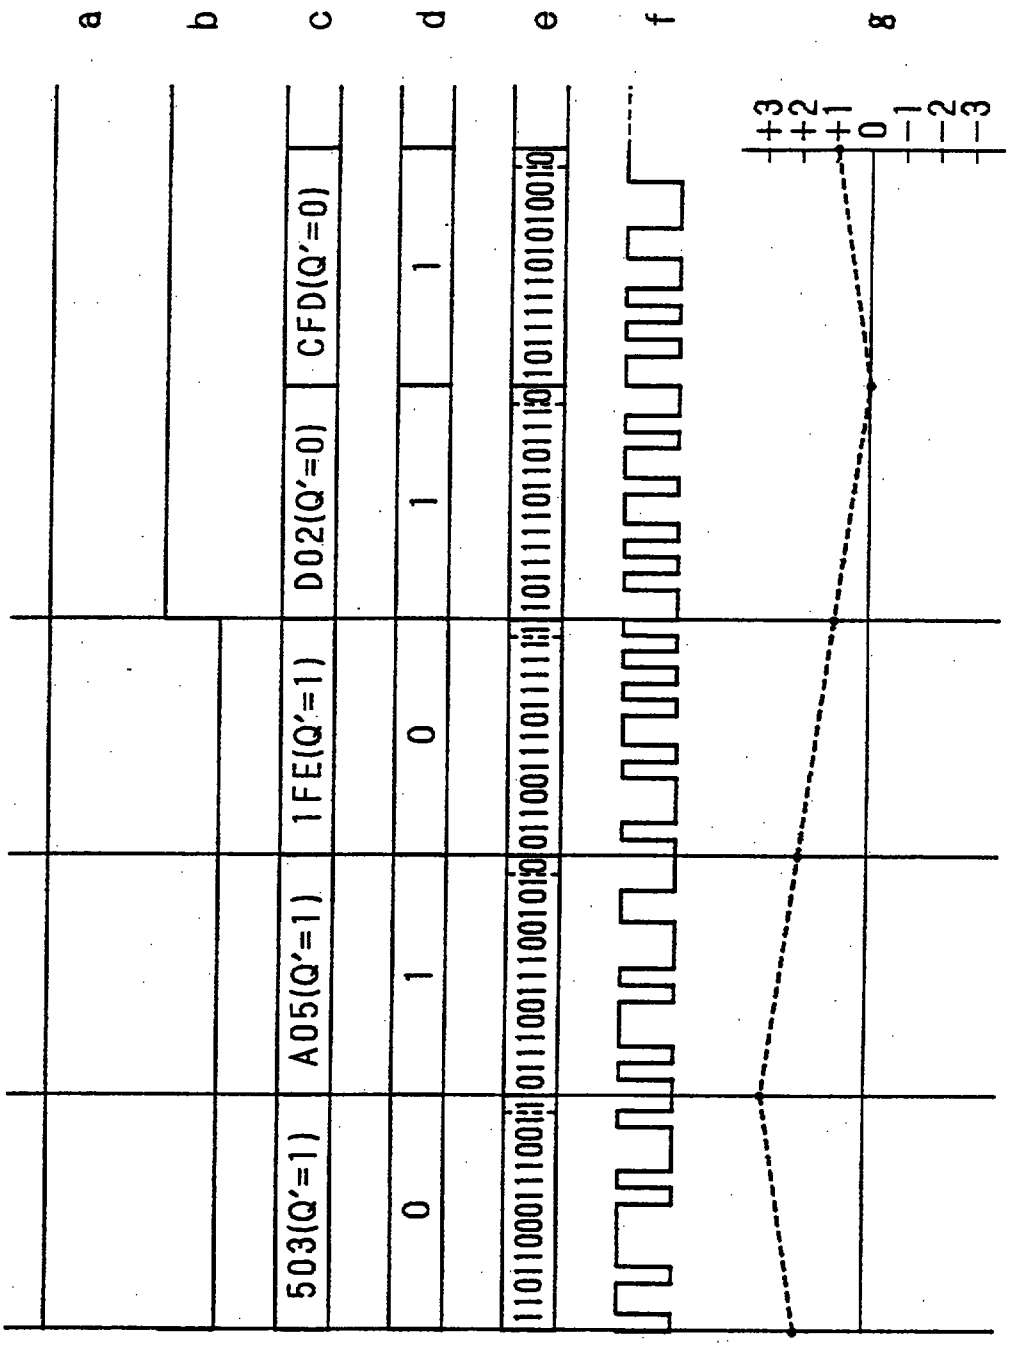

Fig. 52 B

This Sheet Has Been Replaced

REPLACEMENT SHEET
06 JUL 1996

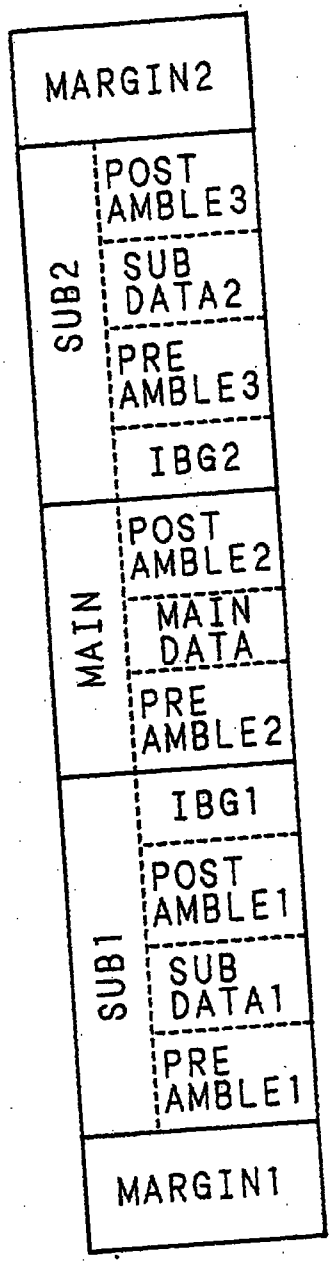

Fig. 53

This Sheet Has Been Replaced

18/07/97
EPOS

CLAIMS

THIS SHEET HAS BEEN REPLACED

REPLACEMENT SHEET
18 AUG 1997

1. A data conversion method for word-converting an r-bit first dataword to an m-bit second dataword (r < m) and converting the word-converted m-bit second dataword to an n-bit codeword (m < n), comprising the steps of:

dividing a sequence of first datawords into groups of x bits where x is the least common multiple of r and m;

dividing into x/m an arbitrary first dataword selected from a group which consists of x/r first datawords; and

forming the m-bit second dataword by appending r/(x/m)-bit data, obtained by dividing the first dataword into x/m, to the LSB or MSB side of one or other of the non-divided first datawords.

2. A recording/reproducing apparatus employing the data conversion method of claim 1, comprising:

means for formatting blocks so that each block separated by a synchronizing signal contains the first datawords of the number equal to an integral multiple of x/r.

3. A recording/reproducing apparatus employing the data conversion method of claim 1, comprising:

means for mapping r bits and r/(x/m) bits to a second dataword corresponding to a synchronizing signal; and

means for mapping the remaining bits of the divided

This Sheet Has Been Replaced

* C L M S *

THIS SHEET HAS BEEN REPLACED

REPLACEMENT SHEET
18 AUG 1997

first dataword to a signal, other than the synchronizing signal, that can complete as data with the remaining bits alone.

4. A recording/reproducing apparatus employing the data conversion method of claim 1, comprising:

first decoding means for decoding n1 bits in the reproduced n-bit codeword into r bits, the reproduced n-bit codeword being divided into n1 bits and n2 bits for reverse conversion into the m-bit second dataword;

second decoding means for decoding the n2 bits into r/(x/m) bits;

third decoding means for decoding the n bits into the m bits;

identifying means for identifying the type of bits at prescribed positions in the n-bit codeword and for outputting an identification signal designating the identified type; and

means for selecting decoded data from the first, second, or third decoding means on the basis of the identification signal supplied from the identifying means and for outputting the decoded second dataword.

5. A data converting apparatus for word-converting an r-bit first dataword to an m-bit second dataword (r < m) and converting the word-converted m-bit second dataword to an n-

This Sheet Has Been Replaced

* C L M S *

THIS SHEET HAS BEEN REPLACED

REPLACEMENT SHEET
18 AUG 1997

bit codeword (m < n), comprising:

means for dividing a sequence of first datawords into groups of x bits where x is the least common multiple of r and m;

means for dividing into x/m an arbitrary first dataword selected from a group which consists of x/r first datawords; and

means for forming the m-bit dataword by appending r/(x/m)-bit data, obtained by dividing the first dataword into x/m, to the LSB or MSB side of one or other of the non-divided first datawords.

6. A data conversion method for converting an m-bit dataword to a codeword consisting of a greater number of bits than m, comprising the steps of:

a first data conversion process wherein the m-bit dataword is converted to an n-bit codeword having a finite digital sum variation (DSV); and

a second data conversion process wherein the DSV is controlled to have the same value at prescribed intervals by appending one bit to the first data conversion process.

7. A data conversion method for dividing digital data first into 12-bit datawords and then converting the 12-bit datawords to 14-bit codewords,

wherein the number of successive 0s between a 1 and a 1 in each of the codewords is limited to 4 within the codeword

This Sheet Has Been Replaced

* C L M S *

REPLACEMENT SHEET
18 AUG 1997
THIS SHEET HAS BEEN REPLACED

and to 3 between codewords, and codewords having a codeword digital sum (CDS) of 0 are directly related to the 12-bit data, while for codewords having a CDS of +2 or -2, two codewords that differ only in MSB are paired and related to the 12-bit data, the two codewords being switched selectively by using polarity signals of the respective codewords.

8. A data conversion method for dividing digital data first into 12-bit datawords and then converting the 12-bit datawords to 15-bit codewords,

wherein one bit is appended to a 14-bit codeword converted in accordance with the data conversion method of claim 7, to form a pair of codewords, one having a CDS of +1 and the other having a CDS of -1, with the number of successive 0s between a 1 and a 1 in the code sequence being limited to 4, and one or other of the pair of codewords is selected in accordance with a DSV control signal with the DSV being made to vary in synchronism with the DSV control signal.

9. A magnetic recording/reproducing apparatus for recording multiple kinds of data in partitioned areas, wherein

when converting digital data to codewords for recording, the data conversion method of claim 8 is used for

This Sheet Has Been Replaced
* C L M S *

THIS SHEET HAS BEEN REPLACED

REPLACEMENT SHEET
18 AUG 1997

recording one or more areas within one track and the data conversion method of claim 7 is used for recording the other areas in the same track.

10. A data converting apparatus for converting an m-bit dataword to a codeword consisting of a greater number of bits than m, comprising:

means for converting the m-bit data to an n-bit codeword having a finite digital sum variation (DSV) as a first data conversion process; and

means for controlling the DSV to have the same value at prescribed by intervals appending one bit to the first data conversion process in a second data conversion process.

11. A data conversion method for word-converting first datawords, the method comprising, for each group of n first datawords, dividing x of the datawords by (n-x) and adding each divided part to a respective one of the other datawords in the group to form respective second datawords, and converting the second datawords to codewords of greater length.

This Sheet Has Been Replaced



THIS SHEET HAS BEEN REPLACED

REPLACEMENT SHEET
19 FEB 1998

19/02/98 JPO

CLAIMS

1. A data conversion method for converting an m-bit dataword to a codeword consisting of a greater number of bits than m, comprising the steps of:

a first data conversion process wherein the m-bit dataword is converted to an n-bit codeword having a finite digital sum variation (DSV); and

a second data conversion process wherein the DSV is controlled to have the same value at prescribed intervals by appending one bit to the n-bit codeword obtained by the first data conversion process.

2. A data conversion method for dividing digital data first into 12-bit datawords and then converting the 12-bit datawords to 14-bit codewords,

wherein the number of successive 0s between a 1 and a 1 in each of the codewords is limited to 4 within the codeword and to 3 between codewords, and codewords having a codeword digital sum (CDS) of 0 are directly related to the 12-bit data, while for codewords having a CDS of +2 or -2, two codewords

This Sheet Has Been Replaced
* C L M S *

THIS SHEET HAS BEEN REPLACED

REPLACEMENT SHEET
19 FEB 1998

that differ only in MSB are paired and related to the 12-bit data, the two codewords being switched selectively by using polarity signals of the respective codewords.

3. A data conversion method for dividing digital data first into 12-bit datawords and then converting the 12-bit datawords to 15-bit codewords,

wherein one bit is appended to a 14-bit codeword converted in accordance with the data conversion method of claim 2, to form a pair of codewords, one having a CDS of +1 and the other having a CDS of -1, with the number of successive 0s between a 1 and a 1 in the code sequence being limited to 4, and one or other of the pair of codewords is selected in accordance with a DSV control signal with the DSV being made to vary in synchronism with the DSV control signal.

4. A magnetic recording/reproducing apparatus for recording multiple kinds of data in partitioned areas, wherein

This Sheet Has Been Replaced

* C L M S *

THIS SHEET HAS BEEN REPLACED

REPLACEMENT SHEET
19 FEB 1998

when converting digital data to codewords for recording, the data conversion method of claim 3 is used for recording one or more areas within one track and the data conversion method of claim 2 is used for recording the other areas in the same track.

5. A data converting apparatus for converting an m-bit dataword to a codeword consisting of a greater number of bits than m, comprising:

means for converting the m-bit data to an n-bit codeword having a finite digital sum variation (DSV) as a first data conversion process; and

means for controlling the DSV to have the same value at prescribed intervals by appending one bit to the n-bit codeword obtained by the first data conversion process as a second data conversion process.

This Sheet Has Been Replaced

* C L M S *

THIS SHEET HAS BEEN REPLACED

REPLACEMENT SHEET
19 FEB 1998

Data Conversion Method

Recording / Reproducing Apparatus Using The Same

ABSTRACT OF THE DISCLOSURE

A data conversion method, wherein a sequence of first r-bit datawords is divided into groups of x bits where x is the least common multiple of r and m, an arbitrary first dataword selected from x/r groups of first datawords is divided into x/m, an m-bit second dataword is formed by appending r/(x/m)-bit data, obtained by dividing the first dataword into x/m, to the LSB or MSB side of one or other of the non-divided first datawords, and the word-converted m-bit second dataword is converted to an n-bit codeword ($m < n$).

FIGURE 27

This Sheet Has Been Replaced

9600801-6
22/07/99
IPDS

DATA CONVERSION METHOD AND RECORDING/REPRODUCING APPARATUS USING THE SAME

REPLACEMENT SHEETS SG
☑ Description : paged 1 to paged 47
☑ Claim(s) : paged 48 to paged 52
☑ Drawing(s) : paged 53 to paged 71/71
☑ Abstract : paged 52 to paged ....
DATE OF RECEIPT 22/07/99.

BACKGROUND OF THE INVENTION

Field of the Invention

The present invention relates to a data conversion method for converting digital data to signals suitable for the recording system or the transmission channel used when recording or transmitting the digital data onto magnetic tape, and a recording/reproducing apparatus employing the data conversion method.

Description of Related Art

Prior art data conversion methods employed in magnetic recording/reproducing apparatus include, for example, an 8/10 modulation method such as disclosed in "THE DAT CONFERENCE STANDARD" (issued June 1987). The 8/10 modulation method is a data conversion method in which digital data are partitioned into datawords of 8 bits each for conversion into 10-bit codewords. Fig. 1 is a circuit block diagram for explaining this data conversion method, and Fig. 2 is a data conversion table used for the same. In Fig. 1, the

REPLACEMENT SHEET
22 JUL 1999

reference numeral 1 designates an encoder for accepting eight-bit digital data and a one-bit table select signal (Q') at its respective inputs and for outputting a total of 11 bits, i.e. a 10-bit codeword plus a one-bit signal (Q) for selecting the table for the next codeword. Further, the numeral 2 denotes a flip-flop for delaying the codeword table select signal by one dataword. The encoder 1 includes a read-only memory (ROM) or the like which contains the data conversion table shown in Fig. 2, wherein codewords of CDS (Codeword Digital Sum) = 0 are mapped on a one-to-one basis to 256 datawords from "00" to "FF" of hexadecimal numeral, while in the case of codewords of CDS ≠ 0, pairs of codewords, one with CDS = +2 and the other with CDS = -2, are each mapped to one dataword, the table of Q' = -1 consisting of codewords of CDS = +2 and the table of Q' = +1 consisting of codewords of CDS = -2. The table select signal (Q) is used to select the CDS (the table) having the direction that suppresses the dispersion of charges in the codeword sequence.

The operation of the above circuit will now be explained with reference to the timing diagram of Fig. 3. In Fig. 3, the reference signs (a), (Q), and (b) correspond to inputs/outputs at the respective parts shown in Fig. 1, and the reference signs (c) and (d) respectively represent an output signal from an NRZI

REPLACEMENT SHEET
22 JUL 1999

converter (not shown) and a DSV (Digital Sum Variation) value at the end of codeword.

First, an eight-bit dataword "FF" is input to the encoder 1, along with the table select signal (Q') = -1, and consequently, the encoder 1 outputs a 10-bit codeword "1111101010" of CDS = +2 corresponding to "FF" for Q' = -1. At the same time, the table select signal Q = -1 is output for the next codeword. The parallel 10-bit signal is then converted to a serial signal, after which the signal is NRZI-modulated. As a result, the DSV value at the end of the codeword becomes +2.

Next, when "00" is input to the encoder 1, the encoder 1 outputs Q = 1 together with a 10-bit signal "0101010101" of CDS = 0 corresponding to "00" for Q' = -1 which is produced by introducing a one-symbol delay in the previous output Q = -1. As a result, the DSV value at the end of the codeword after NRZI modulation remains at +2.

Next, when "11" is input to the encoder 1, the encoder 1 outputs Q = -1 together with a 10-bit signal of CDS = -2 corresponding to "11" for Q' = 1. As a result, the DSV value at the end of the codeword after NRZI modulation becomes zero. In this manner, for each eight-bit dataword input to the encoder 1, a codeword to be output is selected

REPLACEMENT SHEET
22 JUL 1999

from the table of either Q' = -1 or Q' = 1 corresponding to the dataword on the basis of the table select signal output previously. The DSV at the end of each codeword after NRZI modulation can only take the value 0, +2 or -2. This means that the DSV dispersion is suppressed, as a result of which DC-free data conversion is realized.

As described above, according to the prior art data conversion method, eight-bit data is converted to a 10-bit codeword of CDS = 0 or CDS = +2 or -2, and a DC-free signal is produced with the DSV dispersion suppressed, thereby minimizing intersymbol interference on the transmission channel and thus increasing the recording density per track. However, for recent digital magnetic recording/reproducing apparatus using a rotary head, a recording density as high as several square micrometers per bit is demanded, which necessitates not only increasing the recording density per track but also reducing the track width down to several micrometers. To implement such apparatus, it is essential to employ a dynamic tracking following (DTF) control system whereby pilot signals for tracking are recorded on the main track recorded by the rotary head and the playback head is controlled to follow the recorded track curves during playback. When the prior art data conversion method is employed in such apparatus for multiplex recording of the pilot signals, the digital signal spectral distribution has to be

REPLACEMENT SHEET
22 JUL 1999

obtained down to ultra low frequency ranges although the recorded information signals contain no DC components; the resulting problem is that the pilot signals cause external disturbances, leading to increased errors in the detection of the digital signals.

One possible approach to overcoming the problem of the pilot signals causing external disturbances to the digital signals may be by generating pilot signals synchronized to the digital signals. However, the prior art data conversion method is effective only in suppressing the DSV dispersion and is not capable of actively controlling the DSV, and therefore, has the problem that it cannot generate pilot signals synchronized to the digital signals.

Fig. 4 shows a DAT recording format employed in a magnetic recording apparatus using the 8/10 modulation method. As shown, according to the format of Fig. 4, ATF areas for tracking control are provided in each of which a pilot signal for tracking control is recorded. Further, Fig. 5 shows a digital VTR recording format which is disclosed in Japanese Patent Application Laid Open No.3-217179 (1991). As shown, the track is divided into a video data area, an audio data area, a servo pilot area, and a sub code area, the pilot signal being recorded in the servo pilot area only.

REPLACEMENT SHEET
22 JUL 1999

According to the above construction of the prior art, it is not possible to control the DSV in such a manner as desired, and a separate area has to be reserved for recording a pilot signal for tracking control. Accordingly, accurate tracking control cannot be realized without increasing the data amount and hence increasing the recording rate, which makes it difficult to achieve high density recording.

SUMMARY OF THE INVENTION

It would be desirable to provide a data conversion method which, by suppressing low frequency components, can minimize intersymbol interference on the transmission channel, thus permitting increased per-track recording density, as in the prior art data conversion method, and which is capable of generating pilot signals synchronized to digital signals, which has not been possible with the prior art method, and thus achieves increased recording density with reduced track width.

It would also be desirable to provide a recording/reproducing apparatus optimized for the data conversion method capable of generating pilot signals synchronized to digital signals.

It would further be desirable to provide a data conversion method which is capable of generating pilot signals for tracking control and which involves hardly any increase in the recording rate and therefore permits high density

REPLACEMENT SHEET
22 JUL 1999

recording, and a recording/reproducing apparatus using such a data conversion method.

Aspects of the invention are set out in the appended claims.

When converting a word-converted m-bit second dataword to an n-bit codeword, in accordance with the invention, the number of successive 0s between a bit "1" and the next bit "1" in each n-bit codeword may be limited to 4, and two codewords, one with CDS = +1 and the other with CDS = -1, may be paired and related to the m-bit second dataword, the two codewords being selectively used in accordance with a DSV control signal. This enables the DSV to be controlled at a desired value for each codeword, thereby achieving spectrum suppression in a relatively low frequency range. Also, by controlling the CDS polarity in accordance with the DSV control signal, a pilot signal of the DSV variation cycle synchronized to digital data can be generated in the low frequency band where the digital data power spectrum exhibits an abrupt drop.

The method of the invention may include: recording multiple kinds of data in partitioned areas; relating 14-bit codewords of CDS = 0 and pairs of codewords of CDS = ± 2 to respective 12-bit datawords when encoding and recording at least one of the multiple kinds of data and for encoding the data by selectively using these codewords; and appending one bit to each 14-bit codeword to form a pair of codewords, one with CDS = +1 and the other with

REPLACEMENT SHEET
22 JUL 1999

CDS = -1, when encoding and recording at least one other of the multiple kinds of data and for encoding the data by selectively using these codewords.

In the above method, when encoding and recording at least one of the area-partitioned multiple kinds of data, either a 14-bit codeword of CDS = 0 or a pair of codewords differing only in MSB, one with CDS = +2 and the other with CDS = -2, are related to one dataword, and the dataword is encoded by selectively using these codewords, thus constructing a DC-free code of Tmin = 0.86T and Tmax = 4.29T; on the other hand, when encoding and recording at least one other of the multiple kinds of data, one bit is appended to each 14-bit codeword to form a pair of codewords, one with CDS = +1 and the other with CDS = -1, and the data is encoded by selectively using these codewords, thus constructing a code that provides the DSV coming round to the same value at prescribed intervals.

The above and further objects and features of the invention will more fully be apparent from the following detailed description with accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a diagram showing the circuit configuration

REPLACEMENT SHEET
22 JUL 1999

of a prior art data converting apparatus.

Fig. 2 is a code conversion table according to a prior art data conversion method.

Fig. 3 is a diagram for explaining the operation of the data converting apparatus of Fig. 1.

Fig. 4 is a diagram showing a recording format of a prior art DAT.

Fig. 5 is a diagram showing a recording format of a prior art digital VTR.

Figs. 6 is a diagram showing the number of codewords for deriving codewords in accordance with a first embodiment of the invention.

Figs. 7 is a diagram showing the number of codewords for deriving codewords in accordance with a first embodiment of the invention.

Figs. 8 is a diagram for explaining the construction of code conversion tables according to the first embodiment of the invention.

Figs. 9 is a diagram for explaining the construction of code conversion tables according to the first embodiment of the invention.

Figs. 10 is a diagram for explaining the construction of code conversion tables according to the first embodiment of the invention.

Figs. 11 is a diagram showing code conversion according

REPLACEMENT SHEET
22 JUL 1999

to the first embodiment of the invention.

Figs. 12 is a diagram showing code conversion according to the first embodiment of the invention.

Figs. 13 is a diagram showing code conversion according to the first embodiment of the invention.

Figs. 14 is a diagram showing code conversion according to the first embodiment of the invention.

Figs. 15 is a diagram showing code conversion according to the first embodiment of the invention.

Figs. 16 is a diagram showing code conversion according to the first embodiment of the invention.

Figs. 17 is a diagram showing code conversion according to the first embodiment of the invention.

Figs. 18 is a diagram showing code conversion according to the first embodiment of the invention.

Figs. 19 is a diagram showing code conversion according to the first embodiment of the invention.

Figs. 20 is a diagram showing code conversion according to the first embodiment of the invention.

Figs. 21 is a diagram showing code conversion according to the first embodiment of the invention.

Figs. 22 is a diagram showing code conversion according to the first embodiment of the invention.

Figs. 23 is a diagram showing code conversion according to the first embodiment of the invention.

REPLACEMENT SHEET
22 JUL 1999

Figs. 24 is a diagram showing code conversion according to the first embodiment of the invention.

Figs. 25 is a diagram showing code conversion according to the first embodiment of the invention.

Figs. 26 is a diagram showing code conversion according to the first embodiment of the invention.

Fig. 27 is a diagram showing the circuit configuration of a data converting apparatus for implementing the code conversion method of the first embodiment.

Fig. 28 is a diagram for explaining the operation of the data converting apparatus of Fig. 27.

Fig. 29 is a power spectrum diagram showing the effect of the first embodiment.

Fig. 30 is a diagram showing the structure of a first dataword block recorded by a recording/reproducing apparatus employing the data conversion method of the first embodiment.

Fig. 31 is a diagram showing the structure of the first dataword block recorded by the recording/reproducing apparatus employing the data conversion method of the first embodiment along with the structure of the first datawords recorded at the top of the block.

Fig. 32 is a diagram showing the configuration of a circuit for implementing a decoding method in the

REPLACEMENT SHEET
22 JUL 1999

recording/reproducing apparatus employing the data conversion method of the first embodiment.

Fig. 33 is a diagram showing classifications for 5-bit LSB codewords in the codewords of the first embodiment.

Figs. 34 is a diagram showing code conversion according to a second embodiment of the invention.

Figs. 35 is a diagram showing code conversion according to a second embodiment of the invention.

Figs. 36 is a diagram showing code conversion according to a second embodiment of the invention.

Figs. 37 is a diagram showing code conversion according to a second embodiment of the invention.

Figs. 38 is a diagram showing code conversion according to a second embodiment of the invention.

Figs. 39 is a diagram showing code conversion according to a second embodiment of the invention.

Figs. 40 is a diagram showing code conversion according to a second embodiment of the invention.

Figs. 41 is a diagram showing code conversion according to a second embodiment of the invention.

Figs. 42 is a diagram showing code conversion according to a second embodiment of the invention.

Figs. 43 is a diagram showing code conversion according to a second embodiment of the invention.

Figs. 44 is a diagram showing code conversion according

REPLACEMENT SHEET
22 JUL 1999

to a second embodiment of the invention.

Figs. 45 is a diagram showing code conversion according to a second embodiment of the invention.

Figs. 46 is a diagram showing code conversion according to a second embodiment of the invention.

Figs. 47 is a diagram showing code conversion according to a second embodiment of the invention.

Figs. 48 is a diagram showing code conversion according to a second embodiment of the invention.

Figs. 49 is a diagram showing code conversion according to a second embodiment of the invention.

Fig. 50 is a diagram showing the circuit configuration of a data converting apparatus for implementing the data conversion method of the second embodiment.

Fig. 51 is a diagram showing a code select table according to the second embodiment.

Fig. 52 is a diagram for explaining the operation of the data converting apparatus of Fig. 50.

Fig. 53 is a diagram showing a recording format of a recording/reproducing apparatus according to the second embodiment.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

(Embodiment 1)

A first embodiment of the invention will now be

REPLACEMENT SHEET
22 JUL 1999

described below with reference to accompanying drawings. Now suppose a first dataword length r = 8, a word-converted second dataword length m = 12, and a data-converted codeword length n = 15, to form a code with a modulation parameter Tmax/Tmin = 5. At this time, d = 0 and k = 4, where d is the minimum number of 0s between an arbitrary 1 and the next 1, and k is the maximum number of 0s between an arbitrary 1 and the next 1. The NRZI (F) rule is used to form the code. To achieve such a data conversion, the maximum number of successive 0s in each codeword is limited to 3 on the MSB side, 1 on the LSB side, and 4 within codeword. In this situation, the number of possible codewords having the MSB of 0 and satisfying the 0 run length condition is given in Fig. 6 for each CDS.

To form a DC-free code, 2^{12} pairs (4096 pairs) of codewords, each pair having codewords of different CDS polarities, should be provided. The numbers given in Fig. 6 are only for codewords whose MSB is 0; by converting the MSB to 1, codewords of reverse CDS polarity can be obtained while satisfying the 0 run length condition. Accordingly, of the codewords given in Fig. 6, only the codewords of CDS = ± 1 are enough to satisfy the minimum required number of second datawords = 2^{12} (4096 < number of codewords = 4650). Therefore, by using only the codewords of MSB = 0 and CDS = ± 1 and by setting the MSB to 0 or 1, it is possible to suppress

REPLACEMENT SHEET
22 JUL 1999

the dispersion of DSV.

Fig. 7 shows possible combinations of codewords n1 and n2 when the codewords of CDS = ± 1 given in Fig. 6 are each divided into n1 = 10 bits and n2 = 5 bits, n1 representing the 10 bits on the MSB side and n2 representing the 5 bits on the LSB side. In Fig. 7, Group A consists of n1 codewords of CDS = 0, Group B of n1 codewords of CDS = +2, Group C of n1 codewords of CDS = -2, Group D of n1 codewords of +4, and Group E of n1 codewords of CDS = -4. Each of the codeword groups A to E is subdivided in accordance with the 0 run length at codeword end resulting from the concatenation of the codewords n1 and n2.

First, we focus our attention on Group A. It can be seen that there are 18 different n2 codewords that can be paired with A1 while, of the 18 codewords, 17 codewords excluding the codeword "02" can also be paired with A2. Therefore, for Group A, 16 codewords, excluding the codewords "02" and "05", are used, and m = 12 bits are divided into m1 = 8 bits and m2 = 4 bits at the time of m/n conversion, to realize m1/n1 (8/10) conversion and m2/n2 (4/5) conversion, respectively. This coding technique serves to avoid propagation of errors between divided codewords at the time of decoding. To utilize this property, when 8-bit first datawords of length (r) supplied from an error-correcting circuit are word-converted to 12-bit second data-

REPLACEMENT SHEET
22 JUL 1999

words of length (m), four bits separated from the eight bits are mapped to m2, while non-divided 8 bits are mapped to m1. As a result, when a random error occurred to one bit in n bits during the reconstruction process, the error occurring to the first dataword after decoding is limited only to one dataword; the error is thus prevented from propagating between datawords.

In the first embodiment, 1s and 0s used to represent one-bit signals are binary numbers, a 1 representing a high level and a 0 a low level. On the other hand, "0" to "F" used to represent datawords, codewords, or parallel data bit sequences are hexadecimal numbers.

If the above coding method is provided in 256 pairs, a single bit error in n bits during the reconstruction process can be prevented from propagating between first datawords after decoding. However, as is apparent from Fig. 7, under the condition that satisfies the modulation parameter of the data conversion method of the first embodiment, the above coding method can be applied only to Group A, and cannot be applied to the other Groups B to E.

In view of the above situation, we now consider a method of coding, as shown in Figs. 8 to 10 wherein the m1/n1, m2/n2 coding method is divided into three major coding groups, i.e. the first coding group consisting only of Group A codewords corresponding to the first datawords m1

REPLACEMENT SHEET
22 JUL 1999

= "00" to "73", the second coding group consisting of Group B and Group C codewords corresponding to the first datawords m1 = "74" to "BA", and the third coding group consisting of the codewords in the other groups as well as the remaining codewords in Group B and Group C corresponding to the first datawords m1 = "BB" to "FF".

First, referring to the first coding group of Fig. 8 which consists only of Group A codewords, if an error occurred to one bit in n bits in the reconstruction process, the error occurring to the first dataword after decoding is limited only to one dataword and is thus prevented from propagating between datawords.

Next, in the second coding group shown in Fig. 9, there is provided a one-to-one correspondence for the m2/n2 conversion, but for the m1/n1 conversion, two n1 codewords are mapped to one m1. Therefore, of the encoded 15 bits, if the 10 bits mapped to n1 contains a single bit error, the error occurring to the first dataword after decoding is limited only to one dataword and is thus prevented from propagating between datawords. However, if there is an error in one bit out of the five bits mapped to n2, error propagation can occur between first datawords after decoding from the probability point of view.

Further, in the third encoding group shown in Fig. 10, one m1 is mapped to a plurality of n1 codewords for the

REPLACEMENT SHEET
22 JUL 1999

m1/n1 conversion, while for the m2/n2 conversion, a plurality of m2 codewords are mapped to one n2. Therefore, any one bit error can cause error propagation between first datawords after decoding from the probability point of view whether the error is in n1 or n2.

In the data conversion method wherein an 8-bit first dataword is word-converted to a 12-bit second dataword which is further converted to a 15-bit codeword, the above coding method has the effect of reducing the possibility of error propagation that may occur between first datawords after decoding due to a single bit detection error in the encoded 15 bits.

Code conversion tables thus constructed are shown in Figs. 11 to 26. The numbers given in Figs. 11 to 26 represent binary digital signals in hexadecimal notation; "0" to "F" in the uppermost row each correspond to the four bits on the LSB side of a 12-bit input codeword, and "00" to "FF" in the leftmost column each correspond to the eight bits on the MSB side of a 12-bit input codeword, each row and column intersection "XXXX" forming the resulting 16-bit codeword. For example, when a 12-bit dataword "15A" is input, a codeword "9539" is obtained from the intersection between the row of "15" and the column of "A" (see Fig. 12). For a 12-bit input codeword (the second codeword), the resulting codeword consists of 16 bits, of which the MSB

REPLACEMENT SHEET
22 JUL 1999

corresponds to a Q signal ("1" for a high level and "0" for a low level, representing the end level of an NRZI-modulated codeword when the MSB of the premodulation codeword is "0"), the 15th bit represents the CDS information ("1" for +1 and "0" for -1), and the remaining bits from the 14th bit to the LSB correspond to the bits from the 14th bit to the LSB of the 15-bit codeword to be NRZI-modulated. For the m/n (12/15) data conversion, the codeword output is selected as 16 bits because the codeword MSB control is performed by comparing the CDS information of the codeword to be converted with the end level of the previous NRZI-modulated codeword on the basis of a DSV control signal of 50% duty cycle derived by further dividing the data conversion rate signal.

Fig. 27 is a diagram showing an example of a circuit configuration implementing the first embodiment. The reference numeral 3 designates a clock generator circuit which generates, from a channel clock for transmitting a data-converted code, a symbol clock of fCH/10 for transmitting a first codeword (r), a clock (fMW/2) of fCH/30 (a value obtained by multiplying 24, the least common multiple of r and m, by n/m (10/8)) for word-converting the first dataword to the second dataword, a clock (fMW) for parallel-transmitting a converted n-bit codeword, and a DSV control signal (i) for determining the variation frequency of DSV.

REPLACEMENT SHEET
22 JUL 1999

The numeral 4 is a shift register constructed from three stages of flip-flops (F-F) for transmitting 8-bit first datawords in parallel at the symbol clock (fsym); 5 is a latch circuit that latches at the clock (fMW/2) the 24-bit parallel signal output from the shift register 4; 6 is a selector for word-converting the first datawords of 3 bytes to two second datawords by using the clock (fMW/2) as a select switch; 7 is an encoder for data-converting each 12-bit dataword to a codeword selected from the tables shown in Figs. 11 to 26; and 8 is an MSB controller for outputting the MSB of the codeword in accordance with the Q and CDS information supplied from the encoder 7 and the DSV control signal (i) supplied from the clock generator circuit 3, the MSB controller 8 having four EXOR circuits, A to D, and a one-word delay for delaying the end level of the previous NRZI-modulated codeword by one encoding cycle by using the clock (fMW). Further, the numeral 9 designates a parallel/serial converter for loading the encoded 15-bit parallel signal at the clock (fMW) and for converting the parallel signal to a serial signal which is transmitted at the channel clock (fCH), and the numeral 10 indicates an NRZI modulator for causing state inversion (high to low and low to high transitions) when signal "1" is input.

Fig. 28 is a timing diagram for explaining the operation of the circuit shown in Fig. 27. The reference

REPLACEMENT SHEET
22 JUL 1999

signs (a) to (k), (m), (n), and (r) correspond to the respective points designated by the same signs appearing at the inputs/outputs of the respective circuit sections.

The operation of the circuit will now be described in detail. 8-bit first datawords (r) fed from an error-correcting circuit section are shifted at the symbol clock (fsym) into and along the shift register 4 and are output as a 3-byte or 24-bit parallel signal. The 24-bit parallel signal is latched by the latch circuit 5 at the clock (fMW/2) of three-symbol cycle. That is, three bytes of signals "08", "1A", and "93" are latched by the latch circuit 5 at the rising edge, between times 3 and 4, of the clock (fMW/2) shown in Fig. 28. Of the three bytes of parallel signals, the first byte (8 bits) "08" is input to DH11 - DH4 of the selector 6, and the four bits of "1" on the MSB side of the second byte are input to DH3 - DH0 of the selector 6. Further, the last byte (8 bits) "93" is input to DL11 - DL4 of the selector 6, and the four bits of "A" on the LSB side of the second byte are input to DH3 - DH0, respectively. As a result, between time 4 and the first half of time 5 in Fig. 28, the selector 6 outputs a 12-bit parallel signal "081". Between the second half of time 5 and time 6, the selector 6 outputs a 12-bit parallel signal "93A".

With the above operation, the three 8-bit first

REPLACEMENT SHEET
22 JUL 1999

datawords "08", "1A", and "93" are word-converted to two 12-bit second datawords, "081" and "93", by dividing the second of the three first datawords into two and appending the respective halves to the LSBs of the first and third bytes of the first dataword. Likewise, the three bytes of the first dataword, "41", "DE", and "F2", latched by the latch circuit 5 at the rising edge, between times 6 and 7, of the clock (fMW/2) in Fig. 28, are word-converted by the selector 6 to two second datawords "41D" and "F2E".

Next, we will describe in detail the operation for converting the 12-bit second datawords to 15-bit codewords. For the convenience of explanation, it is assumed that, at time 4 in Fig. 28, the output Q' of the one-word delay in the MSB controller 8 is low, and that the DSV value for the codeword sequence up to the converted second dataword immediately preceding "081" is 0.

In this condition, when the second dataword "081" is input to the encoder 7 during the period from time 4 to the first half of time 5, the encoder 7 outputs a signal, 8BC9, in accordance with the conversion tables shown in Figs. 11 to 26, the signal having a total of 16 bits, i.e. a codeword formed from the LSB to the 14th bit and the CDS signal and Q signal, one bit each, associated with the codeword. To describe the contents of the signal, of the four bits "1000" corresponding to "8", the MSB represents the Q signal, "0"

REPLACEMENT SHEET
22 JUL 1999

for a low level and "1" for a high level. Further, of "1000" corresponding to "8", the bit immediately preceding the MSB represents the CDS signal for the codeword, "0" indicating CDS = -1 and a low level and "1" indicating CDS = +1 and a high level. The remaining two bits of the "1000" corresponding to "8", plus the 12 bits "BC9", a total of 14 bits, constitute the data-converted codeword which has 14 bits of "00101111001001" from the 14th bit to the LSB.

Of the signals thus created, the Q signal and the CDS signal are input, along with the DSV control signal (i), to the MSB controller 8 which then determines and outputs the MSB of the codeword in accordance with the operation hereinafter described. The DSV control signal (i) is set at "1" (high level) if the DSV is to be dispersed in the positive direction and at "0" (low level) if the DSV is to be dispersed in the negative direction. In the present embodiment, the DSV control signal is set at a high level for the duration of times 4, 5, and 6 and at a low level for the duration of times 7, 8, and 9, so that the CDS is controlled to give +1 for encoding the second datawords "081" and "93A" and -1 for encoding the second datawords "41D" and "F2E".

The operation of the MSB controller 8 will now be described in detail. First, using the EXOR circuit A, it is checked whether the CDS value of the codeword currently

REPLACEMENT SHEET
22 JUL 1999

output agrees with the direction in which the DSV is to be dispersed; if they agree, a 0 is output, and if they do not agree, a 1 is output, thereby making the CDS value of the codeword agree with the dispersing direction of the DSV. Note, however, that the above output condition is based on the assumption that encoding is performed with the start point of the codeword at a low level at the time of NRZI modulation. Also note that the MSB needs to be determined by referencing the Q' signal (a 0 for a low level and a 1 for a high level) indicating the end level of the previous NRZI-modulated codeword. The output of the EXOR circuit A and the Q' signal are both input to the EXOR circuit B, and when the Q' signal is "0" (indicating that the NRZI-modulated word level at the end of the previous codeword is low), the output level of the EXOR circuit A appears unchanged at the output of the EXOR circuit B. On the other hand, when the Q' signal is "1" (indicating that the NRZI-modulated word level at the end of the previous codeword is high), since the polarity of the CDS of the codeword is inverted after NRZI modulation, the output level of the EXOR circuit A appears inverted at the output of the EXOR circuit B. The output of the EXOR circuit B is supplied as the MSB of the codeword to the parallel/serial converter 9.

To describe the above operation as applied to the present embodiment, when the second dataword "081" is input

REPLACEMENT SHEET
22 JUL 1999

to the encoder 7, the CDS signal output from the encoder 7 is "0", and the DSV control signal (i) is at a high level ("1") that causes the DSV to disperse in the positive direction, as can be seen from Fig. 28, so that the EXOR circuit A outputs a high level signal ("1"). At this time, the Q' signal that indicates the end level of the previous NRZI-modulated codeword is at a low level ("0"), so that the EXOR circuit B outputs a 1 as the MSB of the codeword.

As a result, a 15-bit parallel signal "1001011101" is loaded into the parallel/serial converter 9 in the middle of time 5 when the clock (fMW) goes low. The loaded bits are then output serially at the channel clock (fCH) from the parallel/serial converter 9 to form a code sequence with the MSB at the top of the sequence. The code sequence output from the parallel/serial converter 9 is fed to the NRZI modulator 10 where the polarity of the signal is inverted each time a "1" is input, the resulting signal being shown in Fig. 28(k). Here, with +1 as a high level and -1 as a low level, the CDS can be calculated as +1, which indicates that the DSV of the code sequence is in the positive dispersing direction.

With the above operation, the 12-bit dataword is data-converted to the 15-bit codeword in accordance with the DSV control signal, but it is further necessary to check the end level of the NRZI-modulated codeword, as previously de-

REPLACEMENT SHEET
22 JUL 1999

scribed. This is accomplished by the following operation.

The Q signal from the encoder 7 and the MSB signal from the EXOR circuit B are input to the EXOR circuit C in the MSB controller 8. When the MSB is "0", the Q signal appears unchanged at the output of the EXOR circuit C. On the other hand, when the MSB is "1", the number of inversions that occur in the NRZI modulation increases by one as the number of 1s in the codeword increases by one, and therefore, the Q signal is inverted for output. During the NRZI modulation, the polarity is inverted between positive and negative in accordance with the level of the connected signal. Therefore, the output of the EXOR circuit C is input to the EXOR circuit D along with the Q' signal indicating the word end level of the previous NRZI-modulated codeword, and when the Q' signal is "0" (indicating the word end level after NRZI modulation is low), the output signal of the EXOR circuit C appears unchanged at the output of the EXOR circuit D. On the other hand, when the Q' signal is "1" (indicating the word end level after NRZI modulation is high), the output of the EXOR circuit C is inverted through the EXOR circuit D. The output of the EXOR circuit D is supplied to the one-word delay as a signal indicating the end level of the NRZI-modulated codeword for the immediately following data conversion.

To describe the above operation as applied to the

REPLACEMENT SHEET
22 JUL 1999

present embodiment, when the second dataword "081" is input to the encoder 7, the Q signal output from the encoder 7 is "1", and the MSB output from the EXOR circuit B is also "1", as can be seen from Fig. 28, so that the output of the EXOR circuit D is at a low level ("0"). At this time, the signal Q' that indicates the end level of the previous NRZI-modulated codeword is at a low level ("0"), and therefore, the EXOR circuit D outputs a signal "0" indicating that the end level of the NRZI-modulated codeword is low, the signal "0" being input at the clock (fMW) to the one-word delay through which the signal is delayed by one encoding cycle. By repeating the above operation for every m/n data conversion with one word delay at each time, the end level of each codeword can be checked correctly for continuous sequences of codewords.

As described above, the data that has been word-converted by the selector 6 from 8-bit first datawords to 12 bit second datawords is converted by the encoder 7 to a 16-bit codeword, which is further converted by the MSB controller 8 to a 15-bit codeword, capable of determining the dispersing direction of the DSV as desired by the DSV control signal (i), by converting the two bits on the MSB side of the 16-bit codeword to a one-bit signal that determines the polarity of the CDS. Likewise, subsequent second datawords "93A", "41D", and "F2E" are respectively input to the

REPLACEMENT SHEET
22 JUL 1999

encoder 7 and converted to the signal shown in Fig. 28(j), with their CDSs being controlled in accordance with the DSV control signal (i). As a result, the DSV value at the codeword end obtained at the output of the NRZI modulator 10 has a variation width p - p2 over four data conversion cycles as shown in Fig. 28(k), the resulting signal thus being made to synchronize with the DSV control signal.

The power spectrum of the digital signal is dependent on the state transition probability, and by keeping the DSV variation cycle at a constant value, the state transition occurring at the DSV variation cycle becomes high, thus making it possible to obtain a spectrum having high power at frequencies corresponding to the DSV variation cycle. In the present embodiment, the cycle of the DSV control signal is selected to be equal to four m/n data conversion cycles. However, if the signal cycle is set equal to about 10 data conversion cycles, it will be possible to obtain a relatively low frequency signal corresponding to the DSV variation cycle synchronized with the digital data, and such a low frequency signal can be used as a tracking pilot signal that will become necessary when the track width is reduced. Fig. 29 is a diagram illustrating the power spectrum obtained when first datawords constructed from 8-bit M-sequence random signals expressed as $X^{23} + X^5 + 1$ are input in a circuit constructed in accordance with the first

REPLACEMENT SHEET
22 JUL 1999

embodiment but with the cycle of the DSV control signal set equal to ten m/n data conversion cycles. As can be seen from Fig. 29, the resulting spectrum has no DC content (DC-free) and, at the same time, exhibits high power only at frequencies corresponding to the cycle of the DSV control signal.

We will now describe a digital magnetic recording/reproducing apparatus that can be constructed into a system optimized for the above-described data conversion method.

Digital magnetic recording/reproducing apparatus such as DAT, digital VTR, etc. have the characteristic of being insusceptible to system variation in the sense that degradation in the signal-to-noise ratio does not lead to degradation in the audio and video reproduction performance as long as 1s and 0s can be distinguished. On the other hand, there is some danger with such digital apparatus that only a single bit error in a large volume of information may entirely change the contents of the information. Therefore, in digital magnetic recording/reproducing apparatus, it is essential to employ error-correcting codes for correction of errors caused on the transmission channel. Usually, error-correcting codewords are recorded in error-correcting code blocks separated from one another by a synchronizing signal as shown in Fig. 30. In Fig. 30, the numeral 21 is the

REPLACEMENT SHEET
22 JUL 1999

synchronizing signal for separating one error-correcting code block from another, 22 is an ID signal for the block identified by the track number or the synchronizing signal, 23 is a parity-check codeword for checking whether the ID signal is correctly reproduced, 24 is an audio/video sector, and 25 is an error-correcting code. Rotary head type digital magnetic recording/reproducing apparatus usually have about 100 such blocks per track, each block being separated by the synchronizing signal.

The following description deals with a method of setting the amount of information for each block.

The synchronizing signal 21 serves not only as a signal for separating each error-correcting code block but also as a signal for executing word synchronization for decoding the codeword, encoded and recorded as previously described, into the original dataword. The synchronizing signal thus has a very important role, and therefore, a unique signal that does not usually appear in the recorded signal sequences is often used as the synchronizing signal. This unique signal can only be obtained by reconverting the data-converted codeword. According to the data conversion method of the first embodiment in which 8-bit first datawords are first converted to 12-bit second datawords and then converted to 15-bit codewords, the synchronizing signal length corresponds to 1.5 bytes in the original first datawords. There-

REPLACEMENT SHEET
22 JUL 1999

fore, if the synchronizing signal sector is constructed from one-byte synchronizing signal data plus 0.5 byte obtained by dividing the first dataword, these components would become separated at the time of decoding, so that the 0.5 byte in the synchronizing signal sector would cause a fixed error and therefore, the one byte data immediately following the synchronizing signal data would also cause a fixed error. This problem may be solved by inserting a dummy dataword of one byte immediately following the first dataword (which may be formed from a fixed pattern) used for the synchronizing signal.

However, it is not advantageous in terms of space utilization to add a dummy dataword in a limited package. Therefore, in the recording/reproducing apparatus employing the data conversion method of the first embodiment, the first dataword used for the synchronizing signal is constructed from a fixed pattern of one byte, and the immediately following first dataword is constructed from a fixed pattern of four bits on the MSB side and data (e.g., a cue signal, track address, etc.) of four or less bits on the LSB side. Ordinary 8-bit datawords are mapped starting with the first dataword of the third byte. The pattern of the synchronizing signal sector may be set in any pattern suitable for the reconversion performed after ordinary data conversion.

REPLACEMENT SHEET
22 JUL 1999

We will now describe a method of setting the number of first datawords for each block separated by the synchronizing signal. According to the data conversion method of the first embodiment, r-bit first datawords are first word-converted to m-bit second datawords and then data-converted to n-bit codewords. This requires word synchronization for every x bits, where x is the least common multiple of r and m. For example, in the present embodiment, r = 8 and m = 12, and hence the least common multiple is 24 bits, so that the first codewords are word-synchronized for every three bytes. Since word synchronization is performed for every three bytes in each block, as described above, if the number of first datawords in the block is not an integral multiple of 3, the first dataword remaining after dividing the number by 3 will cause a fixed error. Therefore, in the recording/reproducing apparatus employing the data conversion method of the first embodiment, the number of first datawords per block is selected to be equal to an integral multiple of x/r.

The following describes a method of converting the reproduced 15-bit codeword back to the original 12-bit second dataword in the recording/reproducing apparatus employing the above-described data conversion method.

Fig. 32 is a diagram illustrating an example of a circuit configuration for decoding the reproduced 15-bit

REPLACEMENT SHEET
22 JUL 1999

code-word into the original 12-bit second dataword (m), employed in the recording/reproducing apparatus using the data conversion method of the first embodiment. In Fig. 32, the reference numeral 11 is an NRZI demodulator for NRZI-demodulating the reproduction signal transmitted by a reproduction channel clock; 12 is a serial/parallel converter for converting the NRZI-demodulated serial signal, fed from the NRZI demodulator 11, to a 15-bit parallel signal by using a reproduction word clock which is word-synchronized by a synchronizing signal appended to the top of each block; 13 is a first decoder for accepting at its input the 10 bits n1 on the MSB side of the 15-bit codeword (n) output from the serial/parallel converter 12 and for decoding the n1 into a dataword that forms the eight bits on the MSB side of the second dataword; and 14 is a second decoder for accepting at its input the five bits n2 on the LSB side of the 15-bit codeword (n) output from the serial/parallel converter 12 and for decoding the n2 into a dataword that forms the four bits on the LSB side of the second dataword. The numeral 15 designates a third decoder for decoding the 15-bit codeword, output from the serial/parallel converter 12, into 12-bit decoded data. The third decoder 15 is constructed to perform one-to-one decoding when the five bits on the LSB side is of a prescribed type.

Furthermore, the reference numeral 16 indicates an LSB

REPLACEMENT SHEET
22 JUL 1999

discriminating circuit which accepts at its input the five bits on the LSB side of the 15-bit codeword output from the serial/parallel converter 12, and which discriminates the type of the codeword and outputs a control signal (o) designating the classification type; and 17 refers to a selector which selects either the 12-bit dataword having decoded data from the first decoder 13 and the second decoder 14 or the 12-bit dataword from the third decoder 15 by using the control signal supplied from the LSB discriminating circuit 17 as a select SW, and which generates the second dataword (m) after decoding.

The operation of this embodiment will now be described. The reproduction signal is NRZI-demodulated by the NRZI demodulator 11 and fed to the serial/parallel converter 12 through which the demodulated serial signal is converted to a 15-bit codeword (n). Of the 15 bits in the codeword (n), the 10 bits n1 on the MSB side are entered to the first demodulator 13, and the five bits n2 on the LSB side are fed to the second demodulator 14 as well as to the LSB discriminating circuit 16. On the other hand, all the 15 bits of the codeword (n) are loaded directly into the third demodulator 15.

We will now describe in detail the operation of decoders for decoding the 15-bit codeword back into the 12-bit second dataword. From Figs. 8 to 10, the five-bit codeword

REPLACEMENT SHEET
22 JUL 1999

n2 on the LSB side of the 15-bit codeword can be classified in relation to the demodulated 4-bit dataword m2, as shown in Fig. 33. The codewords classified as the first LSB code group in Fig. 33 correspond to the LSB codewords n2 in the first and second coding groups in Figs. 8 and 9 as well as in the first n1 group for m1 = "BB" to "E7" in the third coding group in Fig. 10, and each n1 in the n1 group is related to one decoding data m1 within the limits of the first LSB code group. Further, the codewords classified as the second LSB code group correspond to the LSB codewords classified as the second n1 group in the third coding group as well as the fourth n1 group for m1 = "EE" to "FF in the same coding group. The codewords classified as the third LSB code group correspond to the LSB codewords classified as the third n1 group, while the codewords classified as the fourth LSB code group correspond to the LSB codewords in the n1 group for m1 = "E8" to "FF". Note, however, that the n1 group in the second to the fourth LSB code groups overlaps with the n1 group in the first LSB code group, and that, in some cases, a plurality of m2 are mapped to one LSB codeword n2.

Now, the first decoder 13 decodes the 10 bits on the MSB side into an eight-bit dataword. In this case, the top bit in the 10-bit codeword is a control bit for controlling the DSV during demodulation and may therefore be disregarded

REPLACEMENT SHEET
22 JUL 1999

at the time of decoding. Thus, the remaining nine bits are decoded. The decoding is performed on the codewords in the first and second coding groups in Figs. 8 and 9 as well as in the first n1 group for m1 = "BB" to "E7" in the third coding group in Fig. 10, and the decoded 8-bit dataword is applied to V11 - V4 on the selector 17 as data representing the eight bits on the MSB side of the second dataword. On the other hand, the second decoder 14 decodes the five bits on the LSB side into a four-bit dataword. In this case, the decoding is performed on the codeword n2 in the first LSB code group. The decoded 4-bit dataword is applied to V3 - V0 on the selector 17 as data representing the four bits on the LSB side of the second dataword. The third decoder 15 decodes the input 15-bit codeword into a 12-bit dataword. In this case also, the top bit on the MSB side is excluded, as in the case of the first decoder 13, and the remaining 14 bits are decoded. The decoding is performed only when the five-bit LSB codeword falls in one of the second to the fourth LSB code groups, and the decoded 12-bit dataword is applied to W11 - W0 on the selector 17.

The selector 17 is switched to select either the dataword supplied from the first decoder 13 and second decoder 14 or the dataword supplied from the third decoder 15, and outputs the selected dataword as the decoded second dataword; the switching of the selector 17 is controlled by

REPLACEMENT SHEET
22 JUL 1999

a control signal supplied from the LSB discriminating circuit 16. Of the 15 bits in the codeword, the five bits n2 on the LSB side are input to the LSB discriminating circuit 16 to discriminate the type of the LSB codeword. For example, if the LSB codeword n2 is a codeword discriminated as belonging to one of the second to the fourth LSB code groups, the LSB discriminating circuit 16 outputs a control signal (o) indicating the discriminated type and applies it to the select SW on the selector 17. When no control signal (o) is received, the selector 17 selects the eight-bit MSB dataword V11 - V4 supplied from the first decoder 13 and the four-bit LSB dataword V3 - V0 supplied from the second decoder 14 and outputs the resulting 12-bit dataword V. On the other hand, when the control signal (o) is received, the selector 17 is switched to select the 12-bit dataword W decoded by the third decoder 15.

Thus, the selector 17 outputs the 12-bit dataword m obtained by reconverting the codeword that was encoded in accordance with the tables shown in Figs. 8 to 10. As described, the 15-bit codeword is decoded on a one-to-one basis to the 12-bit dataword only when the five-bit LSB codeword n2 is discriminated as belonging to one of the second to the fourth LSB code groups in Fig. 33; otherwise, the 15-bit codeword is decoded by dividing it into 10 bits on the MSB side and five bits on the LSB side. This con-

REPLACEMENT SHEET
22 JUL 1999

struction serves to reduce the possibility of the error propagation that may occur between decoded first datawords due to a single bit detection error in the 15-bit codeword.

In the above decoding method, the discrimination of the five-bit LSB codeword is determined by which of the two major groups, the first LSB code group or the second to fourth LSB code group, the LSB codeword belongs to. However, in an alternative method, the types of codeword may be classified into three major groups, for example, the first LSB code group, the second LSB code group, and the third/fourth LSB code group, and four decoders, i.e. the first to the fourth decoders, may be provided, the outputs of these decoders being selected accordingly by using a control signal from the LSB discriminating circuit. Such configuration may somewhat increase the circuit complexity compared to that of the above embodiment, but will serve to further reduce the possibility of error propagation between decoded first datawords.

Thus, according to the first embodiment, eight-bit first datawords are first word-converted to 12-bit second datawords, and then, the 12-bit second datawords are converted to 15-bit codewords, each having bits of CDS = +1 or -1, by executing word-synchronization for every two second datawords, which is the least common multiple of the first and second datawords. In the conversion process, the first

REPLACEMENT SHEET
22 JUL 1999

byte of the first dataword is mapped to the eight bits on the MSB side of the first of the two second datawords, and the four bits on the MSB side of the second byte of the first dataword are mapped to the four bits on the LSB side of the first of the two second datawords. For the second of the two second dataword, the third byte of the first dataword is mapped to the eight bits on the MSB side, while the four bits on the LSB side of the second byte of the first dataword are mapped to the four bits on the LSB side of the second of the two second datawords, thus accomplishing the 8/12 word-conversion. Thereafter, each 12-bit dataword is converted to a 15-bit codeword (12/15 data conversion). This encoding method permits the 8/10 encoding of non-divided first datawords and the 4/5 encoding of divided first datawords, which serves to reduce the possibility of the error propagation that may occur, due to a single bit error in the codeword, between first datawords during reverse conversion at the time of decoding. Furthermore, when this data conversion method is applied to a recording/reproducing apparatus, it is possible to construct a system capable of efficient recording of data without requiring redundant bits, the system being constructed such that the number of first datawords for each block separated by a synchronizing signal is set at a multiple of r/x and that the first dataword as the synchronizing signal at the beginning of the

REPLACEMENT SHEET
22 JUL 1999

block is formed from a fixed pattern and the immediately following first dataword is formed from a fixed pattern of four bits on the MSB side and data of four or less bits (e.g., cue signal, track address, etc.) on the LSB side.

On the other hand, when decoding the 15-bit codeword into the 12-bit second dataword, the 15-bit codeword is divided into 10 bits on the MSB side and five bits on the LSB side, and the 10 bits are decoded into eight bits by the first decoder and the five bits are decoded into four bits by the second decoder, while the 15 bits are decoded into 12 bits by the third decoder. The discriminating circuit discriminates the type of the five bits on the LSB side of the 15-bit codeword and outputs a control signal indicating the discriminated type, on the basis of which the decoded data from the decoders are selected to reconstruct the second dataword. Thus, the codeword is decoded by reverse conversion of 10/8 and 5/4, except when the LSB codeword falls under specific conditions. This has the effect of reducing the possibility of the error propagation that may occur between decoded first datawords due to a detection error in the codeword.

(Embodiment 2)

A second embodiment of the invention will now be described below. Suppose a code of dataword length = 12 and codeword length = 14 with one bit added to form a code with

REPLACEMENT SHEET
22 JUL 1999

Tmax/Tmin = 5. Here, let d = 0 and k = 4. The NRZI(F) rule is used to construct the code. To satisfy k = 4 in each codeword, the number of successive 0s in the codeword is limited to 4, and since one bit is inserted between codewords, the number of successive 0s is limited to 2 on the MSB side and 1 on the LSB side.

To form a DC-free code, 4096 pairs of codewords, each pair having codewords of different CDS polarities, should be provided. There are 2481 codewords with CDS = 0, 2169 codewords with CDS = +2, and 1888 codewords with CDS = -2, which satisfy the above conditions. Hence, 2481 codewords with CDS = 0 and 1615 pairs of codewords with CDS = ± 2, which differ only in MSB, are used to suppress the dispersion of DSV to achieve DC-free modulation. Code conversion tables thus constructed are shown in Figs. 34 to 49. The data given in Figs. 34 to 49 represent binary digital signals in hexadecimal notation. For every 12-bit input data (dataword), there are output a total of 16 bits, i.e. a 14-bit codeword, one-bit data (hereinafter represented by Q) indicating the number of inversions performed on the NRZI-modulated codeword, and the CDS (a zero or nonzero bit) of the codeword.

Fig. 50 is a diagram illustrating an example of a circuit configuration implementing the second embodiment. In Fig. 50, the reference numeral 33 is an encoder for

REPLACEMENT SHEET
22 JUL 1999

converting 12-bit digital data (dataword) to 16-bit digital data shown in Figs. 34 to 49; 34 and 36 are NOT gates; 35, 37, 38, and 39 are EXOR gates; 40, 42, and 48 are flip-flops; 41 and 46 are selectors; 43 is a parallel/serial converter for converting 14-bit or 15-bit parallel data to a serial data sequence; 44 is a counter; 45 is a four-input NAND gate; and 47 is an NRZI modulator for processing the codeword, converted to serial data, so that the signal polarity is inverted each time a 1 is input.

Fig. 51 shows a code select table used to determine a code to be selected in accordance with the current and the previous DSV control signal values, the CDS value of the codeword just selected, and the previous Q' signal.

Fig. 52 is a diagram illustrating code conversion and DSV value variation according to the second embodiment. In Fig. 52, (a) is a pilot signal (write at "1"), (b) is a DSV control signal (positive direction at "1"), (c) is input data (12 bits), (d) is a code select signal Q', (e) is a selected codeword, (f) is a signal waveform to be recorded, and (g) is a DSV value at the end of each codeword.

Fig. 53 is a diagram illustrating the recording format of a magnetic recording/reproducing apparatus according to the second embodiment. In Fig. 53, subcode signals, etc. are recorded in the subdata areas (SUB1, SUB2), and video and audio signals are recorded in the main

REPLACEMENT SHEET
22 JUL 1999

data area (MAIN). Pilot signals are recorded in the subdata areas (SUB1, SUB2).

The circuit operation of the second embodiment will now be described below with reference to Fig. 50.

First, when the pilot area signal output from the flip-flop 48 is "0", i.e. when data other than that for the subdata area is to be encoded for recording, 12-bit data is input to the encoder 33 where the 12-bit data is converted to a 14-bit codeword (parallel) by using the code select signal Q' supplied from the flip-flop 42. The resulting 14-bit codeword is supplied to the parallel/serial converter 43. The encoder 33 also outputs a Q signal which is supplied to the selector 41. On the other hand, the selector 46 selects "10" by the input pilot area signal "0", which sets the load value of the counter 14 to "0010", and the counter 14 outputs a load CLK of one CLK width to the parallel/serial converter 43 for every 14 CH-CLKs. The parallel/serial converter 43 converts the input 14-bit parallel codeword to serial data which is fed to the NRZI modulator 47. At this time, the output of the NOT gate 34, i.e. the LSB, is input to the parallel/serial converter 43, but since a load CLK is input for every 14 CH-CLKs, the LSB is not output from the parallel/serial converter 43. The serial codeword input to the NRZI modulator 47 is NRZI-modulated for output. The Q signal output from the encoder

REPLACEMENT SHEET
22 JUL 1999

33 is input to the selector 41 which selects the Q signal by the pilot area signal and supplies it to the flip-flop 42.

On the other hand, when the pilot area signal output from the flip-flop 48 is "1", i.e. when data for the subdata area is to be encoded for recording, 12-bit data is input to the encoder 33 which converts the 12-bit data to a 14-bit codeword (parallel) by using the code select signal Q' supplied from the flip-flop 42. The resulting 14-bit codeword is supplied to the parallel/serial converter 43. The encoder 33 also supplies a Q signal to the selector 41 and the NOT gate 34, and a CDS signal to the EXOR gate 35. The selector 46 selects "01" by the input pilot area signal "1", which sets the load value of the counter 14 to "0001", and the counter 14 supplies a load CLK of one CLK width to the parallel/serial converter 43 for every 15 CH-CLKs. The parallel/serial converter 43 converts the input 14-bit parallel codeword and LSB to serial data which is supplied to the NRZI modulator 47. The serial codeword input to the NRZI modulator 47 is NRZI-modulated for output. The DSV control signal is input to the flip-flop 40 and the EXOR gate 39, the output of the flip-flop 40 being coupled to the other input of the EXOR gate 39. The output of the EXOR gate 39, i.e. the exclusive OR sum of the current DSV control signal and the previous DSV control signal, is supplied to one input of the EXOR gate 38. The EXOR gate 35

REPLACEMENT SHEET
22 JUL 1999

EXORs the CDS signal output from the encoder 33 with the Q' signal. The output of the EXOR gate 35 is inverted through the NOT gate 36 and applied to one input of the EXOR gate 37. The EXOR gate 37 EXORs the output of the NOT gate 36 with the Q' signal and supplies the result to the other input of the EXOR gate 38. The EXOR gate 38 EXORs the outputs of the EXOR gates 37 and 39 and supplies the result to the other input of the selector 41. In this manner, the signal selected in accordance with the codeword select table is output as a Q" signal. The Q" signal is selected by the pilot area signal and is fed to the flip-flop 42 to form a code select signal Q' for the next coding.

Suppose, for example, that the pilot area signal is "0", the input data is "3FF", the previous polarity is "1", and the Q' signal is "0". In this case, the 14-bit codeword output from the encoder 33 is "11001000010111"; the CDS is -2 and the DSV is also -2. As a result, the Q signal "0" is output. Next, when data "200" is input, since the Q' signal, i.e. the previous Q signal, is "0", the selected codeword is "01110011011010"; the CDS is +2 and the DSV is 0. Next, when the pilot area signal and the DSV control signal both go to a "1" and data "E11" is input, since the Q' signal is "1", the output codeword is "11010111010101", and a Q signal of "0" and a CDS signal of "0" are output; CDS and DSV are both 0. When data "715" is input, since the Q'

REPLACEMENT SHEET
22 JUL 1999

signal is "1", the selected codeword is "00101111101001" and the LSB is "0"; CDS and DSV are both +1. Next, when data "BFC" is input, since the Q' signal is "1", the selected codeword is "10100111101110" and the LSB is "1"; CDS is +1 and DSV is +2. The above operation is repeated for the subdata areas where the pilot area signal is "1", thereby achieving a modulation method in which the DSV varies at the cycle of the DSV control signal.

Using the above-described modulation method, a tracking servo pilot signal is recorded at two places within one track. Therefore, in the subdata areas (SUB1, SUB2), one LSB bit is added to the 14-bit codeword to form a 15-bit codeword, as described previously, and modulation is performed on the codeword including the pilot signal, while for other areas, the 14-bit codeword is directly modulated.

According to the format shown in Fig. 53, two subdata areas are provided within one track, and the pilot signals are recorded in these areas. Alternatively, three or more pilot signal recording areas may be provided within one track in order to enhance the tracking accuracy with a narrower track. It will also be appreciated that the pilot signal may be recorded in any portion within the subdata areas.

As described, according to the second embodiment, 12-bit datawords are each converted to a 14-bit codeword which,

REPLACEMENT SHEET
22 JUL 1999

after NRZI modulation, has a succession of the same level, more than one bit long and five bits at maximum, and provides CDS = 0, +2 or -2, the CDS value being controlled to suppress the dispersion of DSV, thus accomplishing a DC-free modulation method. Furthermore, in areas where pilot signals are recorded, one bit is added to the 14-bit codeword to form codewords of CDS = ± 1, and the modulation is performed so that the DSV varies in synchronism with the DSV control signal to produce a tracking control pilot signal. This eliminates the need for ATF areas, the areas where only tracking control signals are recorded. Moreover, since one bit is added to the codeword and the pilot signal is recorded in a restricted area, it is not necessary to substantially raise the recording rate, and therefore, high density recording is achieved. Furthermore, since the modulation method is basically the same for both the pilot signal areas and other areas, the configuration does not involve any appreciable increase in the circuit complexity.

REPLACEMENT SHEET
22 JUL 1999

CLAIMS

1. A data signal conversion method for converting a first digital signal comprising m-bit datawords to a second digital signal comprising codewords consisting of a greater number of bits than m,

said method comprising the step of a first data conversion process wherein the m-bit datawords are converted to n-bit codewords selected to ensure a finite digital sum variation (DSV) in the second digital signal,

characterised by the further step of a second data conversion process wherein the DSV is controlled to have the same value at prescribed codeword cycle intervals by appending at least one bit to each of the n-bit codewords obtained by the first data conversion process, thereby obtaining a cyclical DSV in the second digital signal which may be used as a tracking pilot signal.

2. A data signal conversion method according to claim 1, wherein said m-bit datawords are 12-bit datawords and said n-bit codewords are 14-bit codewords and said first data conversion process comprises limiting the number of successive 0s between a 1 and a 1 in each of the n-bit codewords to 4 within the codeword and 3 between codewords, directly relating n-bit codewords having a codeword digital sum (CDS) of 0 to certain m-bit datawords, and relating a pair of n-bit codewords having a CDS of +2 or -2 that differ only in MSB to other m-bit datawords, the selection between the codeword pair being switched by using polarity signals of the respective codewords.

3. A data signal conversion method according to claim 2, wherein the second data conversion process comprises the step of appending one bit to an n-bit codeword from the codeword pair to form a pair of 15-bit codewords, one having a CDS of +1 and the other having a CDS of -1.

REPLACEMENT SHEET
22 JUL 1999

4. A data signal conversion method according to any of claims 1 to 3, wherein the second data conversion process is controlled in accordance with a DSV control signal with the DSV being made to vary in synchronism with the DSV control signal.

5. A data signal conversion method according to any preceding claim, wherein said prescribed codeword cycle intervals consist of at least 4 codeword cycles.

6. A data signal conversion method according to claim 5. wherein said prescribed codeword cycle intervals consist of about 10 codeword cycles.

7. A magnetic recording/reproduction method using a data signal conversion method according to any preceding claim, comprising recording said second digital signal on a track of a magnetic tape and using the periodically varying DSV as a tracking pilot signal during reproduction.

8. A magnetic recording/reproduction method according to claim 7, comprising recording multiple kinds of data in partitioned areas of the track, and when converting digital data to codewords during recording, using the first data conversion process and the second data conversion process for recording in one or more areas within the track, and using the first data conversion process but not the second data conversion process for recording in other areas of the track.

9. Data signal conversion apparatus for converting a first digital signal comprising m-bit datawords to a second digital signal comprising codewords consisting of a greater number of bits than m,

REPLACEMENT SHEET
22 JUL 1999

* C L M S *

said apparatus comprising first data conversion means whereby the m-bit datawords are converted to n-bit codewords selected to ensure a finite digital sum variation (DSV) in the second digital signal,

characterised by second data conversion means whereby the DSV is controlled to have the same value at prescribed codeword cycle intervals by appending at least one bit to each of the n-bit codewords obtained by the first data conversion process, thereby obtaining a cyclical DSV in the second digital signal which may be used as a tracking pilot signal.

10. Data signal conversion apparatus according to claim 9, wherein said m-bit datawords are 12-bit datawords and said n-bit codewords are 14-bit codewords and said first data conversion means comprises means for limiting the number of successive 0s between a 1 and a 1 in each of the n-bit codewords to 4 within the codeword and 3 between codewords, means for directly relating n-bit codewords having a codeword digital sum (CDS) of 0 to certain m-bit datawords, and means for relating a pair of n-bit codewords having a CDS of +2 or -2 that differ only in MSB to other m-bit datawords, the selection between the codeword pair being switched by using polarity signals of the respective codewords.

11. Data signal conversion apparatus according to claim 10, wherein the second data conversion means comprises means for appending one bit to an n-bit codeword from the codeword pair to form a pair of 15-bit codewords, one having a CDS of +1 and the other having a CDS of -1.

12. Data signal conversion apparatus according to any of claims 9 to 11, wherein the second data conversion means is controlled in accordance with a DSV control signal with the DSV being made to vary in synchronism with the DSV control signal.

REPLACEMENT SHEET
22 JUL 1999



13. Data signal conversion apparatus according to any of claims 9 to 12, wherein said prescribed codeword cycle intervals consist of at least 4 codeword cycles.

14. Data signal conversion apparatus according to claim 13, wherein said prescribed codeword cycle intervals consist of about 10 codeword cycles.

15. Magnetic recording/reproduction apparatus comprising data signal conversion means according to any of claims 9 to 14, comprising means for recording said second digital signal on a track of a magnetic tape and using the periodically varying DSV as a tracking pilot signal during reproduction.

16. Magnetic recording/reproduction apparatus according to claim 15, comprising means for recording multiple kinds of data in partitioned areas of the track, and when converting digital data to codewords during recording, using the first data conversion process and the second data conversion process for recording in one or more areas within the track, and using the first data conversion process but not the second data conversion process for recording in other areas of the track.

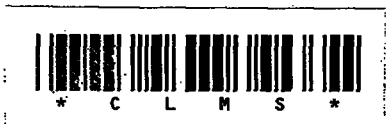

REPLACEMENT SHEET
22 JUL 1999

DATA CONVERSION METHOD AND RECORDING/REPRODUCING APPARATUS USING THE SAME

ABSTRACT

A data conversion method, wherein a sequence of first r-bit datawords is divided into groups of x bits where x is the least common multiple of r and m, an arbitrary first dataword selected from x/r groups of first datawords is divided into x/m, an m-bit second dataword is formed by appending r/(x/m)-bit data, obtained by dividing the first dataword into x/m, to the LSB or MSB side of one or other of the non-divided first datawords, and the word-converted m-bit second dataword is converted to an n-bit codeword ($m < n$).

FIGURE 27

REPLACEMENT SHEET
22 JUL 1999

Fig. 1
Prior Art

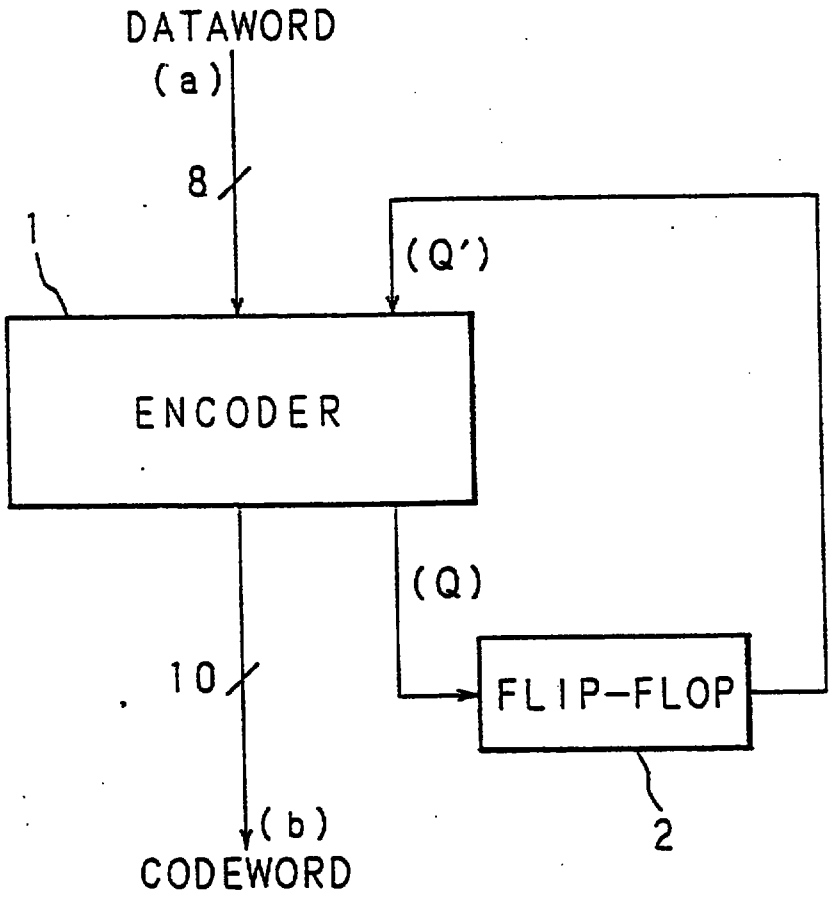

REPLACEMENT SHEET
22 JUL 1999

REPLACEMENT SHEET
22 JUL 1999

Fig. 2
Prior Art

		Q'=−1			Q'=1		
	DATAWORD (MSB-LSB)	CODEWORD (MSB-LSB)	DC	Q	CODEWORD (MSB-LSB)	DC	Q
00	00000000	0101010101	0	1	0101010101	0	−1
01	00000001	0101010111	0	−1	0101010111	0	1
02	00000010	0101011101	0	−1	0101011101	0	1
03	00000011	0101011111	0	1	0101011111	0	−1
04	00000100	0101001001	0	−1	0101001001	0	1
05	00000101	0101001011	0	1	0101001011	0	−1
06	00000110	0101001110	0	1	0101001110	0	−1
07	00000111	0101011010	0	1	0101011010	0	−1
08	00001000	0101110101	0	−1	0101110101	0	1
09	00001001	0101110111	0	1	0101110111	0	−1
0A	00001010	0101111101	0	1	0101111101	0	−1
0B	00001011	0101111111	0	−1	0101111111	0	1
0C	00001100	0101101001	0	1	0101101001	0	−1
0D	00001101	0101101011	0	−1	0101101011	0	1
0E	00001110	0101101110	0	−1	0101101110	0	1
0F	00001111	0101111010	0	−1	0101111010	0	1
.	.	.	.	.	.	.	.
.	.	.	.	.	.	.	.
.	.	.	.	.	.	.	.
.	.	.	.	.	.	.	.
.	.	.	.	.	.	.	.
.	.	.	.	.	.	.	.
.	.	.	.	.	.	.	.
.	.	.	.	.	.	.	.
F0	11110000	1101010101	0	−1	1101010101	0	1
F1	11110001	1101010111	0	1	1101010111	0	−1
F2	11110010	1101011101	0	1	1101011101	0	−1
F3	11110011	1101011111	0	−1	1101011111	0	1
F4	11110100	1101001001	0	1	1101001001	0	−1
F5	11110101	1101001011	0	−1	1101001011	0	1
F6	11110110	1101001110	0	−1	1101001110	0	1
F7	11110111	1101011010	0	−1	1101011010	0	1
F8	11111000	1111100101	2	−1	0111100101	−2	−1
F9	11111001	1111100111	2	1	0111100111	−2	−1
FA	11111010	1111101101	2	1	0111101101	−2	1
FB	11111011	1111101111	2	−1	0111101111	−2	−1
FC	11111100	1111111001	2	1	0111111001	−2	1
FD	11111101	1111111011	2	−1	0111111011	−2	−1
FE	11111110	1111111110	2	−1	0111111110	−2	−1
FF	11111111	1111101010	2	−1	0111101010	−2	−1

Fig. 3
Prior Art

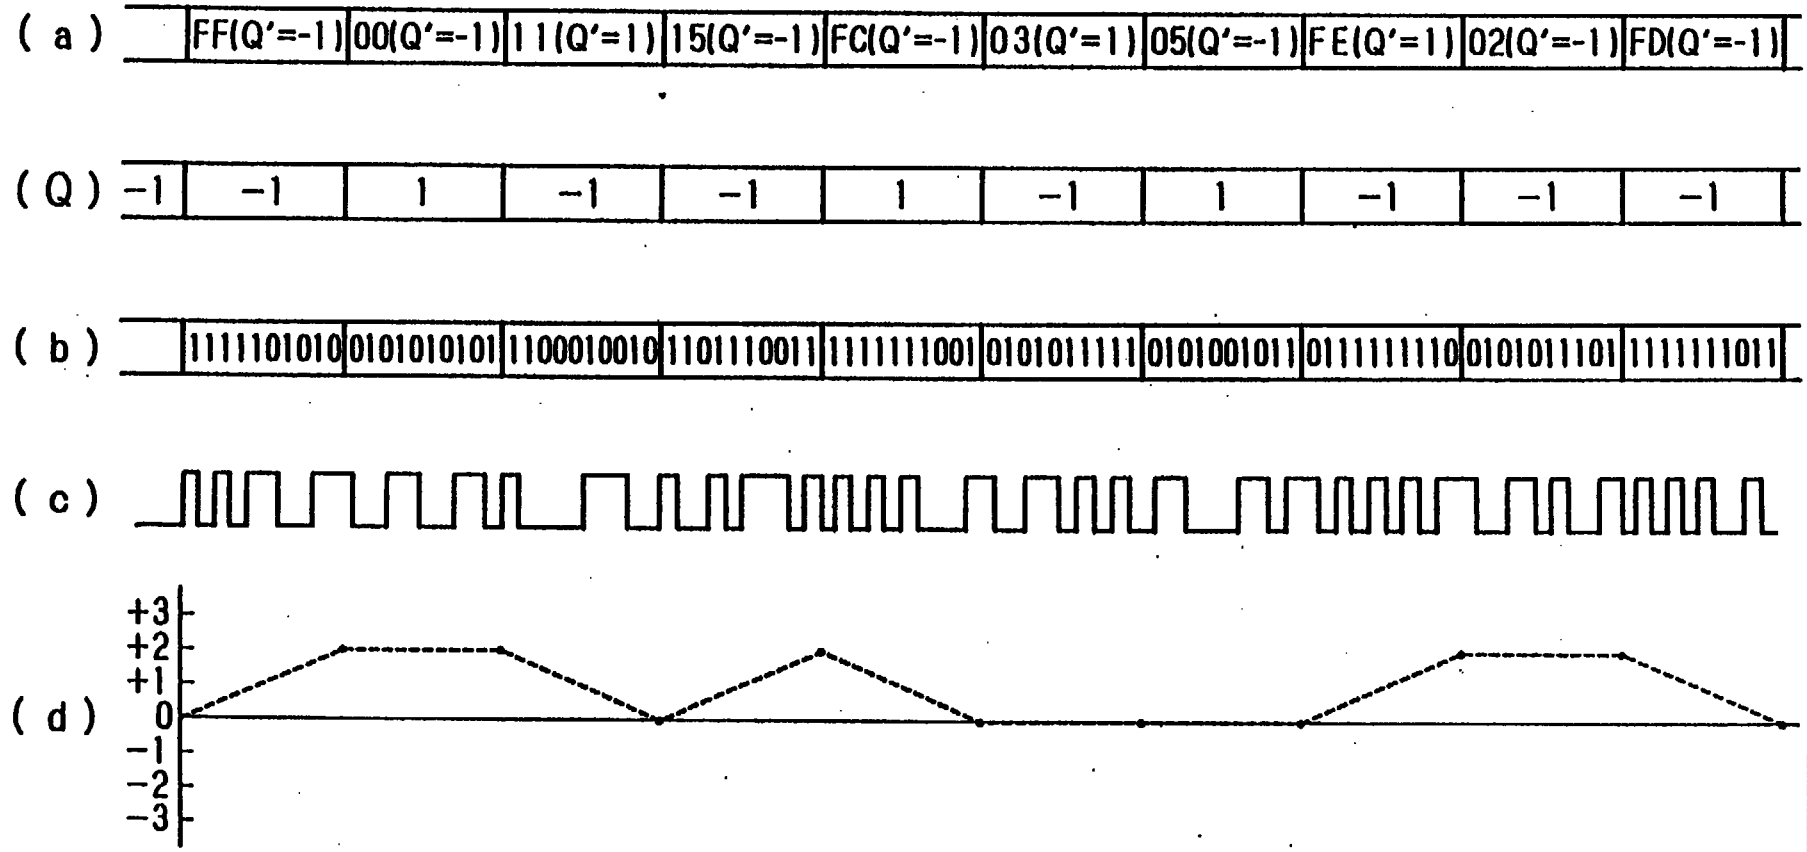

REPLACEMENT SHEET
22 JUL 1999

REPLACEMENT SHEET
22 JUL 1999

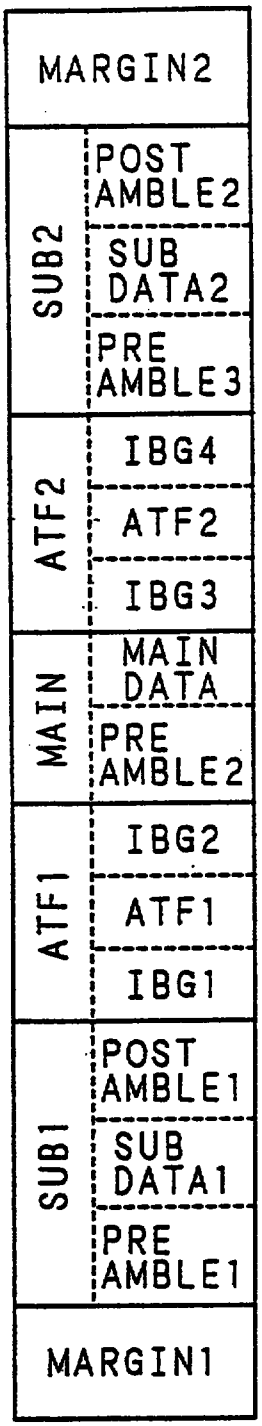

Fig. 4
Prior Art

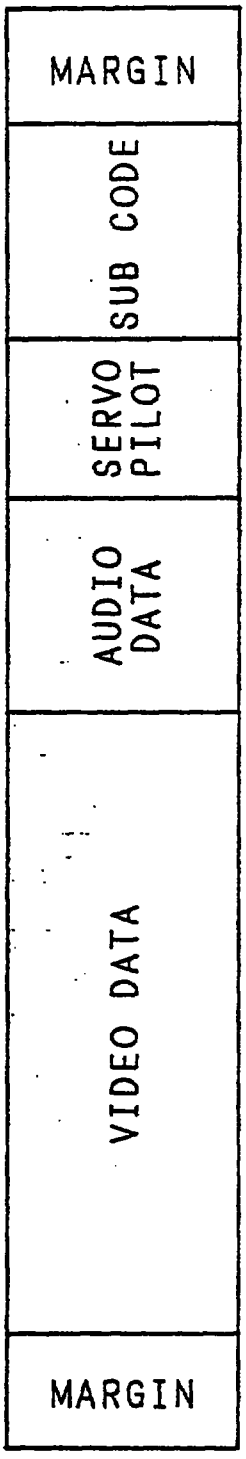

Fig. 5
Prior Art

REPLACEMENT SHEET
22 JUL 1999

Fig. 6

CDS	−1	+1	−3	+3	−5	+5
NUMBER OF CODEWORDS	2481	2169	1888	1231	909	410

REPLACEMENT SHEET
22 JUL 1999

Fig. 7

CONDITION OF n1	A CDS=0			B CDS=+2			C CDS=−2		D CDS=+4		E CDS=−4	
	A1	A2	A3	B1	B2	B3	C1	C2	D1	D2	E1	
NUMBER OF n1 CODEWORDS	102	14	4	51	17	3	116	4	18	2	68	
n2 CODEWORD MATCHING WITH n1	02			02	02							
	05	05		05	05	05						
	07	07		07	07	07						
	09	09	09				09					
	0A	0A	0A	0A	0A	0A						
	0B	0B	0B				0B					
	0D	0D	0D	0D	0D	0D						
	0E	0E	0E				0E					
	0F	0F	0F	0F	0F	0F						
	12	12	12				12	12				
	15	15	15				15	15				
	17	17	17				17	17				
	19	19	19	19	19	19						
	1A	1A	1A				1A	1A				
	1B	1B	1B	1B	1B	1B						
	1D	1D	1D				1D	1D				
	1E	1E	1E	1E	1E	1E						
	1F	1F	1F				1F	1F				
				01					01			
				03	03				03	03		
				06	06	06			06	06		
							11	11			11	
							13	13			13	
							16	16			16	

NOTE : SUBDIVISIONS OF A TO E GROUPS ARE EXECUTED FOR EACH n1 GROUP IN ACCORDANCE WITH "0" RUN-LENGTH AT LSB SIDE OF n1.

REPLACEMENT SHEET
22 JUL 1999

Fig. 8

	m1 DATAWORD	n1 GROUP	n2 CODEWORD m2 0 1 2 3 4 5 6 7 8 9 A B C D E F
1	00~73	A GROUP (A1, A2)	07 09 0A 0B 0D 0E 0F 12 15 17 19 1A 1B 1D 1E 1F

REPLACEMENT SHEET
22 JUL 1999

Fig. 9

	m1 DATAWORD	n1 GROUP	n2 CODEWORD m2 0 1 2 3 4 5 6 7 8 9 A B C D E F
2	74~BA	1st n1 GROUP C1	09 0B 0E 121517 1A 1D1E
		2nd n1 GROUP B1	07 0A 0D 0F 19 1B 1F

REPLACEMENT SHEET
22 JUL 1999

Fig. 10

	m1 DATAWORD	n1 GROUP	n2 CODEWORD m2 0 1 2 3 4 5 6 7 8 9 A B C D E F
3	BB ~ E7	1st n1 GROUP C1	09 0B 0E 12 15 17 1A 1D 1E
		2nd n1 GROUP B1	01 03 05 06
		3rd n1 GROUP E1	11 13 16
	E8 ~ ED	1st n1 GROUP C1	11 13 16 | 11 13 16 | 11 13 16
		2nd n1 GROUP B1	01 03 05 06
		3rd n1 GROUP E1	11 13 16
	EE ~ FF	1st n1 GROUP C1	11 13 16 | 11 13 16 | 11 13 16
		2nd n1 GROUP D1	01 03 06
		3rd n1 GROUP E1.C2	11 13 16
		4th n1 GROUP B2.B3	05

REPLACEMENT SHEET
22 JUL 1999

Fig. 11

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
00	8847	4849	084A	C84B	884D	C84E	084F	4852	C855	4857	8859	C85A	085D	485D	085E	C85F
01	48A7	88A9	C8AA	08AB	48AD	08AE	C8AF	88B2	08B5	88B7	48B9	08BA	C8BD	88BD	C8BE	08BF
02	88E7	48E9	08EA	C8EB	88ED	C8EE	08EF	48F2	C8F5	48F7	88F9	C8FA	08FD	48FD	08FE	C8FF
03	4947	8949	C94A	094B	494D	094E	C94F	8952	0955	8957	4959	095A	C95D	895D	C95E	095F
04	89A7	49A9	09AA	C9AB	89AD	C9AE	09AF	49B2	C9B5	49B7	89B9	C9BA	09BD	49BD	09BE	C9BF
05	49E7	89E9	C9EA	09EB	49ED	09EE	C9EF	89F2	09F5	89F7	49F9	09FA	C9FD	89FD	C9FE	09FF
06	8B27	4B29	0B2A	CB2B	8B2D	CB2E	0B2F	4B32	CB35	4B37	8B39	CB3A	0B3D	4B3D	0B3E	CB3F
07	4B67	8B69	CB6A	0B6B	4B6D	0B6E	CB6F	8B72	0B75	8B77	4B79	0B7A	CB7D	8B7D	CB7E	0B7F
08	4BC7	8BC9	CBCA	0BCB	4BCD	0BCE	CBCF	8BD2	0BD5	8BD7	4BD9	0BDA	CBDD	8BDD	CBDE	0BDF
09	8E27	4E29	0E2A	CE2B	8E2D	CE2E	0E2F	4E32	CE35	4E37	8E39	CE3A	0E3D	4E3D	0E3E	CE3F
0A	4E67	8E69	CE6A	0E6B	4E6D	0E6E	CE6F	8E72	0E75	8E77	4E79	0E7A	CE7D	8E7D	CE7E	0E7F
0B	4EC7	8EC9	CECA	0ECB	4ECD	0ECE	CECF	8ED2	0ED5	8ED7	4ED9	0EDA	CEDD	8EDD	CEDE	0EDF
0C	5127	9129	D12A	112B	512D	112E	D12F	9132	1135	9137	5139	113A	D13D	913D	D13E	113F
0D	9167	5169	116A	D16B	916D	D16E	116F	5172	D175	5177	9179	D17A	117D	517D	117E	D17F
0E	91C7	51C9	11CA	D1CB	91CD	D1CE	11CF	51D2	D1D5	51D7	91D9	D1DA	11DD	51DD	11DE	D1DF
0F	5247	9249	D24A	124B	524D	124E	D24F	9252	1255	9257	5259	125A	D25D	925D	D25E	125F

REPLACEMENT SHEET
22 JUL 1999

Fig. 12

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
10	92A7	52A9	12AA	D2AB	92AD	D2AE	12AF	52B2	D2B5	52B7	92B9	D2BA	12BB	52BD	12BE	D2BF
11	52E7	92E9	D2EA	12EB	52ED	12EE	D2EF	92F2	12F5	92F7	52F9	12FA	D2FB	92FD	D2FE	12FF
12	9347	5349	134A	D34B	934D	D34E	134F	5352	D355	5357	9359	D35A	135B	535D	135E	D35F
13	53A7	93A9	D3AA	13AB	53AD	13AE	D3AF	93B2	13B5	93B7	53B9	13BA	D3BB	93BD	D3BE	13BF
14	93E7	53E9	13EA	D3EB	93ED	D3EE	13EF	53F2	D3F5	53F7	93F9	D3FA	13FB	53FD	13FE	D3FF
15	9527	5529	152A	D52B	952D	D52E	152F	5532	D535	5537	9539	D53A	153B	553D	153E	D53F
16	5567	9569	D56A	156B	556D	156E	D56F	9572	1575	9577	5579	157A	D57B	957D	D57E	157F
17	55C7	95C9	D5CA	15CB	55CD	15CE	D5CF	95D2	15D5	95D7	55D9	15DA	D5DB	95DD	D5DE	15DF
18	9647	5649	164A	D64B	964D	D64E	164F	5652	D655	5657	9659	D65A	165B	565D	165E	D65F
19	56A7	96A9	D6AA	16AB	56AD	16AE	D6AF	96B2	16B5	96B7	56B9	16BA	D6BB	96BD	D6BE	16BF
1A	96E7	56E9	16EA	D6EB	96ED	D6EE	16EF	56F2	D6F5	56F7	96F9	D6FA	16FB	56FD	16FE	D6FF
1B	5747	9749	D74A	174B	574D	174E	D74F	9752	1755	9757	5759	175A	D75B	975D	D75E	175F
1C	97A7	57A9	17AA	D7AB	97AD	D7AE	17AF	57B2	D7B5	57B7	97B9	D7BA	17BB	57BD	17BE	D7BF
1D	57E7	97E9	D7EA	17EB	57ED	17EE	D7EF	97F2	17F5	97F7	57F9	17FA	D7FB	97FD	D7FE	17FF
1E	9A27	5A29	1A2A	DA2B	9A2D	DA2E	1A2F	5A32	DA35	5A37	9A39	DA3A	1A3B	5A3D	1A3E	DA3F
1F	5A67	9A69	DA6A	1A6B	5A6D	1A6E	DA6F	9A72	1A75	9A77	5A79	1A7A	DA7B	9A7D	DA7E	1A7F

REPLACEMENT SHEET
22 JUL 1999

Fig. 13

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
20	5AC7	9AC9	DACA	1ACB	5ACD	1ACE	DACF	9AD2	1AD5	9AD7	5AD9	1ADA	DADB	9ADD	DADE	1ADF
21	9C47	5C49	1C4A	DC4B	9C4D	DC4E	1C4F	5C52	DC55	5C57	9C59	DC5A	1C5B	5C5D	1C5E	DC5F
22	5CA7	9CA9	DCAA	1CAB	5CAD	1CAE	DCAF	9CB2	1CB5	9CB7	5CB9	1CBA	DCBB	9CBD	DCBE	1CBF
23	9CE7	5CE9	1CEA	DCEB	9CED	DCEE	1CEF	5CF2	DCF5	5CF7	9CF9	DCFA	1CFB	5CFD	1CFE	DCFF
24	5D47	9D49	DD4A	1D4B	5D4D	1D4E	DD4F	9D52	1D55	9D57	5D59	1D5A	DD5B	9D5D	DD5E	1D5F
25	9DA7	5DA9	1DAA	DDAB	9DAD	DDAE	1DAF	5DB2	DDB5	5DB7	9DB9	DDBA	1DDB	5DBD	1DBE	DDBF
26	5DE7	9DE9	DDEA	1DEB	5DED	1DEE	DDEF	9DF2	1DF5	9DF7	5DF9	1DFA	DDFB	9DFD	DDFE	1DFF
27	9F27	5F29	1F2A	DF2B	9F2D	DF2E	1F2F	5F32	DF35	5F37	9F39	DF3A	1F3B	5F3D	1F3E	DF3F
28	5F67	9F69	DF6A	1F6B	5F6D	1F6E	DF6F	9F72	1F75	9F77	5F79	1F7A	DF7B	9F7D	DF7E	1F7F
29	5FC7	9FC9	DFCA	1FCB	5FCD	1FCE	DFCF	9FD2	1FD5	9FD7	5FD9	1FDA	DFDB	9FDD	DFDE	1FDF
2A	6227	A229	E22A	222B	622D	222E	E22F	A232	2235	A237	6239	223A	E23B	A23D	E23E	223F
2B	A267	6269	226A	E26B	A26D	E26E	226F	6272	E275	6277	A279	E27A	227B	627D	227E	E27F
2C	A2C7	62C9	22CA	E2CB	A2CD	E2CE	22CF	62D2	E2D5	62D7	A2D9	E2DA	22DB	62DD	22DE	E2DF
2D	6447	A449	E44A	244B	644D	244E	E44F	A452	2455	A457	6459	245A	E45B	A45D	E45E	245F
2E	A4A7	64A9	24AA	E4AB	A4AD	E4AE	24AF	64B2	E4B5	64B7	A4B9	E4BA	24DB	64BD	24BE	E4BF
2F	64E7	A4E9	E4EA	24EB	64ED	24EE	E4EF	A4F2	24F5	A4F7	64F9	24FA	E4FB	A4FD	E4FE	24FF

REPLACEMENT SHEET
22 JUL 1999

Fig. 14

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
30	A547	6549	254A	E54B	A54D	E54E	254F	6552	E555	6557	A559	E55A	255B	655D	255E	E55F
31	65A7	A5A9	E5AA	25AB	65AD	25AE	E5AF	A5B2	25B5	A5B7	65B9	25BA	E5BB	A5BD	E5BE	25BF
32	A5E7	65E9	25EA	E5EB	A5ED	E5EE	25EF	65F2	E5F5	65F7	A5F9	E5FA	25FB	65FD	25FE	E5FF
33	6727	A729	E72A	272B	672D	272E	E72F	A732	2735	A737	6739	273A	E73B	A73D	E73E	273F
34	A767	6769	276A	E76B	A76D	E76E	276F	6772	E775	6777	A779	E77A	277B	677D	277E	E77F
35	A7C7	67C9	27CA	E7CB	A7CD	E7CE	27CF	67D2	E7D5	67D7	A7D9	E7DA	27DB	67DD	27DE	E7DF
36	A927	6929	292A	E92B	A92D	E92E	292F	6932	E935	6937	A939	E93A	293B	693D	293E	E93F
37	6967	A969	E96A	296B	696D	296E	E96F	A972	2975	A977	6979	297A	E97B	A97D	E97E	297F
38	69C7	A9C9	E9CA	29CB	69CD	29CE	E9CF	A9D2	29D5	A9D7	69D9	29DA	E9DB	A9DD	E9DE	29DF
39	AA47	6A49	2A4A	EA4B	AA4D	EA4E	2A4F	6A52	EA55	6A57	AA59	EA5A	2A5B	6A5D	2A5E	EA5F
3A	6AA7	AAA9	EAAA	2AAB	6AAD	2AAE	EAAF	AAB2	2AB5	AAB7	6AB9	2ABA	EABB	AABD	EABE	2ABF
3B	AAE7	6AE9	2AEA	EAEB	AAED	EAEE	2AEF	6AF2	EAF5	6AF7	AAF9	EAFA	2AFB	6AFD	2AFE	EAFF
3C	6B47	AB49	EB4A	2B4B	6B4D	2B4E	EB4F	AB52	2B55	AB57	6B59	2B5A	EB5B	AB5D	EB5E	2B5F
3D	ABA7	6BA9	2BAA	EBAB	ABAD	EBAE	2BAF	6BB2	EBB5	6BB7	ABB9	EBBA	2BBB	6BBD	2BBE	EBBF
3E	6BE7	ABE9	EBEA	2BEB	6BED	2BEE	EBEF	ABF2	2BF5	ABF7	6BF9	2BFA	EBFB	ABFD	EBFE	2BFF
3F	6D27	AD29	ED2A	2D2B	6D2D	2D2E	ED2F	AD32	2D35	AD37	6D39	2D3A	ED3B	AD3D	ED3E	2D3F

REPLACEMENT SHEET
22 JUL 1999

Fig. 15

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
40	AD67	6D69	2D6A	ED6B	AD6D	ED6E	2D6F	6D72	ED75	6D77	AD79	ED7A	2D7B	6D7D	2D7E	ED7F
41	ADC7	6DC9	2DCA	EDCB	ADCD	EDCE	2DCF	6DD2	EDD5	6DD7	ADD9	EDDA	2DDB	6DDD	2DDE	EDDF
42	6E47	AE49	EE4A	2E4B	6E4D	2E4E	EE4F	AE52	2E55	AE57	6E59	2E5A	EE5B	AE5D	EE5E	2E5F
43	AEA7	6EA9	2EAA	EEAB	AEAD	EEAE	2EAF	6EB2	EEB5	6EB7	AEB9	EEBA	2EBB	6EBD	2EBE	EEBF
44	6EE7	AEE9	EEEA	2EEB	6EED	2EEE	EEEF	AEF2	2EF5	AEF7	6EF9	2EFA	EEFB	AEFD	EEFE	2EFF
45	AF47	6F49	2F4A	EF4B	AF4D	EF4E	2F4F	6F52	EF55	6F57	AF59	EF5A	2F5B	6F5D	2F5E	EF5F
46	6FA7	AFA9	EFAA	2FAB	6FAD	2FAE	EFAF	AFB2	2FB5	AFB7	6FB9	2FBA	EFBB	AFBD	EFBE	2FBF
47	AFE7	6FE9	2FEA	EFEB	AFED	EFEE	2FEF	6FF2	EFF5	6FF7	AFF9	EFFA	2FFB	6FFD	2FFE	EFFF
48	B227	7229	322A	F22B	B22D	F22E	322F	7232	F235	7237	B239	F23A	323B	723D	323E	F23F
49	7267	B269	F26A	326B	726D	326E	F26F	B272	3275	B277	7279	327A	F27B	B27D	F27E	327F
4A	72C7	B2C9	F2CA	32CB	72CD	32CE	F2CF	B2D2	32D5	B2D7	72D9	32DA	F2DB	B2DD	F2DE	32DF
4B	B447	7449	344A	F44B	B44D	F44E	344F	7452	F455	7457	B459	F45A	345B	745D	345E	F45F
4C	74A7	B4A9	F4AA	34AB	74AD	34AE	F4AF	B4B2	34B5	B4B7	74B9	34BA	F4BB	B4BD	F4BE	34BF
4D	B4E7	74E9	34EA	F4EB	B4ED	F4EE	34EF	74F2	F4F5	74F7	B4F9	F4FA	34FB	74FD	34FE	F4FF
4E	7547	B549	F54A	354B	754D	354E	F54F	B552	3555	B557	7559	355A	F55B	B55D	F55E	355F
4F	B5A7	75A9	35AA	F5AB	B5AD	F5AE	35AF	75B2	F5B5	75B7	B5B9	F5BA	35BB	75BD	35BE	F5BF

REPLACEMENT SHEET
22 JUL 1999

Fig. 16

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
50	75E7	B5E9	F5EA	35EB	75ED	35EE	F5EF	B5F2	35F5	B5F7	75F9	35FA	F5FB	B5FD	F5FE	35FF
51	B727	7729	372A	F72B	B72D	F72E	372F	7732	F735	7737	B739	F73A	373B	773D	373E	F73F
52	7767	B769	F76A	376B	776D	376E	F76F	B772	3775	B777	7779	377A	F77B	B77D	F77E	377F
53	77C7	B7C9	F7CA	37CB	77CD	37CE	F7CF	B7D2	37D5	B7D7	77D9	37DA	F7DB	B7DD	F7DE	37DF
54	7927	B929	F92A	392B	792D	392E	F92F	B932	3935	B937	7939	393A	F93B	B93D	F93E	393F
55	B967	7969	396A	F96B	B96D	F96E	396F	7972	F975	7977	B979	F97A	397B	797D	397E	F97F
56	B9C7	79C9	39CA	F9CB	B9CD	F9CE	39CF	79D2	F9D5	79D7	B9D9	F9DA	39DB	79DD	39DE	F9DF
57	7A47	BA49	FA4A	3A4B	7A4D	3A4E	FA4F	BA52	3A55	BA57	7A59	3A5A	FA5B	BA5D	FA5E	3A5F
58	BAA7	7AA9	3AAA	FAAB	BAAD	FAAE	3AAF	7AB2	FAB5	7AB7	BAB9	FABA	3ABB	7ABD	3ABE	FABF
59	7AE7	BAE9	FAEA	3AEB	7AED	3AEE	FAEF	BAF2	3AF5	BAF7	7AF9	3AFA	FAFB	BAFD	FAFE	3AFF
5A	BB47	7B49	3B4A	FB4B	BB4D	FB4E	3B4F	7B52	FB55	7B57	BB59	FB5A	3B5B	7B5D	3B5E	FB5F
5B	7BA7	BBA9	FBAA	3BAB	7BAD	3BAE	FBAF	BBB2	3BB5	BBB7	7BB9	3BBA	FBBB	BBBD	FBBE	3BBF
5C	BBE7	7BE9	3BEA	FBEB	BBED	FBEE	3BEF	7BF2	FBF5	7BF7	BBF9	FBFA	3BFB	7BFD	3BFE	FBFF
5D	BD27	7D29	3D2A	FD2B	BD2D	FD2E	3D2F	7D32	FD35	7D37	BD39	FD3A	3D3B	7D3D	3D3E	FD3F
5E	7D67	BD69	FD6A	3D6B	7D6D	3D6E	FD6F	BD72	3D75	BD77	7D79	3D7A	FD7B	BD7D	FD7E	3D7F
5F	7DC7	BDC9	FDCA	3DCB	7DCD	3DCE	FDCF	BDD2	3DD5	BDD7	7DD9	3DDA	FDDB	BDDD	FDDE	3DDF

REPLACEMENT SHEET
22 JUL 1999

Fig. 17

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
60	BE47	7E49	3E4A	FE4B	BE4D	FE4E	3E4F	7E52	FE55	7E57	BE59	FE5A	3E5B	7E5D	3E5E	FE5F
61	7EA7	BEA9	FEAA	3EAB	7EAD	3EAE	FEAF	BEB2	3EB5	BEB7	7EB9	3EBA	FEBB	BEBD	FEBE	3EBF
62	BEE7	7EE9	3EEA	FEEB	BEED	FEEE	3EEF	7EF2	FEF5	7EF7	BEF9	FEFA	3EFB	7EFD	3EFE	FEFF
63	7F47	BF49	FF4A	3F4B	7F4D	3F4E	FF4F	BF52	3F55	BF57	7F59	3F5A	FF5B	BF5D	FF5E	3F5F
64	BFA7	7FA9	3FAA	FFAB	BFAD	FFAE	3FAF	7FB2	FFB5	7FB7	BFB9	FFBA	3FBB	7FBD	3FBE	FFBF
65	7FE7	BFE9	FFEA	3FEB	7FED	3FEE	FFEF	BFF2	3FF5	BFF7	7FF9	3FFA	FFFB	BFFD	FFFE	3FFF
66	4A87	8A89	CA8A	0A8B	4A8D	0A8E	CA8F	8A92	0A95	8A97	4A99	0A9A	CA9B	8A9D	CA9E	0A9F
67	4F87	8F89	CF8A	0F8B	4F8D	0F8E	CF8F	8F92	0F95	8F97	4F99	0F9A	CF9B	8F9D	CF9E	0F9F
68	9087	5089	108A	D08B	908D	D08E	108F	5092	D095	5097	9099	D09A	109B	509D	109E	D09F
69	5487	9489	D48A	148B	548D	148E	D48F	9492	1495	9497	5499	149A	D49B	949D	D49E	149F
6A	5B87	9B89	DB8A	1B8B	5B8D	1B8E	DB8F	9B92	1B95	9B97	5B99	1B9A	DB9B	9B9D	DB9E	1B9F
6B	5E87	9E89	DE8A	1E8B	5E8D	1E8E	DE8F	9E92	1E95	9E97	5E99	1E9A	DE9B	9E9D	DE9E	1E9F
6C	A387	6389	238A	E38B	A38D	E38E	238F	6392	E395	6397	A399	E39A	239B	639D	239E	E39F
6D	A687	6689	268A	E68B	A68D	E68E	268F	6692	E695	6697	A699	E69A	269B	669D	269E	E69F
6E	6887	A889	E88A	288B	688D	288E	E88F	A892	2895	A897	6899	289A	E89B	A89D	E89E	289F
6F	AC87	6C89	2C8A	EC8B	AC8D	EC8E	2C8F	6C92	EC95	6C97	AC99	EC9A	2C9B	6C9D	2C9E	EC9F

REPLACEMENT SHEET
22 JUL 1999

Fig. 18

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
70	7387	B389	F38A	338B	738D	338E	F38F	B392	3395	B397	7399	339A	F39B	B39D	F39E	339F
71	7687	B689	F68A	368B	768D	368E	F68F	B692	3695	B697	7699	369A	F69B	B69D	F69E	369F
72	B887	7889	388A	F88B	B88D	F88E	388F	7892	F895	7897	B899	F89A	389B	789D	389E	F89F
73	7C87	BC89	FC8A	3C8B	7C8D	3C8E	FC8F	BC92	3C95	BC97	7C99	3C9A	FC9B	BC9D	FC9E	3C9F
74	0927	C869	892A	486B	092D	486E	892F	C872	4875	C877	0939	487A	893B	C87D	893E	487F
75	0AE7	0889	8AEA	888B	0AED	888E	8AEF	0892	8895	0897	0AF9	889A	8AFB	089D	8AFE	889F
76	0BA7	C8C9	8BAA	48CB	0BAD	48CE	8BAF	C8D2	48D5	C8D7	0BB9	48DA	8BBB	C8DD	8BBE	48DF
77	0D67	0969	8D6A	896B	0D6D	896E	8D6F	0972	8975	0977	0D79	897A	8D7B	097D	8D7E	897F
78	0EA7	C989	8EAA	498B	0EAD	498E	8EAF	C992	4995	C997	0EB9	499A	8EDB	C99D	8EBE	499F
79	0FE7	09C9	8FEA	89CB	0FED	89CE	8FEF	09D2	89D5	09D7	0FF9	89DA	8FFB	09DD	8FFE	89DF
7A	D0E7	0AA9	50EA	8AAB	D0ED	8AAE	50EF	0AB2	8AB5	0AB7	D0F9	8ABA	50FB	0ABD	50FE	8ABF
7B	D1A7	CB09	51AA	4B0B	D1AD	4B0E	51AF	CB12	4B15	CB17	D1B9	4B1A	51BB	CB1D	51BE	4B1F
7C	1227	0B49	922A	8B4B	122D	8B4E	922F	0B52	8B55	0B57	1239	8B5A	923B	0B5D	923E	8B5F
7D	D327	0BE9	532A	8BEB	D32D	8BEE	532F	0BF2	8BF5	0BF7	D339	8BFA	533B	0BFD	533E	8BFF
7E	14E7	0D29	94EA	8D2B	14ED	8D2E	94EF	0D32	8D35	0D37	14F9	8D3A	94FB	0D3D	94FE	9D3F
7F	15A7	0E49	95AA	8E4B	15AD	8E4E	95AF	0E52	8E55	0E57	15B9	8E5A	95BB	0E5D	95BE	8E5F

REPLACEMENT SHEET
22 JUL 1999

Fig. 19

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
80	D627	0EE9	562A	8EEB	D62D	82EE	562F	0EF2	8EF5	0EF7	D639	8EFA	563B	0EFD	563E	82FF
81	1727	0FA9	972A	8FAB	172D	8FAE	972F	0FB2	8FB5	0FB7	1739	8FBA	973B	0FBD	973E	8FBF
82	1967	D0A9	996A	50AB	196D	50AE	996F	D0B2	50B5	D0B7	1979	50BA	997B	D0BD	997E	50BF
83	1AA7	1109	9AAA	910B	1AAD	910E	9AAF	1112	9115	1117	1AB9	911A	9ABB	111D	9ABE	911F
84	1BE7	D149	9BEA	514B	1BED	514E	9BEF	D152	5155	D157	1BF9	515A	9BFB	D15D	9BFE	515F
85	DC27	D1E9	5C2A	51EB	DC2D	51EE	5C2F	D1F2	51F5	D1F7	DC39	51FA	5C3B	D1FD	5C3E	51FF
86	1D27	1269	9D2A	926B	1D2D	926E	9D2F	1272	9275	1277	1D39	927A	9D3B	127D	9D3E	927F
87	1EE7	D289	9EEA	528B	1EED	528E	9EEF	D292	5295	D297	1EF9	529A	9EFB	D29D	9EFE	529F
88	1FA7	12C9	9FAA	92CB	1FAD	92CE	9FAF	12D2	92D5	12D7	1FB9	92DA	9FBB	12DD	9FBE	92DF
89	E167	D369	616A	536B	E16D	536E	616F	D372	5375	D377	E179	537A	617B	D37D	617E	537F
8A	E2A7	1389	62AA	938B	E2AD	938E	62AF	1392	9395	1397	E2B9	939A	62BB	139D	62BE	939F
8B	E3E7	D3C9	63EA	53CB	E3ED	53CE	63EF	D3D2	53D5	D3D7	E3F9	53DA	63FB	D3DD	63FE	53DF
8C	2427	14A9	A42A	94AB	242D	94AE	A42F	14B2	94B5	14B7	2439	94BA	A43B	14BD	A43E	94BF
8D	E527	D509	652A	550B	E52D	550E	652F	D512	5515	D517	E539	551A	653B	D51D	653E	551F
8E	E6E7	1549	66EA	954B	E6ED	954E	66EF	1552	9555	1557	E6F9	955A	66FB	155D	66FE	955F
8F	E7A7	15E9	67AA	95EB	E7AD	95EE	67AF	15F2	95F5	15F7	E7B9	95FA	67BB	15FD	67BE	95FF

REPLACEMENT SHEET
22 JUL 1999

Fig. 20

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
90	28E7	D669	A8EA	566B	28ED	566E	A8EF	D672	5675	D677	28F9	567A	A8FB	D67D	A8FE	567F
91	29A7	1689	A9AA	968B	29AD	968E	A9AF	1692	9695	1697	29B9	969A	A9BB	169D	A9BE	969F
92	EA27	D6C9	6A2A	56CB	EA2D	56CE	6A2F	D6D2	56D5	D6D7	EA39	56DA	6A3B	D6DD	6A3E	56DF
93	2B27	1769	AB2A	976B	2B2D	976E	AB2F	1772	9775	1777	2B39	977A	AB3B	177D	AB3E	977F
94	ECE7	D789	6CEA	578B	ECED	578E	6CEF	D792	5795	D797	ECF9	579A	6CFB	D79D	6CFE	579F
95	EDA7	17C9	6DAA	97CB	EDAD	97CE	6DAF	17D2	97D5	17D7	EDB9	97DA	6DBB	17DD	6DBE	97DF
96	2E27	1929	AE2A	992B	2E2D	992E	AE2F	1932	9935	1937	2E39	993A	AE3B	193D	AE3E	993F
97	EF27	1A49	6F2A	9A4B	EF2D	9A4E	6F2F	1A52	9A55	1A57	EF39	9A5A	6F3B	1A5D	6F3E	9A5F
98	3167	1AE9	B16A	9AEB	316D	9AEE	B16F	1AF2	9AF5	1AF7	3179	9AFA	B17B	1AFD	B17E	9AFF
99	32A7	1BA9	B2AA	9BAB	32AD	9BAE	B2AF	1BB2	9BB5	1BB7	32B9	9BBA	B2BB	1BBD	B2BE	9BBF
9A	33E7	DC69	B3EA	5C6B	33ED	5C6E	B3EF	DC72	5C75	DC77	33F9	5C7A	B3FB	DC7D	B3FE	5C7F
9B	F427	1C89	742A	9C8B	F42D	9C8E	742F	1C92	9C95	1C97	F439	9C9A	743B	1C9D	743E	9C9F
9C	3527	DCC9	B52A	5CCB	352D	5CCE	B52F	DCD2	5CD5	DCD7	3539	5CDA	B53B	DCDD	B53E	5CDF
9D	36E7	1D69	B6EA	9D6B	36ED	9D6E	B6EF	1D72	9D75	1D77	36F9	9D7A	B6FB	1D7D	B6FE	9D7F
9E	37A7	DD89	B7AA	5D8B	37AD	5D8E	B7AF	DD92	5D95	DD97	37B9	5D9A	B7BB	DD9D	B7BE	5D9F
9F	F8E7	1DC9	78EA	9DCB	F8ED	9DCE	78EF	1DD2	9DD5	1DD7	F8F9	9DDA	78FB	1DDD	78FE	9DDF

REPLACEMENT SHEET
22 JUL 1999

Fig. 21

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
A0	F9A7	1EA9	79AA	9EAB	F9AD	9EAE	79AF	1EB2	9EB5	1EB7	F9B9	9EBA	79BB	1EBD	79BE	9EBF
A1	3A27	DF09	BA2A	5F0B	3A2D	5F0E	BA2F	DF12	5F15	DF17	3A39	5F1A	BA3B	DF1D	BA3E	5F1F
A2	FB27	1F49	7B2A	9F4B	FB2D	9F4E	7B2F	1F52	9F55	1F57	FB39	9F5A	7B3B	1F5D	7B3E	9F5F
A3	3CE7	1FE9	BC2A	9FEB	3CED	9FEE	BC2F	1FF2	9FF5	1FF7	3CF9	9FFA	BCFB	1FFD	BCFE	9FFF
A4	3DA7	E129	BDAA	612B	3DAD	612E	BDAF	E132	6135	E137	3DB9	613A	BDBB	E13D	BDBE	613F
A5	FE27	E249	7E2A	624B	FE2D	624E	7E2F	E252	6255	E257	FE39	625A	7E3B	E25D	7E3E	625F
A6	3F27	E2E9	BF2A	62EB	3F2D	62EE	BF2F	E2F2	62F5	E2F7	3F39	62FA	BF3B	E2FD	BF3E	62FF
A7	0A47	E3A9	1A4A	63AB	0A4D	63AE	8A4F	E3B2	63B5	E3B7	0A59	63BA	8A5B	E3BD	8A5E	63BF
A8	0DC7	2469	8DCA	A46B	0DCD	A46E	8DCF	2472	A475	2477	0DD9	A47A	8DDB	247D	8DDE	A47F
A9	0F47	E489	8F4A	648B	0F4D	648E	8F4F	E492	6495	E497	0F59	649A	8F5B	E49D	8F5E	649F
AA	1447	24C9	944A	A4CB	144D	A4CE	944F	24D2	A4D5	24D7	1459	A4DA	945B	24DD	945E	A4DF
AB	19C7	E569	99CA	656B	19CD	656E	99CF	E572	6575	E577	19D9	657A	99DB	E57D	99DE	657F
AC	1B47	2589	9B4A	A58B	1B4D	A58E	9B4F	2592	A595	2597	1B59	A59A	9B5B	259D	9B5E	A59F
AD	1E47	E5C9	9E4A	65CB	1E4D	65CE	9E4F	E5D2	65D5	E5D7	1E59	65DA	9E5B	E5DD	9E5E	65DF
AE	E1C7	E6A9	61CA	66AB	E1CD	66AE	61CF	E6B2	66B5	E6B7	E1D9	66BA	61DB	E6BD	61DE	66BF
AF	E347	2709	634A	A70B	E34D	A70E	634F	2712	A715	2717	E359	A71A	635B	271D	635E	A71F

REPLACEMENT SHEET
22 JUL 1999

Fig. 22

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
B0	E647	E749	664A	674B	E64D	674E	664F	E752	6755	E757	E659	675A	665B	E75D	665E	675F
B1	2847	E7E9	A84A	67EB	284D	67EE	A84F	E7F2	67F5	E7F7	2859	67FA	A85B	E7FD	A85E	67FF
B2	EC47	28A9	6C4A	A8AB	EC4D	A8AE	6C4F	28B2	A8B5	21B7	EC59	A8BA	6C5B	28BD	6C5E	A8BF
B3	31C7	E909	B1CA	690B	31CD	690E	B1CF	E912	6915	E917	31D9	691A	B1DB	E91D	B1CE	691F
B4	3347	2949	B34A	A94B	334D	A94E	B34F	2952	A955	2957	3359	A95A	B35B	295D	B35E	A95F
B5	3647	29E9	B64A	A9EB	364D	A9EE	B64F	29F2	A9F5	29F7	3659	A9FA	B65B	29FD	B65E	A9FF
B6	F847	EA69	784A	6A6B	F84D	6A6E	784F	EA72	6A75	EA77	F859	6A7A	785B	EA7D	785E	6A7F
B7	3C47	2A89	BC4A	AA8B	3C4D	AA8E	BC4F	2A92	AA95	2A97	3C59	AA9A	BC5B	2A9D	BC5E	AA9F
B8	0C87	EAC9	8C8A	6ACB	0C8D	6ACE	8C8F	EAD2	6AD5	EAD7	0C99	6ADA	8C9B	EADD	8C9E	6ADF
B9	1887	2B69	988A	AB6B	188D	AB6E	988F	2B72	AB75	2B77	1899	AB7A	989B	2B7D	989E	AB7F
BA	3087	EB89	B08A	6B8B	308D	6B8E	B08F	EB92	6B95	EB97	3099	6B9A	B09B	EB9D	B09E	6B9F
BB	4921	2BC9	C923	ABCB	8925	ABCE	C926	2BD2	ABD5	2BD7	0911	ABDA	8913	2BDD	8916	ABDF
BC	4AE1	ECA9	CAE3	6CAB	8AE5	6CAE	CAE6	ECB2	6CB5	ECB7	0A71	6CBA	8A73	ECBD	8A76	6CBF
BD	4BA1	2D09	CBA3	AD0B	8BA5	AD0E	CBA6	2D12	AD15	2D17	0AD1	AD1A	8AD3	2D1D	8AD6	AD1F
BE	4D61	ED49	CD63	6D4B	8D65	6D4E	CD66	ED52	6D55	ED57	0B91	6D5A	8B93	ED5D	8B96	6D5F
BF	4EA1	EDE9	CEA3	6DEB	8EA5	6DEE	CEA6	EDF2	6DF5	EDF7	0CB1	6DFA	8CB3	EDFD	8CB6	6DFF

REPLACEMENT SHEET
22 JUL 1999

Fig. 23

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
C0	4FE1	2E69	CFE3	AE6B	8FE5	AE6E	CFE6	2E72	AE75	2E77	0D51	AE7A	8D73	2E7D	8D76	AE7F
C1	90E1	EE89	10E3	6E8B	50E5	6E8E	10E6	EE92	6E95	EE97	0DF1	6E9A	8D93	EE9D	8D96	6E9F
C2	91A1	2EC9	11A3	AECB	51A5	AECE	11A6	2ED2	AED5	2ED7	0E91	AEDA	8ED3	2EDD	8ED6	AEDF
C3	5221	EF69	D223	6F6B	9225	6F6E	D226	EF72	6F75	EF77	0F71	6F7A	8F73	EF7D	8F76	6F7F
C4	9321	2F89	1323	AF8B	5325	AF8E	1326	2F92	AF95	2F97	0FD1	AF9A	8F93	2F9D	8F96	AF9F
C5	54E1	EFC9	D4E3	6FCB	94E5	6FCE	D4E6	EFD2	6FD5	EFD7	D0D1	6FDA	50D3	EFDD	50D6	6FDF
C6	55A1	3129	D5A3	B12B	95A5	B12E	D5A6	3132	B135	3137	D191	B13A	5133	313D	5136	B13F
C7	9621	3249	1623	B24B	5625	B24E	1626	3252	B255	3257	1211	B25A	9253	325D	9256	B25F
C8	5721	32E9	D723	B2EB	9725	B2EE	D726	32F2	B2F5	32F7	D311	B2FA	53F3	32FD	53F6	B2FF
C9	5961	33A9	D963	B3AB	9965	B3AE	D966	33B2	B3B5	33B7	1471	B3BA	94B3	33BD	94B6	B3BF
CA	5AA1	F469	DAA3	746B	9AA5	746E	DAA6	F472	7475	F477	14D1	747A	9473	F47D	9476	747F
CB	5BE1	3489	DBE3	B48B	9BE5	B48E	DBE6	3492	B495	3497	1591	B49A	9593	349D	9596	B49F
CC	9C21	F4C9	1C23	74CB	5C25	74CE	1C26	F4D2	74D5	F4D7	D611	74DA	56D3	F4DD	56D6	74DF
CD	5D21	3569	DD23	B56B	9D25	B56E	DD26	3572	B575	3577	1711	B57A	9773	357D	9776	B57F
CE	5EE1	F589	DEE3	758B	9EE5	758E	DEE6	F592	7595	F597	18B1	759A	9893	F59D	9896	759F
CF	5FA1	35C9	DFA3	B5CB	9FA5	B5CE	DFA6	35D2	B5D5	35D7	1951	B5DA	99D3	35DD	99D6	B5DF

REPLACEMENT SHEET
22 JUL 1999

Fig. 24

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
D0	A161	36A9	2163	B6AB	6165	B6AE	2166	36B2	B6B5	36B7	19F1	B6BA	99F3	36BD	99F6	B6BF
D1	A2A1	F709	22A3	770B	62A5	770E	22A6	F712	7715	F717	1A91	771A	9A93	F71D	9A96	771F
D2	A3E1	3749	23E3	B74B	63E5	B74E	23E6	3752	B755	3757	1B71	B75A	9B73	375D	9B76	B75F
D3	6421	37E9	E423	B7EB	A425	B7EE	E426	37F2	B7F5	37F7	1BD1	B7FA	9BD3	37FD	9BD6	B7FF
D4	A521	F8A9	2523	78AB	6525	78AE	2526	F8B2	78B5	F8B7	1D11	78BA	9D13	F8BD	9D16	78BF
D5	A6E1	3909	26E3	B90B	66E5	B90E	26E6	3912	B915	3917	1E71	B91A	9E73	391D	9E76	B91F
D6	A7A1	F949	27A3	794B	67A5	794E	27A6	F952	7955	F957	1ED1	795A	9ED3	F95D	9ED6	795F
D7	68E1	F9E9	E8E3	79EB	A8E5	79EE	E8E6	F9F2	79F5	F9F7	1F91	79FA	9F93	F9FD	9F96	79FF
D8	69A1	3A69	E9A3	BA6B	A9A5	BA6E	E9A6	3A72	BA75	3A77	E151	BA7A	6153	3A7D	6156	BA7F
D9	AA21	FA89	2A23	7A8B	6A25	7A8E	2A26	FA92	7A95	FA97	E1F1	7A9A	61F3	FA9D	61F6	7A9F
DA	6B21	3AC9	EB23	BACB	AB25	BACE	EB26	3AD2	BAD5	3AD7	E291	BADA	6293	3ADD	6296	BADF
DB	ACE1	FB69	2CE3	7B6B	6CE5	7B6E	2CE6	FB72	7B75	FB77	E371	7B7A	6373	FB7D	6376	7B7F
DC	ADA1	3B89	2DA3	BB8B	6DA5	BB8E	2DA6	3B92	BB95	3B97	E3D1	BB9A	63D3	3B9D	63D6	BB9F
DD	6EE1	FBC9	EEE3	7BCB	AEE5	7BCE	EEE6	FBD2	7BD5	FBD7	E511	7BDA	6513	FBDD	6516	7BDF
DE	AFE1	3CA9	2FE3	BCAB	6FE5	BCAE	2FE6	3CB2	BCB5	3CB7	E671	BCBA	6673	3CBD	6676	BCBF
DF	7161	FD09	F163	7D0B	B165	7D0E	F166	FD12	7D15	FD17	E6D1	7D1A	66D3	FD1D	66D6	7D1F

REPLACEMENT SHEET
22 JUL 1999

Fig. 25

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
E0	72A1	3D49	F2A3	BD4B	B2A5	BD4E	F2A6	3D52	BD55	3D57	E791	BD5A	6793	3D5D	6796	BD5F
E1	73E1	3DE9	F3E3	BDEB	B3E5	BDEE	F3E6	3DF2	BDF5	3DF7	2871	BDFA	A873	3DFD	A876	BDFF
E2	B421	FE69	3423	7E6B	7425	7E6E	3426	FE72	7E75	FE77	28D1	7E7A	A8D3	FE7D	A8D6	7E7F
E3	7521	3E89	F523	BE8B	B525	BE8E	F526	3E92	BE95	3E97	2991	BE9A	A993	3E9D	A996	BE9F
E4	76E1	FEC9	F6E3	7ECB	B6E5	7ECE	F6E6	FED2	7ED5	FED7	EA11	7EDA	6A13	FEDD	6A16	7EDF
E5	77A1	3F69	F7A3	BF6B	B7A5	BF6E	F7A6	3F72	BF75	3F77	2B11	BF7A	AB13	3F7D	AB16	BF7F
E6	B8E1	FF89	38E3	7F8B	78E5	7F8E	38E6	FF92	7F95	FF97	EC71	7F9A	6C73	FF9D	6C76	7F9F
E7	B9A1	3FC9	39A3	BFCB	79A5	BFCE	39A6	3FD2	BFD5	3FD7	ECD1	BFDA	6CD3	3FDD	6CD6	BFDF
E8	7A21	90B1	FA23	10B3	BA25	10B6	FA26	A131	2133	2136	ED91	7131	6D93	F133	6D96	F13F
E9	BB21	5111	3B23	D113	7B25	D116	3B26	A251	2253	2256	2E11	7251	AE13	F253	AE16	F25F
EA	7CE1	9151	FCE3	1153	BCE5	1156	FCE6	A2F1	22F3	22F6	EF11	72F1	6F13	F2F3	6F16	F2FF
EB	7DA1	91F1	FDA3	11F3	BDA5	11F6	FDA6	A3B1	23B3	23B6	30B1	73B1	B0B3	F3B3	B0B6	F3BF
EC	BE21	5271	3E23	D273	7E25	D276	3E26	6471	E473	E476	3151	B471	B153	3473	B156	347F
ED	7F21	9291	FF23	1293	BF25	1296	FF26	A491	2493	2496	31F1	7491	B1F3	F493	B1F6	F49F
EE	0A21	52D1	8A23	D2D3	BA45	D2D6	8A26	64D1	E4D3	E4D6	3291	B4D1	B293	34D3	B296	34DF
EF	0CE1	9371	8CE3	1373	BDC5	1376	8CE6	A571	2573	2576	3371	7571	B373	F573	B376	F57F

REPLACEMENT SHEET
22 JUL 1999

Fig. 26

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
F0	1DA1	5391	8DA3	D393	8F45	D396	8DA6	6591	E593	E596	33D1	B591	B3D3	3593	B3D6	3596
F1	1F21	93D1	8F23	13D3	9445	13D6	8F26	A5D1	25D3	25D6	3511	75D1	B513	F5D3	B516	F5D6
F2	1421	54B1	9423	D4B3	98C5	D4B6	9426	A6B1	26B3	26B6	3671	76B1	B673	F6B3	B676	F6B6
F3	18E1	9511	98E3	1513	9B45	1516	98E6	6711	E713	E716	36D1	B711	B6D3	3713	B6D6	3716
F4	19A1	5551	99A3	D553	9E45	D556	99A6	A751	2753	2756	3791	7751	B793	F753	B796	F756
F5	1B21	55F1	9B23	D5F3	61C5	D5F6	9B26	A7F1	27F3	27F6	F871	77F1	7873	F7F3	7876	F7F6
F6	1E21	9671	9E23	1673	6345	1676	9E26	68B1	E8B3	E8B6	F8D1	B8B1	78D3	38B3	78D6	38B6
F7	E1A1	5691	61A3	D693	6645	D696	61A6	A911	2913	2916	F991	7911	7993	F913	7996	F916
F8	E321	96D1	6323	16D3	A845	16D6	6326	6951	E953	E956	3A11	B951	BA13	3953	BA16	3956
F9	E621	5771	6623	D773	6C45	D776	6626	69F1	E9F3	E9F6	FB11	B9F1	7B13	39F3	7B16	39F6
FA	EC21	9791	6C23	1793	B1C5	1796	6C26	AA71	2A73	2A76	3C71	7A71	BC73	FA73	BC76	FA76
FB	30E1	57D1	B0E3	D7D3	B345	D7D6	B0E6	6A91	EA93	EA96	3CD1	BA91	BCD3	3A93	BCD6	3A96
FC	31A1	5931	B1A3	D933	B645	D936	B1A6	AAD1	2AD3	2AD6	3D91	7AD1	BD93	FAD3	BD96	FAD6
FD	3321	5A51	B323	DA53	7845	DA56	B326	6B71	EB73	EB76	FE11	BB71	7E13	3B73	7E16	3B76
FE	3621	5AF1	B623	DAF3	BC45	DAF6	B626	AB91	2B93	2B96	3F11	7B91	BF13	FB93	BF16	FB96
FF	3C21	5BB1	BC23	DBB3	8C85	DBB6	BC26	6BD1	EBD3	EBD6	8E11	BBD1	0E13	3BD3	0E16	3BD6

REPLACEMENT SHEET
22 JUL 1999

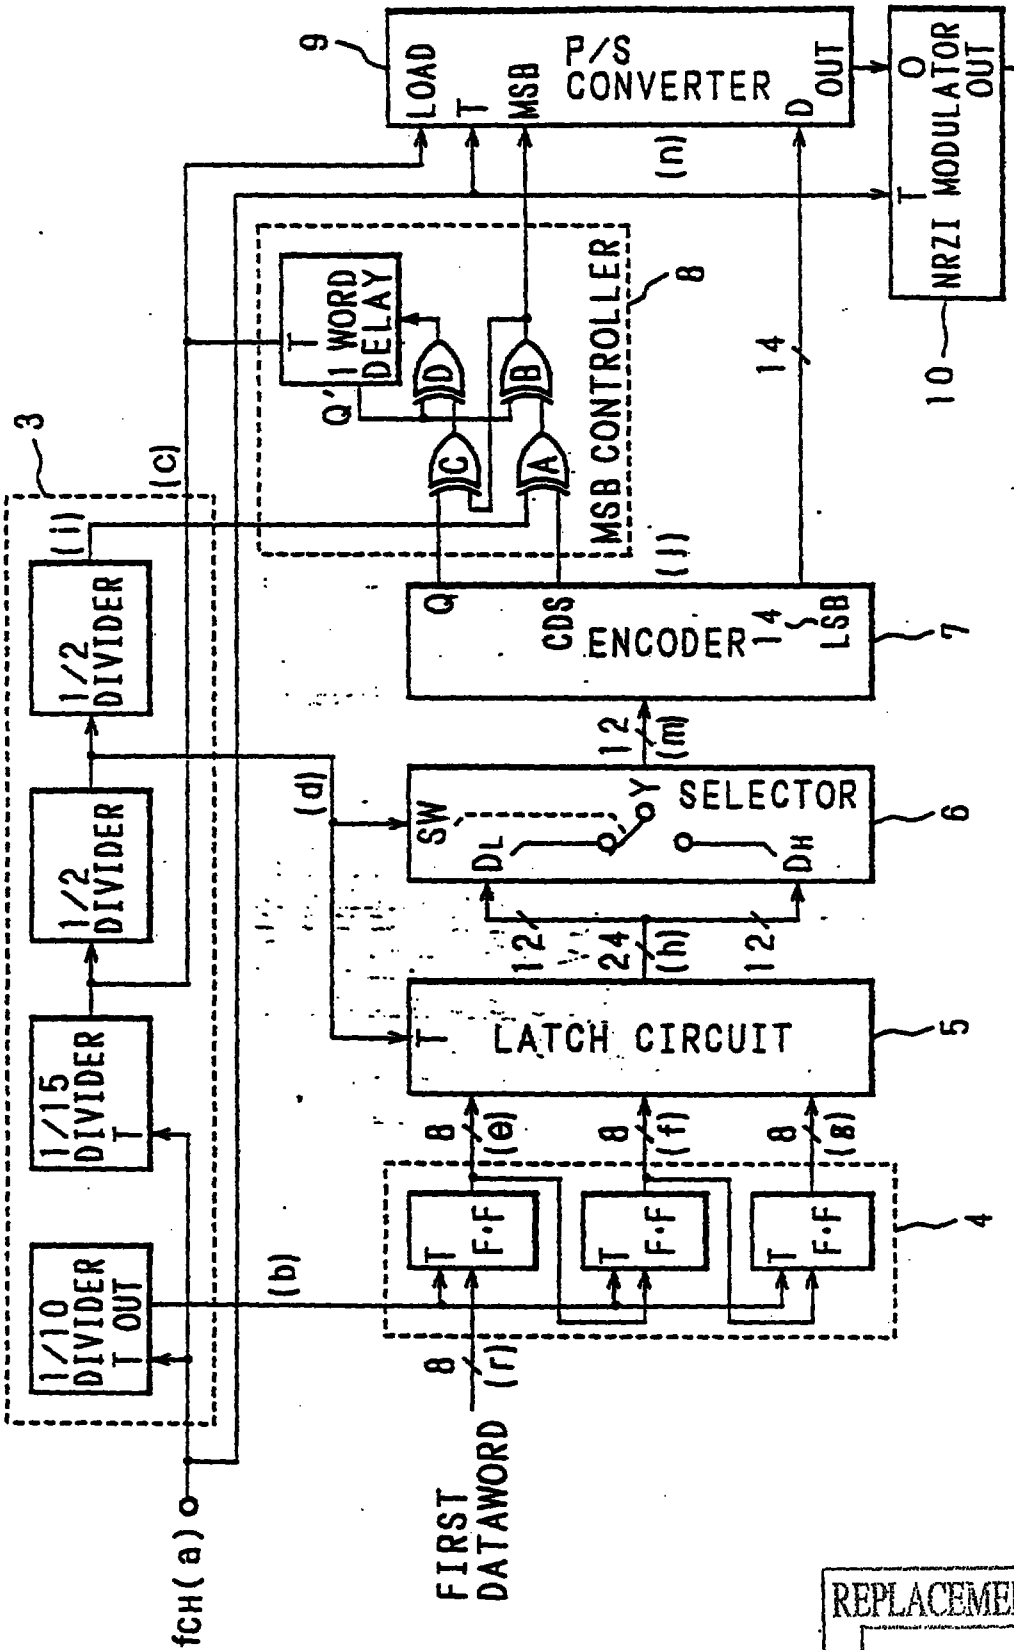

F i g. 27

REPLACEMENT SHEET

22 JUL 1999

REPLACEMENT SHEET
22 JUL 1999

Fig. 28(A)

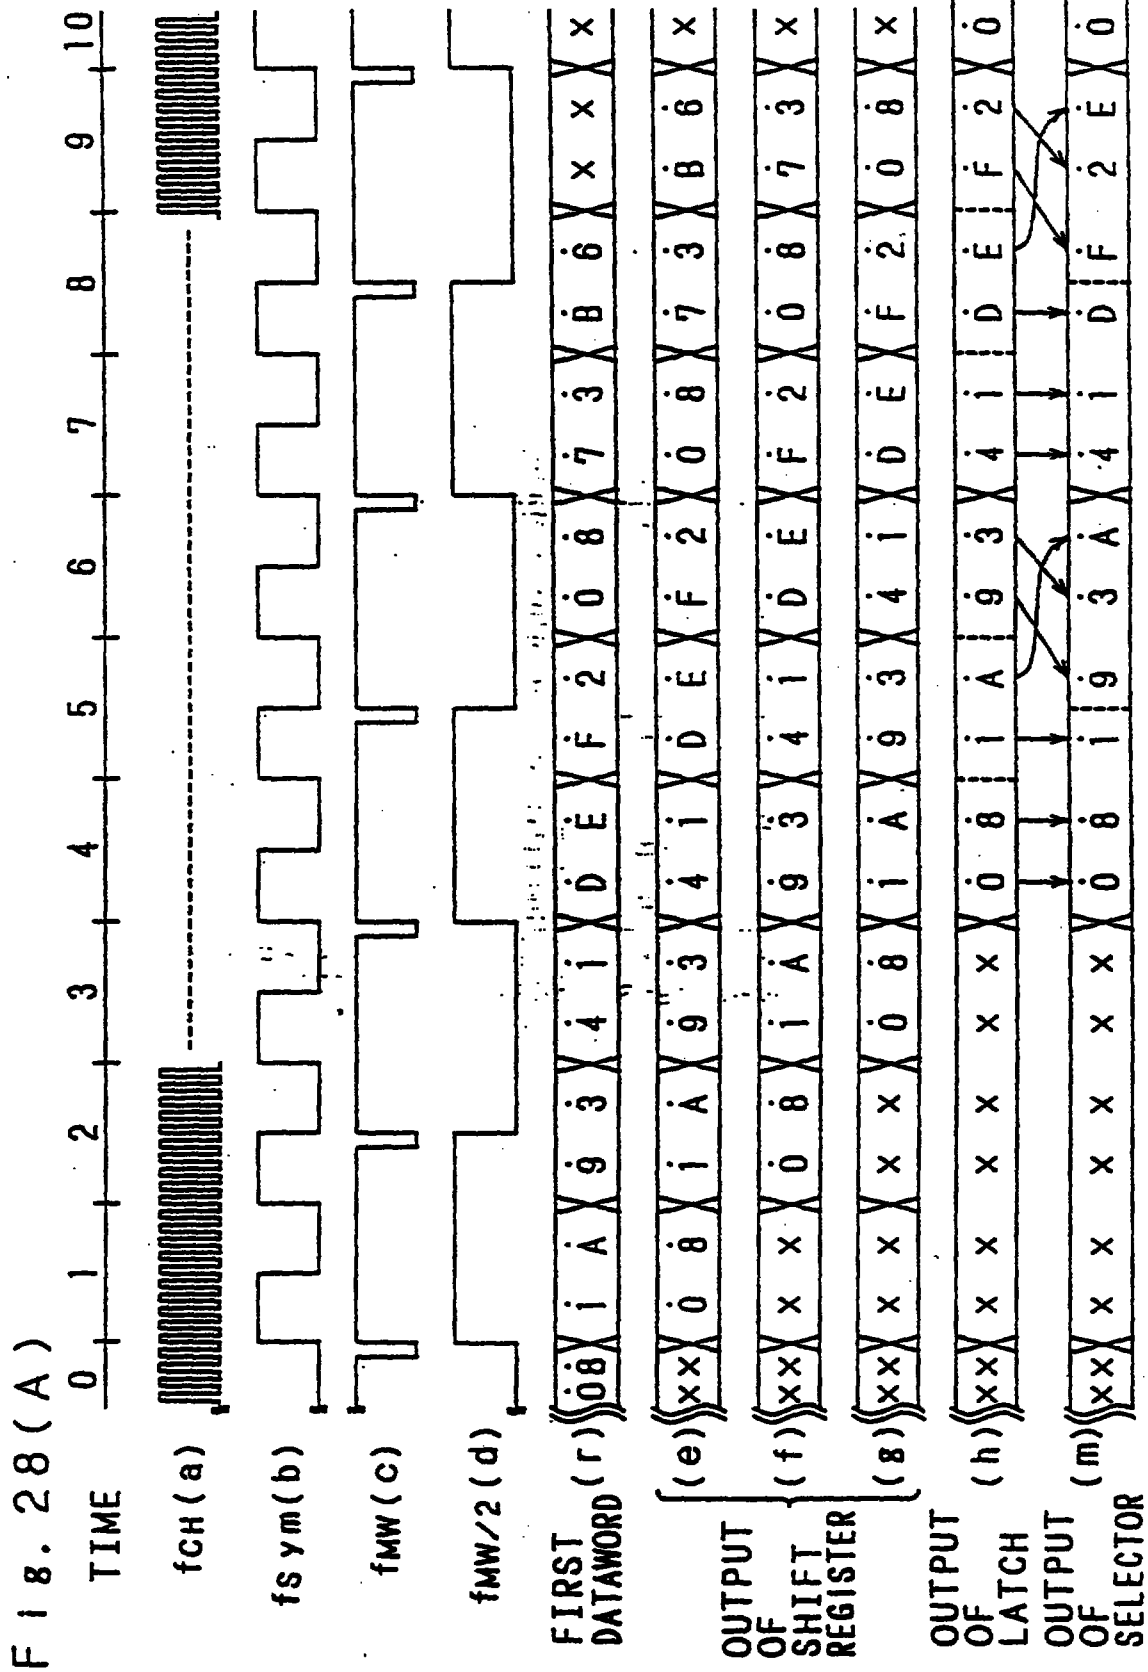

Fig. 28(B)

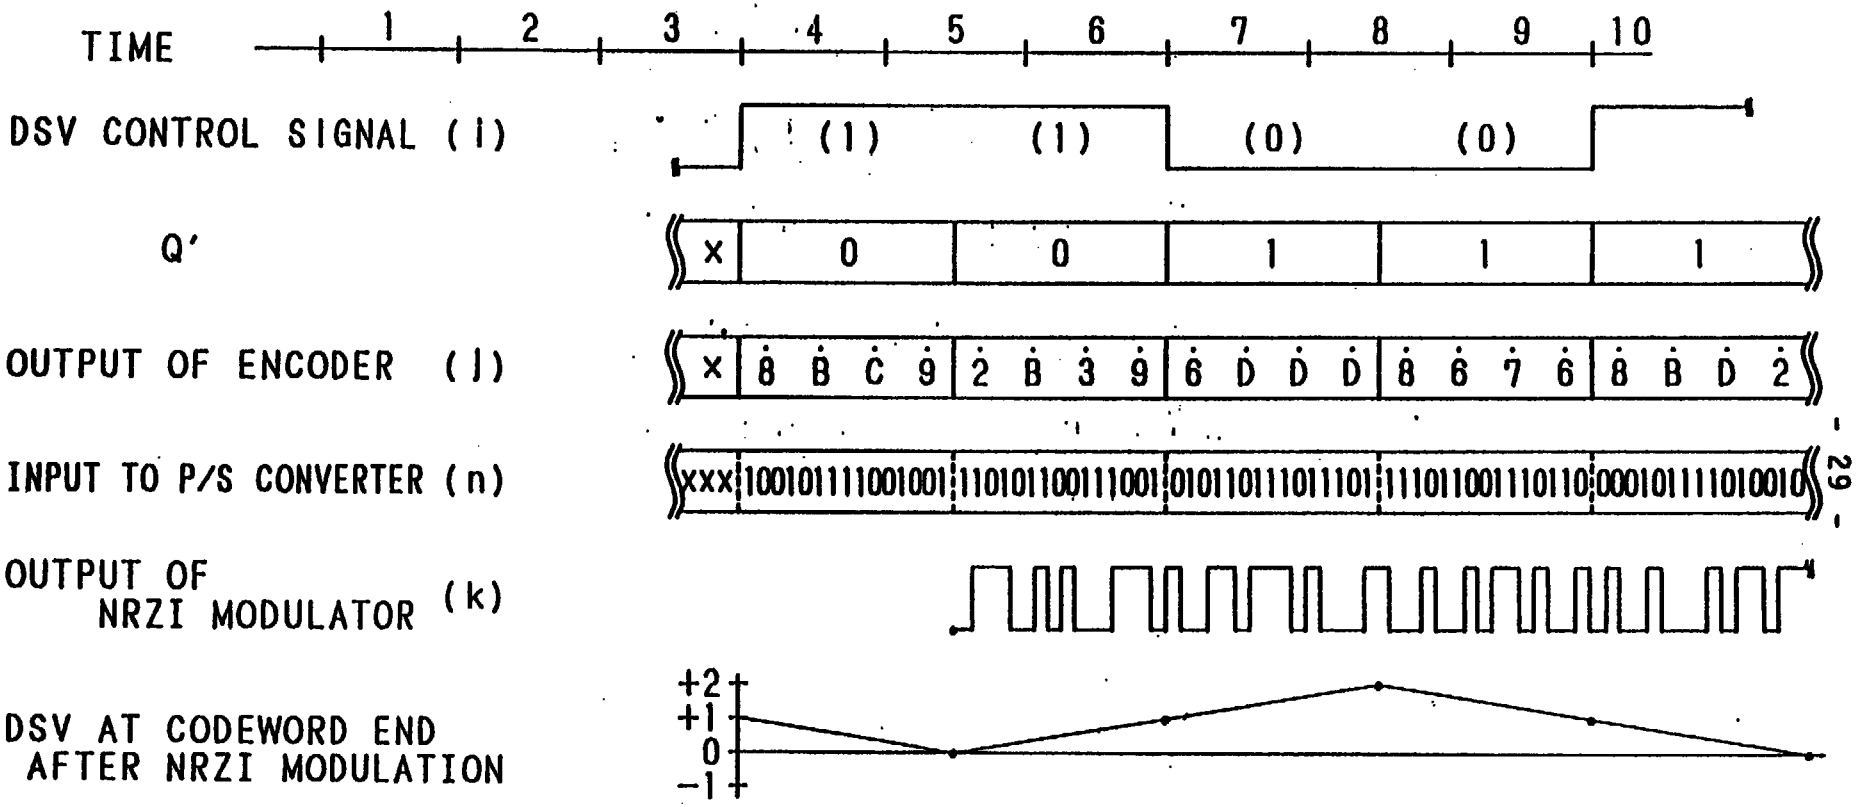

REPLACEMENT SHEET
22 JUL 1999

Fig. 29

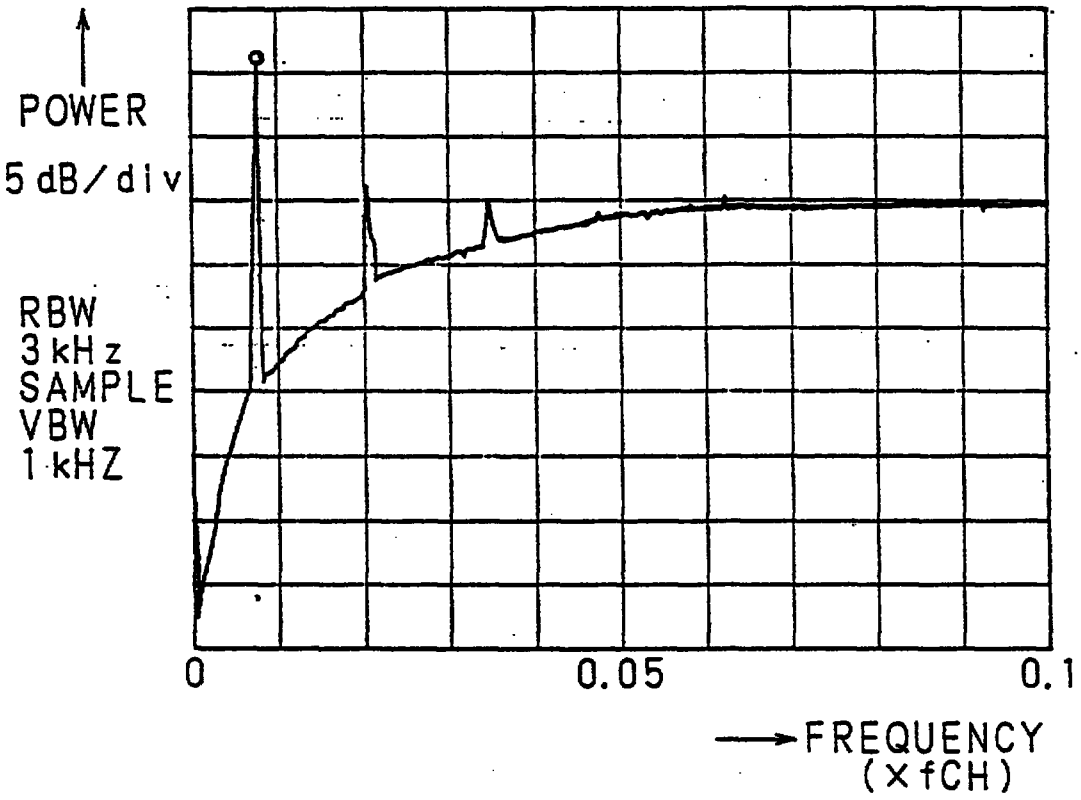

REPLACEMENT SHEET
22 JUL 1999

Fig. 30

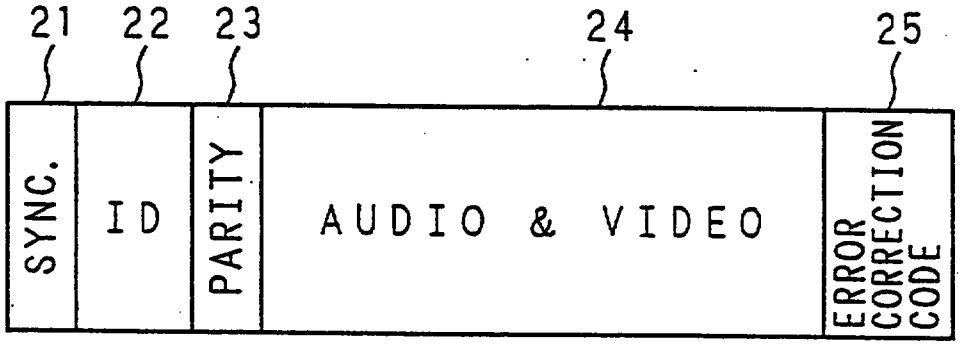

REPLACEMENT SHEET
22 JUL 1999

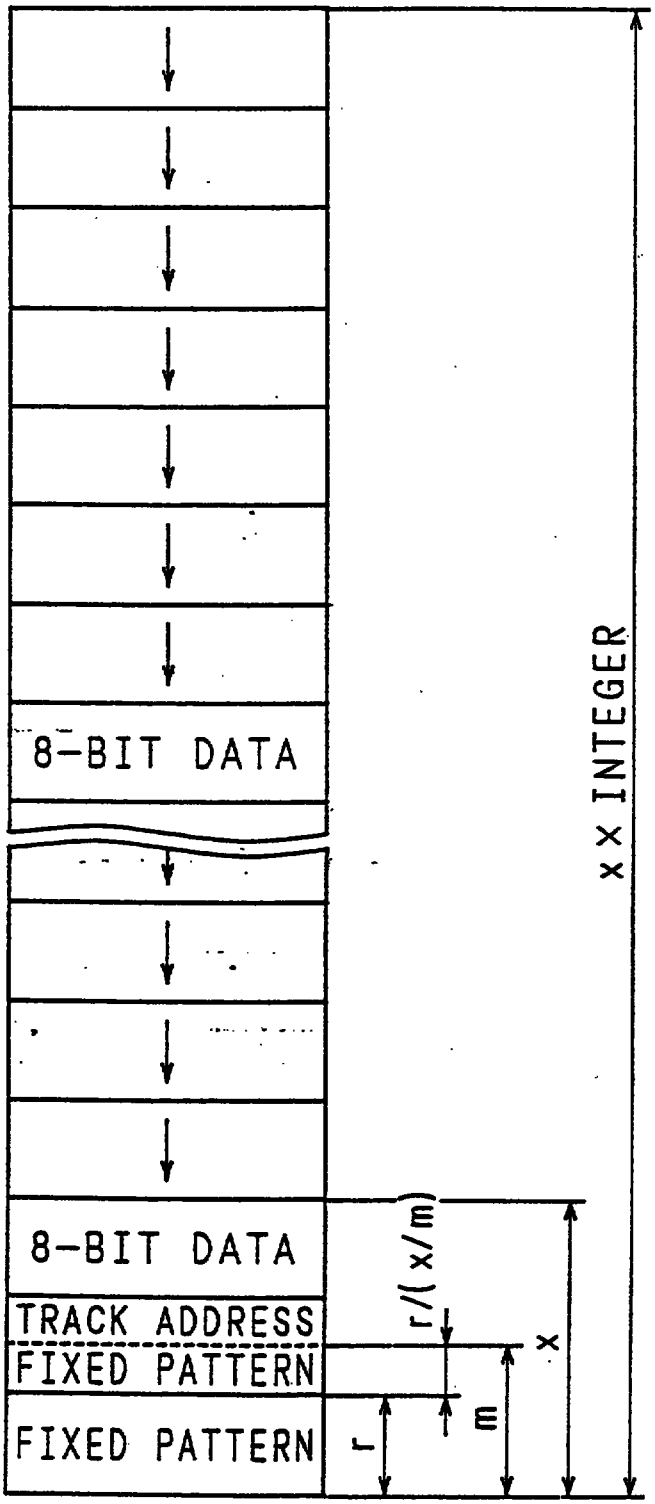

Fig. 31

REPLACEMENT SHEET
22 JUL 1999

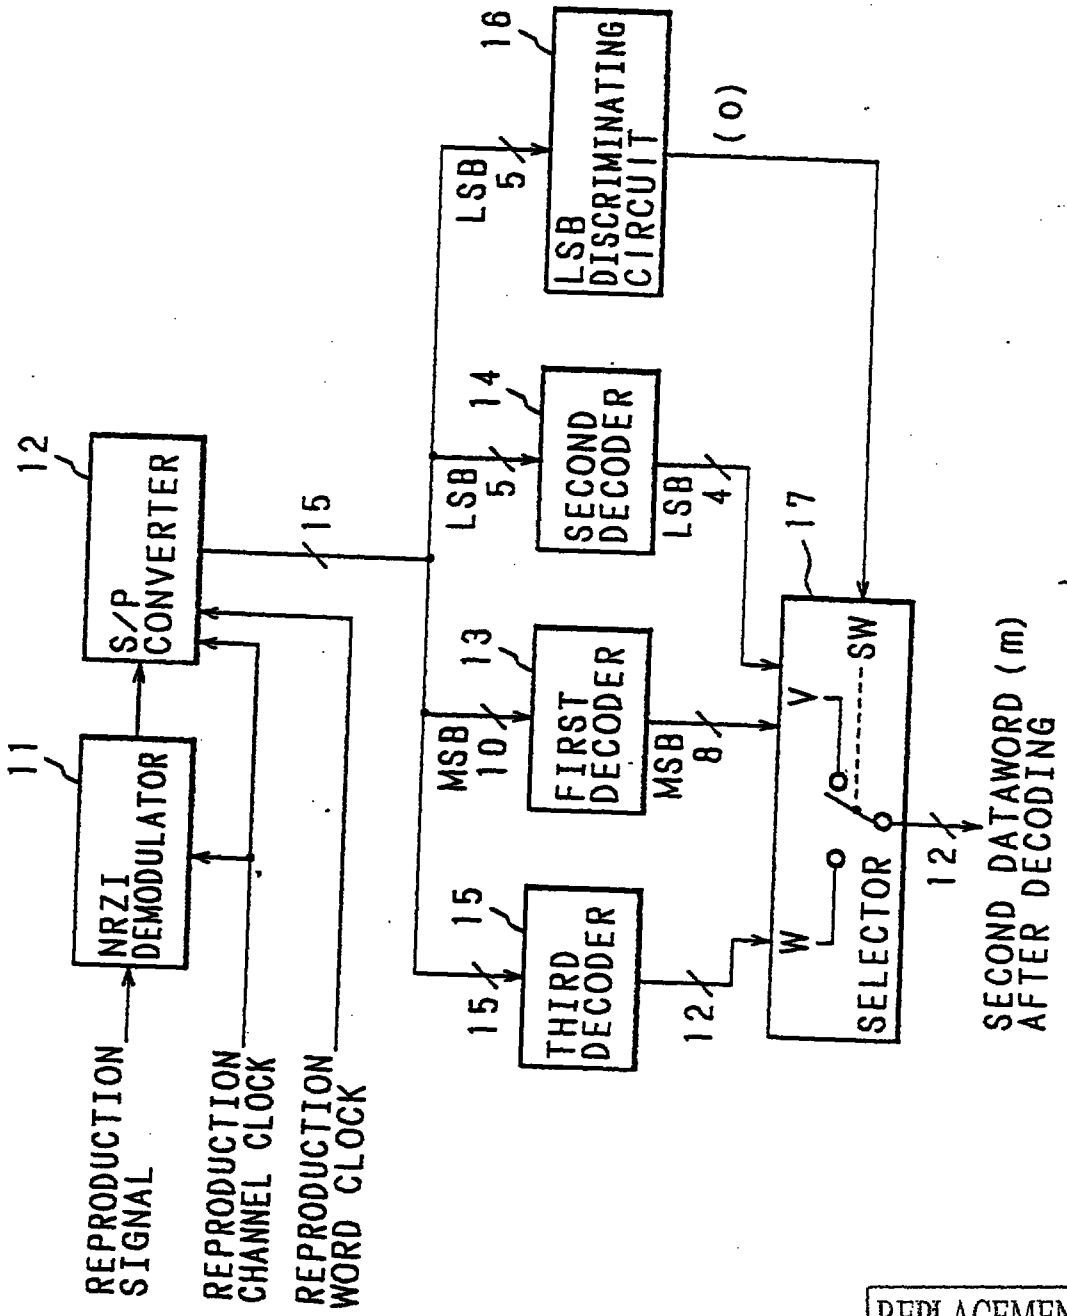

Fig. 32

REPLACEMENT SHEET
22 JUL 1999

Fig. 33

n2 GROUP	m2 DATA 0 1 2 3 4 5 6 7 8 9 A B C D E F
1	07 09 0A 0B 0D 0E 0F 12 15 17 19 1A 1B 1D 1E 1F
2	01 03 05 06
3	11 13 16
4	11 13 16 | 11 13 16 | 11 13 16

REPLACEMENT SHEET
22 JUL 1999

Fig. 34(a)

$Q' = 0$

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
00	4E7B	4E7E	CEA1	4EA3	4EA6	CEC2	4EC5	CEC7	4ECA	CECD	4ECF	CED9	4EDB	4EDE	CEF1	4EF3
01	4EF6	4F43	4F46	4F85	CF87	4F8A	CF8D	4F8F	CF99	4F9B	4F9E	CFB1	4FB3	4FB6	CFE1	4FE3
02	4FE6	D0B9	50BB	50BE	D092	5095	D097	509A	D09D	509F	50A9	D0AB	D0AE	50B2	D0B5	50B7
03	D0BA	50BD	D0BF	50D1	D0D3	D0D6	50E2	D0E5	50E7	D0EA	50ED	D0EF	50F9	D0FB	D0FB	D011
04	5113	5116	D122	5125	D127	512A	D12D	512F	D139	513B	513E	5149	D14B	D14E	5152	D155
05	5157	D15A	515D	D15F	D169	516B	516E	D172	5175	D177	517A	D17D	517F	5191	D193	D196
06	51A2	D1A5	51A7	D1AA	51AD	D1AF	51B9	D1BB	D1BE	D1C9	51CB	51CE	D1D2	51D5	D1D7	51DA
07	D1DD	51DF	51E9	D1EB	D1EE	51F2	D1F5	51F7	D1FA	51FD	D1FF	D221	5223	5226	D242	5245
08	D247	524A	D24D	524F	D259	525B	525E	D271	5273	5286	5289	D28B	D28E	5292	D295	5297
09	D29A	529D	D29F	D2A9	52AB	52AE	D2B2	52B5	D2B7	52BA	D2BD	52BF	D2D1	52D3	52D6	D2E2
0A	52E5	D2E7	52EA	D2ED	D2EF	D2F9	52FB	52FE	5311	D313	D316	5322	D325	5327	D32A	532D
0B	D32F	5339	D33B	D33E	D349	534B	534E	D352	5355	D357	535A	D35D	535F	5369	D36B	D36E
0C	5372	D375	5377	D37A	537D	D37F	D391	5393	5396	D3A2	53A5	D3A7	53AA	D3AD	53AF	D3B9
0D	53BB	53BE	53C9	D3CB	D3CE	53D2	D3D5	53D7	D3DA	53DD	D3DF	D3E9	53EB	53EE	D3F2	53F5
0E	D3F7	53FA	D3FD	53FF	5443	5446	5485	D487	548A	D48D	548F	D499	549B	549E	D4B1	54B3
0F	54BB	D4E1	54E3	54E6	5509	D50B	D50E	5512	D515	5517	D51A	551D	D51F	D529	552B	552E

REPLACEMENT SHEET
22 JUL 1999

Fig. 34(b)

$Q' = 0$

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
10	D532	5535	D537	553A	D53D	553F	D551	5553	5556	D562	5565	D567	556A	D56D	556F	D579
11	557B	557E	D5A1	55A3	55A6	D542	55C5	D5C7	55CA	D5CD	55CF	D5D9	55DB	55DE	D5F1	55F3
12	55F6	5611	D613	D616	5622	D625	5627	D62A	562D	D62F	5639	D63B	D63E	D649	564B	564E
13	D652	5655	D657	565A	D65D	565F	5669	D66B	D66E	5672	D675	5677	D67A	567D	D67F	D691
14	5693	5696	D6AE	56A5	D6A7	56AA	D6AD	56AF	D6B9	56BB	56BE	56C9	D6CB	D6CE	56D2	D6D5
15	56D7	D6DA	56DD	D6DF	D6E9	56EB	56EE	D6F2	56F5	D6F7	56FA	D6FD	56FF	D621	5623	5626
16	D742	5745	D747	574A	D74D	574F	D759	575B	575E	D771	5773	5776	5789	D78B	D78E	5792
17	D795	5797	D79A	579D	D79F	D7A9	57AB	D7AE	D7B2	57B5	D7B7	57BA	D7BD	57BF	D7D1	57D3
18	57D6	D7E2	57E5	D7E7	57EA	D7ED	57EF	D7F9	57FB	57FE	5886	590A	D90D	590F	D919	591B
19	591E	D931	5933	5936	D961	5963	5966	59C3	5906	5A12	DA15	5A17	DA1A	5A1D	DA1F	DA29
1A	5A2B	5A2E	DA32	5A35	DA37	5A3A	DA3D	5A3F	DA51	5A53	5A56	DA62	5A65	DA67	5A6A	DA6D
1B	5A6F	DA79	5A7B	5A7E	DAA1	5AA3	5AA6	DAC2	5AC5	DAC7	5ACA	DACD	5ACF	DAD9	5ADB	5ADE
1C	DAF1	5AF3	5AF6	5B43	5B46	5B85	DB87	5B8A	DB8D	5B8F	DB99	5B9B	5B9E	DBB1	5BB3	5BB6
1D	DBE1	5BE3	5BE6	5C22	DC25	5C27	DC2A	5C2D	DC2F	5C39	DC3B	DC3E	DC49	5C4B	5C4E	DC52
1E	5C55	DC57	5C5A	DC5D	5C5F	5C69	DC6B	DC6E	5C72	DC75	5C77	DC7A	5C7D	DC7F	DC91	5C93
1F	5C96	DCA2	5CA5	DCA7	5CAA	DCAD	5CAF	DCB9	5CBB	5CBE	5CC9	DCCB	DCCE	5CD2	DCD5	5CD7

REPLACEMENT SHEET
22 JUL 1999

Fig. 35(a)

$Q' = 0$

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
20	DCDA	5CDD	DCDF	DCE5	5CEB	5CEE	DCF2	5CF5	DCF7	5CFA	DCFD	5CFF	DD21	5D23	5D26	DD42
21	5D45	DD47	5D4A	DD4D	5D4F	DD59	5D5B	5D5E	DD71	5D73	5D76	5D89	DD8B	DD8E	5D92	DD95
22	5D97	DD9A	5D9D	DD9F	DDA9	5DAB	5DAE	DDB2	5DB5	DDB7	5DBA	DDBD	5DBF	DDD1	5DD3	5DD6
23	DDE2	5DE5	DDE7	5DEA	DDED	5DEF	DDF9	5DFB	5DFE	5E43	5E46	5E85	DE87	5E8A	DE8D	5E8F
24	DE99	5E9B	5E9E	DED1	5ED3	5EB6	DEE1	5EE3	5EE6	5F09	DF0B	DF0E	5F12	DF15	5F17	DF1A
25	5F1D	DF1F	DF29	5F2B	5F2E	DF32	5F35	DF37	5F3A	DF3D	5F3F	DF51	5F53	5F56	DF62	5F65
26	DF67	5F64	DF6D	5F6F	DF79	5F7D	5F7E	DFA1	5FA3	5FA6	DFC2	5FC5	DFC7	5FCA	DFCD	5FCF
27	DFD9	5FDB	5FDE	DFF1	5FF3	5FF6	6843	6846	6885	E887	688A	E88D	688F	E899	689B	689E
28	E8B1	68B7	68B6	E8E1	68E3	68E6	6909	E90B	E90E	6912	E915	6917	E91A	691D	E91F	E929
29	692B	692E	E932	6935	E937	693A	E93D	693F	E951	6953	6956	E962	6965	E967	696A	E96D
2A	696F	E979	697B	697E	E9A1	69A3	69A6	E9C2	69C5	E9C7	69CA	E9CD	69CF	E9D9	69DB	69DE
2B	E9F1	69F3	69F6	6A11	EA13	EA16	6A22	EA25	6A27	EA2A	6A2D	EA2F	6A39	EA3B	EA3E	EA49
2C	6A4B	6A4E	EA52	6A55	EA57	6A5A	EA5D	6A5F	6A66	EA6B	EA6E	6A72	EA75	6A77	EA7A	6A7D
2D	EA7F	EA91	6A93	6A96	EAA2	6AA5	EAA7	6AAA	EAAD	6AAF	EAB9	6ABB	6ABE	6AC9	EACB	EACE
2E	6AD2	EAD5	6AD7	EADA	6ADD	EADF	EAE9	6AEB	6AEE	EAF2	6AF5	EAF7	6AFA	EAFD	6AFF	EB21
2F	6B23	6B26	EB42	6B45	EB47	6B4A	EB4D	6B4F	EB59	6B5B	6B5E	EB71	6B73	6B76	6B89	EB8B

REPLACEMENT SHEET
22 JUL 1999

Fig. 35(b)

Q' = 0

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
30	EBBE	6B92	EB95	6B97	6B9A	6B9D	EB9F	EBA9	6BAB	6BAE	EBB2	6BB5	EBB7	6BBA	EBBD	6BBF
31	EBD1	6BD3	6BD6	EBE2	EBE5	EBE7	6BEA	EBED	6BEF	EBF9	6BFB	6BFE	6C21	EC23	EC26	6C42
32	EC45	6C47	EC4A	6C4D	6C4F	6C59	EC5B	EC5E	6C71	EC73	EC76	EC89	6C8B	6C8E	EC92	6C95
33	EC97	6C9A	EC9D	6C9F	ECA9	ECAB	ECAE	6CB2	ECB5	6CB7	ECBA	6CBD	ECBF	6CD1	ECD3	ECD6
34	6CE2	ECE5	6CE7	ECEA	6CED	ECEF	6CF9	ECFB	ECFE	ED11	6D13	6D16	ED22	6D25	ED27	6D2A
35	ED2D	6D2F	ED39	6D3B	6D3E	6D49	ED4B	ED4E	6D52	ED55	6D57	ED5A	6D5D	ED5F	ED69	6D6B
36	6D6E	ED72	6D75	ED77	6D7A	ED7D	6D7F	6D91	ED93	ED96	6DA2	EDA5	6DA7	EDAA	6DAD	EDAF
37	6DB9	EDBB	EDBE	EDC9	6DCB	6DCE	EDD2	6DD5	EDD7	6DDA	EDDD	6DDF	6DE9	EDEB	EDEE	6DF2
38	EDF5	6DF7	EDFA	6DFD	EDFF	EE21	6E23	6E26	EE42	6E45	EE47	6E4A	EE4D	6E4F	EE59	6E5B
39	6E5E	EE71	6E73	6E76	6E89	EE8B	EE8E	6E92	EE95	6E97	EE95	6E9D	EE9F	EEA9	6EAB	6EAE
3A	EEB2	6EB5	EEB7	6EBA	EEBD	6EBF	EED1	6ED3	6ED6	EEE2	6EEA	EEE7	6EEA	EEED	6EEF	EEF9
3B	6EFB	6EFE	6F11	EF13	EF16	6F22	EF25	6F27	EF2A	6F2D	EF2F	6F39	EF3B	EF3E	EF49	6F4B
3C	6F4E	EF52	6F55	EF57	6F5A	EF5D	6F5F	6F69	EF6B	EF6E	6F72	EF75	6F77	EF7A	6F7D	EF7F
3D	EF91	6F93	6F9B	EFA2	6FA5	EFA7	6FAA	EFAD	6FAF	EFB9	6FBB	6FBE	6FC9	EFCB	EFCE	6FD2
3E	EFD5	6FD7	EFDA	6FDD	EFDF	EFE9	6FEB	6FEE	EFF2	6FF5	EFF7	6FFA	EFFD	6FFF	7086	710A
3F	F10D	710F	F119	711B	711E	F131	7133	7136	F161	7163	7166	71C3	71C6	7212	F215	7217

REPLACEMENT SHEET
22 JUL 1999

Fig. 36(a)

Q′=0

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
40	F21A	721D	F21F	F229	722B	722E	F232	7235	F237	723A	F23D	723F	F251	F253	7256	F262
41	7265	F267	726A	F26D	726F	F279	727B	727E	F2A1	72A3	72A6	F2C2	72C5	72C7	72CA	F2CD
42	72CF	F2D9	72DB	72DE	F2F1	72F3	72F6	7343	7346	7385	F387	738A	F38D	738F	F399	739B
43	739E	F381	73B3	73B6	F3E1	73E3	73E6	7422	F425	7427	F42A	742D	F42F	7439	F43B	F43E
44	F449	744B	744E	F452	7455	F457	745A	F45D	745F	7469	F46B	F46E	7472	F475	7477	F47A
45	747D	F47F	F471	7493	7496	F4A2	74A5	F4A7	74AA	F4AD	74AF	F4B9	74BB	74CE	74C9	F4CB
46	F4CE	74D2	F4D5	74D7	F4DA	74DD	F4DF	F4E9	74EB	74EE	F4F2	74F5	F4F7	74FA	F4FD	74FF
47	F521	7523	7526	F542	7545	F547	754A	F54D	754F	F559	755B	755E	F571	7573	7576	7589
48	F58B	F58E	7582	F595	7597	F59A	759D	F59F	F5A9	75AB	75AE	F5B2	75B5	F5B7	75BA	F5BD
49	75BF	F5D1	75D3	75D6	F5E2	75E5	F5E7	75EA	F5ED	75EF	F5F9	75FB	75FE	7643	7646	7685
4A	F687	768A	F68D	768F	F699	769B	769E	F6B1	76B3	76B6	F6E1	76E3	76E6	7709	F70B	F70E
4B	7712	F715	7717	F71A	771D	F71F	F729	772B	772E	F732	7735	F737	773A	F73D	773F	F751
4C	7753	7756	F752	7765	F767	776A	F76D	776F	F776	777B	777E	F7A1	77A3	77C0	F7A2	77C5
4D	F7C7	77CA	F7CD	77CF	F7D9	77DB	77DE	F7F1	77F3	77F6	7842	F845	7847	F84A	784D	F84F
4E	7859	F85B	F85E	7871	F873	F876	F889	788B	788E	F892	7895	F897	789A	F89D	789F	78A9
4F	F8AB	F8AE	78A2	F8B5	78B7	F8BA	78BD	F8BF	78D1	F8D3	F8D6	78E2	F8E5	78E7	F8EA	78ED

REPLACEMENT SHEET
22 JUL 1999

Fig. 36(b)

$Q' = 0$

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
50	F8EF	78F9	F8FB	F8FE	F911	7913	7916	F922	7925	F927	792A	F92D	792F	F939	793B	793E
51	7949	F94B	F94E	7952	F955	7957	F95A	795D	F95F	F969	796B	796E	F972	7975	F977	797A
52	F97D	797F	7991	F993	F996	79A2	F9A5	79A7	F9AA	79AD	F9AF	79B9	F9BB	F9BB	F9C9	79CB
53	79CE	F9D2	79D5	F9D7	79DA	F9DD	79DF	79E9	F9EB	F9EE	79F2	F9F5	79F7	F9FA	79FD	F9FF
54	FA21	7A23	7A26	FA42	7A45	FA47	7A4A	FA4D	7A4F	FA59	7A5B	7A5E	FA71	7A73	7A76	7A89
55	FA8B	FA8E	7A92	FA95	7A97	FA9A	7A9D	FA9F	FAA9	7AAB	7AAE	FAB2	7AB5	FAB7	7ABA	FABD
56	7ABF	FAD1	7AD3	7AD6	FAE2	7AE5	FAE7	7AEA	FAED	7AEF	FAF9	7AFB	7AFE	7B11	FB13	FB16
57	7B22	FB25	7B27	FB2A	7B2D	FB2F	7B39	FB3B	FB3E	FB49	7B4B	7B4F	FB52	7B55	FB57	7B5A
58	FB5D	7B5F	7B69	FB6B	FB6E	7B72	FB75	7B77	FB7A	7B7D	FB7F	FB91	7B93	7B96	FBA2	7BA5
59	FBA7	7BAA	FBAD	7BAF	FBB9	7BBB	7BBE	7BC9	FBCB	FBCE	7BD2	FBD5	7BD7	FBDA	7BDD	FBDF
5A	FBE9	7BEB	7BEE	FBF2	7BF5	FBF7	7BFA	FBFD	7BFF	7C43	7C46	7C85	FC87	7C8A	FC8D	7C8F
5B	FC99	7C9B	7C9E	FCB1	7CB3	7CB6	FCE1	7CE3	7CE6	7D09	FD0B	FD0E	7D12	FD15	7D17	FD1A
5C	7D1D	FD1F	FD29	7D2B	7D2E	FD32	7D35	FD37	7D3A	FD3D	7D3F	FD51	7D53	7D56	FD62	7D65
5D	FD67	7D6A	FD6D	7D6F	FD79	7D7B	7D7E	FDA1	7DA3	7DA6	FDC2	7DC5	FDC7	7DCA	FDCD	7DCF
5E	FDD9	7DDB	7DDE	FDF1	7DF3	7DF6	7E11	FE13	FE16	7E22	FE25	7E27	FE2A	7E2D	FE2F	7E39
5F	FE3B	FE3E	FE49	7E4B	7E4E	FE52	7E55	FE57	7E5A	FE5D	7E5F	7E69	FE6B	FE6E	7E72	FE75

REPLACEMENT SHEET
22 JUL 1999

Fig. 37(a)

$Q' = 0$

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
60	7E77	FE7A	7E7D	FE7F	FE91	7E93	7E96	FEA2	7EA5	FEA7	7EAA	FEAD	7EAF	FEB9	7EBB	7EBE
61	7EC9	FECB	FECE	7ED2	FED5	7ED7	FEDA	7EDD	FEDF	FEE9	7EEB	7EEE	FEF2	7EF5	FEF7	7EFA
62	FEFD	7EFF	FF21	7F23	7F26	FF42	7F45	FF47	7F4A	FF4D	7F4F	FF59	7F5B	7F5E	FF71	7F73
63	7F76	7F89	FF8B	FF8E	7F92	FF95	7F97	FF9A	7F9D	FF9F	FFA9	7FAB	7FAE	FFB2	7FB5	FFB7
64	7FBA	FFBD	7FBF	FFD1	7FD3	7FD8	FFE2	7FE5	FFE7	7FEA	FFED	7FEF	FFF9	7FFB	7FFB	8842
65	0845	8847	084A	884D	084F	8859	085B	085E	8871	0873	0876	0889	888B	888E	0892	8895
66	0897	889A	089D	889F	88A9	08AB	08AE	88B2	08B5	88B7	08BA	88BD	08BF	88D1	08D3	08D6
67	88E2	08E5	88E7	08EA	88ED	08EF	88F9	08FB	08FE	0911	8913	8916	0922	8925	0927	892A
68	092D	892F	0939	893B	893E	8949	094B	094E	8952	0955	8957	095A	895D	095F	0969	896B
69	896E	0972	8975	0977	897A	097D	897F	8991	0993	0996	89A2	09A5	89A7	09AA	89AD	09AF
6A	89B9	09BB	09BE	09C9	89CB	89CE	09D2	89D5	09D7	89DA	09DD	89DF	89E9	09EB	09EE	89F2
6B	09F5	89F7	09FA	89FD	09FF	0A21	8A23	8A26	0A42	8A45	0A47	8A4A	0A4D	8A4F	0A59	8A5B
6C	8A5E	0A71	8A73	8A76	8A89	0A8B	0A8E	8A92	0A95	8A97	0A9A	8A9B	0A9F	0AA9	8AAB	8AAE
6D	0AB2	8AB5	0AB7	8ABA	0AB0	8ABF	0AD1	8AD3	8AD6	0AE2	8AE5	0AE7	8AEA	0AED	8AEF	0AF9
6E	8AFB	8AFE	8B11	0B13	0B16	8B22	0B25	8B27	0B2A	8B2D	0B2F	8B39	0B3B	0B3E	0B49	8B4B
6F	8B4E	0B52	8B55	0B57	8B5A	0B5D	8B5F	8B69	0B6B	0B6E	8B72	0B75	8B77	0B7A	8B7D	0B7F

REPLACEMENT SHEET
22 JUL 1999

Fig. 37(b)

$Q' = 0$

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
70	0B91	8B93	8B96	0BA2	8BA5	0BA7	8BAA	0BAD	8BAF	0BB9	8BBB	8BBE	8BC9	0BCB	0BCE	8BD2
71	0BD5	8BD7	0BDA	8BDD	0BDF	0BE9	8BEB	8BEE	0BF2	8BF5	0BF7	8BFA	0BFD	8BFF	8B43	8B46
72	8C85	0C87	8C8A	0CBD	8C8F	0C99	8C9B	8C9E	0CB1	8CB3	8CB6	0CE1	8CE3	8CE6	8C09	0C0B
73	0D0E	8D12	0D15	8D17	0D1A	8D1D	0D1F	0D29	8D2B	8D2E	0D32	8D35	0D37	8D3A	0D3D	8D3F
74	0D51	8D53	8D56	0D62	8D65	0D67	8D6A	0D6D	8D6F	0D79	8D7B	8D7E	0DA1	8DA3	8DA6	0DC2
75	8DC5	0DC7	8DCA	0DCD	8DCF	0DD9	8DDB	8DDE	0DF1	8DF3	8DF6	8E11	0E13	0E16	8E22	0E25
76	8E27	0E2A	8E2D	0E2F	8E39	0E3B	0E3E	0E49	8E4B	8E4E	0E52	8E55	0E57	8E5A	0E5D	8E5F
77	8E69	0E6B	0E6E	8E72	0E75	8E77	0E7A	8E7D	0E7F	0E91	8E93	8E96	0EA2	8EA5	0EA7	8EAA
78	0EAD	8EAF	0EB9	8EBB	8EBE	8EC9	0ECB	0ECE	8ED2	0ED5	8ED7	0EDA	8EDD	0EDF	0EE9	8EEB
79	8EEE	0EF2	8EF5	0EF7	8EFA	0EFD	8EFF	0E21	8F23	8F26	0F42	8F45	0F47	8F4A	0F4D	8F4F
7A	0F59	8F5B	8F5E	0F71	8F73	8F76	8F8B	0F8B	0F8E	8F92	0F95	8F97	0F9A	8F9D	0F9F	0FA9
7B	8FAB	8FAE	0FB2	8FB5	0FB7	8FBA	0FBD	8FBF	0FD1	8FD3	8FD6	0FE2	8FE5	0FE7	8FEA	0FED
7C	8FEF	0FF9	8FFB	8FFE	1085	9087	108A	908D	108F	9099	109B	109E	90B1	10B3	10B6	90E1
7D	10E3	10E6	1109	910B	910E	1112	9115	1117	911A	111D	911F	9129	112B	112E	9132	1135
7E	9137	113A	013D	113F	9151	1153	1156	9162	1165	9167	116A	016D	116F	9179	117B	117E
7F	91A1	11A3	11A6	91C2	11C5	91C7	11CA	91CD	11CF	81D9	11DB	11DE	91F1	11F3	11F6	1211

REPLACEMENT SHEET
22 JUL 1999

Fig. 38(a)

$Q' = 0$

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
80	9213	9216	1222	0225	1227	922A	122D	022F	1239	923B	923E	9249	124B	124E	9252	1255
81	9257	125A	925D	125F	1269	926B	926E	1272	9275	1277	927A	127D	927F	9291	1293	1296
82	92A2	12A5	92A7	12AA	92AD	12AF	92B0	12BB	12BE	12C9	92CB	92CE	12D2	92D5	12D7	92DA
83	12DD	92DF	92E9	12EB	12EE	92F2	12F5	93F7	12FA	92FD	12FF	9321	1323	1326	9342	1345
84	9347	134A	934D	134F	9359	135B	135E	0371	1373	1376	1389	93BB	938E	1392	9395	1397
85	939A	139D	939F	93A9	13AB	13AE	93B2	13B5	93B7	13BA	938D	13BF	93D1	13D3	13D6	93E2
86	13E5	93E7	13EE	93ED	13EF	93F9	13FB	14FE	1421	0423	9426	1442	9445	1447	944A	144D
87	944F	1459	945D	945E	1471	9473	9476	9489	148B	148E	9492	1495	9497	149A	949D	149F
88	14A9	94AB	94AE	14B2	94B5	14B7	94BA	158D	94BF	14D1	94D3	94D6	14E2	94E5	14E7	94EA
89	14ED	94EF	14F9	94FB	94FE	9511	1513	1516	9522	1525	9527	152A	952D	152F	9539	153B
8A	153E	1549	9548	954E	1552	9555	1557	955A	155D	055F	9569	156B	156E	9572	1575	9577
8B	157A	957D	157F	1591	9593	9596	15A2	95A5	15A7	05AA	15AD	95AF	15B9	95BB	05BE	95C9
8C	15CB	15CE	95D2	15D5	95D7	15DA	95DD	15DF	15A9	05EB	95EE	15F2	95F5	15F7	95FA	15FD
8D	95FF	9621	1623	1626	0642	1645	0647	164A	964D	164F	9659	1658	165E	9671	1673	1676
8E	1689	9688	968E	169E	0695	1697	069A	169D	969F	96A9	16AB	16AE	96B2	16B5	06B7	16BA
8F	96BD	16B4	96D1	16D3	16D6	96E2	16E5	96E7	16EA	96ED	16EF	96F9	16FB	16FE	1711	9713

REPLACEMENT SHEET
22 JUL 1999

Fig. 38(b)

$Q' = 0$

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
90	9716	1722	9725	1727	972A	172D	972F	1739	973B	973E	9749	174B	174E	9752	1755	9757
91	175A	975D	175F	1769	976B	976E	1772	9775	1777	977A	177D	977F	9791	1793	1796	97A2
92	17A5	97A7	17AA	97AD	17AF	97B9	17BB	17BE	17C9	97CB	97CE	17D2	97D5	17D7	97DA	17DD
93	97DF	97E9	17EB	17EE	97F2	17F5	97F7	17FA	97FD	17FF	9843	98A6	9885	1887	988A	1B8D
94	988F	1899	989B	989E	18B1	98B3	98B6	18E1	98E3	98E6	9909	190B	190E	9912	1915	9917
95	191A	991D	191F	1929	992B	992E	1932	9935	1937	993A	193D	993F	1951	9953	9956	1962
96	9965	1967	996A	196D	996F	1979	997B	997E	19A1	99A3	99A6	19C2	99C5	19C7	99CA	19CD
97	09CF	19D9	99DB	99DE	19F1	99F3	99F6	9A11	1A13	1A16	9A22	1A25	9A27	1A2A	9A2D	1A2F
98	9A39	1A3B	1A3E	1A49	9A4B	9A4E	1A52	9A55	1A57	9A5A	1A5D	9A5F	9A65	1A6B	1A6E	9A72
99	1A75	9A77	1A7A	9A7D	1A7F	1A91	9A93	9A96	1AA2	9AA5	1AA7	9AAA	1AAD	9AAF	1AB9	9ABB
9A	0ABE	9AC9	1ACB	1ACE	0AD2	1AD5	9AD7	1ADA	9ADD	1ADF	1AE9	9AEB	9AEE	1AF2	9AF5	1AF7
9B	0AFA	1AFD	9AFF	1B21	0B23	0B26	1B42	9B45	1B47	0B4A	1B4D	0B4F	1B59	9B5B	0B5E	1B71
9C	0B73	9B76	9B89	1BBB	1B8E	0B92	1B95	9B97	1B9A	0B9D	1B9F	1BA9	8BAB	9BAE	1BB2	9BB5
9D	1BB7	0BBA	1BBD	9BBF	1BD1	0BD3	9BD6	1BE2	9BE5	1BE7	9BEA	1BED	0BEF	1BF9	9BFB	9BFE
9E	9C21	1C23	1C26	9C42	1C45	0C47	1C4A	9C4D	1C4F	0C55	1C5B	1C5E	0C71	1C73	1C76	1C89
9F	0C8B	0C8E	1C92	9C95	1C97	0C9A	1C9D	9C9F	9CA9	1CAB	1CAE	0CB2	1CB5	9CB7	1CBA	9CBD

REPLACEMENT SHEET
22 JUL 1999

Fig. 39(a)

$Q' = 0$

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
A0	1CBF	9CD1	1CD3	1CD6	9CE2	1CE5	9CE7	1CEA	9CED	1CEF	9CF9	1CFB	1CFE	1D11	9D13	9D16
A1	1D22	9D25	1D27	9D2A	1D2D	9D2F	1D39	9D3B	9D3E	9D49	1D4B	1D4E	9D52	1D55	9D57	1D5A
A2	9D5D	1D5F	1D69	9D6B	9D6E	1D72	9D75	1D77	9D7A	1D7D	9D7F	9D91	1D93	1D96	9DA2	1DA5
A3	9DA7	1DAA	9DAD	1DAF	9DB9	1DBB	1DBE	1DC9	9DCB	9DCE	1DD2	9DD5	1DD7	9DDA	1DDD	9DDF
A4	9DE9	1DEB	1DEE	9DF2	1DF9	9DF7	1DFA	9DFD	1DFF	1E21	9E23	9E26	1E42	9E45	1E47	9E4A
A5	1E4D	9E4F	1E59	9E5B	9E5B	1E71	9E73	9E76	9E89	1E8B	1E8E	9E92	1E95	9E97	1E9A	9E9D
A6	1E9F	1EA9	9EAB	9EAE	1EB2	9EB5	1EB7	9EBA	1EBD	9EBF	1ED1	9ED3	9ED6	1EE2	9EE5	1EE7
A7	9EEA	1EED	9EEF	1EF9	9EFB	9EFE	9F11	1F13	1F16	9F22	1F25	9F27	1F2A	9F2D	1F2F	9F39
A8	1F3B	1F3E	1F49	9F4B	9F4E	1F52	9F55	1F57	9F5A	1F5D	9F5F	9F69	1F6B	1F6E	9F72	1F7D
A9	9F77	1F7A	9F7D	1F7F	1F91	9F93	9F96	1FA2	9FA5	1FA7	9FAA	1FAD	9FAF	1FB9	9FBB	9FBE
AA	9FC9	1FCB	1FCE	9FD2	1FD5	9FD7	1FDA	9FDD	1FDF	1FE9	9FEB	9FEE	1FF2	9FF5	1FF7	9FFA
AB	1FFD	9FFF	210A	A10D	210F	A119	211B	211E	A131	2133	2136	A161	2163	2166	21C3	21C6
AC	2212	A215	2217	A21A	221D	A21F	A229	222B	222E	A232	2235	A237	223A	A23D	223F	A251
AD	2253	2256	A262	2265	A267	226A	A26D	226F	A279	227B	227E	A2A1	22A3	22A6	A2C2	22C5
AE	A2C7	22CA	A2CD	22CF	A2D9	22DB	22DE	A2F1	22F3	22F6	2343	2346	2385	A387	238A	A38D
AF	238F	A399	239B	239E	A3B1	23B3	23B6	A3E1	23E3	23E6	2422	A425	2427	A42A	242D	A42F

REPLACEMENT SHEET
22 JUL 1999

Fig. 39(b)

$Q' = 0$

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
B0	2439	A43B	A43E	A449	244B	244E	A452	2455	A457	245A	A45D	245F	2469	A46B	A46E	2472
B1	A475	2477	A47A	247D	A47F	A491	2493	2496	A4A2	24A5	A4A7	24AA	A4AD	24AF	A4B9	24BB
B2	24BE	24C9	A4C8	A4CE	24D2	A4D5	24D7	A4DA	24DD	A4DF	A4E9	24EB	24EE	A4F2	24F5	A4F7
B3	24FA	A4FD	24FF	A521	2523	2526	A542	2545	A547	254A	A54D	254F	A555	255B	255E	A571
B4	2573	2576	2589	A58B	A58E	2592	A595	2597	A59A	259D	A59F	A5A9	25AB	25AE	A5B2	25B5
B5	A5B7	25BA	A58D	25BF	A5D1	25D3	25D6	A5E2	25E5	A5E7	25EA	A5ED	25EF	A5F9	25FB	25FE
B6	2643	2646	2685	A687	268A	A68D	268F	A699	269B	269E	A6B1	26B3	26B6	A6E1	26E3	26E6
B7	2709	A70B	A70E	2712	A715	2717	A71A	271D	A71F	A729	272B	272E	A732	2735	A737	273A
B8	A73D	273F	A751	2753	2756	A762	2765	A767	276A	A76D	276F	A779	277B	277E	A7A1	27A3
B9	27A6	A7C2	27C5	A7C7	27CA	A7CD	27CF	A7D9	27DB	27DE	A7F1	27F3	27F6	2842	A845	2847
BA	A84A	284D	A84F	2859	A85B	A85E	2871	A873	A876	A889	288B	288E	A892	2895	A897	289A
BB	A89D	289F	28A9	A8AB	A8AE	28B2	A8B5	28B7	A8BA	28BD	A8BF	28D1	A8D3	A8D6	28E2	A8E5
BC	28E7	A8EA	28ED	A8EF	28F9	A8FB	A8FE	A911	2913	2916	A92E	2925	A927	292A	A92D	292F
BD	A939	293B	293E	2949	A94B	A94E	2952	A955	2957	A95A	295D	A95F	A969	296B	296E	A972
BE	2975	A977	297A	A97D	297F	2991	A993	A996	29A2	A9A5	29A7	A9AA	29AD	A9AF	29B9	A9BB
BF	A9BE	A9C9	29CB	29CE	A9D2	29D5	A9D7	29DA	A9DD	29DF	29E9	A9EB	A9EE	29F2	A9F5	29F7

REPLACEMENT SHEET
22 JUL 1999

Fig. 40(a)

$Q' = 0$

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
C0	A9FA	29FD	A9FF	AA21	2A23	2A26	AA42	2A45	AA47	2A4A	AA4D	2A4F	AA55	2A5B	2A5E	AA71
C1	2A73	2A76	2A89	AA8B	AA8E	2A92	AA95	2A97	AA9A	2A9D	AA9F	AA99	2AAB	2AAE	AAB2	2AB5
C2	AAB7	2ABA	AABD	2ABF	AAD1	2AD3	2AD0	AAE2	2AE5	AAE7	2AEA	AAAD	2AEF	AAF9	2AFB	2AFE
C3	2B11	AB13	AB16	2B22	AB25	2B27	AB2A	2B2D	AB2F	2B39	AB3B	AB3E	AB49	2B4B	2B4E	AB52
C4	2B55	AB57	2B5A	AB5D	2B5F	2B69	AB6B	AB6E	2B72	AB75	2B77	AB7A	2B7D	AB7F	AB91	2B93
C5	2B96	ABA2	2BA5	ABA7	2BAA	ABAD	2BAF	ABB9	2BBB	2BBE	2BC9	ABCB	ABCE	2BD2	ABD5	2BD7
C6	ABDA	2BDD	ABDF	ABE9	2BEB	2BEE	ABF2	2BF5	ABF7	2BFA	ABFD	2BFF	2C43	2C46	2C85	AC87
C7	2C8A	AC8D	2C8F	AC99	2C9B	2C9E	ACB1	2C83	2CB6	ACE1	2CE3	2CE6	2D09	AD0B	AD0E	2D12
C8	AD15	2D17	AD1A	2D1D	AD1F	AD29	2D2B	2D2E	AD32	2D35	AD37	2D3A	AD3D	2D3F	AD51	2D53
C9	2D56	AD62	2D65	AD67	2D6A	AD6D	2D6F	AD79	2D7B	2D7E	ADA1	2DA3	2DA6	ADC2	2DC5	ADC7
CA	2DCA	ADCD	2DCF	ADD9	2DDB	2DDE	ADF1	2DF3	2DF6	2E11	AE13	AE16	2E22	AE25	2E27	AE2A
CB	2E2D	AE2F	2E39	AE3B	AE3E	AE49	2E4B	2E4E	AE52	2E55	AE57	2E5A	AE5D	2E5F	2E69	AE6B
CC	AE6E	2E72	AE75	2E77	AE7A	2E7D	AE7F	AE91	2E93	2E96	AEA2	2EA5	AEA7	2EAA	AEAD	2EAF
CD	AE89	2EBB	2EBE	2EC9	AECB	AECE	2EB2	AED5	2ED7	AEDA	2EDD	AEDF	AEE9	2EEB	2EEE	AEF2
CE	2EF5	AEF7	2EFA	AEFD	2EFF	AF21	2F23	2F26	AF42	2F45	AF47	2F4A	AF4D	2F4F	AF59	2F5B
CF	2F5E	AF71	2F73	2F76	2F89	AF8B	AF8E	2F92	AF95	2F97	AF9A	2F9D	AF9F	AFA5	2FAB	2FAE

REPLACEMENT SHEET
22 JUL 1999

Fig. 40(b)

$Q' = 0$

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
D0	AFB2	2FB5	AFB7	2FBA	AFBD	2FBF	AFD1	2FD3	2FD6	AFE2	2FE5	AFE7	2FEA	AFED	2FEF	AFF9
D1	2FFB	2FFE	B085	3087	808A	308D	808F	3099	809B	809E	30B1	80B3	80B6	30E1	80E3	B0E6
D2	B109	310B	310E	8112	3115	8117	311A	811D	311F	3129	812B	812E	3132	B135	3137	813A
D3	313D	813F	3151	8153	8156	3162	8165	3167	816A	316D	816F	3179	817B	B17E	31A1	81A3
D4	81A6	31C2	81C5	31C7	81CA	31CD	81CF	31D9	81DB	81DE	31F1	81F3	81F6	B211	3213	3216
D5	8222	3225	8227	322A	822D	322F	8239	323B	323E	3249	824B	824E	3252	B255	3257	825A
D6	325D	825F	8269	326B	326E	8272	3275	8277	327A	827D	327F	3291	8293	B296	32A2	82A5
D7	32A7	82AA	32AD	82AF	3289	82BB	82BE	82C9	32CB	32CE	82D2	32D5	82D7	32DA	82DD	32DF
D8	32E9	82EB	82EE	32F2	82F5	32F7	82FA	32FD	82FF	3321	8323	8326	3342	B345	3347	834A
D9	334D	834F	3359	835B	835E	3371	8373	8376	8389	338B	338E	8392	3395	8397	339A	839D
DA	339F	33A9	83AB	83AE	33B2	83B5	33B7	83BA	33BD	83BF	33D1	83D3	83D6	33E2	8325	33E7
DB	83EA	33ED	83EF	33F9	83FB	83FE	8421	3423	3426	8442	3445	8447	344A	B44D	344F	8459
DC	345B	345E	8471	3473	3476	3489	848B	848E	3492	8495	3497	849A	349D	B49F	84A9	34AB
DD	34AE	84B2	34B5	84B7	34BA	84BD	34BF	84D1	34D3	34D6	84E2	34E5	84E7	34EA	84ED	34EF
DE	84F9	34FB	34FE	3511	8513	8516	3522	8525	3527	852A	352D	852F	3539	853B	853E	8549
DF	354B	354E	8552	3555	8557	355A	855D	355F	3569	856B	856E	3572	8575	3577	857A	357D

REPLACEMENT SHEET
22 JUL 1999

Fig. 41(a)

$Q' = 0$

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
E0	B57F	B591	3593	3596	B5A2	35A5	B5A7	35AA	B5AD	35AF	B5BB	35BB	35BE	35C9	B5CB	B5CE
E1	35D2	B5D5	35D7	B5DA	35DD	B5DF	B5E9	35EB	35EE	B5F2	35F5	B5F7	35FA	B5FD	35FF	3621
E2	B623	B626	3642	B645	3647	B64A	364D	B64F	3659	B65B	B65E	3671	B673	B676	B689	368B
E3	368E	B692	3695	B697	369A	B69D	369F	36A9	B6AB	B6AE	36B2	B6B5	36B7	B6BA	36BD	B6BF
E4	36D1	B6D3	B6D6	36E2	B6B5	36E7	B6EA	36ED	B6EF	36F9	B6FB	B6FE	B711	3713	3716	B722
E5	3725	B727	372A	B72D	372F	B739	373B	373E	3749	B74B	B74E	3752	B755	3757	B75A	375D
E6	B75F	B769	376B	376B	B772	3775	B777	377A	B77D	377F	3791	B793	B796	37A2	B7A5	37A7
E7	B7AA	37AD	B7AF	37B9	B7BB	B7BE	B7C9	37CB	37CE	B7D2	37D5	B7D7	37DA	B7DD	37DF	37D9
E8	B7EB	B7EE	37F2	B7F5	37F7	B7FA	37FD	B7FF	3843	3846	3885	B887	38BA	B88D	388F	B899
E9	389B	389E	B8B1	38B3	38B6	B8E1	38B3	38E6	3909	B90B	B90E	3912	B915	3917	B91A	391D
EA	B91F	B929	392B	392E	B932	3935	B937	393A	B93D	393F	B951	3953	3956	B962	3965	B967
EB	396A	B96D	396F	B979	397B	397E	B9A1	39A3	39A6	B9C2	39C5	B9C7	39CA	B9CD	39CF	39D9
EC	39DB	39DE	B9F1	39F3	39F6	3A11	BA13	BA16	3A22	BA25	3A27	BA2A	3A2D	BA2F	3A39	BA3B
ED	BA32	BA49	3A4B	3A4E	BA52	3A55	BA57	3A5A	BA5D	3A5F	3A69	BA6B	BA6E	3A72	BA75	3A77
EE	BA7A	3A7D	BA7F	BA91	3A93	3A96	BAA2	3AA5	BAA7	3AAA	BAAD	3AAF	BAB9	3ABB	3ABE	3AC9
EF	BACB	BACE	3AD2	BAD5	3AD7	BADA	3ADD	BADF	BAE9	3AEB	3AEE	BAF2	3AF5	BAF7	3AFA	BAFD

REPLACEMENT SHEET
22 JUL 1999

Fig. 41(b)

$Q' = 0$

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
F0	3AFF	BB21	3B23	3B26	BB42	3B45	BB47	3B4A	BB4D	3B4F	BB59	3B5B	3B5E	BB71	3B73	3B76
F1	3B89	BB8B	BB8E	3B92	BB95	3B97	BB9A	3B9D	BB9F	BBA9	3BAB	3BAE	BBB2	3BB5	BBB7	3BBA
F2	BBBD	3BBF	BBD1	3BD3	3BD6	BBE2	3BE5	BBE7	3BEA	BBED	3BEF	BBF9	3BFB	3BFE	3C21	BC23
F3	BC26	3C42	BC45	3C47	BC4A	3C4D	BC4F	3C59	BC5B	BC53	3C71	BC73	BC76	BC89	3C8B	3C8E
F4	BC92	3C95	BC97	3C9A	BC9D	3C9F	3CA9	BCAB	BCAE	3CB2	BCB5	3CB7	BCBA	3CBD	BCBF	3CD1
F5	BCD3	BCD6	3CE2	BCE5	3CE7	BCDA	3CED	BCEF	3CF9	BCFB	BCFE	BD11	3D13	3D16	BD22	3D25
F6	BD27	3D2A	BD2D	3D2F	BD39	3D3B	3D3B	3D49	BD48	BD4E	3D52	BD55	3D57	BD5A	3D5D	BD5F
F7	BD69	3D6B	3D6E	BD72	3D75	BD77	3D7A	BD7D	3D7F	3D91	BD93	BD96	3DA2	BDA5	3DA7	BDAA
F8	3DAD	BDAF	3DB9	BDBB	BDBE	BDC9	3DCB	3DCE	BDD2	3DD5	BDD7	3DDA	BDDD	3DDF	3DE9	BDEB
F9	BDEE	3DF2	BDF5	3DF7	BDFA	3DFD	BDFF	BE21	3E23	3E26	BE42	3E45	BE47	3E4A	BE4D	3E4F
FA	BE59	3E5B	3E5E	BE71	3E73	3E76	3E89	BE8B	BE8E	3E92	BE95	3E97	BE9A	3E9D	BE9F	BEA9
FB	3EAB	3EAE	BEB2	3E85	BEB7	3EBA	BEBD	3EBF	BED1	3ED3	3ED6	BEE2	3EE5	BEE7	3EEA	BEED
FC	3EEF	BEF9	3EFB	3EFE	3F11	BF13	BF16	3F22	BF25	3F27	BF2A	3F2D	BF2F	3F39	BF3B	BF3E
FD	BF49	3F4B	3F4E	BF52	3F55	BF57	3F5A	BF5D	3F5F	3F69	BF6B	BF6E	3F72	BF75	3F77	BF7A
FE	3F7D	BF7F	BF91	3F93	3F96	BFA2	3FA5	BFA7	3FAA	BFAD	3FAF	BFB9	3FBB	3FBE	3FC9	BFCB
FF	BFCE	3FD2	BFD5	3FD7	BFDA	3FDD	BFDF	BFE9	3FEB	3FEE	BFF2	3FF5	BFF7	3FFA	BFFD	3FFF

REPLACEMENT SHEET
22 JUL 1999

Fig. 42(a)

Q' = 1

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
00	CCB5	4CB7	CCBA	4CBD	CCBF	4CD1	CCD3	CCD6	4CE2	CCE5	4CE7	CCEA	4CED	CCEF	4CF9	CCFB
01	CCFE	CD11	4D13	4D16	CD22	4D25	CD27	4D2A	CD2D	4D2F	CD39	4D3B	4D3E	4D49	CD4B	CD4E
02	4D52	CD55	4D57	CD5A	4D5D	CD5F	CD69	4D6B	4D66	CD72	4D75	CD77	4D7A	CD7D	4D7F	4D91
03	CD93	CD96	4DA2	CDA5	4DA7	CDAA	4DAD	CDAF	4DB9	CDBB	CDBE	CDC9	4DCB	4DCE	CDD2	4DD5
04	CDD7	4DDA	CDDD	4DDF	4DEB	CDEB	CDEE	4DF2	CDF5	4DF7	CDFA	4DFD	CDFF	CE21	4E23	4E26
05	CE42	4E45	CE47	4E4A	CE4D	4E4F	CE59	4E5B	4E5E	CE71	4E73	4E76	AE89	CE8B	CE8E	4E92
06	CE95	4E97	CE9A	4E9D	CE9F	CEA9	4EAB	4EAE	CEB2	4EB5	CEB7	4EBA	CEBD	4EBF	CED1	4ED3
07	4ED6	CEE2	4EE5	CEE7	4EEA	CEED	4EEF	CEF9	4EFB	4EFE	4F11	CF13	CF16	4F22	CF25	4F27
08	CF2A	4F2D	CF2F	4F39	CF3B	CF3E	CF49	4F4B	4F4E	CF52	4F55	CF57	4F5A	CF5D	4F5F	4F69
09	CF6B	CF6E	4F72	CF75	4F77	CF7A	4F7D	CF7F	CF91	4F93	4F96	CFA2	4FA5	CFA7	4FAA	CFAD
0A	4FAF	CFB9	4FBB	4FBB	4FC9	CFCB	CFCE	4FD2	CFD5	4FD7	CFAA	4FAD	CFDF	CFE9	4FEB	AFEE
0B	CFF2	4FF5	CFF7	4FFA	CFFD	4FFF	5086	510A	D10D	510F	D119	511B	511E	D131	5133	6136
0C	D161	5163	5166	51C3	51C6	5212	D215	5217	D21A	521D	D21F	D229	522B	522E	D232	5235
0D	D237	523A	D23D	523F	D251	5253	5256	D262	5265	D267	526A	D26D	526F	D279	527B	527E
0E	D2A1	52A3	52A6	D2C2	52C5	D2C7	52CA	D2CD	52CF	D2D9	52DB	52DE	D2F1	52F3	52F6	5343
0F	5346	5385	D387	538A	D38D	538F	D399	5396	539E	D3B1	53B3	53B6	D3E1	53E3	53E6	5422

REPLACEMENT SHEET
22 JUL 1999

Fig. 42(b)

$Q' = 1$

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
10	D425	5427	D42A	542D	D42F	5439	D43B	D43E	D449	544B	544E	D452	5455	D457	545A	D45D
11	545F	5469	D46B	D46E	5472	D475	5477	D47A	547D	D47F	D491	5493	5498	D4A2	54A5	D4A7
12	54AA	D4AD	54AF	D4B9	54BB	54BE	54C9	D4CB	D4CE	54D2	D4D5	54D7	D4DA	54DD	D4DF	D4E9
13	54EB	54EE	D4F2	54F5	D4F7	54FA	D4FD	54FF	D521	5523	5526	D542	5545	D547	554A	D54D
14	554F	D559	555B	555E	D571	5573	5576	5589	D58B	D58E	5592	D595	5597	D59A	559D	D59F
15	D5A9	55AB	55AE	D5B2	55B5	D5B7	55BA	D5BD	558F	D5D1	55D3	55D6	D5E2	55E5	D5E7	55EA
16	D5ED	55EF	D5F9	55FB	55FE	5643	5646	5685	D687	568A	D68D	568F	D699	569B	569E	D6B1
17	56B3	56B8	D6E1	56E3	56E6	5709	D70B	D70E	5712	D715	5717	D71A	571D	D71F	D729	572B
18	572E	D732	5735	D737	573A	D73D	573F	D751	5753	5756	D762	5765	D767	576A	D76D	576F
19	D779	5778	577E	D7A1	57A3	57A6	D7C2	57C5	D7C7	57CA	D7CD	57CF	D7D9	57DB	57DE	D7F1
1A	57F3	57F6	5842	D845	5847	D84A	584D	D84F	5859	D85B	D85E	5871	D873	D876	D889	588B
1B	588E	D892	5895	D897	589A	D89D	589F	58A9	D8AB	D8AE	58B2	D8B5	5887	D8BA	58BD	D8BF
1C	58D1	D8D3	D8D6	58E2	D8E5	58E7	D8EA	58ED	D8EF	58F9	D8FB	D8FE	D911	5913	5916	D922
1D	5925	D927	592A	D92D	592F	D939	593B	593E	5949	D94B	D94E	5952	D955	5957	D95A	595D
1E	D95F	D969	596B	596E	D972	5975	D977	597A	D97D	597F	5991	D993	D996	59A2	D9A5	59A7
1F	D9AA	59AD	D9AF	59B9	D9BB	D9BE	D9C9	59CB	59CE	D9D2	59D5	D9D7	59DA	D9DD	59DF	59E9

REPLACEMENT SHEET
22 JUL 1999

Fig. 43(a)

Q′=1

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
20	D9EB	D9EE	59F2	D9F5	59F7	D9FA	59FD	D9FF	DA21	5A23	5A26	DA42	5A45	DA47	5A4A	DA4D
21	5A4F	DA59	5A5B	5A5E	DA71	5A73	5A76	5A89	DA8B	DA8E	5A92	DA95	5A97	DA9A	5A9D	DA9F
22	DAA9	5AAB	5AAE	DAB2	5AB5	DAB7	5ABA	DABD	5ABF	DAD1	5AD3	5ADD	DAE2	5AE5	DAE7	5AEA
23	DAED	5AEF	DAF9	5AFB	5AFE	5B11	DB13	DB16	5B22	DB25	5B27	DB2A	5B2D	DB2F	5B39	DB3B
24	DB3E	DB49	5B4B	5B4E	DB52	5B55	DB57	5B5A	DB5D	5B5F	5B69	DB6B	DB6E	5B72	DB75	5B77
25	DB7A	5B7D	DB7F	DB91	5B93	5B96	DBA2	5BA5	DBA7	5BAA	DBAD	5BAF	DBB9	5BBB	5BBE	5BC9
26	DBCB	DBCE	5BD2	DBD5	5BD7	DBDA	5BDD	DBDF	DBE9	5BE8	5BEE	DBF2	5BF5	DBF7	5BFA	DBFD
27	5BFF	5C43	5C46	5C85	DC87	5C8A	DCBD	5C8F	DC99	5C9B	5C9E	DCB1	5CB3	5CB6	DCE1	5CE3
28	5CE6	5D09	DD0B	DD0E	5D12	DD15	5D17	DD1A	5D1D	DD1F	DD29	5D2B	5D2E	DD32	5D35	DD37
29	5D3A	DD3D	5D3F	DD51	5D53	5D56	DD62	5D65	DD67	5D6A	DD6D	5D6F	DD79	5D7B	5D7E	DDA1
2A	5DA3	5DA6	DDC2	5DC5	DDC7	5DCA	DDCD	5DCF	DDD9	5DDB	5DDE	DDF1	5DF3	5DF6	5E11	DE13
2B	DE16	5E22	DE25	5E27	DE2A	5E2D	DE2F	5E39	DE3B	DE3E	DE49	5E4B	5E4E	DE52	5E55	DE57
2C	5E5A	DE5D	5E5F	5E69	DE6B	DE6E	5E72	DE75	5E77	DE7A	5E7D	DE7F	DE91	5E93	5E96	DEA2
2D	5EA5	DEA7	5EAA	DEAD	5EAF	DEB9	5EBB	5EBE	5EC9	DECB	DECE	5ED2	DED5	5ED7	DEDA	5EDD
2E	DEDF	DEE9	5EEB	5EEE	DEF2	5EF5	DEF7	5EFA	DEFD	5EFF	DF21	5F23	5F26	DF42	5F45	DF47
2F	5F4A	DF4D	5F4F	DF59	5F5B	5F5E	DF71	5F73	5F76	5F89	DF8B	DF8E	5F92	DF95	5F97	DF9A

REPLACEMENT SHEET
22 JUL 1999

Fig. 43(b)

Q'=1

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
30	5F9D	DF9F	DFA9	5FAB	5FAE	DFB2	5FB5	DF67	5F6A	DFBD	5FBF	DFD1	5FD3	5FD6	DFE2	5FE5
31	DFE7	5FEA	DFED	5FEF	DFF9	5FFB	5FFE	E849	684B	684E	E852	6855	E857	685A	E85D	685F
32	6869	E86B	E86E	6872	E875	6877	E87A	687D	E87F	E891	6893	6896	E8A2	68A5	E8A7	68AA
33	E8AD	68AF	E8B9	68BB	68BE	68C9	E8CB	E8CE	68D2	E8D5	68D7	E8DA	68DD	E8DF	E8E9	68EB
34	68EE	E8F2	68F5	E8F7	68FA	E8FD	68FF	E921	6923	6926	E942	6945	E947	694A	E94D	694F
35	E959	695B	698E	E971	6973	6976	6989	E98B	E98E	6992	E995	6997	E99A	699D	E99F	E9A9
36	69AB	69AE	E9B2	69B5	E9B7	69BA	E9BD	69BF	E9D1	69D3	69D6	E9E2	69E5	E9E7	69EA	E9ED
37	695F	E9F9	69FB	69FE	6A43	6A46	6A85	EA87	6A8A	EA8D	6A8F	EA99	6A9B	6A9E	EAB1	6AD3
38	6AB6	EAE1	6AE3	6AE6	6B09	EB0B	EB0E	6B12	EB15	6B17	EB1A	6B1D	EB1F	EB29	6B2B	6B2E
39	EB32	6B35	EB37	6B3A	EB3D	6B3F	EB51	6B53	6B56	EB62	6B65	EB67	6B6A	EB6D	6B6F	EB79
3A	6B7B	6B7E	EBA1	6BA3	6BA6	EBC2	6BC5	EBC7	6BCA	EBCD	6BCF	EBD9	6BDB	6BDE	EBF1	6BF3
3B	6BF6	6C86	6D0A	ED0D	6D0F	ED19	6D1B	6D1E	ED31	6D33	6D36	ED61	6D63	6D66	6DC3	6DC6
3C	6E12	EE15	6E17	EE1A	6E1D	EE1F	EE29	6E2B	6E2E	EE32	6E35	EE37	6E3A	EE3D	6E3F	EE51
3D	6E53	6E56	EE62	6E65	EE67	6E6A	EE6D	6E6F	EE79	6E7B	6E7E	EEA1	6EA3	6EA6	EEC2	6EC5
3E	EEC7	6ECA	EECD	6ECF	EED9	6EDB	6EDE	EEF1	6EF3	6EF6	6F43	6F46	6F85	EF87	6F8A	EF8D
3F	6F8F	EF99	6F9B	6F9E	EFB1	6FB3	6FB6	EFE1	6FE3	6FE6	F089	708B	708E	F092	7095	F097

REPLACEMENT SHEET
22 JUL 1999

Fig. 44(a)

Q′=1

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
40	709A	F09D	709F	70A9	F0AB	F0AE	70B2	F0B5	70B7	F0BA	70BD	F0BF	70D1	F0D3	F0D6	70E2
41	F0E5	70E7	F0EA	70ED	F0EF	70F9	F0FD	F0FE	F111	7113	7116	F122	7125	F127	712A	F12D
42	712F	F139	713B	713E	7149	F14B	F14E	7152	F155	7157	F15A	715D	F15F	F169	716B	716E
43	F172	7175	F177	717A	F17D	717F	7191	F193	F196	71A2	F1A5	71A7	F1AA	71AD	F1AF	71B9
44	F1BB	F1BE	F1C9	71CB	71CE	F1D2	71D5	F1D7	71DA	F1DD	71DF	71E9	F1EB	F1EE	71F2	F1F5
45	71F7	F1FA	71FD	F1FF	F221	7223	7226	F242	7245	F247	724A	F24D	724F	F259	725B	725E
46	F271	7273	7276	7289	F28B	F28E	7292	F295	7297	F29A	729D	F29F	F2A9	72AB	72AE	F2B2
47	72B5	F2B7	72BA	F2BD	72BF	F2D1	72D3	72D6	F2E2	72E5	F2E7	72EA	F2ED	72EF	F2F9	72FB
48	72FE	7311	F313	F316	7322	F325	7327	F32A	732D	F32F	7339	F33B	F33E	F349	734B	734E
49	F352	7355	F357	735A	F35D	735F	7369	F36B	F36E	7372	F375	7377	F37A	737D	F37F	F391
4A	7393	7396	F3A2	73A5	F3A7	73AA	F3AD	73AF	F389	73BB	73BE	73C9	F3CB	F3CE	73D2	F3D5
4B	73D7	F3DA	73DD	F3DF	F3E9	73EB	73EE	F3F2	73F5	F3F7	73FA	F3FD	73FF	7443	7446	7485
4C	F487	748A	F4BD	748F	F499	749B	749E	F4B1	74B3	74B6	F4E1	74E3	74E6	7509	F50B	F50E
4D	7512	F515	7517	F51A	751D	F51F	F529	7522	752A	F532	7535	F537	753A	F53D	753F	F551
4E	7553	7556	F562	7565	F567	756A	F56D	756F	F579	757B	757E	F5A1	75A3	75A6	F5C2	75C5
4F	F5C7	75CA	F5CD	75CF	F5D9	75DB	75DE	F5F1	75F3	75F6	7611	F613	F616	7622	F625	7627

REPLACEMENT SHEET
22 JUL 1999

Fig. 44(b)

$Q' = 1$

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
50	F62A	762D	F62F	7639	F63B	F63E	F649	764B	764E	F652	7655	F657	765A	F65D	765F	7669
51	F66B	F66E	7672	F675	7677	F67A	767D	F67F	F691	7693	7696	F6A2	76A5	F6A7	76AA	F6AD
52	76AF	F6B9	76BB	76BE	76C9	F6CB	F6CE	76D2	F6D5	76D7	F6DA	76DD	F6DF	F6E9	76EB	76EE
53	F6F2	76F5	F6F7	76FA	F6FD	76FF	F721	7723	7726	F742	7745	F747	774A	F74D	774F	F759
54	775B	775E	F771	7773	7776	7789	F78B	F78E	7792	F795	7797	F79A	779D	F79F	F7A9	77AB
55	77AE	F7B2	77B5	F7B7	77BA	F7BD	77BF	F7D1	77D3	77D6	F7E2	77E5	F7E7	77EA	F7ED	77EF
56	F7F9	77FB	77FE	7886	790A	F90D	790F	F915	791B	791E	F931	7933	7936	F961	7963	7966
57	79C3	79C6	7A12	FA15	7A17	FA1A	7A1D	FA1F	FA29	7A2B	7A2E	FA32	7A35	FA37	7A3A	FA3D
58	7A3F	FA51	7A53	7A56	FA62	7A65	FA67	7A6A	FA6D	7A6F	FA79	7A7B	7A7E	FAA1	7AA3	7AA6
59	FAC2	7AC5	FAC7	7ACA	FACD	7ACF	FAD9	7ADB	7ADE	FAF1	7AF3	7AF6	7B43	7B46	7B85	FB87
5A	7BBA	FB8D	7B8F	FB99	7B9B	7B9E	FBB1	7BB3	7BB6	FBE1	7BE3	7BE6	7C22	FC25	7C27	FC2A
5B	7C2D	FC2F	7C39	FC3B	FC3E	FC49	7C4B	7C4E	FC52	7C55	FC57	7C5A	FC5D	7C5F	7C69	FC6B
5C	FC6E	7C72	FC75	7C77	FC7A	7C7D	FC7F	FC91	7C93	7C96	FCA2	7CA5	FCA7	7CAA	FCAD	7CAF
5D	FCB9	7CBB	7CBE	7CC9	FCCB	FCCE	7CD2	FCD5	7CD7	FCDA	7CDD	FCDF	FCE9	7CEB	7CEE	FCF2
5E	7CF5	FCF7	7CFA	FCFD	7CFF	FD21	7D23	7D26	FD42	7D45	FD47	7D4A	FD4D	7D4F	FD59	7D5B
5F	7D5E	FD71	7D73	7D76	7D89	FD8B	FD8E	7D92	FD95	7D97	FD9A	7D9D	FD9F	FDA9	7DAB	7DAE

REPLACEMENT SHEET
22 JUL 1999

Fig. 45(a)

$Q' = 1$

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
60	FDB2	7DB5	FDB7	7DBA	FDBD	7DBF	FDD1	7DD3	7DD6	FDE2	7DE5	FDE7	7DEA	FDED	7DEF	FDF9
61	7DFB	7DFE	7E43	7E46	7E85	FE87	7E8A	FE8D	7E8F	FE99	7E9B	7E9E	FEB1	7EB3	7EB6	FEE1
62	7EE3	7EE6	7F09	FF0B	FF0E	7F12	FF15	7F17	FF1A	7F1D	FF1F	FF29	7F2B	7F2E	FF32	7F35
63	FF37	7F3A	FF3D	7F3F	FF51	7F53	7F56	FF62	7F65	FF67	7F6A	FF6D	7F6F	FF79	7F7B	7F7E
64	FFA1	7FA3	7FA6	FFC2	7FC5	FFC7	7FCA	FFCD	7FCF	FFD9	7FDB	7FDE	FFF1	7FF3	7FF6	0842
65	8845	0847	884A	084D	884F	0859	885B	885E	0871	8873	8876	8889	088B	088E	8892	0895
66	8897	089A	889D	089F	08A9	88AB	88AE	08B2	88B5	08B7	88BA	08BD	88BF	08D1	88D3	88D6
67	08E2	88E5	08E7	88EA	08ED	88EF	08F9	88FB	88FE	8911	0913	0916	8922	0925	8927	092A
68	892D	092F	8939	093B	093E	0949	894B	894E	0952	8955	0957	895A	095D	895F	8969	096B
69	096E	8972	0975	8977	097A	897D	097F	0991	8993	8996	09A2	89A5	09A7	89AA	09AD	89AF
6A	09B9	99BB	89BB	89C9	09CB	09CE	89D2	09D5	89D7	09DA	89DD	09DF	09E9	89EB	89EE	09F2
6B	89F5	09F7	89FA	09FD	89FF	8A21	0A23	0A26	8A42	0A45	8A47	0A4A	8A4D	0A4F	8A59	0A5B
6C	0A5E	8A71	0A73	0A76	0A89	8A8B	8A8E	0A92	8A95	0A97	8A9A	0A9D	8A9F	8AA9	0AA2	0AAE
6D	8AB2	0AB5	8AB7	0ABA	8ABD	0ABF	8AD1	0AD3	0AD6	8AE2	0AE5	8AE7	0AEA	8AED	0AEF	8AF9
6E	0AFB	0AFE	0B11	8B13	8B16	0B22	8B25	0B27	8B2A	0B2D	8B2F	0B39	8B3B	8B3E	8B49	0B4B
6F	0B4E	8B52	0B55	8B57	0B5A	8B5D	0B5F	0B69	8B6B	8B6E	0B72	8B75	0B77	8B7A	0B7D	8B7F

REPLACEMENT SHEET
22 JUL 1999

Fig. 45(b)

Q′=1

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
70	8B91	0B93	0B96	8BA2	0BA5	8BA7	0BAA	8BAD	0BAF	8BB9	0BBB	0BBE	0BC9	8BCB	8BCE	0BD2
71	8BD5	0BD7	8BDA	0BDD	8BDF	8BE9	0BEB	0BEE	8BF2	0BF5	8BF7	0BFA	8BFD	0BFF	0B43	0B46
72	0C85	8C87	0C8A	8CBD	0C8F	8C99	0C9B	0C9E	8CB1	0CB3	0CB6	8CE1	0CE3	0CE6	0C09	8C0B
73	8D0E	0D12	8D15	0D17	8D1A	0D1D	9D1F	8D29	0D2B	0D2E	8D32	0D35	8D37	0D3A	8D3D	0D3F
74	8D51	0D53	0D56	8D62	0D65	8D67	0D6A	8D6D	0D6F	8D79	0D7B	0D7E	8DA1	0DA3	0DA6	8DC2
75	0DC5	8DC7	0DCA	8DCD	0DCF	8DD9	0DDB	0DDE	8DF1	0DF3	0DF6	0E11	8E13	8E16	0E22	8E25
76	0E27	8E2A	0E2D	8E2F	0E39	8E3B	8E3E	8E49	0E4B	0E4E	8E52	0E55	8E57	0E5A	8E5D	0E5F
77	0E69	8E6B	8E6E	0E72	8E75	0E77	8E7A	0E7D	8E7F	8E91	0E93	0E96	8EA2	0EA5	8EA7	0EAA
78	8EAD	0EAF	8EB9	0EBB	0EBE	0EC9	8ECB	8ECE	0ED2	8ED5	0ED7	8EDA	0EDD	8EDF	8EE9	0EEB
79	0EEE	8EF2	0EF5	8EF7	0EFA	8EFD	0EFF	8E21	0F23	0F26	8F42	0F45	8F47	0F4A	8F4D	0F4F
7A	8F59	0F5B	0F5E	8F71	0F73	0F76	0F8B	8F8B	8F8E	0F92	8F95	0F97	8F9A	0F9D	8F9F	8FA9
7B	0FAB	0FAE	8FB2	0FB5	8FB7	0FBA	8FBD	0FBF	8FD1	0FD3	0FD6	8FE2	0FE5	8FE7	0FEA	8FED
7C	0FEF	8FF9	0FFB	0FFE	9085	1087	908A	108D	908F	1099	909B	909E	10B1	90B3	90B6	10E1
7D	90E3	90E6	9109	110B	110E	9112	1115	9117	111A	911D	111F	1129	912B	912E	1132	9135
7E	1137	913A	113D	913F	1151	9153	9156	1162	9165	1167	916A	116D	916F	1179	917B	917E
7F	11A1	91A3	81A6	11C2	91C5	11C7	91CA	11CD	91CF	11D9	91DB	91DE	11F1	91F3	91F6	9211

REPLACEMENT SHEET
22 JUL 1999

Fig. 46(a)

$Q' = 1$

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
80	1213	1216	9222	1225	9227	122A	922D	122F	9239	123B	123E	1249	924B	924E	1252	9255
81	1257	925A	125D	925F	9269	126B	126E	9272	1275	9277	127A	927D	127F	1291	9293	9296
82	12A2	92A5	12A7	92AA	12AD	92AF	12B0	92BB	92BE	92C9	12CB	12CE	92D2	12D5	92D7	12DA
83	92DD	12DF	12E9	92EB	92EE	12F2	92F5	13F7	92FA	12FD	92FF	1321	9323	9326	1342	9345
84	1347	934A	134D	934F	1359	935B	935E	1371	9373	9376	9389	13BB	138E	9392	1395	9397
85	139A	939D	139F	13A9	93AB	93AE	13B2	93B5	13B7	93BA	138D	93BF	13D1	93D3	93D6	13E2
86	93E5	13E7	93EE	13ED	93EF	13F9	93FB	94FE	9421	1423	1426	9442	1445	9447	144A	944D
87	144F	9459	145D	145E	9471	1473	1476	1489	948B	948E	1492	9495	1497	949A	149D	949F
88	94A9	14AB	14AE	94B2	14B5	94B7	14BA	958D	14BF	94D1	14D3	14D6	94E2	14E5	94E7	14EA
89	94ED	14EF	94F9	14FB	14FE	1511	9513	9516	1522	9525	1527	952A	152D	952F	1539	953B
8A	953E	9549	1548	154E	9552	1555	9557	155A	955D	155F	1569	956B	956E	1572	9575	1577
8B	957A	157D	957F	9591	1593	1596	95A2	15A5	95A7	15AA	95AD	15AF	95B9	15BB	15BE	15C9
8C	95CB	95CE	15D2	95D5	15D7	95DA	15DD	95DF	95A9	15EB	15EE	95F2	15F5	95F7	15FA	95FD
8D	15FF	1621	9623	9626	1642	9645	1647	964A	164D	964F	1659	9658	965E	1671	9673	9676
8E	9689	1688	168E	969E	1695	9697	169A	969D	169F	16A9	96AB	96AE	16B2	96B5	16B7	96BA
8F	16BD	96B4	16D1	96D3	96D6	16E2	96E5	16E7	96EA	16ED	96EF	16F9	96FB	96FE	9711	1713

REPLACEMENT SHEET
22 JUL 1999

Fig. 46(b)

$Q' = 1$

	0	1	2	3	4	5.	6	7	8	9	A	B	C	D	E	F
90	1716	9722	1725	9727	172A	972D	172F	9739	173B	173E	1749	974B	974E	1752	9755	1757
91	975A	175D	975F	9769	176B	176E	9772	1775	9777	177A	977D	177F	1791	9793	9796	17A2
92	97A5	17A7	97AA	17AD	97AF	17B9	97BB	97BE	97C9	17CB	17CE	97D2	17D5	97D7	17DA	97DD
93	17DF	17E9	97EB	97EE	17F2	97F5	17F7	97FA	17FD	97FF	1843	18A6	1885	9887	188A	9B8D
94	188F	9899	189B	189E	98B1	18B3	18B6	98E1	18E3	18E6	1909	990B	990E	1912	9915	1917
95	991A	191D	991F	9929	192B	192E	9932	1935	9937	193A	993D	193F	9951	1953	1956	9962
96	1965	9967	196A	996D	196F	9979	197B	197E	99A1	19A3	19A6	99C2	19C5	99C7	19CA	99CD
97	19CF	99D9	19DB	19DE	99F1	19F3	19F6	1A11	9A13	9A16	1A22	9A25	1A27	9A2A	1A2D	9A2F
98	1A39	9A3B	9A3E	9A49	1A4B	1A4E	9A52	1A55	9A57	1A5A	9A5D	1A5F	1A65	9A6B	9A6E	1A72
99	9A75	1A77	9A7A	1A7D	9A7F	9A91	1A93	1A96	9AA2	1AA5	9AA7	1AAA	9AAD	1AAF	9AB9	1ABB
9A	1ABE	1AC9	9ACB	9ACE	1AD2	9AD5	1AD7	9ADA	1ADD	9ADF	9AE9	1AEB	1AEE	9AF2	1AF5	9AF7
9B	1AFA	9AFD	1AFF	9B21	1B23	1B26	9B42	1B45	9B47	1B4A	9B4D	1B4F	9B59	1B5B	1B5E	9B71
9C	1B73	1B76	1B89	9BBB	9B8E	1B92	9B95	1B97	9B9A	1B9D	9B9F	9BA9	1BAB	1BAE	9BB2	1BB5
9D	9BB7	1BBA	9BBD	1BBF	9BD1	1BD3	1BD6	9BE2	1BE5	9BE7	1BEA	9BED	1BEF	9BF9	1BFB	1BFE
9E	1C21	9C23	9C26	1C42	9C45	1C47	9C4A	1C4D	9C4F	1C55	9C5B	9C5E	1C71	9C73	9C76	9C89
9F	1C8B	1C8E	9C92	1C95	9C97	1C9A	9C9D	1C9F	1CA9	9CAB	9CAE	1CB2	9CB5	1CB7	9CBA	1CBD

REPLACEMENT SHEET
22 JUL 1999

Fig. 47(a)

$Q' = 1$

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
A0	9CBF	1CD1	9CD3	9CD6	1CE2	9CE5	1CE7	9CEA	1CED	9CEF	1CF9	9CFB	9CFE	9D11	1D13	1D16
A1	9D22	1D25	9D27	1D2A	9D2D	1D2F	9D39	1D3B	1D3E	1D49	9D4B	9D4E	1D52	9D55	1D57	9D5A
A2	1D5D	9D5F	9D69	1D6B	1D6E	9D72	1D75	9D77	1D7A	9D7D	1D7F	1D91	9D93	9D96	1DA2	9DA5
A3	1DA7	9DAA	1DAD	9DAF	1DB9	9DBB	9DBE	9DC9	1DCB	1DCE	9DD2	1DD5	9DD7	1DDA	9DDD	1DDF
A4	1DE9	9DEB	9DEE	1DF2	9DF9	1DF7	9DFA	1DFD	9DFF	9E21	1E23	1E26	9E42	1E45	9E47	1E4A
A5	9E4D	1E4F	9E59	1E5B	1E5B	9E71	1E73	1E76	1E89	9E8B	9E8E	1E92	9E95	1E97	9E9A	1E9D
A6	9E9F	9EA9	1EAB	1EAE	9EB2	1EB5	9EB7	1EBA	9EBD	1EBF	9ED1	1ED3	1ED6	9EE2	1EE5	9EE7
A7	1EEA	9EED	1EEF	9EF9	1EFB	1EFE	1F11	9F13	9F16	1F22	9F25	1F27	9F2A	1F2D	9F2F	1F39
A8	9F3B	9F3E	9F49	1F4B	1F4E	9F52	1F55	9F57	1F5A	9F5D	1F5F	1F69	9F6B	9F6E	1F72	9F7D
A9	1F77	9F7A	1F7D	9F7F	9F91	1F93	1F96	9FA2	1FA5	9FA7	1FAA	9FAD	1FAF	9FB9	1FBB	1FBE
AA	1FC9	9FCB	9FCE	1FD2	9FD5	1FD7	9FDA	1FDD	9FDF	9FE9	1FEB	1FEE	9FF2	1FF5	9FF7	1FFA
AB	9FFD	1FFF	A10A	210D	A10F	2119	A11B	A11E	2131	A133	A136	2161	A163	A166	A1C3	A1C6
AC	A212	2215	A217	221A	A21D	221F	2229	A22B	A22E	2232	A235	2237	A23A	223D	A23F	2251
AD	A253	A256	2262	A265	2267	A26A	226D	A26F	2279	A27B	A27E	22A1	A2A3	A2A6	22C2	A2C5
AE	22C7	A2CA	22CD	A2CF	22D9	A2DB	A2DE	22F1	A2F3	A2F6	A343	A346	A385	2387	A38A	238D
AF	A38F	2399	A39B	A39E	23B1	A3B3	A3B6	23E1	A3E3	A3E6	A422	2425	A427	242A	A42D	242F

REPLACEMENT SHEET
22 JUL 1999

Fig. 47(b)

$Q' = 1$

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
B0	A439	243B	243E	2449	A44B	A44E	2452	A455	2457	A45A	245D	A45F	A469	246B	246E	A472
B1	2475	A477	247A	A47D	247F	2491	A493	A496	24A2	A4A5	24A7	A4AA	24AD	A4AF	24B9	A4BB
B2	A4BE	A4C9	24C8	24CE	A4D2	24D5	A4D7	24DA	A4DD	24DF	24E9	A4EB	A4EE	24F2	A4F5	24F7
B3	A4FA	24FD	A4FF	2521	A523	A526	2542	A545	2547	A54A	254D	A54F	2555	A55B	A55E	2571
B4	A573	A576	A589	258B	258E	A592	2595	A597	259A	A59D	259F	25A9	A5AB	A5AE	25B2	A5B5
B5	25B7	A5BA	258D	A5BF	25D1	A5D3	A5D6	25E2	A5E5	25E7	A5EA	25ED	A5EF	25F9	A5FB	A5FE
B6	A643	A646	A685	2687	A68A	268D	A68F	2699	A69B	A69E	26B1	A6B3	A6B6	26E1	A6E3	A6E6
B7	A709	270B	270E	A712	2715	A717	271A	A71D	271F	2729	A72B	A72E	2732	A735	2737	A73A
B8	273D	A73F	2751	A753	A756	2762	A765	2767	A76A	276D	A76F	2779	A77B	A77E	27A1	A7A3
B9	A7A6	27C2	A7C5	27C7	A7CA	27CD	A7CF	27D9	A7DB	A7DE	27F1	A7F3	A7F6	A842	2845	A847
BA	284A	A84D	284F	A859	285B	285E	A871	2873	2876	2889	A88B	A88E	2892	A895	2897	A89A
BB	289D	A89F	A8A9	28AB	28AE	A8B2	28B5	A8B7	28BA	A8BD	28BF	A8D1	28D3	28D6	A8E2	28E5
BC	A8E7	28EA	A8ED	28EF	A8F9	28FB	28FE	2911	A913	A916	292E	A925	2927	A92A	292D	A92F
BD	2939	A93B	A93E	A949	294B	294E	A952	2955	A957	295A	A95D	295F	2969	A96B	A96E	2972
BE	A975	2977	A97A	297D	A97F	A991	2993	2996	A9A2	29A5	A9A7	29AA	A9AD	29AF	A9B9	29BB
BF	29BE	29C9	A9CB	A9CE	29D2	A9D5	29D7	A9DA	29DD	A9DF	A9E9	29EB	29EE	A9F2	29F5	A9F7

REPLACEMENT SHEET
22 JUL 1999

Fig. 48(a)

$Q' = 1$

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
C0	29FA	A9FD	29FF	2A21	AA23	AA26	2A42	AA45	2A47	AA4A	2A4D	AA4F	2A55	AA5B	AA5E	2A71
C1	AA73	AA76	AA89	2A8B	2A8E	AA92	2A95	AA97	2A9A	AA9D	2A9F	2A99	AAAB	AAAE	2AB2	AAB5
C2	2AB7	AABA	2ABD	AABF	2AD1	AAD3	AAD0	2AE2	AAE5	2AE7	AAEA	2AAD	AAEF	2AF9	AAFB	AAFE
C3	AB11	2B13	2B16	AB22	2B25	AB27	2B2A	AB2D	2B2F	AB39	2B3B	2B3E	2B49	AB4B	AB4E	2B52
C4	AB55	2B57	AB5A	2B5D	AB5F	AB69	2B6B	2B6E	AB72	2B75	AB77	2B7A	AB7D	2B7F	2B91	AB93
C5	AB96	2BA2	ABA5	2BA7	ABAA	2BAD	ABAF	2BB9	ABBB	ABBE	ABC9	2BCB	2BCE	ABD2	2BD5	ABD7
C6	2BDA	ABDD	2BDF	2BE9	ABEB	ABEE	2BF2	ABF5	2BF7	ABFA	2BFD	ABFF	AC43	AC46	AC85	2C87
C7	AC8A	2C8D	AC8F	2C99	AC9B	AC9E	2CB1	AC83	ACB6	2CE1	ACE3	ACE6	AD09	2D0B	2D0E	AD12
C8	2D15	AD17	2D1A	AD1D	2D1F	2D29	AD2B	AD2E	2D32	AD35	2D37	AD3A	2D3D	AD3F	2D51	AD53
C9	AD56	2D62	AD65	2D67	AD6A	2D6D	AD6F	2D79	AD7B	AD7E	2DA1	ADA3	ADA6	2DC2	ADC5	2DC7
CA	ADCA	2DCD	ADCF	2DD9	ADDB	ADDE	2DF1	ADF3	ADF6	AE11	2E13	2E16	AE22	2E25	AE27	2E2A
CB	AE2D	2E2F	AE39	2E3B	2E3E	2E49	AE4B	AE4E	2E52	AE55	2E57	AE5A	2E5D	AE5F	AE69	2E6B
CC	2E6E	AE72	2E75	AE77	2E7A	AE7D	2E7F	2E91	AE93	AE96	2EA2	AEA5	2EA7	AEAA	2EAD	AEAF
CD	2E89	AEBB	AEBE	AEC9	2ECB	2ECE	AEB2	2ED5	AED7	2EDA	AEDD	2EDF	2EE9	AEEB	AEEE	2EF2
CE	AEF5	2EF7	AEFA	2EFD	AEFF	2F21	AF23	AF26	2F42	AF45	2F47	AF4A	2F4D	AF4F	2F59	AF5B
CF	AF5E	2F71	AF73	AF76	AF89	2F8B	2F8E	AF92	2F95	AF97	2F9A	AF9D	2F9F	2FA5	AFAB	AFAE

REPLACEMENT SHEET
22 JUL 1999

Fig. 48(b)

$Q' = 1$

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
D0	2FB2	AFB5	2FB7	AFBA	2FBD	AFBF	2FD1	AFD3	AFD6	2FE2	AFE5	2FE7	AFEA	2FED	AFEF	2FF9
D1	AFFB	AFFE	3085	B087	308A	B08D	308F	B099	309B	309E	B0B1	30B3	30B6	B0E1	30E3	30E6
D2	3109	B10B	B10E	3112	B115	3117	B11A	311D	B11F	B129	312B	312E	B132	3135	B137	313A
D3	B13D	313F	B151	3153	3156	B162	3165	B167	316A	B16D	316F	B179	317B	317E	B1A1	31A3
D4	31A6	B1C2	31C5	B1C7	31CA	B1CD	31CF	B1D9	31DB	31DE	B1F1	31F3	31F6	3211	B213	B216
D5	3222	B225	3227	B22A	322D	B22F	3239	B23B	B23E	B249	324B	324E	B252	3255	B257	325A
D6	B25D	325F	3269	B26B	B26E	3272	B275	3277	B27A	327D	B27F	B291	3293	3296	B2A2	32A5
D7	B2A7	32AA	B2AD	32AF	B289	32BB	32BE	32C9	B2CB	B2CE	32D2	B2D5	32D7	B2DA	32DD	B2DF
D8	B2E9	32EB	32EE	B2F2	32F5	B2F7	32FA	B2FD	32FF	B321	3323	3326	B342	3345	B347	334A
D9	B34D	334F	B359	335B	335E	B371	3373	3376	3389	B38B	B38E	3392	B395	3397	B39A	339D
DA	B39F	B3A9	33AB	33AE	B3B2	33B5	B3B7	33BA	B3BD	33BF	B3D1	33D3	33D6	B3E2	3325	B3E7
DB	33EA	B3ED	33EF	B3F9	33FB	33FE	3421	B423	B426	3442	B445	3447	B44A	344D	B44F	3459
DC	B45B	B45E	3471	B473	B476	B489	348B	348E	B492	3495	B497	349A	B49D	349F	34A9	B4AB
DD	B4AE	34B2	B4B5	34B7	B4BA	34BD	B4BF	34D1	B4D3	B4D6	34E2	B4E5	34E7	B4EA	34ED	B4EF
DE	34F9	B4FB	B4FE	B511	3513	3516	B522	3525	B527	352A	B52D	352F	B539	353B	353E	3549
DF	B54B	B54E	3552	B555	3557	B55A	355D	B55F	B569	356B	356E	B572	3575	B577	357A	B57D

REPLACEMENT SHEET
22 JUL 1999

Fig. 49(a)

Q'=1

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
E0	357F	3591	B593	B596	35A2	B5A5	35A7	B5AA	35AD	B5AF	35BB	B5BB	B5BE	B5C9	35CB	35CE
E1	B5D2	35D5	B5D7	35DA	B5DD	35DF	35E9	B5EB	B5EE	35F2	B5F5	35F7	B5FA	35FD	B5FF	B621
E2	3623	3626	B642	3645	B647	364A	B64D	364F	B659	365B	365E	B671	3673	3676	3689	B68B
E3	B68E	3692	B695	3697	B69A	369D	B69F	B6A9	36AB	36AE	B6B2	36B5	B6B7	36BA	B6BD	36BF
E4	B6D1	36D3	36D6	B6E2	36B5	B6E7	36EA	B6ED	36EF	B6F9	36FB	36FE	3711	B713	B716	3722
E5	B725	3727	B72A	372D	B72F	3739	B73B	B73E	B749	374B	374E	B752	3755	B757	375A	B75D
E6	375F	3769	B76B	B76B	3772	B775	3777	B77A	377D	B77F	B791	3793	3796	B7A2	37A5	B7A7
E7	37AA	B7AD	37AF	B7B9	37BB	37BE	37C9	B7CB	B7CE	37D2	B7D5	37D7	B7DA	37DD	B7DF	B7D9
E8	37EB	37EE	B7F2	37F5	B7F7	37FA	B7FD	37FF	B843	B846	B885	3887	B8BA	388D	B88F	3899
E9	B89B	B89E	38B1	B8B3	B8B6	38E1	B8B3	B8E6	B909	390B	390E	B912	3915	B917	391A	B91D
EA	391F	3929	B92B	B92E	3932	B935	3937	B93A	393D	B93F	3951	B953	B956	3962	B965	3967
EB	B96A	396D	B96F	3979	B97B	B97E	39A1	B9A3	B9A6	39C2	B9C5	39C7	B9CA	39CD	B9CF	39D9
EC	B9DB	B9DE	39F1	B9F3	B9F6	BA11	3A13	3A16	BA22	3A25	BA27	3A2A	BA2D	3A2F	BA39	3A3B
ED	3A32	3A49	BA4B	BA4E	3A52	BA55	3A57	BA5A	3A5D	BA5F	BA69	3A6B	3A6E	BA72	3A75	BA77
EE	3A7A	BA7D	3A7F	3A91	BA93	BA96	3AA2	BAA5	3AA7	BAAA	3AAD	BAAF	3AB9	BABB	BABE	BAC9
EF	3ACB	3ACE	BAD2	3AD5	BAD7	3ADA	BADD	3ADF	3AE9	BAEB	BAEE	3AF2	BAF5	3AF7	BAFA	3AFD

REPLACEMENT SHEET
22 JUL 1999

Fig. 49(b)

Q' = 1

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
F0	BAFF	3B21	BB23	BB26	3B42	BB45	3B47	BB4A	3B4D	BB4F	3B59	BB5B	BB5E	3B71	BB73	BB76
F1	BB89	3B8B	3B8E	BB92	3B95	BB97	3B9A	BB9D	3B9F	3BA9	BBAB	BBAE	3BB2	BBB5	3BB7	BBBA
F2	3BBD	BBBF	3BD1	BBD3	BBD6	3BE2	3BE5	3BE7	BBEA	3BED	BBEF	3BF9	BBFB	BBFE	BC21	3C23
F3	3C26	BC42	3C45	BC47	3C4A	BC4D	3C4F	BC59	3C5B	3C53	BC71	3C73	3C76	3C89	BC8B	BC8E
F4	3C92	BC95	3C97	BC9A	3C9D	BC9F	BCA9	3CAB	3CAE	BCB2	3CB5	BCB7	3CBA	BCBD	3CBF	BCD1
F5	3CD3	3CD6	BCE2	3CE5	BCE7	3CDA	BCED	3CEF	BCF9	3CFB	3CFE	3D11	BD13	BD16	3D22	BD25
F6	3D27	BD2A	3D2D	BD2F	3D39	BD3B	BD3B	BD49	3D48	3D4E	BD52	3D55	BD57	3D5A	BD5D	3D5F
F7	3D69	BD6B	BD6E	3D72	BD75	3D77	BD7A	3D7D	BD7F	BD91	3D93	3D96	BDA2	3DA5	BDA7	3DAA
F8	BDAD	3DAF	BDB9	3DBB	3DBE	3DC9	BDCB	BDCE	3DD2	BDD5	3DD7	BDDA	3DDD	BDDF	BDE9	3DEB
F9	3DEE	BDF2	3DF5	BDF7	3DFA	BDFD	3DFF	3E21	BE23	BE26	3E42	BE45	3E47	BE4A	3E4D	BE4F
FA	3E59	BE5B	BE5E	3E71	BE73	BE76	BE89	3E8B	3E8E	BE92	3E95	BE97	3E9A	BE9D	3E9F	3EA9
FB	BEAB	BEAE	3EB2	BE85	3EB7	BEBA	3EBD	BEBF	3ED1	BED3	BED6	3EE2	BEE5	3EE7	BEEA	3EED
FC	BEEF	3EF9	BEFB	BEFE	BF11	3F13	3F16	BF22	3F25	BF27	3F2A	BF2D	3F2F	BF39	3F3B	3F3E
FD	3F49	BF4B	BF4E	3F52	BF55	3F57	BF5A	3F5D	2F5F	BF69	3F6B	3F6E	BF72	3F75	BF77	3F7A
FE	BF7D	3F7F	3F91	BF93	BF96	3FA2	BFA5	3FA7	2FAA	3FAD	BFAF	3FB9	BFBB	BFBE	BFC9	3FCB
FF	3FCE	BFD2	3FD5	BFD7	3FDA	BFDD	3FDF	3FE9	2FEB	BFEE	3FF2	BFF5	3FF7	BFFA	3FFD	BFFF

REPLACEMENT SHEET
22 JUL 1999

REPLACEMENT SHEET
22 JUL 1999

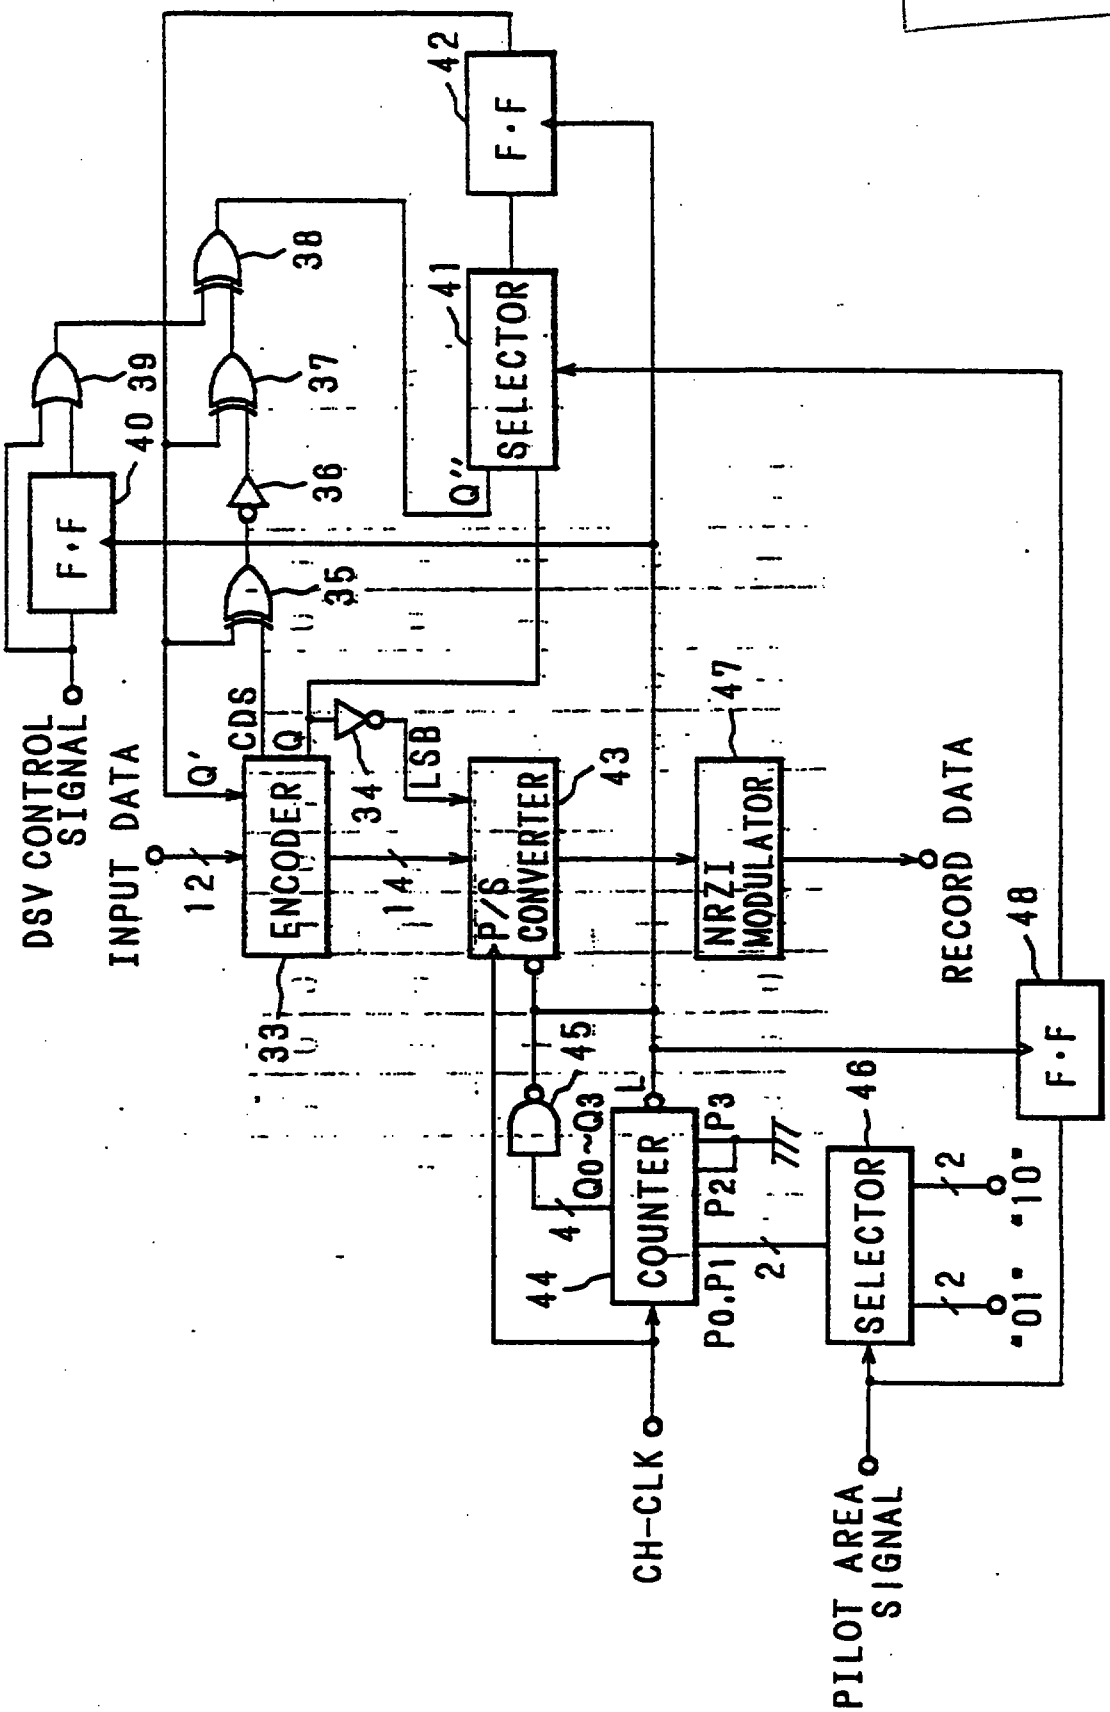

Fig. 50

REPLACEMENT SHEET
22 JUL 1999

DSV	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1
DSV'	0	0	0	0	1	1	1	1	0	0	0	0	1	1	1
Q'	0	0	1	1	0	0	1	1	0	0	1	1	0	0	1
CDS	0	1	0	1	0	1	0	1	0	1	0	1	0	1	0
Q"	1	0	1	0	0	1	0	1	0	1	0	1	0	1	0

Fig. 51

Fig. 52(A)

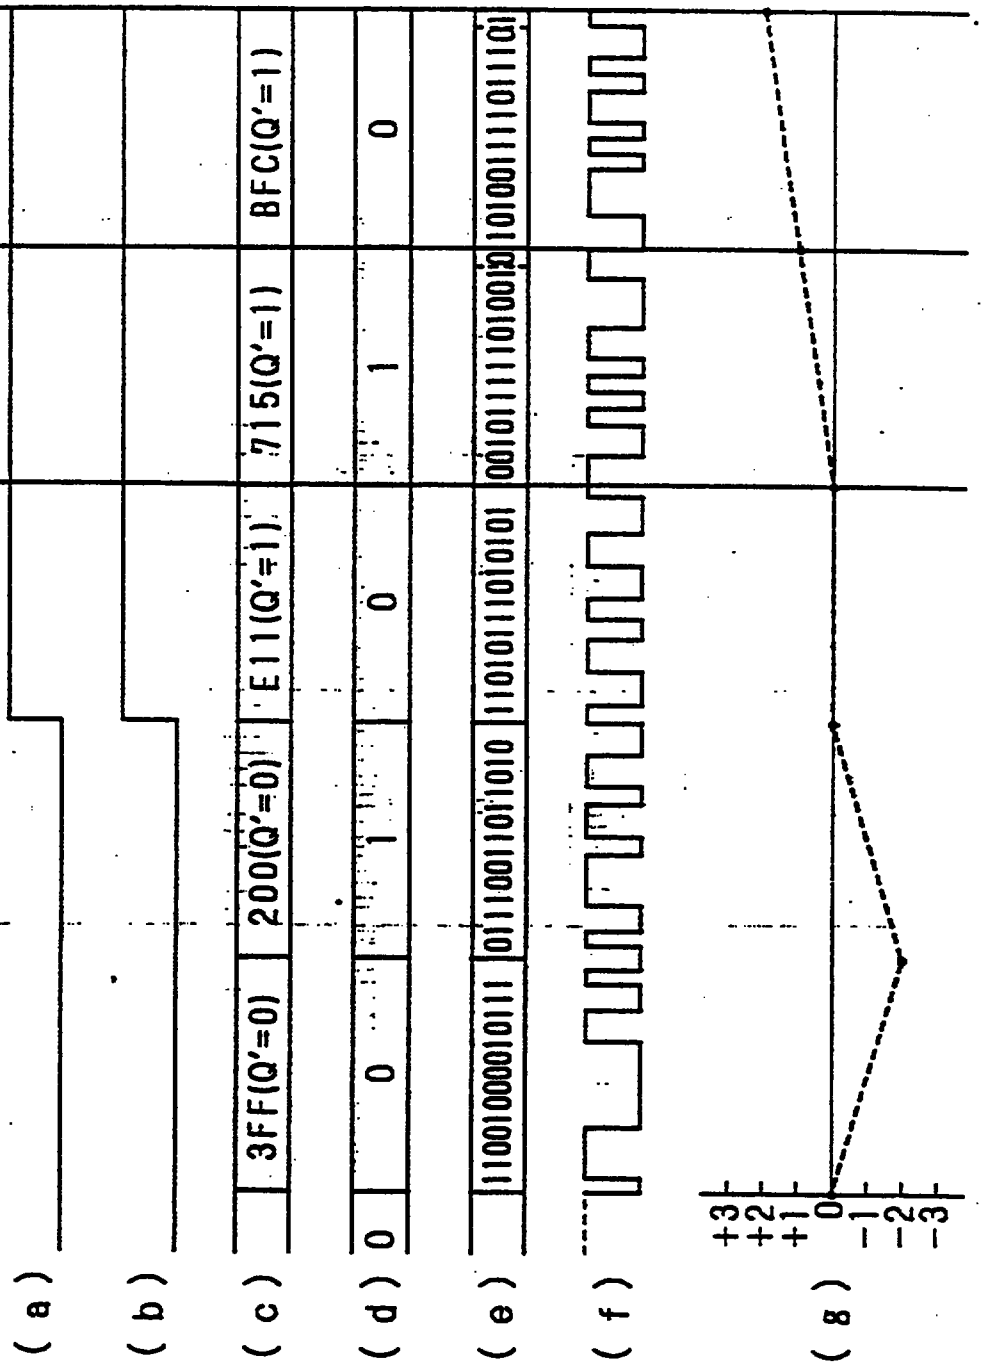

REPLACEMENT SHEET
22 JUL 1999

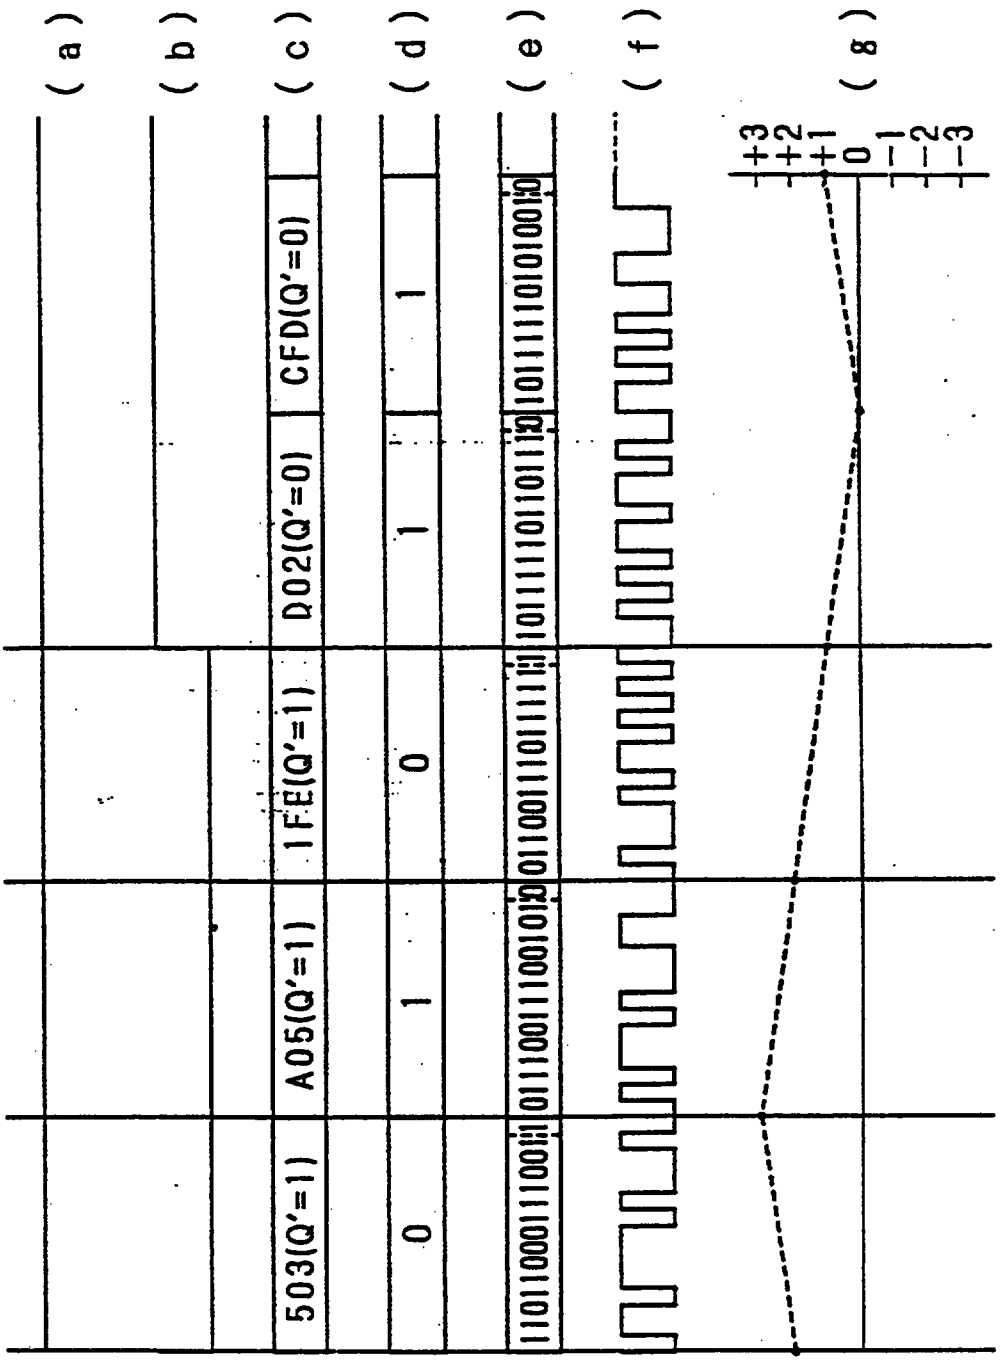

Fig. 52(B)

REPLACEMENT SHEET
22 JUL 1999

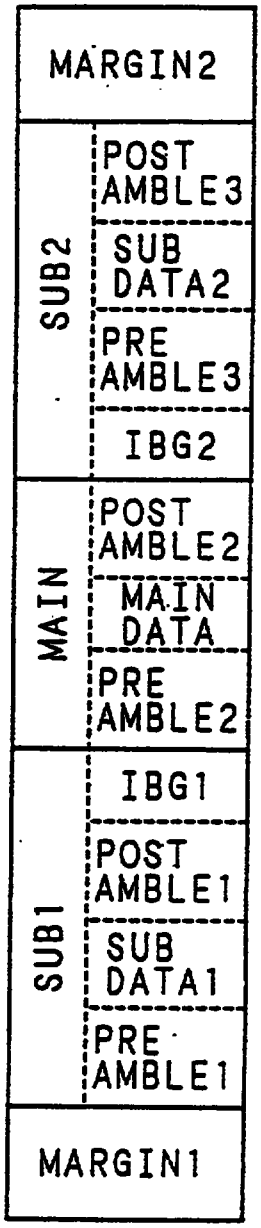

Fig. 53

REPLACEMENT SHEET
22 JUL 1999