



- (51) International Patent Classification:
B65D 47/26 (2006.01) *B65D 47/32* (2006.01)
- (21) International Application Number:
PCT/GB2013/050975
- (22) International Filing Date:
17 April 2013 (17.04.2013)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
1206742.7 17 April 2012 (17.04.2012) GB
- (71) Applicant: MILLERS OILS LIMITED [GB/GB]; Hillside Oil Works, Rastrick Common, Brighouse, Yorkshire HD6 3DP (GB).
- (72) Inventor: HALL, Nevil Peter; c/o Millers Oils Limited, Hillside Oil Works, Rastrick Common, Brighouse, Yorkshire HD6 3DP (GB).
- (74) Agent: HARRISON GODDARD FOOTE; Saviour House, 9 St Saviourgate, York, Yorkshire YO1 8NQ (GB).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— of inventorship (Rule 4.17(iv))

[Continued on next page]

(54) Title: FLUID DISPENSER

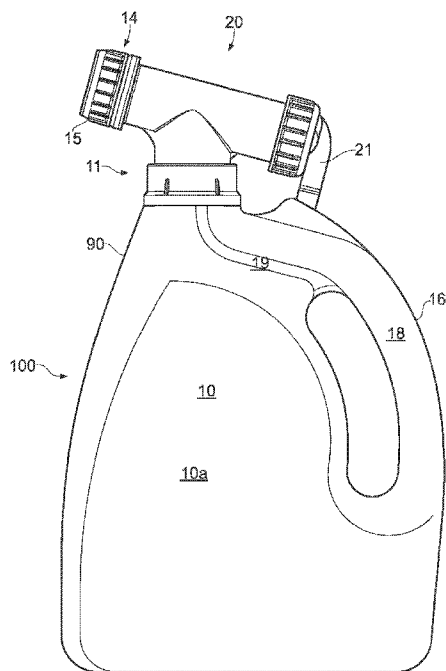


FIG. 1

(57) Abstract: A container (100) comprising: a fluid reservoir (10); a first flow path for dispensing fluid; a second flow path for permitting the entry of air into the container so that air can communicate with the fluid in the container; wherein the first flow path and the second flow path are spatially separate; and a flow control assembly (20) comprising a control means (50); wherein the control means is moveable between a first position in which the first flow path and the second flow path are closed and a second position in which the first flow path and the second flow path are open.

**Published:****(88) Date of publication of the international search report:**

30 January 2014

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*