

7607081-8
1703 4/25

-1-

APPARATUS FOR NEAR VERTICAL LAYING OF PIPELINE

The invention is generally related to the laying of pipeline and particularly to the near vertical laying of pipeline offshore such as in deep water.

The laying of offshore pipelines has been done for many years utilizing the technique referred to as S-lay. In the S-lay technique, joints of pipe are added to the pipeline in a horizontal position on the deck of a lay barge. The pipeline then curves over the stern of the barge, angles down toward the seabed, curves back to horizontal and lays on the seabed. The profile of the pipeline from the lay barge to the seabed is in the form of a long "S", which leads to the name of S-lay.

Although S-lay has been the method of choice for virtually all pipeline installed to date, there are physical limitations on the use of this technique. Chief among these is water depth. As the water depth increases, the ability to move the vessel on anchors becomes more and more difficult and the horizontal component of the pipe tension becomes greater and greater. The offshore pipeline industry has been aware of this problem for years and has as a solution, accepted the concept of near vertical lay, called J-lay, as the system of choice for deep water pipe laying. It should be understood that the definition of deep water, when referring to the use of J-lay, is a direct function of pipe diameter. This relationship is a result of the minimum water depth required for pipe of a certain diameter to achieve the proper flex during the vertical laying operation. There is also a maximum practical depth for specific pipe diameters. As an example, pipe having a diameter of 168.3 mm (6.625 inches) requires a minimum water depth, with no water in the pipe, of 37.8 m (124

THIS SHEET HAS BEEN
REPLACED



-2-

feet). At the opposite end of the scale, pipe having a diameter of 1.07 m (42 inches) requires a minimum water depth, with no water in the pipe, of 407.5 m (1,337 feet).

Considerable work has been done over the years on the theoretical aspects of the J-lay concept, but very little work has been done on the actual hardware and equipment needed for this type of system. Most of the systems proposed have utilized existing semi-submersible drilling units. These units, which are capable of being modified for this service, were not built to be used as pipe layers and cannot be made to be very efficient during pipe laying operations.

Another problem area in laying pipeline offshore is the storage, transportation, and transfer of pipe to the lay vessel. In normal operations, the line pipe for the pipeline is transported to the field in forty feet (12.2 m) long joints. The transport vessel, which is usually a small material barge or a special purpose pipe haul boat, is tied to the side of the lay vessel as the pipe is transferred to the lay vessel. Transfer of the pipe, one joint at a time, may take several days. The transfer of pipe from between vessels subject to sea-induced motion is hazardous to personnel and equipment under good sea conditions and becomes impossible to do safely under bad conditions.

Applicants are aware of a system that utilizes a ramp that can be adjusted from horizontal to vertical. It uses large tensioners to grip the pipe and apply the necessary amount of tension to the system. This system has never been used for deep water pipeline construction.

Offshore pipe laying systems, those in use (S-lay) and theoretical proposals (J-lay), have certain things in common. The systems may or may not use pipe add-ons that

THIS SHEET HAS BEEN
REPLACED



have been multi-jointed outside the system to provide pipe joint lengths greater than the normal forty foot (12.2 m) pipe length. Theoretical J-lay systems have proposed joint lengths of eight feet (24.4 m) or more. A single station
5 is used to accomplish the welding, NDT (non-destructive testing), and pipe coating of joints. In J-lay, it is necessary to have a means to transfer the pipe from the horizontal position on the lay vessel to a near vertical position on the lay line. It is also necessary to have
10 some means of lowering the pipe as the lay vessel moves forward. A particular problem in this area has been the issue of devising an efficient manner of transferring the load of the pipeline to a holding mechanism so that the lowering mechanism can then be raised in preparation for
15 receiving the weight of the pipeline after addition of the next pipe joint. Copending European Patent Application No. 94305071.6 describes an apparatus for near vertical laying of pipeline that includes a tower on the lay barge that supports the weight of the flooded pipeline and uses a
20 travel block and pedestal arrangement that allows for a ready weight transfer of the pipeline from the travel block to the pedestal during lowering of the pipeline after a new pipe joint has been added. A problem with the system as described is that the major loads of the pipeline are
25 carried through compression in the tower during lowering. This puts large loads above the vessel deck on a continuous basis and raises the centre of gravity of the system above the normal centre of gravity of the vessel.

According to the present invention there is provided
30 apparatus on a vessel for near vertical laying of a pipeline offshore, the apparatus comprising:

a support base mounted on the vessel;

a framework mounted on said support base and extending



upwardly therefrom;

a pipe joint alignment tower pivotally attached to and supported by said support base and framework;

a support tower pivotally attached to said support
5 base and extending downwardly from said support base; and

means received in said support tower for receiving and supporting the weight of the pipeline.

In a preferred embodiment of the invention, the apparatus lowers the centre of gravity of the system to
10 below that of the vessel. An alignment tower that extends above the deck of the vessel supports the weight of only one multijoint of pipe and the internal lineup clamp and storage and transfer system. The tower that supports the weight of the flooded pipeline extends below the vessel
15 into the water and replaces the stinger. The travel block and pedestal used to support and lower the pipeline in the tower are positioned in the tower. The travel block is moved in and out of the water along the length of the tower during operations.

20 In accordance with another aspect of the invention, the support tower is replaced by a stinger support frame pivotally attached to the support base, a pedestal attached to the support frame, the pedestal being operable to releasably receive and support the weight of the pipeline,
25 a stinger attached to the lower end of the stinger support frame and extending downwardly therefrom, and a travel block received in the stinger and movable along the length of the stinger.

The invention will now be described by way of example
30 with reference to the accompanying drawings, throughout which like parts are referred to by like references, and in which:

Fig. 1 is an elevation view of one embodiment of the

THIS SHEET HAS BEEN
REPLACED



-5-

invention;

Fig. 2 is a detail view that illustrates the junctures of the support base, alignment tower, and support tower shown in Fig. 1;

5 Fig. 3 is a detail view that illustrates the lower end of the support tower;

Fig. 4 is a detail view that illustrates the lower end of the support tower with the travel block near the pedestal;

10 Fig. 5 illustrates an alternative embodiment of the invention;

Fig. 6 illustrates a detail view of the stinger support framing and upper end of the stinger of the alternative embodiment;


15 Fig. 7 illustrates a detail view of the lower end of the stinger of the alternative embodiment with the travel block at the lower end of the stinger.

Referring to Fig. 1, apparatus 10 for near vertical laying of pipeline is generally comprised of a support base 12, a framework 14, a pipe joint alignment tower 16, a support tower 18, and means in said support tower 18 for receiving and supporting the weight of the pipeline 20.

Support base 12 is rigidly attached to a lay vessel 22. In the preferred embodiment, support base 12 is arranged to pivotally receive both alignment tower 16 and support tower 18. Support base 12 and apparatus 10 are illustrated in Fig. 1 and 2 as being positioned amid ship on lay vessel 22 at which is commonly referred to as a moon pool. However, it should be

30

THIS SHEET HAS BEEN
REPLACED



-6-

understood that apparatus 10 may also be positioned at a side or the stern of lay vessel 22 to accommodate the specific needs of the pipe laying operation.

Framework 14 is rigidly attached to support base 12 and extends upwardly therefrom. Framework 14 provides support to pipe joint alignment tower 16.

Pipe joint alignment tower 16 is lightly framed as it only has to support the weight of one joint or multijoint of pipe and the internal lineup clamp and transfer system. Pipe joint alignment tower 16 is a U-shaped frame open on one side along its length and is designed to support the weight of the pipe joint during welding to the pipeline. As seen in the phantom views in Fig. 1, pipe joint alignment tower 16 is attached to support base 12 and framework 14 so that it may be selectively positioned at several different angles according to that required during pipe laying operations. Pipe joint alignment tower 16 is in alignment with support tower 18.

Support tower 18 is pivotally supported at its upper end in support base 12 by support framing 24, best seen in Fig. 2. As indicated by the phantom views in Fig. 1, support framing 24 provides for selective pivoting of support tower 18 according to needs of the pipe laying operations as mentioned above for pipe joint alignment tower 16. Support tower 18 is designed to be able to support the weight of the flooded pipeline during pipe laying operations. Means for receiving the weight of the pipeline is provided in the form of travel block 26 and pedestal 28, seen in Fig. 2-4. Travel block 26 and pedestal 28 are used



-7-

in cooperation to support and lower the pipeline after a pipe joint has been added. Pedestal 28 supports the weight of the pipeline at a buckle arrestor 30 while a pipe joint is being added to the pipeline. After addition of the new joint, the travel block is raised to pick up the pipeline load, the pedestal is opened, and then the travel block 26 is lowered in support tower 18 via winch 32, cable 34, and crown block 36 and the weight of the pipeline is transferred to pedestal 28. Travel block 26 is then raised back to the upper end of support tower 18 in preparation for addition of another pipe joint to the pipeline while the pedestal supports the pipeline. Although any suitable equipment may be used to achieve the operations required of the travel block and pedestal, the travel block and pedestal configuration described in European Patent Application No. 94305071.6 is preferred for the most efficient and time saving weight transfer.


The transfer of pipe joints from horizontal on a pipe ready rack into pipe joint alignment tower 16 is illustrated as being accomplished by the use of an alignment boom 38 that is pivotally attached to pipe joint alignment tower 16. However, it should be understood that any suitable transfer means such as a strongback may also be used.

In operation, pipe joint alignment tower 16 and support tower 18 are aligned with each other and set at the angle required for the pipe laying operations according to pipe size and water depth. A single pipe joint has the ends prepared for welding to the pipeline and is transferred to a pipe ready rack.

THIS SHEET HAS BEEN
REPLACED



Alignment boom 38, or any suitable equipment, receives the pipe joint from cranes and is then pivoted upwardly as indicated by the arrow and line in Fig. 1 to transfer the pipe joint to pipe joint alignment tower 16. Clamps provided in pipe joint alignment tower 16 receive the pipe joint and hold it in place while it is welded to pipeline 20. The clamps provided in pipe joint alignment tower 16 are preferably adjustable to allow for precise alignment of the pipe joint and pipeline. Work deck 40 is provided for personnel and the necessary equipment to carry out the welding and testing operations. During the addition of the pipe joint, pedestal 28 supports the pipeline at a buckle arrestor 30 on the pipeline. An internal line up clamp will typically be provided at the upper end of pipe joint alignment tower 16 for lowering into the pipe joint to the abutting surfaces of the pipe joint and pipeline. Buckle arrestors are provided at selected intervals along the pipeline to prevent buckling of the pipe during laying operations. After the welding, testing, and coating operations are complete, travel block 26 takes the load from pedestal 28 and is lowered in support tower 18 as the lay vessel moves forward. Fig. 3 illustrates a buckle arrestor 30 at pedestal 28 as it supports the pipeline 20 during welding of the next joint and the raising of travel block 28 while Fig. 4 illustrates a just completed transfer between the travel block 26 and pedestal 28 as travel block 26 is beginning to be moved back to the upper end of support tower 18 in preparation for attachment of another pipe joint. Travel block 26 is moved to the upper end of support



tower 18 and used to support the pipeline at a buckle arrestor after completion of welding. A pipe joint already positioned in pipe joint alignment tower 16 is then welded to pipeline 20 and the process is repeated. Besides providing for a lower center of gravity, the location of the travel block below the work area eliminates the need to wait for the travel block to clear the work area before proceeding with work on attaching the next pipe joint to the pipeline.

Fig. 5-7 illustrate an alternate embodiment of the invention. The main difference in the alternate embodiment is that the large support tower is replaced by a stinger, the pedestal is moved above the water line, and the travel block moves along the length of the stinger in and out of the water. As seen in Fig. 5, the support tower shown in Fig. 1 is replaced by stinger support frame 42 and stinger 44. As best seen in Fig. 6, stinger support frame 42 is also pivotally supported in support base 12 by support framing 24. Pedestal 46 operates in a similar fashion as above so as to cooperate with travel block 26 for receiving and transferring the weight of the pipeline between the pedestal and travel block. Pedestal 46 is provided with clamp 48 that moves between an open position where it does not support the weight of the pipeline and a closed position where it does support the weight of the pipeline. Fig. 6 illustrates the pedestal clamp and travel block in position for transferring the weight of the pipeline to the travel block. As described above, travel block 26 is supported and moved by cable 34 across crown block 36. Travel block 26 receives the weight



-10-

of the pipeline from clamp 48 by contact of the upper end of travel block 26 with buckle arrestor 30 on the pipeline. Travel block 26 is then lowered in stinger 44 as lay vessel 22 moves forward to lower and lay pipeline equal to the length of the pipe joint that has been added. Clamp 48 is then closed to receive a buckle arrestor on the pipeline and support the weight of the pipeline while another joint is added and travel block 26 is opened to release the pipeline and raised back up to the pedestal. As illustrated by the dotted lines indicating a phantom view of stinger 44, the lower portion of stinger 44 is hinged such that it may be pivoted upward and locked in an inoperative stowed position to reduce its water depth and resistance to movement of lay vessel 22 when pipe laying operations are not being conducted. As described above, the alternate embodiment is movable within a selected range of angles to provide the most desirable angle for pipe size and water depth. The alternate embodiment provides the additional advantages of the stinger being lighter weight than the support tower and the travel block being the only moving part that is submerged in water below the vessel. The location of the pedestal also keeps it out of the water and provides for easier maintenance.

Because many differing embodiments may be made within the scope of the inventive concept herein taught and defined in the claims and because many modifications may be made in the embodiment herein detailed in accordance with the description, it is to be understood that the details herein are to be interpreted as illustrative and not in a limiting sense.

THIS SHEET HAS BEEN
REPLACED



-11-

This Sheet Has Been Replaced

CLAIMS



1. Apparatus on a vessel for near vertical laying of a pipeline offshore, the apparatus comprising:
 - 5 a support base (12) mounted on the vessel (22);
 - a framework (14) mounted on said support base (12) and extending upwardly therefrom;
 - a pipe joint alignment tower (16) pivotally attached to and supported by said support base (12) and framework
10 (14);
 - a support tower (18) pivotally attached to said support base (12) and extending downwardly from said support base (12); and
 - means (26,28) received in said support tower (12) for
15 receiving and supporting the weight of the pipeline (20).
2. Apparatus according to claim 1, comprising means (38) for transferring a pipe joint from the vessel (22) into said alignment tower (16).
20
3. Apparatus according to claim 1 or claim 2, wherein said means for receiving and supporting the weight of the pipeline comprises:
 - a travel block (26) arranged to be movable along the
25 length of said support tower (18); and
 - a pedestal (28) at the lower end of said support tower (18) for receiving and supporting the weight of the pipeline (20) from said travel block (26).
- 30 4. Apparatus on a vessel for near vertical laying of a pipeline offshore, the apparatus comprising:

THIS SHEET HAS BEEN
REPLACED



-12-

a support base (12) mounted on the vessel (22);

a framework (14) mounted on said support base (12) and
extending upwardly therefrom;

a pipe joint alignment tower (16) pivotally attached
5 to and supported by said support base (12) and framework
(14);

a stinger support frame (42) pivotally attached to
said support base (12);

a pedestal (46) attached to said support frame (42),
10 said pedestal (46) being operable to releasably receive and
support the weight of the pipeline (20);

a stinger (44) attached to the lower end of said
stinger support frame (42) and extending downwardly
therefrom; and

15 a travel block (26) received in said stinger (44) so
as to be movable along the length of said stinger (44),
said travel block (26) being operable to releasably receive
and support the weight of the pipeline (20) in cooperation
with said pedestal (46).

20

5. Apparatus according to claim 4, wherein said stinger
(44) is hinged at its lower section to allow pivoting of
the lower section upwardly into a stowed inoperative
position.

25

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

ABSTRACT

APPARATUS FOR NEAR VERTICAL LAYING OF PIPELINE

5 A support base (12) and framework (14) on a lay vessel
(22) support an alignment tower (16) that extends upwardly
from the base (12) and is designed to support the pipe
joint to be added to the pipeline (20). A support tower
(18) that supports the weight of the pipeline (20) is
10 attached to the support base (12) such that the support
tower (18) extends downwardly therefrom into the water. A
travel block (26) can move along the length of the tower
(18) for raising or lowering the pipe and pipeline (20).
A pedestal (28) that is movable between open and closed
15 positions for receiving a pipe section from the travel
block (26) and supporting the weight of the pipeline (20)
is positioned near the bottom of the tower (18). A
strongback or boom (38) may be used to grasp a pipe joint
from a ready rack and transfer the pipe joint into the
20 alignment tower (16) for addition to the pipeline (20).
The attachment position and extension of the support tower
(18) into the water lowers the centre of gravity of the
apparatus.

25 Fig. 1

This Sheet Has Been Replaced



THIS SHEET HAS BEEN REPLACED

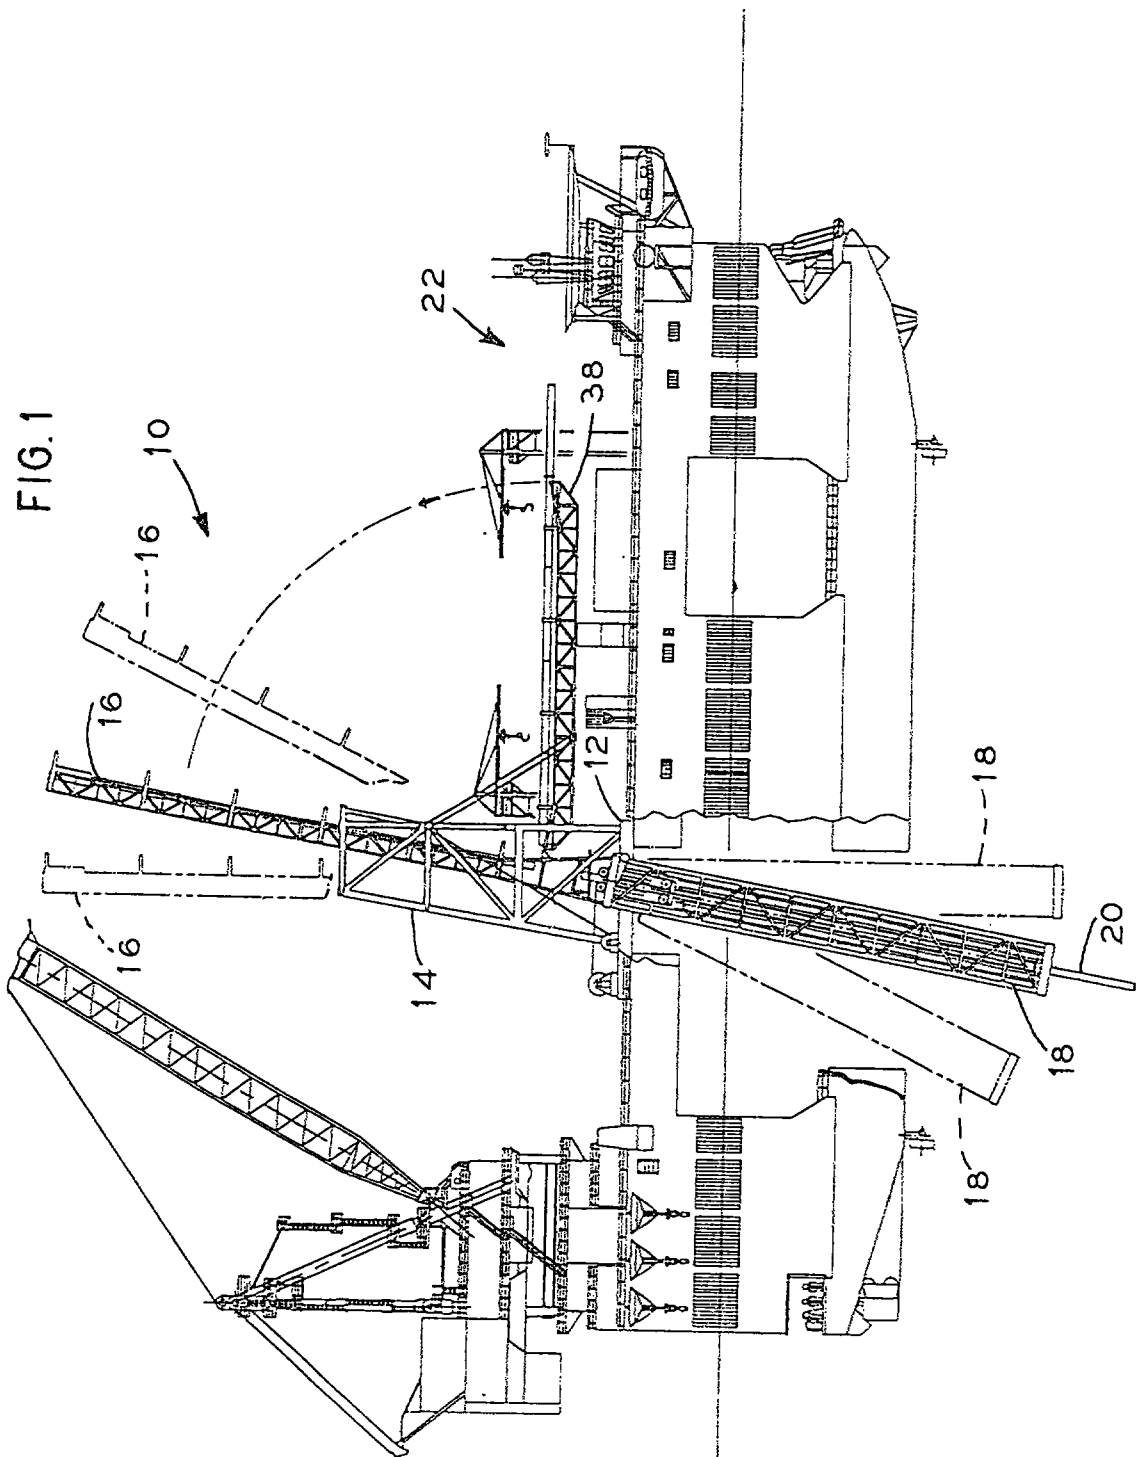


FIG. 2

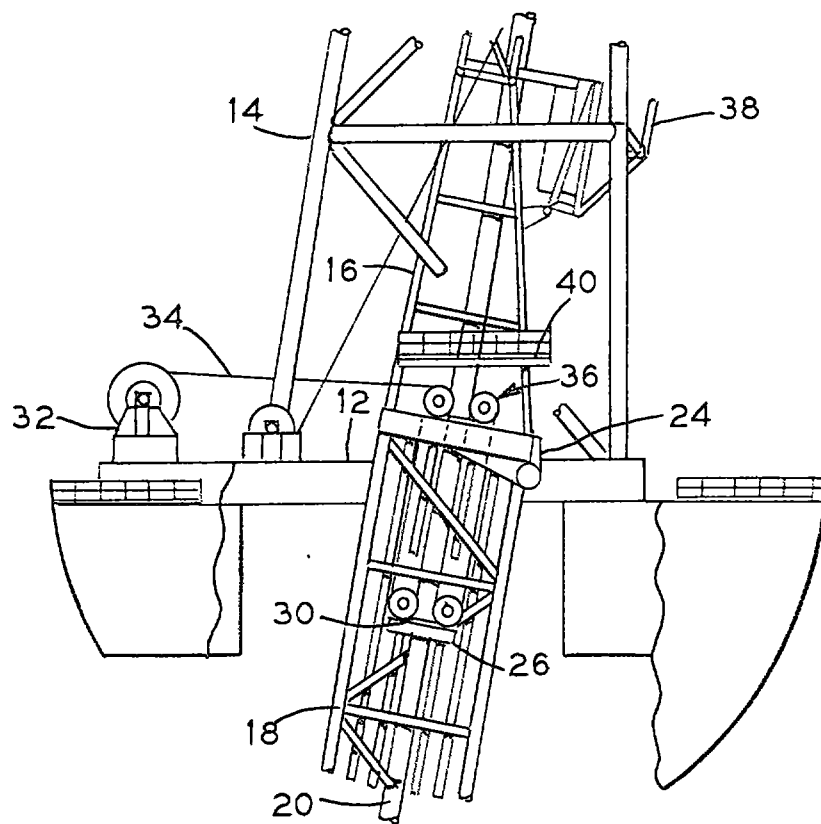


FIG. 3

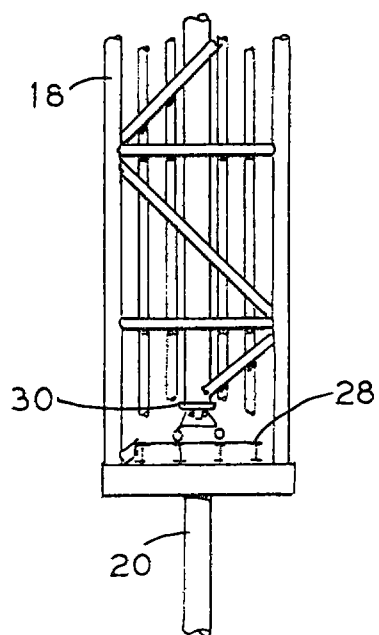
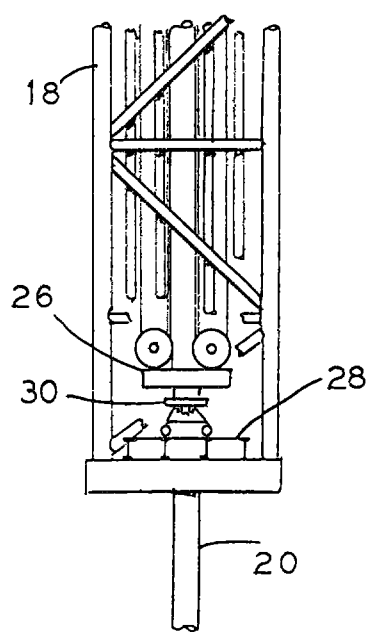


FIG. 4



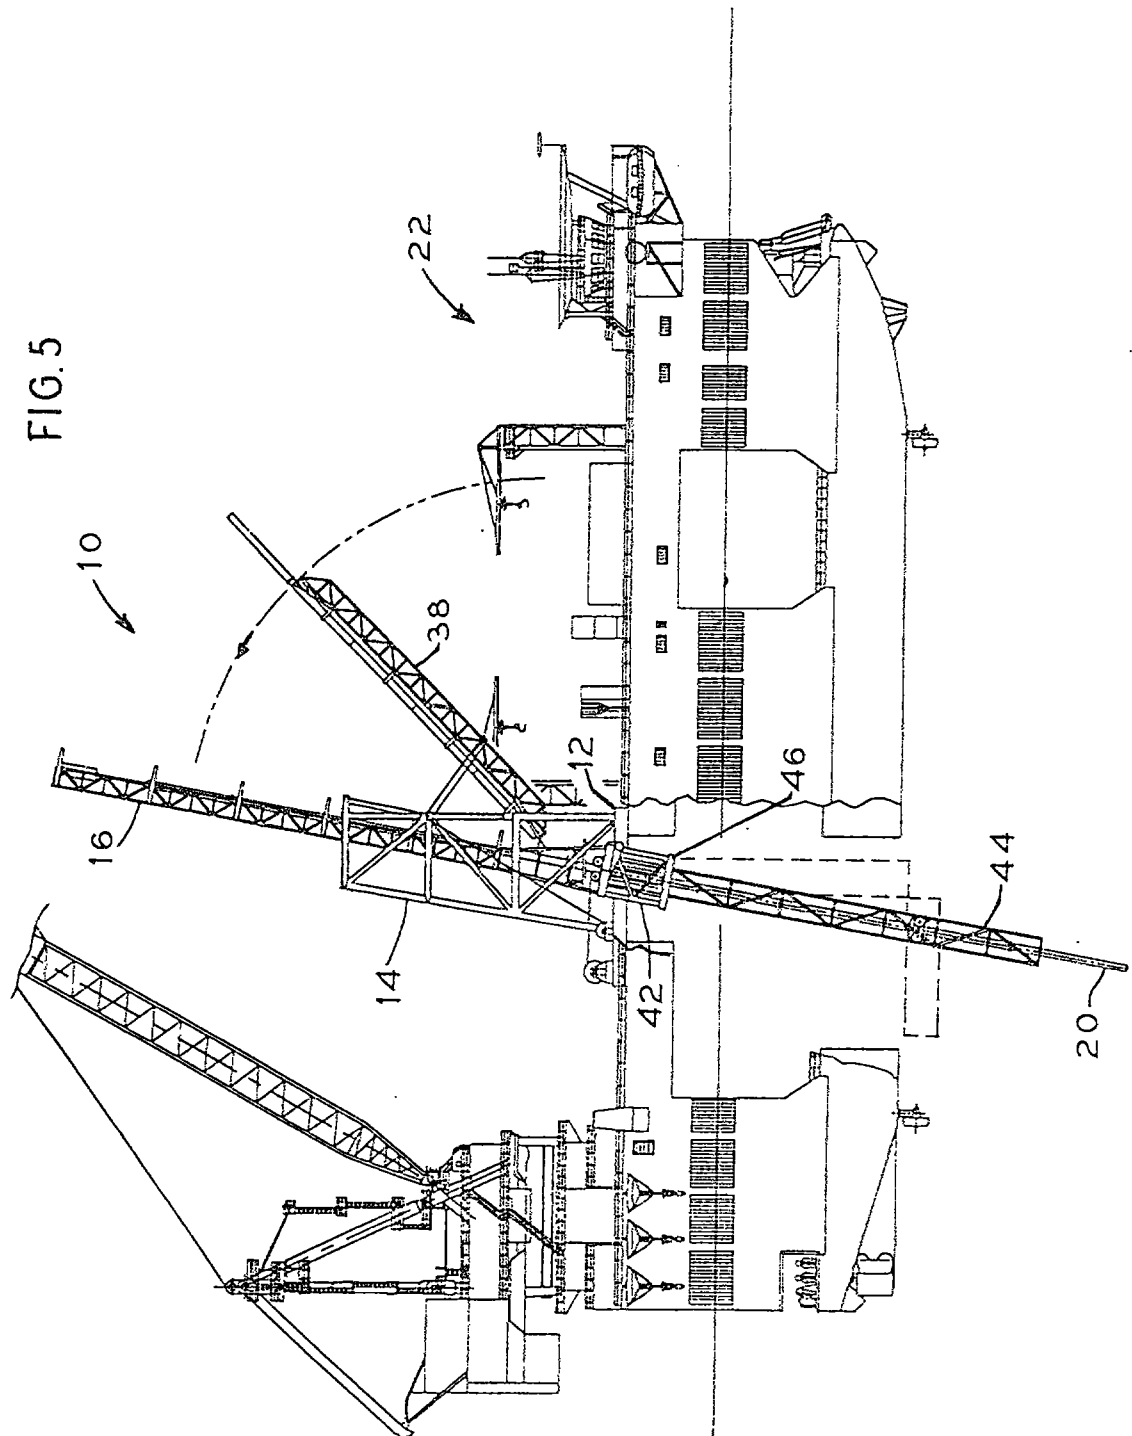


FIG. 6


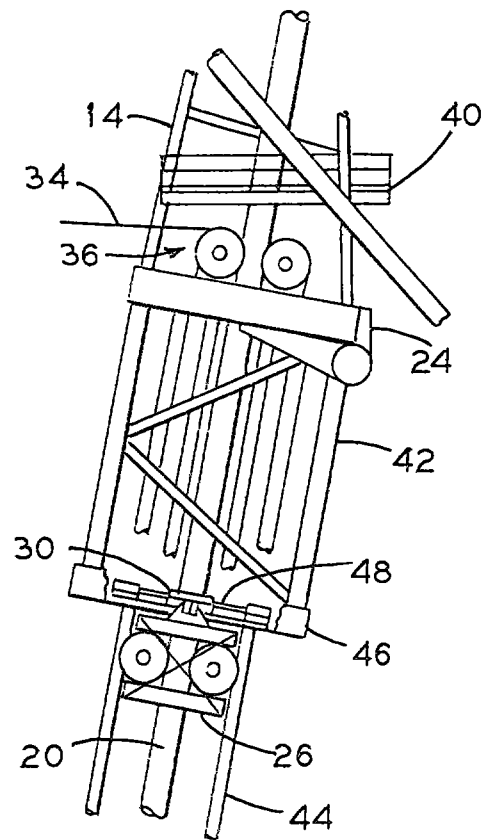


FIG. 7

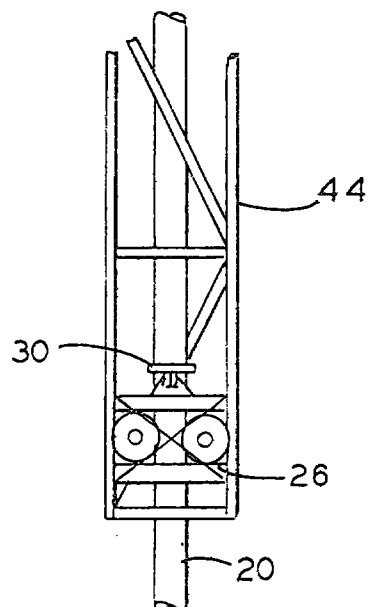

29 JUL 1996

-1-

APPARATUS FOR NEAR VERTICAL LAYING OF PIPELINE

The invention is generally related to the laying of pipeline and particularly to the near vertical laying of pipeline offshore such as in deep water.

The laying of offshore pipelines has been done for many years utilizing the technique referred to as S-lay. In the S-lay technique, joints of pipe are added to the pipeline in a horizontal position on the deck of a lay barge. The pipeline then curves over the stern of the barge, angles down toward the seabed, curves back to horizontal and lays on the seabed. The profile of the pipeline from the lay barge to the seabed is in the form of a long "S", which leads to the name of S-lay.

Although S-lay has been the method of choice for virtually all pipeline installed to date, there are physical limitations on the use of this technique. Chief among these is water depth. As the water depth increases, the ability to move the vessel on anchors becomes more and more difficult and the horizontal component of the pipe tension becomes greater and greater. The offshore pipeline industry has been aware of this problem for years and has as a solution, accepted the concept of near vertical lay, called J-lay, as the system of choice for deep water pipe laying. It should be understood that the definition of deep water, when referring to the use of J-lay, is a direct function of pipe diameter. This relationship is a result of the minimum water depth required for pipe of a certain diameter to achieve the proper flex during the vertical laying operation. There is also a maximum practical depth for specific pipe diameters. As an example, pipe having a diameter of 168.3 mm (6.625 inches) requires a minimum water depth, with no water in the pipe, of 37.8 m (124

29 JUL 1996

-2-

feet). At the opposite end of the scale, pipe having a diameter of 1.07 m (42 inches) requires a minimum water depth, with no water in the pipe, of 407.5 m (1,337 feet).

5 Considerable work has been done over the years on the theoretical aspects of the J-lay concept, but very little work has been done on the actual hardware and equipment needed for this type of system. Most of the systems proposed have utilized existing semi-submersible drilling units. These units, which are capable of being modified
10 for this service, were not built to be used as pipe layers and cannot be made to be very efficient during pipe laying operations.

Another problem area in laying pipeline offshore is the storage, transportation, and transfer of pipe to the
15 lay vessel. In normal operations, the line pipe for the pipeline is transported to the field in forty feet (12.2 m) long joints. The transport vessel, which is usually a small material barge or a special purpose pipe haul boat, is tied to the side of the lay vessel as the pipe is
20 transferred to the lay vessel. Transfer of the pipe, one joint at a time, may take several days. The transfer of pipe from between vessels subject to sea-induced motion is hazardous to personnel and equipment under good sea conditions and becomes impossible to do safely under bad
25 conditions.

Applicants are aware of a system that utilizes a ramp that can be adjusted from horizontal to vertical. It uses large tensioners to grip the pipe and apply the necessary amount of tension to the system. This system has never
30 been used for deep water pipeline construction.

Offshore pipe laying systems, those in use (S-lay) and theoretical proposals (J-lay), have certain things in common. The systems may or may not use pipe add-ons that




29 JUL 1996

have been multi-jointed outside the system to provide pipe joint lengths greater than the normal forty foot (12.2 m) pipe length. Theoretical J-lay systems have proposed joint lengths of eight feet (24.4 m) or more. A single station is used to accomplish the welding, NDT (non-destructive testing), and pipe coating of joints. In J-lay, it is necessary to have a means to transfer the pipe from the horizontal position on the lay vessel to a near vertical position on the lay line. It is also necessary to have some means of lowering the pipe as the lay vessel moves forward. A particular problem in this area has been the issue of devising an efficient manner of transferring the load of the pipeline to a holding mechanism so that the lowering mechanism can then be raised in preparation for receiving the weight of the pipeline after addition of the next pipe joint. Copending European Patent Application No. 94305071.6 describes an apparatus for near vertical laying of pipeline that includes a tower on the lay barge that supports the weight of the flooded pipeline and uses a travel block and pedestal arrangement that allows for a ready weight transfer of the pipeline from the travel block to the pedestal during lowering of the pipeline after a new pipe joint has been added. A problem with the system as described is that the major loads of the pipeline are carried through compression in the tower during lowering. This puts large loads above the vessel deck on a continuous basis and raises the centre of gravity of the system above the normal centre of gravity of the vessel.

According to the present invention there is provided apparatus on a vessel for near vertical laying of a pipeline offshore, the apparatus comprising:

- a support base mounted on the vessel;
- a framework mounted on said support base and extending



upwardly therefrom;

a pipe joint alignment tower pivotally attached to and supported by said support base and framework;

a support tower pivotally attached to said support
5 base and extending downwardly from said support base; and



means received in said support tower for receiving and supporting the weight of the pipeline.

In a preferred embodiment of the invention, the apparatus lowers the centre of gravity of the system to
10 below that of the vessel. An alignment tower that extends above the deck of the vessel supports the weight of only one multijoint of pipe and the internal lineup clamp and storage and transfer system. The tower that supports the weight of the flooded pipeline extends below the vessel
15 into the water and replaces the stinger. The travel block and pedestal used to support and lower the pipeline in the tower are positioned in the tower. The travel block is moved in and out of the water along the length of the tower during operations.

20 In accordance with another aspect of the invention, the support tower is replaced by a stinger support frame pivotally attached to the support base, a pedestal attached to the support frame, the pedestal being operable to releasably receive and support the weight of the pipeline,
25 a stinger attached to the lower end of the stinger support frame and extending downwardly therefrom, and a travel block received in the stinger and movable along the length of the stinger.

The invention will now be described by way of example
30 with reference to the accompanying drawings, throughout which like parts are referred to by like references, and in which:

Fig. 1 is an elevation view of one embodiment of the



invention;

Fig. 2 is a detail view that illustrates the junctures of the support base, alignment tower, and support tower shown in Fig. 1;

5 Fig. 3 is a detail view that illustrates the lower end of the support tower;

Fig. 4 is a detail view that illustrates the lower end of the support tower with the travel block near the pedestal;

10 Fig. 5 illustrates an alternative embodiment of the invention;

Fig. 6 illustrates a detail view of the stinger support framing and upper end of the stinger of the alternative embodiment;

15 Fig. 7 illustrates a detail view of the lower end of the stinger of the alternative embodiment with the travel block at the lower end of the stinger.

Referring to Fig. 1, apparatus 10 for near vertical laying of pipeline is generally comprised of a support base 20 12, a framework 14, a pipe joint alignment tower 16, a support tower 18, and means in said support tower 18 for receiving and supporting the weight of the pipeline 20.

Support base 12 is rigidly attached to a lay vessel 22. In the preferred embodiment, support base 12 is 25 arranged to pivotally receive both alignment tower 16 and support tower 18. Support base 12 and apparatus 10 are illustrated in Fig. 1 and 2 as being positioned amid ship on lay vessel 22 at which is commonly referred to as a moon pool. However, it should be



29 JUL 1996

-6-

understood that apparatus 10 may also be positioned at a side or the stern of lay vessel 22 to accommodate the specific needs of the pipe laying operation.

5 Framework 14 is rigidly attached to support base 12 and extends upwardly therefrom. Framework 14 provides support to pipe joint alignment tower 16.

10 Pipe joint alignment tower 16 is lightly framed as it only has to support the weight of one joint or multijoint of pipe and the internal lineup clamp and transfer system. Pipe joint alignment tower 16 is a U-shaped frame open on one side along its length and is designed to support the weight of the pipe joint during welding to the pipeline. As seen in the phantom views in Fig. 1, pipe joint alignment tower 16 is attached to support base 12 and framework 14 so that it may be selectively positioned at
15 several different angles according to that required during pipe laying operations. Pipe joint alignment tower 16 is in alignment with support tower 18.

Support tower 18 is pivotally supported at its upper end in support base 12 by support framing 24, best seen in Fig. 2. As
20 indicated by the phantom views in Fig. 1, support framing 24 provides for selective pivoting of support tower 18 according to needs of the pipe laying operations as mentioned above for pipe joint alignment tower 16. Support tower 18 is designed to be able to support the weight of the flooded pipeline during pipe
25 laying operations. Means for receiving the weight of the pipeline is provided in the form of travel block 26 and pedestal 28, seen in Fig. 2-4. Travel block 26 and pedestal 28 are used

This Sheet Has Been Replaced



-7-

REPLACEMENT SHEET
29 JUL 1996

in cooperation to support and lower the pipeline after a pipe joint has been added. Pedestal 28 supports the weight of the pipeline at a buckle arrestor 30 while a pipe joint is being added to the pipeline. After addition of the new joint, the travel block is raised to pick up the pipeline load, the pedestal is opened, and then the travel block 26 is lowered in support tower 18 via winch 32, cable 34, and crown block 36 and the weight of the pipeline is transferred to pedestal 28. Travel block 26 is then raised back to the upper end of support tower 18 in preparation for addition of another pipe joint to the pipeline while the pedestal supports the pipeline. Although any suitable equipment may be used to achieve the operations required of the travel block and pedestal, the travel block and pedestal configuration described in European Patent Application No. 94305071.6 is preferred for the most efficient and time saving weight transfer.

The transfer of pipe joints from horizontal on a pipe ready rack into pipe joint alignment tower 16 is illustrated as being accomplished by the use of an alignment boom 38 that is pivotally attached to pipe joint alignment tower 16. However, it should be understood that any suitable transfer means such as a strongback may also be used.

In operation, pipe joint alignment tower 16 and support tower 18 are aligned with each other and set at the angle required for the pipe laying operations according to pipe size and water depth. A single pipe joint has the ends prepared for welding to the pipeline and is transferred to a pipe ready rack.



29 JUL 1996

-8-

Alignment boom 38, or any suitable equipment, receives the pipe joint from cranes and is then pivoted upwardly as indicated by the arrow and line in Fig. 1 to transfer the pipe joint to pipe joint alignment tower 16. Clamps provided in pipe joint alignment tower 16 receive the pipe joint and hold it in place while it is welded to pipeline 20. The clamps provided in pipe joint alignment tower 16 are preferably adjustable to allow for precise alignment of the pipe joint and pipeline. Work deck 40 is provided for personnel and the necessary equipment to carry out the welding and testing operations. During the addition of the pipe joint, pedestal 28 supports the pipeline at a buckle arrestor 30 on the pipeline. An internal line up clamp will typically be provided at the upper end of pipe joint alignment tower 16 for lowering into the pipe joint to the abutting surfaces of the pipe joint and pipeline. Buckle arrestors are provided at selected intervals along the pipeline to prevent buckling of the pipe during laying operations. After the welding, testing, and coating operations are complete, travel block 26 takes the load from pedestal 28 and is lowered in support tower 18 as the lay vessel moves forward. Fig. 3 illustrates a buckle arrestor 30 at pedestal 28 as it supports the pipeline 20 during welding of the next joint and the raising of travel block 28 while Fig. 4 illustrates a just completed transfer between the travel block 26 and pedestal 28 as travel block 26 is beginning to be moved back to the upper end of support tower 18 in preparation for attachment of another pipe joint. Travel block 26 is moved to the upper end of support



29 JUL 1996

-9-

tower 18 and used to support the pipeline at a buckle arrestor after completion of welding. A pipe joint already positioned in pipe joint alignment tower 16 is then welded to pipeline 20 and the process is repeated. Besides providing for a lower center of gravity, the location of the travel block below the work area eliminates the need to wait for the travel block to clear the work area before proceeding with work on attaching the next pipe joint to the pipeline.

Fig. 5-7 illustrate an alternate embodiment of the invention. The main difference in the alternate embodiment is that the large support tower is replaced by a stinger, the pedestal is moved above the water line, and the travel block moves along the length of the stinger in and out of the water. As seen in Fig. 5, the support tower shown in Fig. 1 is replaced by stinger support frame 42 and stinger 44. As best seen in Fig. 6, stinger support frame 42 is also pivotally supported in support base 12 by support framing 24. Pedestal 46 operates in a similar fashion as above so as to cooperate with travel block 26 for receiving and transferring the weight of the pipeline between the pedestal and travel block. Pedestal 46 is provided with clamp 48 that moves between an open position where it does not support the weight of the pipeline and a closed position where it does support the weight of the pipeline. Fig. 6 illustrates the pedestal clamp and travel block in position for transferring the weight of the pipeline to the travel block. As described above, travel block 26 is supported and moved by cable 34 across crown block 36. Travel block 26 receives the weight

This Sheet Has Been Replaced




REPLACEMENT SHEET

29 JUL 1996

-10-

of the pipeline from clamp 48 by contact of the upper end
of travel block 26 with buckle arrestor 30 on the pipeline.
Travel block 26 is then lowered in stinger 44 as lay vessel
22 moves forward to lower and lay pipeline equal to the
5 length of the pipe joint that has been added. Clamp 48 is
then closed to receive a buckle arrestor on the pipeline
and support the weight of the pipeline while another joint
is added and travel block 26 is opened to release the
pipeline and raised back up to the pedestal. As
10 illustrated by the dotted lines indicating a phantom view
of stinger 44, the lower portion of stinger 44 is hinged
such that it may be pivoted upward and locked in an
inoperative stowed position to reduce its water depth and
resistance to movement of lay vessel 22 when pipe laying
15 operations are not being conducted. As described above,
the alternate embodiment is movable within a selected range
of angles to provide the most desirable angle for pipe size
and water depth. The alternate embodiment provides the
additional advantages of the stinger being lighter weight
20 than the support tower and the travel block being the only
moving part that is submerged in water below the vessel.
The location of the pedestal also keeps it out of the water
and provides for easier maintenance.

Because many differing embodiments may be made within
25 the scope of the inventive concept herein taught and
defined in the claims and because many modifications may be
made in the embodiment herein detailed in accordance with
the description, it is to be understood that the details
herein are to be interpreted as illustrative and not in a
30 limiting sense.



-11-




CLAIMS

1. Apparatus on a vessel for near vertical laying of a pipeline offshore, the apparatus comprising:
 - 5 a support base (12) mounted on the vessel (22);
a framework (14) mounted on said support base (12) and extending upwardly therefrom;
a pipe joint alignment tower (16) pivotally attached to and supported by said support base (12) and framework
10 (14);
a support tower (18) pivotally attached to said support base (12) and extending downwardly from said support base (12); and
means (26,28) received in said support tower (12) for
15 receiving and supporting the weight of the pipeline (20).
2. Apparatus according to claim 1, comprising means (38) for transferring a pipe joint from the vessel (22) into said alignment tower (16).
20
3. Apparatus according to claim 1 or claim 2, wherein said means for receiving and supporting the weight of the pipeline comprises:
 - a travel block (26) arranged to be movable along the
25 length of said support tower (18); and
a pedestal (28) at the lower end of said support tower (18) for receiving and supporting the weight of the pipeline (20) from said travel block (26).
- 30 4. Apparatus on a vessel for near vertical laying of a pipeline offshore, the apparatus comprising:

This Sheet Has Been Replaced





-12-

a support base (12) mounted on the vessel (22);

a framework (14) mounted on said support base (12) and extending upwardly therefrom;

5 a pipe joint alignment tower (16) pivotally attached to and supported by said support base (12) and framework (14);

a stinger support frame (42) pivotally attached to said support base (12);

10 a pedestal (46) attached to said support frame (42), said pedestal (46) being operable to releasably receive and support the weight of the pipeline (20);

a stinger (44) attached to the lower end of said stinger support frame (42) and extending downwardly therefrom; and

15 a travel block (26) received in said stinger (44) so as to be movable along the length of said stinger (44), said travel block (26) being operable to releasably receive and support the weight of the pipeline (20) in cooperation with said pedestal (46).


20

5. Apparatus according to claim 4, wherein said stinger (44) is hinged at its lower section to allow pivoting of the lower section upwardly into a stowed inoperative position.

25

This Sheet Has Been Replaced






ABSTRACT

APPARATUS FOR NEAR VERTICAL LAYING OF PIPELINE

5 A support base (12) and framework (14) on a lay vessel
(22) support an alignment tower (16) that extends upwardly
from the base (12) and is designed to support the pipe
joint to be added to the pipeline (20). A support tower
(18) that supports the weight of the pipeline (20) is
10 attached to the support base (12) such that the support
tower (18) extends downwardly therefrom into the water. A
travel block (26) can move along the length of the tower
(18) for raising or lowering the pipe and pipeline (20).
A pedestal (28) that is movable between open and closed
15 positions for receiving a pipe section from the travel
block (26) and supporting the weight of the pipeline (20)
is positioned near the bottom of the tower (18). A
strongback or boom (38) may be used to grasp a pipe joint
from a ready rack and transfer the pipe joint into the
20 alignment tower (16) for addition to the pipeline (20).
The attachment position and extension of the support tower
(18) into the water lowers the centre of gravity of the
apparatus.

25 Fig. 1



upwardly therefrom;

a pipe joint alignment tower pivotally attached to and supported by said support base and framework;

a support tower pivotally attached to said support
5 base and extending downwardly from said support base;

a travel block arranged to be movable along the length of said support tower; and

a pedestal at the lower end of said support tower for receiving and supporting the weight of the pipeline from
10 said travel block.

In a preferred embodiment of the invention, the apparatus lowers the centre of gravity of the system to below that of the vessel. An alignment tower that extends above the deck of the vessel supports the weight of only
15 one multijoint of pipe and the internal lineup clamp and storage and transfer system. The tower that supports the weight of the flooded pipeline extends below the vessel into the water and replaces the stinger. The travel block and pedestal used to support and lower the pipeline in the
20 tower are positioned in the tower. The travel block is moved in and out of the water along the length of the tower during operations.

In accordance with another aspect of the invention, there is provided apparatus on a vessel for near vertical
25 laying of a pipeline offshore, the apparatus comprising:

a support base mounted on the vessel;

a framework mounted on said support base and extending upwardly therefrom;

a pipe joint alignment tower pivotally attached to and
30 supported by said support base and framework;

a stinger support frame pivotally attached to said support base;







a pedestal attached to said support frame, said pedestal being operable to releasably receive and support
5 the weight of the pipeline;

a stinger attached to the lower end of said stinger support frame and extending downwardly therefrom; and

a travel block received in said stinger so as to be movable along the length of said stinger, said travel block
10 being operable to releasably receive and support the weight of the pipeline in cooperation with said pedestal.

The invention will now be described by way of example with reference to the accompanying drawings, throughout which like parts are referred to by like references, and in which:

5 Fig. 1 is an elevation view of one embodiment of the

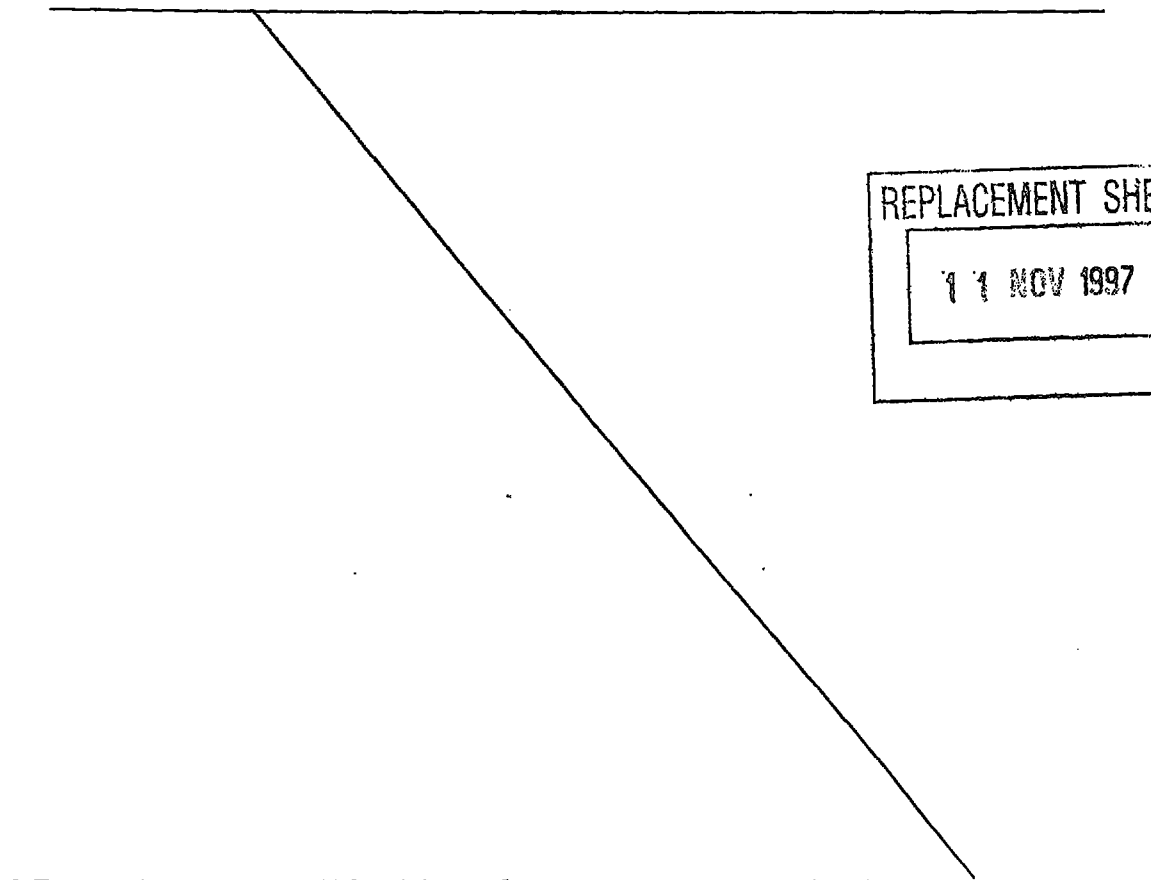

CLAIMS

1. Apparatus on a vessel for near vertical laying of a pipeline offshore, the apparatus comprising:

5 a support base (12) mounted on the vessel (22);
a framework (14) mounted on said support base (12) and extending upwardly therefrom;

a pipe joint alignment tower (16) pivotally attached to and supported by said support base (12) and framework
10 (14);

a support tower (18) pivotally attached to said support base (12) and extending downwardly from said support base (12);

15 a travel block (26) arranged to be movable along the length of said support tower (18); and

a pedestal (28) at the lower end of said support tower (18) for receiving and supporting the weight of the pipeline (20) from said travel block (26).

20 2. Apparatus according to claim 1, comprising means (38) for transferring a pipe joint from the vessel (22) into said alignment tower (16).

25 3. Apparatus on a vessel for near vertical laying of a pipeline offshore, the apparatus comprising:

a support base (12) mounted on the vessel (22);

a framework (14) mounted on said support base (12) and extending upwardly therefrom;

30 a pipe joint alignment tower (16) pivotally attached to and supported by said support base (12) and framework (14);

This Sheet Has Been Replaced



REPLACEMENT SHEET

11 NOV 1997




a stinger support frame (42) pivotally attached to said support base (12);

a pedestal (46) attached to said support frame (42), said pedestal (46) being operable to releasably receive and
5 support the weight of the pipeline (20);

a stinger (44) attached to the lower end of said stinger support frame (42) and extending downwardly therefrom; and

a travel block (26) received in said stinger (44) so
10 as to be movable along the length of said stinger (44), said travel block (26) being operable to releasably receive and support the weight of the pipeline (20) in cooperation with said pedestal (46).

15 4. Apparatus according to claim 3, wherein said stinger (44) is hinged at its lower section to allow pivoting of the lower section upwardly into a stowed inoperative position.



This Sheet Has Been Replaced




11 MAY 1999

-3-

have been multi-jointed outside the system to provide pipe joint lengths greater than the normal forty foot (12.2 m) pipe length. Theoretical J-lay systems have proposed joint lengths of eighty feet (24.4 m) or more. A single station
5 is used to accomplish the welding, NDT (non-destructive testing), and pipe coating of joints. In J-lay, it is necessary to have a means to transfer the pipe from the horizontal position on the lay vessel to a near vertical position on the lay line. It is also necessary to have
10 some means of lowering the pipe as the lay vessel moves forward. A particular problem in this area has been the issue of devising an efficient manner of transferring the load of the pipeline to a holding mechanism so that the lowering mechanism can then be raised in preparation for
15 receiving the weight of the pipeline after addition of the next pipe joint. EP-A-657670

describes an apparatus for near vertical laying of pipeline that includes a tower on the lay barge that supports the weight of the flooded pipeline and uses a
20 travel block and pedestal arrangement that allows for a ready weight transfer of the pipeline from the travel block to the pedestal during lowering of the pipeline after a new pipe joint has been added. A problem with the system as described is that the major loads of the pipeline are
25 carried through compression in the tower during lowering. This puts large loads above the vessel deck on a continuous basis and raises the centre of gravity of the system above the normal centre of gravity of the vessel.

Patent specification GB-A-2 095 787 discloses a
30 pipelaying vessel wherein pipe lengths to be welded to a pipeline are fed to a swing arm, pivoted about a transverse axis, and used to raise the pipe lengths to an upright orientation. A gripper carriage holds the pipe length and



is movable in a laying tower by a cable.

According to the present invention there is provided apparatus on a vessel suitable for near vertical laying of a pipeline offshore, the apparatus comprising:

5 a support base mounted on the vessel;

 a framework mounted on said support base and extending upwardly therefrom;

 a pipe joint alignment tower pivotally attached to and supported by said support base and said framework;

10 a support tower pivotally attached to said support base and extending downwardly from said support base;

 a pedestal at the lower end of said support tower, said pedestal being operable to releasably receive and support the weight of the pipeline; and

15 a travel block received in said support tower so as to be movable along the length of said support tower to releasably receive and support the weight of the pipeline;

 characterised in that:

 a plurality of buckle arrestors are provided at
20 selected intervals on the pipeline;

 said pedestal is operable to releasably receive and support the pipeline by one of said buckle arrestors; and

 said travel block is movable along the pipeline and is operable between a first open position and a second closed
25 position to releasably receive and support the weight of the pipeline by one of said buckle arrestors when said travel block is in the second closed position, in cooperation with said pedestal.


REPLACEMENT SHEET

1 1 MAY 1999

4a

In a preferred embodiment of the invention, the apparatus lowers the centre of gravity of the system to
5 below that of the vessel. The alignment tower that extends above the deck of the vessel supports the weight of only one multijoint of pipe and an internal lineup clamp and storage and transfer system. The support tower, which can be in the form of a stinger, that supports the weight of
10 the flooded pipeline, extends below the vessel into the water. The travel block and pedestal used to support and lower the pipeline in the tower are positioned in the tower. The travel block is moved in and out of the water along the length of the tower during operations.

15 The invention will now be described by way of example



with reference to the accompanying drawings, throughout which like parts are referred to by like references, and in which:

Fig. 1 is an elevation view of one embodiment of the
5 invention;

Fig. 2 is a detail view that illustrates the junctures of a support base, an alignment tower, and a support tower shown in Fig. 1;

Fig. 3 is a detail view that illustrates the lower end
10 of the support tower;

Fig. 4 is a detail view that illustrates the lower end of the support tower with a travel block near the pedestal;

Fig. 5 illustrates an alternative embodiment of the invention;

Fig. 6 illustrates a detail view of a stinger support framing and upper end of the stinger of the alternative
15 embodiment;

Fig. 7 illustrates a detail view of the lower end of the stinger of the alternative embodiment with the travel
20 block at the lower end of the stinger.

Referring to Fig. 1, apparatus 10 for near vertical laying of pipeline generally comprises a support base 12, a framework 14, a pipe joint alignment tower 16, a support tower 18, and means in said support tower 18 for receiving
25 and supporting the weight of a pipeline 20.

The support base 12 is rigidly attached to a lay vessel 22. In the preferred embodiment, the support base 12 is arranged to pivotally receive both the alignment tower 16 and the support tower 18. The support base 12 and
30 the apparatus 10 are illustrated in Fig. 1 and 2 as being positioned amid-ships on the lay vessel 22 at which is commonly referred to as a moon pool. However, it should be understood that the apparatus 10 may also be positioned at

11 MAY 1999

-6-

a side or the stern of the lay vessel 22 to accommodate the specific needs of the pipe laying operation.

The framework 14 is rigidly attached to the support base 12 and extends upwardly therefrom. The framework 14 provides support to the pipe joint alignment tower 16.

The pipe joint alignment tower 16 is lightly framed as it only has to support the weight of one joint or multijoint of pipe and the internal lineup clamp and transfer system. The pipe joint alignment tower 16 is a U-shaped frame open on one side along its length and is designed to support the weight of the pipe joint during welding to the pipeline. As seen in the phantom views in Fig. 1, the pipe joint alignment tower 16 is attached to the support base 12 and the framework 14 so that it may be selectively positioned at several different angles according to that required during pipe laying operation. The pipe joint alignment tower 16 is in alignment with the support tower 18.

The support tower 18 is pivotally supported at its upper end in the support base 12 by support framing 24, best seen in Figure 2. As indicated by the phantom views in Figure 1, the support framing 24 provides for selective pivoting of the support tower 18 according to needs of the pipe laying operations as mentioned above for the pipe joint alignment tower 16. The support tower 18 is designed to be able to support the weight of the flooded pipeline during pipe laying operations. Means for receiving the weight of the pipeline is provided in the form of a travel block 26 and a pedestal 28, seen in Fig. 2-4. The travel block 26 and the pedestal 28 are used in cooperation to support and lower the pipeline after a pipe joint has been added. The pedestal 28 supports the weight of the pipeline at a buckle arrestor 30 while a pipe joint is being added

1 MAY 1993

-7-

to the pipeline. After addition of the new joint, the travel block 26 is raised to pick up the pipeline load, the pedestal 28 is opened, and then the travel block 26 is lowered in the support tower 18 via a winch 32, a cable 34, and a crown block 36 and the weight of the pipeline is transferred to the pedestal 28. The travel block 26 is then raised back to the upper end of the support tower 18 in preparation for addition of another pipe joint to the pipeline while the pedestal 28 supports the pipeline. Although any suitable equipment may be used to achieve the operations required of the travel block 26 and the pedestal 28, the travel block and pedestal configuration described in EP-A-657670 is preferred for the most efficient and time saving weight transfer.

The transfer of pipe joints from a horizontal orientation on a pipe ready rack into the pipe joint alignment tower 16 is illustrated as being accomplished by the use of an alignment boom 38 that is pivotally attached to the pipe joint alignment tower 16. However, it should be understood that any suitable transfer means such as a strongback may also be used.

In operation, the pipe joint alignment tower 16 and the support tower 18 are aligned with each other and set at the angle required for the pipe laying operations according to pipe size and water depth. A single pipe joint has its ends prepared for welding to the pipeline and is transferred to a pipe ready rack.

The alignment boom 38, or any suitable equipment, receives the pipe joint from cranes and is then pivoted upwardly as indicated by the arrow and line in Fig. 1 to transfer the pipe joint to the pipe joint alignment tower 16. Clamps provided in the pipe joint alignment tower 16 receive the pipe joint and hold it in place while it is

11 MAY 1999

-8-

welded to the pipeline 20. The clamps provided in the pipe joint alignment tower 16 are preferably adjustable to allow for precise alignment of the pipe joint and the pipeline. A work deck 40 is provided for personnel and the necessary equipment to carry out the welding and testing operations. During the addition of the pipe joint, the pedestal 28 supports the pipeline at the buckle arrestor 30 on the pipeline. An internal line up clamp will typically be provided at the upper end of the pipe joint alignment tower 16 for lowering into the pipe joint to the abutting surfaces of the pipe joint and pipeline. Buckle arrestors are provided at selected intervals along the pipeline to prevent buckling of the pipe during laying operations. After the welding, testing, and coating operations are complete, the travel block 26 takes the load from the pedestal 28 and is lowered in the support tower 18 as the lay vessel moves forward. Fig. 3 illustrates the buckle arrestor 30 at the pedestal 28 as it supports the pipeline 20 during welding of the next joint and the raising of the travel block 26 while Fig. 4 illustrates a just completed transfer between the travel block 26 and the pedestal 28 as the travel block 26 is beginning to be moved back to the upper end of the support tower 18 in preparation for attachment of another pipe joint. The travel block 26 is moved to the upper end of the support tower 18 and used to support the pipeline at a buckle arrestor after completion of welding. A pipe joint already positioned in the pipe joint alignment tower 16 is then welded to the pipeline 20 and the process is repeated. Besides providing for a lower center of gravity, the location of the travel block 26 below the work area eliminates the need to wait for the travel block to clear the work area before proceeding with work on attaching the next pipe joint to the pipeline.

11 MAY 1999


-9-

Fig. 5-7 illustrate an alternate embodiment of the invention. The main difference in the alternate embodiment is that the large support tower 18 is replaced by a stinger 44, the pedestal is moved above the water line, and the travel block moves along the length of the stinger 44 in and out of the water. As seen in Fig. 5, the support tower shown in Fig. 1 is replaced by a stinger support frame 42 and stinger 44. As best seen in Fig. 6, the stinger support frame 42 is also pivotally supported in the support base 12 by the support framing 24. A pedestal 46 operates in a similar fashion as above so as to cooperate with the travel block 26 for receiving and transferring the weight of the pipeline between the pedestal 46 and the travel block 26. The pedestal 46 is provided with a clamp 48 that moves between an open position where it does not support the weight of the pipeline and a closed position where it does support the weight of the pipeline. Fig. 6 illustrates the pedestal clamp and travel block in position for transferring the weight of the pipeline to the travel block. As described above, the travel block 26 is supported and moved by the cable 34 across the crown block 36. The travel block 26 receives the weight of the pipeline from the clamp 48 by contact of the upper end of the travel block 26 with the buckle arrestor 30 on the pipeline. The travel block 26 is then lowered in the stinger 44 as the lay vessel 22 moves forward to lower and lay pipeline equal to the length of the pipe joint that has been added. The clamp 48 is then closed to receive a buckle arrestor on the pipeline and support the weight of the pipeline while another joint is added and the travel block 26 is opened to release the pipeline and raised back up to the pedestal 46. As illustrated by the dotted lines indicating a phantom view of the stinger 44, the lower

11 MAY 1999

-10-

portion of the stinger 44 is hinged such that it may be pivoted upward and locked in an inoperative stowed position to reduce its water depth and resistance to movement of the lay vessel 22 when pipe laying operations are not being
5 conducted. As described above, the alternate embodiment is movable within a selected range of angles to provide the most desirable angle for pipe size and water depth. The alternate embodiment provides the additional advantages of the stinger 46 being lighter weight than the support tower
10 18 and the travel block 26 being the only moving part that is submerged in water below the vessel. The location of the pedestal 46 also keeps it out of the water and provides for easier maintenance.

CLAIMS

1. Apparatus on a vessel suitable for near vertical
laying of a pipeline (20) offshore, the apparatus
5 comprising:

a support base (12) mounted on the vessel (22);

a framework (14) mounted on said support base (12) and
extending upwardly therefrom;

a pipe joint alignment tower (16) pivotally attached
10 to and supported by said support base (12) and said
framework (14);

a support tower (18) pivotally attached to said
support base (12) and extending downwardly from said
support base (12);

15 a pedestal (28,46) at the lower end of said support
tower (18), said pedestal (28,46) being operable to
releasably receive and support the weight of the pipeline
(20); and

a travel block (26) received in said support tower
20 (18) so as to be movable along the length of said support
tower (18) to releasably receive and support the weight of
the pipeline (20);

characterised in that:

a plurality of buckle arrestors (30) are provided at
25 selected intervals on the pipeline (20);

said pedestal (28,46) is operable to releasably
receive and support the pipeline (20) by one of said buckle
arrestors (30); and

said travel block (26) is movable along the pipeline
30 (20) and is operable between a first open position and a
second closed position to releasably receive and support



12

REPLACEMENT SHEET

11 MAY 1999

the weight of the pipeline (20) by one of said buckle arrestors (30) when said travel block (26) is in the second closed position, in cooperation with said pedestal (28,46).

- 5 2. Apparatus according to claim 1, including an alignment boom (38) pivotally attached to said pipe joint alignment tower (16) for transferring a pipe joint from the vessel (22) into said pipe joint alignment tower (16).
- 10 3. Apparatus according to claim 1, wherein said support tower (18) comprises a stinger support frame (42) pivotally attached to said support base (12) and a stinger (44) attached to the lower end of said stinger support frame (42) and extending downwardly therefrom; said travel block
15 (26) being received in said stinger (44) so as to be movable along the length of said stinger (44).
4. Apparatus according to claim 3, wherein said stinger (44) is hinged at its lower portion to allow pivoting of
20 the lower portion upwardly into a stowed inoperative position.