

SERVICE SWITCH FOR VIDEO DISPLAY DEFLECTION APPARATUS

This invention relates to video display apparatus. In particular, the invention relates to service mode circuitry that
5 disables deflection.

Typically, a vertical sawtooth generator of a vertical deflection circuit in a television receiver utilizes a current integrating capacitor that is charged from a source of a D.C. current to produce a ramp, trace portion of an output sawtooth
10 signal synchronized to a vertical synchronizing signal. The trace portion of the sawtooth signal controls a trace portion of a vertical deflection current that produces vertical deflection in a cathode ray tube (CRT).

In a D.C. coupled vertical deflection circuit, the
15 sawtooth signal is D.C. coupled to an input of a vertical deflection amplifier. A feedback signal that is indicative of the magnitude of the vertical deflection current, produced by the amplifier, is D.C. coupled to an input of the amplifier in a negative feedback manner.

During manufacture and assembly of the television receiver, it may be necessary or desirable to adjust the video drive circuitry to appropriate levels so that the red, green and blue designated electron beams of a cathode ray tube are generated in a manner that will produce proper color images on
25 the phosphor display screen of the tube. Such adjustments are typically performed while the vertical deflection circuitry is disabled. The resulting single horizontal line is more easily observed than a complete raster field when setting electron beam drive and cutoff levels. The circuitry utilized to perform the
30 disabling function is typically referred to as a service switch. It may be desirable to provide such disabling function in a D.C.-coupled vertical deflection circuit.

A vertical sawtooth generator, embodying an aspect of the invention, is D.C. coupled to a vertical deflection amplifier. A
35 voltage that is indicative of an average value of the sawtooth signal during normal operation is generated and is available when service mode operation is required. A service mode control signal is generated when service mode operation is required. When the

REPLACED SHEETS		SG
☒	Description : paged 1 to paged 11.	
☒	Claim(s) : paged 12 to paged 12.	
☒	Drawing(s) : paged 114 to paged 114.	
☒	Abstract : paged 114 to paged 114.	

service-mode control signal is generated, the generation of the sawtooth signal is disabled. In the service mode operation, the sawtooth generator is responsive to the average value signal to produce a D.C. output signal that is D.C. coupled to the vertical deflection amplifier at a magnitude that is required to position the electron beam at the vertical center of a CRT.

A video display deflection apparatus, embodying an aspect of the invention, includes a sawtooth generator for generating a sawtooth signal. A deflection circuit amplifier is responsive to the sawtooth signal and coupled to a vertical deflection winding that is mounted on a neck of a cathode ray tube for generating a vertical deflection current in the deflection winding in accordance with the sawtooth signal. The deflection current periodically varies a position of a beam spot on a screen of the cathode ray tube in a vertical direction, during normal operation. A service mode control signal is generated. The vertical position variation of the beam spot is disabled and a signal, that is indicative of normal operation vertical centering, is applied to the deflection winding via a signal path formed between an input and an output of the amplifier to position the beam spot at a vertical center of the screen.

FIGURES 1a, 1b and 1c illustrate, a vertical deflection circuit, embodying an aspect of the invention; and

FIGURES 2a-2d illustrate idealized waveforms of the arrangement of FIGURE 1.

FIGURES 1a, 1b and 1c illustrate, partially in block diagram form, a vertical deflection circuit, embodying an aspect of the invention that includes a sawtooth generator 100. A synchronizing signal SYNC produced by, for example, a video detector of a television receiver, not shown, that processes a television signal conforming to the NTSC standard, for example, is coupled to a vertical timing generator 10. Generator 10 generates a vertical rate pulse signal VRESET, as shown in FIGURE 2a. Similar symbols and numerals in FIGURES 1a, 1b, 1c and 2a-2d indicate similar items or functions.

Pulse signal VRESET of FIGURE 1a is coupled to a "set" input of a Set-Reset flip-flop 12 causing flip-flop 12 to change states. Consequently, an output Q of flip-flop 12 produces a

leading edge LE of an output control signal 112a. Leading edges of signals VRESET and 112a occur at the end of a given vertical trace interval and initiate vertical retrace. Signal 112a is coupled to a control terminal 13a of a current switch 13. Immediately after
5 leading edge LE, signal 112a causes switch 13 to couple a D.C. current IDRAMP to a junction terminal 18a of an integrating capacitor 14 that is fabricated using an integrating circuit (IC) fabrication technique.

Current IDRAMP is produced in a voltage-to-current
10 (V/I) converter 15 that is controlled by a voltage VRSLOPE produced in a digital-to-analog (D/A) converter 16. The digital data input to D/A converter 16 is supplied via a bus BUS from a microprocessor 17. Microprocessor 17 may additionally control various adjustment functions, not shown, in the television receiver
15 such as S-shaping and East-West correction. A second end terminal 18b of integrating capacitor 14 is coupled to an output of an amplifier 18 where a sawtooth signal VRAMP is generated. Current IDRAMP forms a retrace portion RETRACE of sawtooth signal VRAMP of FIGURE 2b. Terminal 18a of capacitor 14 of
20 FIGURE 1a is coupled to an inverting input terminal of amplifier 18 to form a current integrator.

Signal VRAMP of FIGURE 1a is also coupled to a noninverting input terminal of a comparator 19 that senses the level of signal VRAMP during portion RETRACE to determine an
25 end time of portion RETRACE of signal VRAMP. An inverting input terminal of comparator 19 is coupled to a source of a D.C. reference voltage VLOW that is generated in a manner discussed later on. An output terminal 19a of comparator 19 is coupled via an "OR" gate 20 to a "reset" input R of flip-flop 12.

30 When, as a result of current IDRAMP, signal VRAMP ramps down and attains a level that is equal to voltage VLOW, comparator 19 produces an output signal that causes flip-flop 12 to change states and to produce, at output Q, a trailing edge TE of signal 112a. Thereafter, current IDRAMP is decoupled from
35 capacitor 14 by switch 13.

A magnitude of current IDRAMP is programmable, in accordance with the value of the digital data input to D/A converter 16 for providing the required retrace slope or length of

portion RETRACE of signal VRAMP. For example, in an arrangement similar to that of FIGURE 1a, intended for controlling a switched vertical deflection circuit, not shown, V/I converter 15 may be programmed to produce current IDRAMP of a smaller magnitude than in FIGURE 1a. In this way, portion RETRACE is lengthened, as shown in broken line in FIGURE 2b, relative to the length of portion RETRACE used for controlling a non-switched vertical deflection circuit such as shown in FIGURE 1c. Thus, retrace portion RETRACE of signal VRAMP of FIGURE 2b can be made adaptable for operation with either a switched or non-switched vertical deflection circuit.

Provided that the pulse width of signal VRESET of FIGURE 1a is shorter than the length of portion RETRACE of signal VRAMP, the precise timings of the trailing edge of signal VRESET is, advantageously, not critical. The advantage of not being critical is that timing generator 10 that is required for processing both nonstandard and standard sync signal SYNC can be simplified. Nonstandard sync signal SYNC might be received from, for example, a video tape recorder operating in a freeze-frame or still picture mode.

A D.C. current IURAMP that is substantially smaller than current IDRAMP is produced in a V/I converter 21. After trailing edge TE of signal 112a, current IURAMP that is coupled to terminal 18a of capacitor 14 charges capacitor 14 to produce a ramping trace portion TRACE of sawtooth signal VRAMP of FIGURE 2b. The magnitude of current IURAMP of V/I converter 21 of FIGURE 1a is controlled in an automatic gain control (AGC) feedback loop by a voltage VAGC, developed across a capacitor 22. Voltage VAGC controls converter 21 such that the more positive is voltage VAGC, the smaller is current IURAMP. An AGC strobe signal AGCSTR is coupled to a control terminal 24a of a switch 24.

Signal AGCSTR is produced in vertical timings generator 10 close to the end of vertical trace. Signal AGCSTR has a pulse width that is equal to the length of, for example, a horizontal video line or 64 microseconds. During the occurrence of the pulse of signal AGCSTR, a current IOU, generated in a V/I converter 23, is coupled via a switch 24 to capacitor 22. Outside of the occurrence of the pulse of signal AGCSTR, capacitor 22

maintains its voltage approximately at a constant level to provide sample-and-hold operation. The magnitude of current IOUT is controlled in converter 23 is proportional to a difference between signal VRAMP and a reference voltage VHIGH, that is produced in a manner described later on.

During a given trace interval, should the magnitude of signal VRAMP be smaller than voltage VHIGH when strobe signal AGCSTR occurs, current IOUT would be positive and at a magnitude that is proportional to the difference between voltage VHIGH and signal VRAMP. Positive current IOUT causes a decrease of voltage VAGC in capacitor 22. Consequently, in subsequent vertical trace intervals, current IURAMP would be larger and the rate of increase of signal VRAMP would be greater than before in a manner to compensate for the aforementioned tendency of signal VRAMP to be smaller than required.

Conversely, should the magnitude of signal VRAMP be larger than voltage VHIGH, when the pulse of signal AGCSTR occurs, current IURAMP, in the subsequent vertical trace intervals, would be smaller. Thus, the AGC feedback loop causes the magnitude of signal VRAMP to be at the same level of voltage VHIGH, when strobe signal AGCSTR occurs. In steady state operation, the polarity of current IOUT changes at the center of the pulse of signal AGCSTR, as shown in FIGURE 2d.

Immediately after the circuit is energized, capacitor 22 is fully discharged. Capacitor 22 is coupled to voltage VCC. Therefore, upon power turn-on, voltage VAGC is equal to voltage VCC and the amplitude of ramp signal VRAMP is at a minimum or zero. Had capacitor 22 been coupled to ground, instead, the amplitude of signal VRAMP at power turn-on might have been excessive. Excessive amplitude of signal VRAMP could cause excessive deflection current amplitude. The result could be that the electron beam in CRT 49 could impinge on a neck of CRT 49 and damage CRT 49.

Signal AGCSTR is made to occur further from the center of vertical trace portion TRACE and as close to the end of vertical trace as feasible. In this way, the length of an interval between the instant when the level of signal VRAMP is established to be equal to voltage VLOW and the instant when

signal AGCSTR is generated is, for example, at the maximum feasible length. The upper limit as to how late in the cycle of signal VRAMP, signal AGCSTR can occur, is determined by the minimum required length of the vertical cycle of signal VRAMP.

- 5 Illustratively, signal AGCSTR is selected to occur after an interval T, having a length of 80% of the nominal vertical period V, has elapsed from the trailing edge TE of signal 112a, as shown in FIGURE 2c.

A time CENTER occurs at the center of portion TRACE.

- 10 At a time that is further away from time CENTER of FIGURE 2b, the level of signal VRAMP is close to its peak value. Therefore, the relative contribution of offset errors to control accuracy is reduced with respect to a situation in which signal AGCSTR occurs, for example, at time CENTER. It follows that, advantageously, a
15 more accurate control of signal VRAMP of FIGURE 1a can be obtained.

- Signal VRAMP is waveform corrected for providing S-shaping, in a manner not shown, and D.C. coupled to, for example, a D.C. coupled linear vertical deflection circuit 11 of FIGURE 1c
20 that includes a vertical amplifier 11a for producing a vertical deflection current i_y in a vertical deflection winding L_y . Winding L_y of FIGURE 1c provides vertical deflection in a CRT 49. Advantageously, D.C. coupling eliminates the need for a large A.C. coupling capacitor and eliminates a dependency of linearity and S-
25 correction on the coupling capacitor characteristics.

FIGURE 1b illustrates an arrangement 101, for generating voltages VHIGH, and VLOW of FIGURE 1a, referred to before, and for generating a voltage VCENT that is used for vertical centering adjustment purposes, as explained later on.

- 30 Arrangement 101 includes a resistor R9 having a terminal that is coupled to a supply voltage VCC of 7.7 volts. A second terminal, 101a, of resistor R9 is coupled to a resistor R8. A terminal 101c of resistor R8 is coupled to a series arrangement of resistors R7 and R6. The series arrangement of resistors R7 and R6 is coupled
35 between terminal 101c and a terminal 101b. A resistor R5 is coupled between terminal 101b and ground. A second series arrangement of resistors R11A and R10A is coupled between

terminals 101b and 101c, in parallel with the series arrangement of resistors R7 and R6.

Voltage VLOW is developed at terminal 101b. Voltage VHIGH is developed at terminal 101c. Voltage VCENT is developed at a terminal 101d, between resistors R11A and R10A.

A V/I converter 52 that is controlled by input data received via bus BUS from microprocessor 17 of FIGURE 1a and via a D/A converter 53 produces a D.C. current ICENTER of FIGURE 1b. Current ICENTER is coupled between resistors R6 and R7.

Current ICENTER provides adjustment of the average value of signal VRAMP by adjusting voltages VLOW and VHIGH so as to adjust vertical centering. The average value of signal VRAMP is nominally equal to one-half the value of voltage VCC. Because signal VRAMP is D.C. coupled to winding Ly of FIGURE 1c, a change in the average value of signal VRAMP causes a corresponding change in the vertical centering of the electron beam.

A V/I converter 50 of FIGURE 1b that is controlled by input data received via bus BUS from microprocessor 17 of FIGURE 1a and via a D/A converter 51 of FIGURE 1b produces a D.C. current IHEIGHT of FIGURE 1b that is coupled both to the base and to the collector of a transistor Q1, coupled in a diode configuration. The base and collectors of transistor Q1 are coupled to the base of a transistor Q3 to control a collector current in transistor Q3 that is equal to current IHEIGHT. The collector of transistor Q3 is coupled to terminal 101b between resistors R5 and R6. Collector base electrodes of a transistor Q4 are coupled together in a diode configuration and also coupled to the emitter of transistor Q3 for supplying the current of transistor Q3. The emitter of transistor Q4 is coupled via a resistor R2 to terminal 101a. The base of transistor Q2 is coupled to the base and to the collector of transistor Q4. The emitter of transistor Q2 is coupled via a resistor R1 to terminal 101a. A collector of transistor Q2 is coupled to the emitter of transistor Q1 for supplying the collector current of transistor Q1.

Transistors Q1, Q2, Q3 and Q4 form a temperature compensated current mirror arrangement. The sum of the emitter currents of transistors Q2 and Q4 that flow in resistors R1 and R2, respectively, is supplied via terminal 101a and is equal to twice

the value of current IHEIGHT. Whereas, the collector current of transistor Q3, that is coupled to terminal 101b, is equal to current IHEIGHT.

5 The level of current IHEIGHT is controlled to establish the required peak-to-peak amplitude of signal VRAMP of FIGURE 1a by establishing the levels of voltages VHIGH and VLOW. An adjustment of current IHEIGHT causes voltages VHIGH and VLOW to change in opposite directions.

10 A change in current IHEIGHT produces a change in the peak-to-peak amplitude of signal VRAMP for providing vertical height adjustment without affecting vertical centering. For example, an increase in current IHEIGHT of FIGURE 1b causes voltages VHIGH to decrease and voltage VLOW to increase such that the average value of voltage VRAMP and the level of voltage
15 VCENT remain unaffected by the increase in current IHEIGHT. This advantageous feature is obtained by selecting the appropriate values for the resistors in arrangement 101 as well as for the currents that are coupled to terminals 101a and 101b and produced by transistors Q1, Q2, Q3 and Q4.

20 The level of current ICENTER is controlled via bus BUS such that voltages VLOW and VHIGH change in the same direction. For example, an increase in current ICENTER, made for service raster centering adjustment, causes each of voltages VHIGH and VLOW to decrease.

25 The values of the resistors in arrangement 101 are also selected in such a way that the peak-to-peak amplitude of signal VRAMP of FIGURE 1a remains approximately the same after adjustment of current ICENTER of FIGURE 1b. Therefore, adjustment of vertical centering does not affect vertical height.
30 Advantageously, the peak-to-peak amplitude of signal VRAMP and the average value of signal VRAMP can be adjusted independently of each other.

35 In deflection circuit 11 of FIGURE 1c, deflection winding Ly is coupled in series with a deflection current sampling resistor R80 to form a series arrangement that is coupled between an output terminal 11b of amplifier 11a and a junction terminal 11c of a power supply decoupling capacitor Cb. A resistor R70 couples to terminal 11c a supply voltage V+ of, for example, +12

volts. A junction terminal 11d, coupled between winding Ly and resistor R80, is coupled via a feedback resistor R60 to an inverting input terminal of amplifier 11a. Terminal 11c of resistor R80 is coupled via a resistor R30 to a noninverting input terminal of amplifier 11a. In this way, a negative feedback voltage that is developed across resistor R80 is applied to the input terminals of amplifier 11a. Sawtooth signal VRAMP that controls amplifier 11a is coupled via a parallel arrangement of resistors R40 and R50 to the inverting input terminal of amplifier 11a. Voltage VCC is coupled via a resistor R10 to the noninverting input terminal of amplifier 11a. A resistor R20 is coupled between the noninverting input terminal of amplifier 11a and ground.

Resistors R10, R20, R30, R40, R50 and R60 are manufactured, for example, on a common substrate to form a single resistor network package for providing close temperature tracking. Each of resistors R10, R20, R30, R40, R50 and R60 has a tolerance of, for example, 0.5%. Resistors R10, R20 and R30 form a first portion of the resistor network for coupling voltage VCC and the voltage that is developed at terminal 11c to the noninverting input terminal of amplifier 11a. Resistors R40, R50 and R60 form a second portion of the resistor network for coupling signal VRAMP and the deflection current indicative feedback signal at terminal 11d to the inverting input terminal of amplifier 11d.

The values of the elements of arrangement 101 of FIGURE 1b are selected in such a way that the average value of signal VRAMP of FIGURE 1c is nominally equal to one-half of voltage VCC. Assume that the voltages at terminals 11d and 11c are equal when the level of signal VRAMP is equal to one-half of voltage VCC. Thus, the Thevenin equivalent, with respect to the inverting input terminal of amplifier 11a, of the portion of the circuit that includes signal VRAMP and resistors R40, R50 and R60, is equal to the Thevenin equivalent, with respect to the noninverting input terminal of amplifier 11a, of the portion of the circuit that includes voltage VCC and resistors R10, R20 and R30. Therefore, signal VRAMP that is equal to its average value or one-half of voltage VCC, produces deflection current i_y that is nominally zero or close to zero. Signal VRAMP produces current

iy having approximately symmetrical negative and positive peak amplitudes.

The contribution of each of resistors R10, R20 and R30 to the Thevenin equivalent, with respect to the noninverting input terminal of amplifier 11a, is the same as the contribution of each of resistors R40, R50 and R60, respectively, to the Thevenin equivalent with respect to the inverting input terminal. This is so, because the resistors within a given pair of each of the pairs (R10, R40), (R20, R50) and (R30, R60) are of equal values. Advantageously, because the resistors within each of the pairs are of equal value, a closer or better match and temperature tracking is obtained than if the resistor of such pair were of unequal value. Such close temperature tracking occurs because, in the manufacture process, it is more feasible to make a pair of separate resistors having close temperature tracking coefficient, such as 50 ppm/°C, when they are of equal value. By establishing the average value of signal VRAMP equal to one-half of voltage VCC, the pair of resistors R10 and R40 could be made of equal value resistors and also the pair of resistors R20 and R50 could be made of equal value resistors.

Advantageously, because the resistors in each of the pairs are equal, common mode rejection with respect to a vertical rate parabolic voltage developed at terminal 11c of capacitor C6 due to current iy, common mode rejection with respect to variations of supply voltage V+ and common mode rejection with respect to variations of supply voltage VCC are higher and less temperature dependent. Thus, distortion and D.C. current drift in deflection current iy are, advantageously, reduced, within an entire operational temperature range of, for example, 0°C and 40°C. A change in voltage VCC due to, for example, a temperature change, causes both the average value of signal VRAMP, that is coupled to the inverting input terminal of amplifier 11a, and the portion of D.C. voltage VCC, that is coupled to the noninverting input terminal of amplifier 11a, to vary in the same direction and approximately by the same amounts. Therefore, advantageously, D.C. centering is made less dependent on variation of voltage VCC.

For the purpose of television receiver field adjustment or factory adjustment, it may be desirable to collapse the vertical

raster and to establish the electron beam in CRT 49 of FIGURE 1c at or close to the vertical center of the display screen.

In accordance with an aspect of the invention, a signal SERVICE of FIGURE 1a that is produced in a bus interface unit 30
5 from input data generated by microprocessor 17 is coupled via "OR" gate 20 to "reset" input R of flip-flop 12, during service mode operation. Consequently, current IDRAMP is decoupled from capacitor 14. Instead, signal SERVICE that is coupled to a control
10 terminal 31a of a switch 31, causes switch 31 to couple a current ISERV produced in a V/I converter 32 to terminal 18a of capacitor 14. V/I converter 32 generates current ISERV at a magnitude that is proportional to a difference between signal VRAMP and D.C. voltage VCENT produced in a manner that was described
15 before. As a result of the negative feedback via V/I converter 32, signal VRAMP is established at a constant level that is equal to voltage VCENT, when signal SERVICE is generated. Signal VRAMP at the level of voltage VCENT produces a small or zero D.C. current
20 iy of FIGURE 1c that causes the vertical raster to collapse at the vertical center of the screen of CRT 49. Thus, horizontal scanning produced by a horizontal deflection circuit, not shown, occurs continuously at a vertical center of the display screen of CRT 49.

WHAT IS CLAIMED IS:


1. A video display deflection apparatus, comprising:
a cathode ray tube (49);
a sawtooth generator (14,18) for generating a sawtooth signal (VRAMP);
a deflection circuit amplifier (11a) responsive to said sawtooth signal and coupled to a vertical deflection winding (L_Y) that is mounted on a neck of said cathode ray tube for generating a vertical deflection current (i_Y) in said deflection winding in accordance with said sawtooth signal, said deflection current periodically varying a position of a beam spot on a screen of said cathode ray tube in a vertical direction, during normal operation; characterized by
means (17,31a) for generating a service mode control signal (SERVICE); and
means (32,31) responsive to said service mode control signal for disabling the vertical position variation of said beam spot and for applying a signal (VCENT) that is indicative of normal operation vertical centering to said deflection winding to vertically center said beam spot.
2. An apparatus according to Claim 1 characterized in that said deflection circuit (11a, L_Y) forms a D.C. coupled deflection circuit with respect to said sawtooth signal (VRAMP).
3. An apparatus according to Claim 2 characterized in that said vertical centering indicative signal (VCENT) is D.C. coupled to said deflection winding (L_Y) via said sawtooth generator (18) when said service mode control signal (SERVICE) is generated.
4. An apparatus according to Claim 1 characterized in that said vertical centering indicative signal (VCENT) is coupled to said deflection winding (L_Y) via a signal path formed between an input (inverting input terminal) and an output of said amplifier (18).



ABSTRACT

A sawtooth signal generator (18) of a D.C. coupled vertical deflection circuit is responsive, during service mode of operation, to a first signal (VCENT) at a D.C. level that is indicative of vertical centering. During the service mode operation, the generation of the sawtooth signal (VRAMP) is disabled and, instead, the generator generates a D.C. signal (at output of 18) that is D.C. coupled via a vertical deflection amplifier (11a, Fig. 1c) to a vertical deflection winding (L_Y) in a manner to position an electron beam at the vertical center of a display screen.

FIGURE 1a

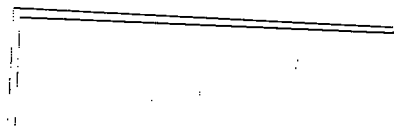

$$ISERV(\overline{m}A)=2 \bullet (VRAMP - VCENTER)$$

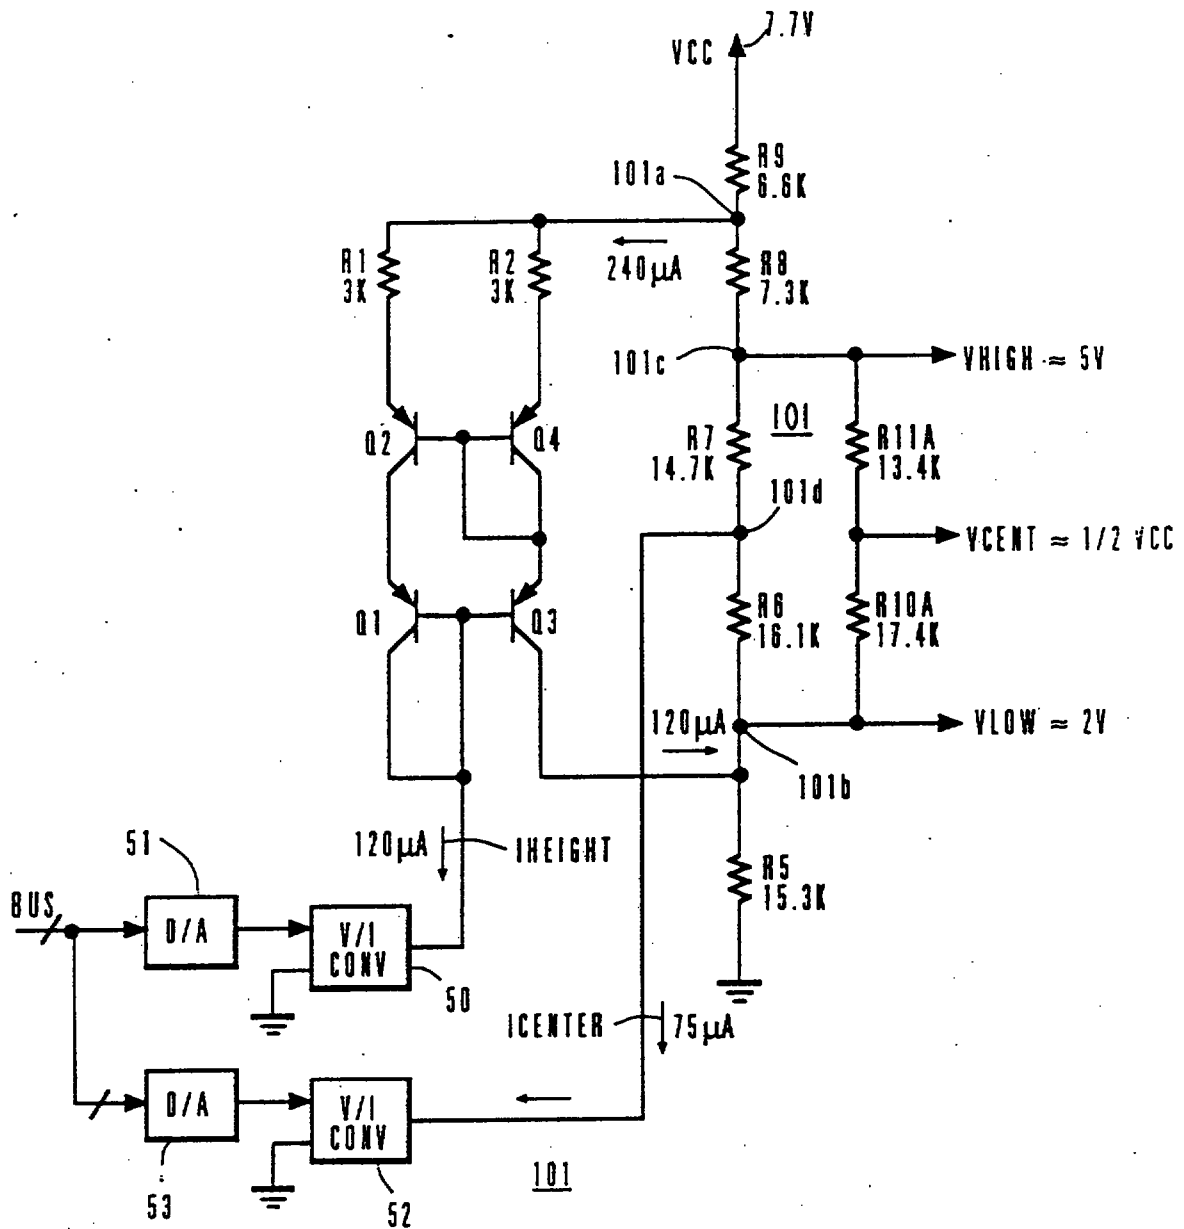



FIG. 1b

FIG. 1C

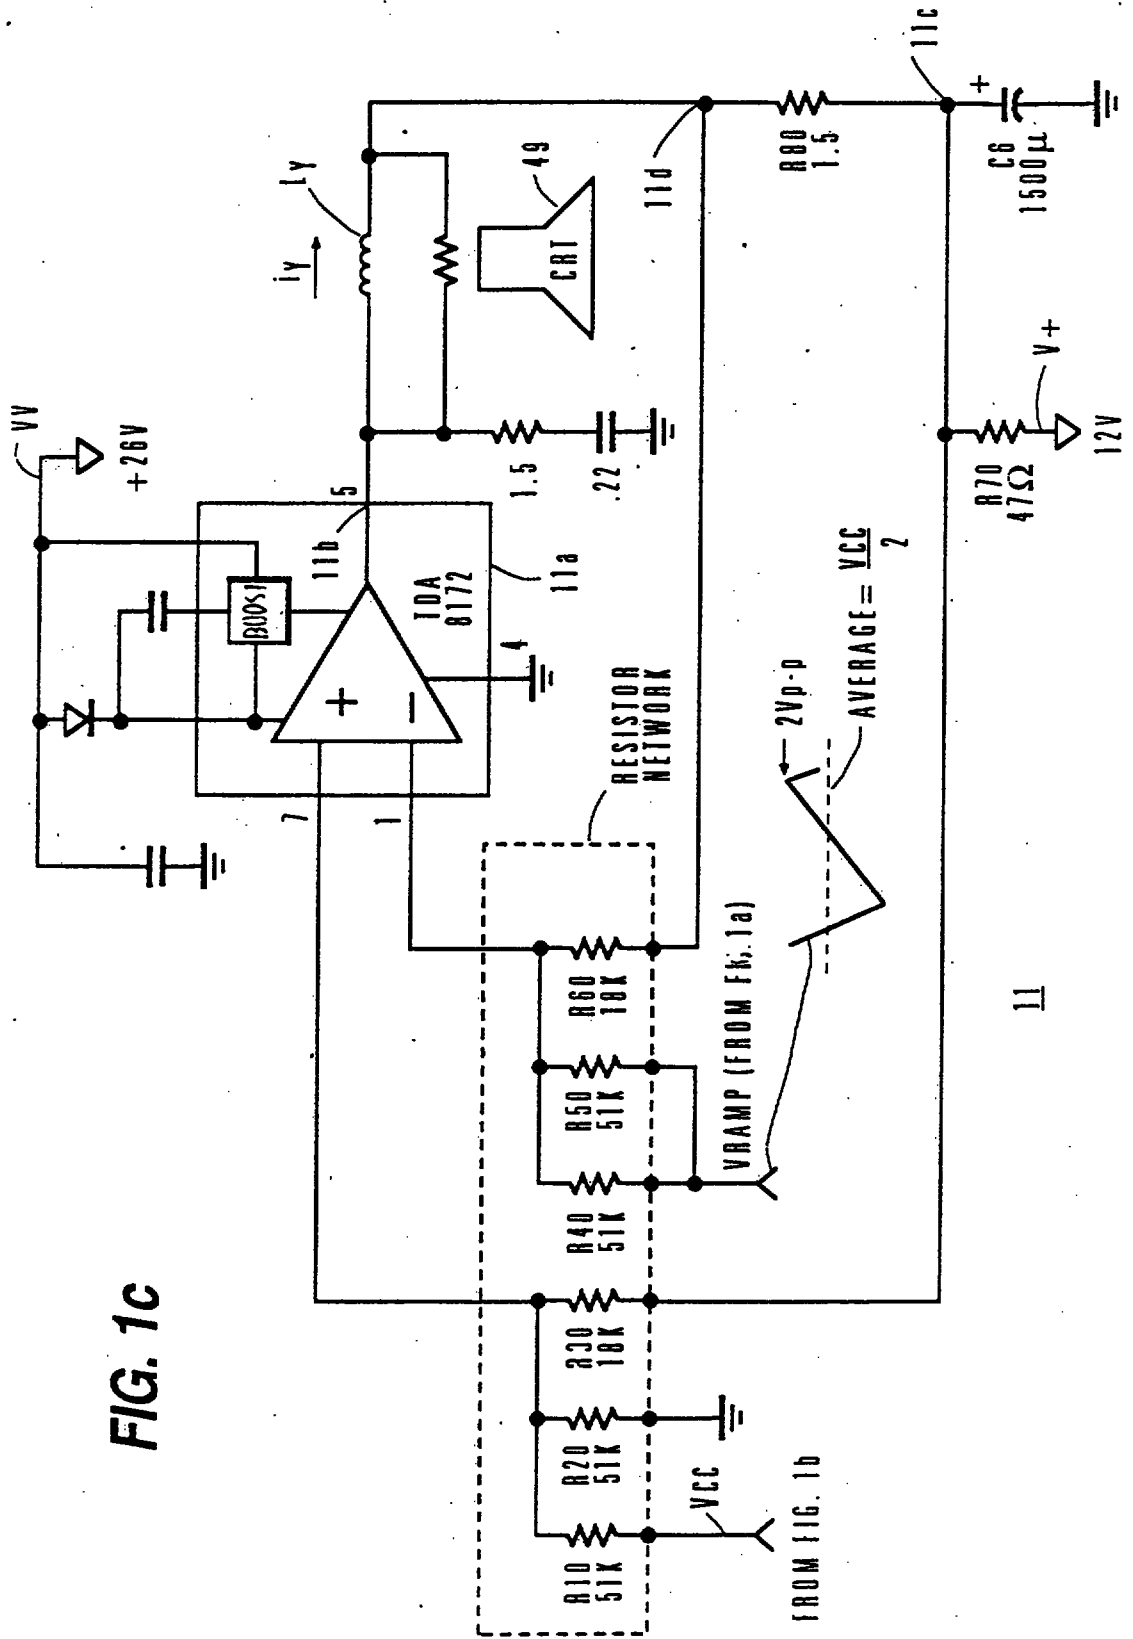




FIG. 2a

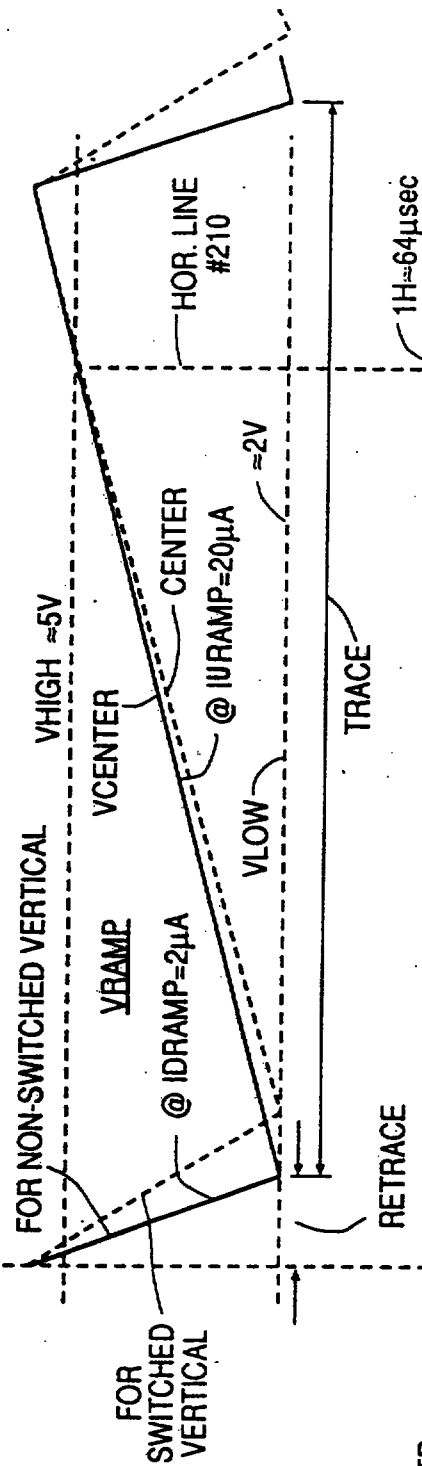


FIG. 2b

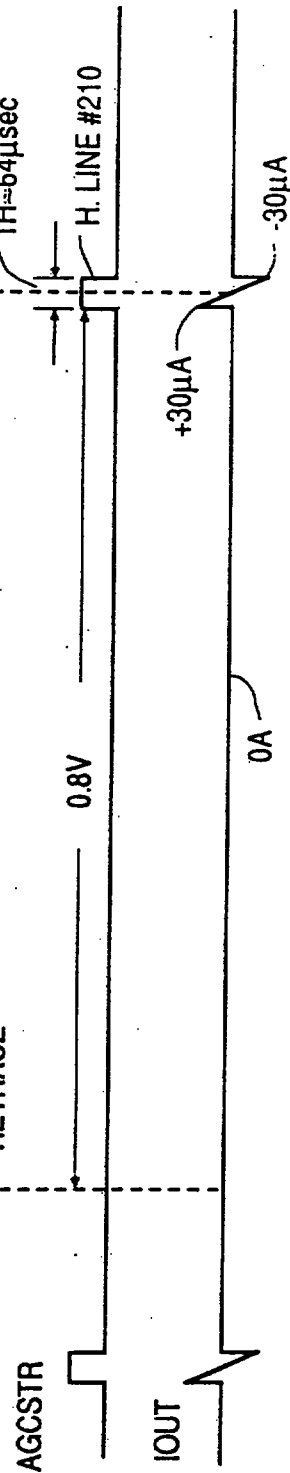


FIG. 2c

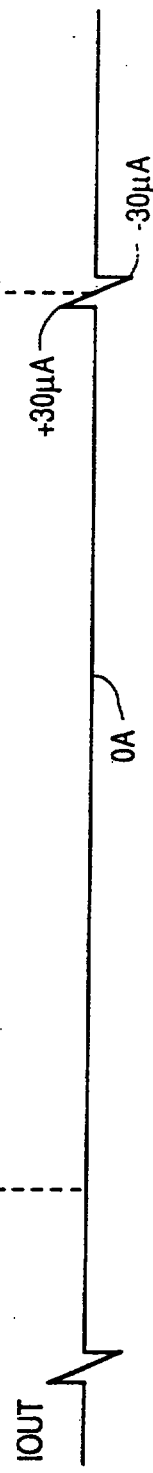


FIG. 2d

- ☒ Description : paged ...1. to paged ...11.
☒ Claim(s) : paged ...12. to paged ...
☒ Drawing(s) : paged ...1/4 to paged ...4/4
☒ Abstract : paged ...13. to paged ...

DATE OF RECEIPT 31/07/96.

31 JUL 1996

- 1 -

SERVICE SWITCH FOR VIDEO
DISPLAY DEFLECTION APPARATUS

This invention relates to video display apparatus. In particular, the invention relates to service mode circuitry that
5 disables deflection.

Typically, a vertical sawtooth generator of a vertical deflection circuit in a television receiver utilizes a current integrating capacitor that is charged from a source of a D.C. current to produce a ramp, trace portion of an output sawtooth
10 signal synchronized to a vertical synchronizing signal. The trace portion of the sawtooth signal controls a trace portion of a vertical deflection current that produces vertical deflection in a cathode ray tube (CRT).

In a D.C. coupled vertical deflection circuit, the
15 sawtooth signal is D.C. coupled to an input of a vertical deflection amplifier. A feedback signal that is indicative of the magnitude of the vertical deflection current, produced by the amplifier, is D.C. coupled to an input of the amplifier in a negative feedback manner.

During manufacture and assembly of the television receiver, it may be necessary or desirable to adjust the video drive circuitry to appropriate levels so that the red, green and blue designated electron beams of a cathode ray tube are
20 generated in a manner that will produce proper color images on the phosphor display screen of the tube. Such adjustments are typically performed while the vertical deflection circuitry is disabled. The resulting single horizontal line is more easily observed than a complete raster field when setting electron beam drive and cutoff levels. The circuitry utilized to perform the
25 disabling function is typically referred to as a service switch. It may be desirable to provide such disabling function in a D.C.-coupled vertical deflection circuit.

A vertical sawtooth generator, embodying an aspect of the invention, is D.C. coupled to a vertical deflection amplifier. A
30 voltage that is indicative of an average value of the sawtooth signal during normal operation is generated and is available when service mode operation is required. A service mode control signal is generated when service mode operation is required. When the
35

31 JUL 1996

-2-

service-mode control signal is generated, the generation of the sawtooth signal is disabled. In the service mode operation, the sawtooth generator is responsive to the average value signal to produce a D.C. output signal that is D.C. coupled to the vertical deflection amplifier at a magnitude that is required to position the electron beam at the vertical center of a CRT.

A video display deflection apparatus, embodying an aspect of the invention, includes a sawtooth generator for generating a sawtooth signal. A deflection circuit amplifier is responsive to the sawtooth signal and coupled to a vertical deflection winding that is mounted on a neck of a cathode ray tube for generating a vertical deflection current in the deflection winding in accordance with the sawtooth signal. The deflection current periodically varies a position of a beam spot on a screen of the cathode ray tube in a vertical direction, during normal operation. A service mode control signal is generated. The vertical position variation of the beam spot is disabled and a signal, that is indicative of normal operation vertical centering, is applied to the deflection winding via a signal path formed between an input and an output of the amplifier to position the beam spot at a vertical center of the screen.

FIGURES 1a, 1b and 1c illustrate, a vertical deflection circuit, embodying an aspect of the invention; and

FIGURES 2a-2d illustrate idealized waveforms of the arrangement of FIGURE 1.

FIGURES 1a, 1b and 1c illustrate, partially in block diagram form, a vertical deflection circuit, embodying an aspect of the invention that includes a sawtooth generator 100. A synchronizing signal SYNC produced by, for example, a video detector of a television receiver, not shown, that processes a television signal conforming to the NTSC standard, for example, is coupled to a vertical timing generator 10. Generator 10 generates a vertical rate pulse signal VRESET, as shown in FIGURE 2a. Similar symbols and numerals in FIGURES 1a, 1b, 1c and 2a-2d indicate similar items or functions.

Pulse signal VRESET of FIGURE 1a is coupled to a "set" input of a Set-Reset flip-flop 12 causing flip-flop 12 to change states. Consequently, an output Q of flip-flop 12 produces a

31 JUL 1990

leading edge LE of an output control signal 112a. Leading edges of signals VRESET and 112a occur at the end of a given vertical trace interval and initiate vertical retrace. Signal 112a is coupled to a control terminal 13a of a current switch 13. Immediately after
5 leading edge LE, signal 112a causes switch 13 to couple a D.C. current IDRAMP to a junction terminal 18a of an integrating capacitor 14 that is fabricated using an integrating circuit (IC) fabrication technique.

Current IDRAMP is produced in a voltage-to-current
10 (V/I) converter 15 that is controlled by a voltage VRSLOPE produced in a digital-to-analog (D/A) converter 16. The digital data input to D/A converter 16 is supplied via a bus BUS from a microprocessor 17. Microprocessor 17 may additionally control various adjustment functions, not shown, in the television receiver
15 such as S-shaping and East-West correction. A second end terminal 18b of integrating capacitor 14 is coupled to an output of an amplifier 18 where a sawtooth signal VRAMP is generated. Current IDRAMP forms a retrace portion RETRACE of sawtooth signal VRAMP of FIGURE 2b. Terminal 18a of capacitor 14 of
20 FIGURE 1a is coupled to an inverting input terminal of amplifier 18 to form a current integrator.

Signal VRAMP of FIGURE 1a is also coupled to a noninverting input terminal of a comparator 19 that senses the level of signal VRAMP during portion RETRACE to determine an
25 end time of portion RETRACE of signal VRAMP. An inverting input terminal of comparator 19 is coupled to a source of a D.C. reference voltage VLOW that is generated in a manner discussed later on. An output terminal 19a of comparator 19 is coupled via an "OR" gate 20 to a "reset" input R of flip-flop 12.

30 When, as a result of current IDRAMP, signal VRAMP ramps down and attains a level that is equal to voltage VLOW, comparator 19 produces an output signal that causes flip-flop 12 to change states and to produce, at output Q, a trailing edge TE of signal 112a. Thereafter, current IDRAMP is decoupled from
35 capacitor 14 by switch 13.

A magnitude of current IDRAMP is programmable, in accordance with the value of the digital data input to D/A converter 16 for providing the required retrace slope or length of


31 JUL 1996

portion RETRACE of signal VRAMP. For example, in an arrangement similar to that of FIGURE 1a, intended for controlling a switched vertical deflection circuit, not shown, V/I converter 15 may be programmed to produce current IDRAMP of a smaller magnitude than in FIGURE 1a. In this way, portion RETRACE is lengthened, as shown in broken line in FIGURE 2b, relative to the length of portion RETRACE used for controlling a non-switched vertical deflection circuit such as shown in FIGURE 1c. Thus, retrace portion RETRACE of signal VRAMP of FIGURE 2b can be made adaptable for operation with either a switched or non-switched vertical deflection circuit.

Provided that the pulse width of signal VRESET of FIGURE 1a is shorter than the length of portion RETRACE of signal VRAMP, the precise timings of the trailing edge of signal VRESET is, advantageously, not critical. The advantage of not being critical is that timing generator 10 that is required for processing both nonstandard and standard sync signal SYNC can be simplified. Nonstandard sync signal SYNC might be received from, for example, a video tape recorder operating in a freeze-frame or still picture mode.

A D.C. current IURAMP that is substantially smaller than current IDRAMP is produced in a V/I converter 21. After trailing edge TE of signal 112a, current IURAMP that is coupled to terminal 18a of capacitor 14 charges capacitor 14 to produce a ramping trace portion TRACE of sawtooth signal VRAMP of FIGURE 2b. The magnitude of current IURAMP of V/I converter 21 of FIGURE 1a is controlled in an automatic gain control (AGC) feedback loop by a voltage VAGC, developed across a capacitor 22. Voltage VAGC controls converter 21 such that the more positive is voltage VAGC, the smaller is current IURAMP. An AGC strobe signal AGCSTR is coupled to a control terminal 24a of a switch 24.

Signal AGCSTR is produced in vertical timings generator 10 close to the end of vertical trace. Signal AGCSTR has a pulse width that is equal to the length of, for example, a horizontal video line or 64 microseconds. During the occurrence of the pulse of signal AGCSTR, a current IOUT, generated in a V/I converter 23, is coupled via a switch 24 to capacitor 22. Outside of the occurrence of the pulse of signal AGCSTR, capacitor 22

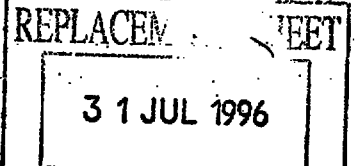

maintains its voltage approximately at a constant level to provide sample-and-hold operation. The magnitude of current IOUT is controlled in converter 23 is proportional to a difference between signal VRAMP and a reference voltage VHIGH, that is produced in
5 a manner described later on.

During a given trace interval, should the magnitude of signal VRAMP be smaller than voltage VHIGH when strobe signal AGCSTR occurs, current IOUT would be positive and at a magnitude that is proportional to the difference between voltage
10 VHIGH and signal VRAMP. Positive current IOUT causes a decrease of voltage VAGC in capacitor 22. Consequently, in subsequent vertical trace intervals, current IURAMP would be larger and the rate of increase of signal VRAMP would be greater than before in a manner to compensate for the aforementioned
15 tendency of signal VRAMP to be smaller than required.

Conversely, should the magnitude of signal VRAMP be larger than voltage VHIGH, when the pulse of signal AGCSTR occurs, current IURAMP, in the subsequent vertical trace intervals, would be smaller. Thus, the AGC feedback loop causes
20 the magnitude of signal VRAMP to be at the same level of voltage VHIGH, when strobe signal AGCSTR occurs. In steady state operation, the polarity of current IOUT changes at the center of the pulse of signal AGCSTR, as shown in FIGURE 2d.

Immediately after the circuit is energized, capacitor 22
25 is fully discharged. Capacitor 22 is coupled to voltage VCC. Therefore, upon power turn-on, voltage VAGC is equal to voltage VCC and the amplitude of ramp signal VRAMP is at a minimum or zero. Had capacitor 22 been coupled to ground, instead, the amplitude of signal VRAMP at power turn-on might have been
30 excessive. Excessive amplitude of signal VRAMP could cause excessive deflection current amplitude. The result could be that the electron beam in CRT 49 could impinge on a neck of CRT 49 and damage CRT 49.

Signal AGCSTR is made to occur further from the
35 center of vertical trace portion TRACE and as close to the end of vertical trace as feasible. In this way, the length of an interval between the instant when the level of signal VRAMP is established to be equal to voltage VLOW and the instant when

signal AGCSTR is generated is, for example, at the maximum feasible length. The upper limit as to how late in the cycle of signal VRAMP, signal AGCSTR can occur, is determined by the minimum required length of the vertical cycle of signal VRAMP.

- 5 Illustratively, signal AGCSTR is selected to occur after an interval T, having a length of 80% of the nominal vertical period V, has elapsed from the trailing edge TE of signal 112a, as shown in FIGURE 2c.

A time CENTER occurs at the center of portion TRACE.

- 10 At a time that is further away from time CENTER of FIGURE 2b, the level of signal VRAMP is close to its peak value. Therefore, the relative contribution of offset errors to control accuracy is reduced with respect to a situation in which signal AGCSTR occurs, for example, at time CENTER. It follows that, advantageously, a
15 more accurate control of signal VRAMP of FIGURE 1a can be obtained.

- Signal VRAMP is waveform corrected for providing S-shaping, in a manner not shown, and D.C. coupled to, for example, a D.C. coupled linear vertical deflection circuit 11 of FIGURE 1c
20 that includes a vertical amplifier 11a for producing a vertical deflection current i_y in a vertical deflection winding L_y . Winding L_y of FIGURE 1c provides vertical deflection in a CRT 49. Advantageously, D.C. coupling eliminates the need for a large A.C. coupling capacitor and eliminates a dependency of linearity and S-
25 correction on the coupling capacitor characteristics.

FIGURE 1b illustrates an arrangement 101, for generating voltages VHIGH, and VLOW of FIGURE 1a, referred to before, and for generating a voltage VCENT that is used for vertical centering adjustment purposes, as explained later on.

- 30 Arrangement 101 includes a resistor R9 having a terminal that is coupled to a supply voltage VCC of 7.7 volts. A second terminal, 101a, of resistor R9 is coupled to a resistor R8. A terminal 101c of resistor R8 is coupled to a series arrangement of resistors R7 and R6. The series arrangement of resistors R7 and R6 is coupled
35 between terminal 101c and a terminal 101b. A resistor R5 is coupled between terminal 101b and ground. A second series arrangement of resistors R11A and R10A is coupled between


terminals 101b and 101c, in parallel with the series arrangement of resistors R7 and R6.

Voltage VLOW is developed at terminal 101b. Voltage VHIGH is developed at terminal 101c. Voltage VCENT is
 5 developed at a terminal 101d, between resistors R11A and R10A.

A V/I converter 52 that is controlled by input data received via bus BUS from microprocessor 17 of FIGURE 1a and via a D/A converter 53 produces a D.C. current ICENTER of FIGURE 1b. Current ICENTER is coupled between resistors R6 and R7.
 10 Current ICENTER provides adjustment of the average value of signal VRAMP by adjusting voltages VLOW and VHIGH so as to adjust vertical centering. The average value of signal VRAMP is nominally equal to one-half the value of voltage VCC. Because
 15 signal VRAMP is D.C. coupled to winding Ly of FIGURE 1c, a change in the average value of signal VRAMP causes a corresponding change in the vertical centering of the electron beam.

A V/I converter 50 of FIGURE 1b that is controlled by input data received via bus BUS from microprocessor 17 of FIGURE 1a and via a D/A converter 51 of FIGURE 1b produces a
 20 D.C. current IHEIGHT of FIGURE 1b that is coupled both to the base and to the collector of a transistor Q1, coupled in a diode configuration. The base and collectors of transistor Q1 are coupled to the base of a transistor Q3 to control a collector current in
 25 transistor Q3 that is equal to current IHEIGHT. The collector of transistor Q3 is coupled to terminal 101b between resistors R5 and R6. Collector base electrodes of a transistor Q4 are coupled together in a diode configuration and also coupled to the emitter
 of transistor Q3 for supplying the current of transistor Q3. The emitter of transistor Q4 is coupled via a resistor R2 to terminal
 30 101a. The base of transistor Q2 is coupled to the base and to the collector of transistor Q4. The emitter of transistor Q2 is coupled via a resistor R1 to terminal 101a. A collector of transistor Q2 is coupled to the emitter of transistor Q1 for supplying the collector
 current of transistor Q1.

35 Transistors Q1, Q2, Q3 and Q4 form a temperature compensated current mirror arrangement. The sum of the emitter currents of transistors Q2 and Q4 that flow in resistors R1 and R2, respectively, is supplied via terminal 101a and is equal to twice



the value of current IHEIGHT. Whereas, the collector current of transistor Q3, that is coupled to terminal 101b, is equal to current IHEIGHT.

5 The level of current IHEIGHT is controlled to establish the required peak-to-peak amplitude of signal VRAMP of FIGURE 1a by establishing the levels of voltages VHIGH and VLOW. An adjustment of current IHEIGHT causes voltages VHIGH and VLOW to change in opposite directions.

10 A change in current IHEIGHT produces a change in the peak-to-peak amplitude of signal VRAMP for providing vertical height adjustment without affecting vertical centering. For example, an increase in current IHEIGHT of FIGURE 1b causes voltages VHIGH to decrease and voltage VLOW to increase such that the average value of voltage VRAMP and the level of voltage
15 VCENT remain unaffected by the increase in current IHEIGHT. This advantageous feature is obtained by selecting the appropriate values for the resistors in arrangement 101 as well as for the currents that are coupled to terminals 101a and 101b and produced by transistors Q1, Q2, Q3 and Q4.

20 The level of current ICENTER is controlled via bus BUS such that voltages VLOW and VHIGH change in the same direction. For example, an increase in current ICENTER, made for service raster centering adjustment, causes each of voltages VHIGH and VLOW to decrease.

25 The values of the resistors in arrangement 101 are also selected in such a way that the peak-to-peak amplitude of signal VRAMP of FIGURE 1a remains approximately the same after adjustment of current ICENTER of FIGURE 1b. Therefore, adjustment of vertical centering does not affect vertical height.
30 Advantageously, the peak-to-peak amplitude of signal VRAMP and the average value of signal VRAMP can be adjusted independently of each other.

In deflection circuit 11 of FIGURE 1c, deflection winding Ly is coupled in series with a deflection current sampling
35 resistor R80 to form a series arrangement that is coupled between an output terminal 11b of amplifier 11a and a junction terminal 11c of a power supply decoupling capacitor Cb. A resistor R70 couples to terminal 11c a supply voltage V+ of, for example, +12

3 1 JUL 1996

volts. A junction terminal 11d, coupled between winding Ly and resistor R80, is coupled via a feedback resistor R60 to an inverting input terminal of amplifier 11a. Terminal 11c of resistor R80 is coupled via a resistor R30 to a noninverting input terminal of amplifier 11a. In this way, a negative feedback voltage that is developed across resistor R80 is applied to the input terminals of amplifier 11a. Sawtooth signal VRAMP that controls amplifier 11a is coupled via a parallel arrangement of resistors R40 and R50 to the inverting input terminal of amplifier 11a. Voltage VCC is coupled via a resistor R10 to the noninverting input terminal of amplifier 11a. A resistor R20 is coupled between the noninverting input terminal of amplifier 11a and ground.

Resistors R10, R20, R30, R40, R50 and R60 are manufactured, for example, on a common substrate to form a single resistor network package for providing close temperature tracking. Each of resistors R10, R20, R30, R40, R50 and R60 has a tolerance of, for example, 0.5%. Resistors R10, R20 and R30 form a first portion of the resistor network for coupling voltage VCC and the voltage that is developed at terminal 11c to the noninverting input terminal of amplifier 11a. Resistors R40, R50 and R60 form a second portion of the resistor network for coupling signal VRAMP and the deflection current indicative feedback signal at terminal 11d to the inverting input terminal of amplifier 11d.

The values of the elements of arrangement 101 of FIGURE 1b are selected in such a way that the average value of signal VRAMP of FIGURE 1c is nominally equal to one-half of voltage VCC. Assume that the voltages at terminals 11d and 11c are equal when the level of signal VRAMP is equal to one-half of voltage VCC. Thus, the Thevenin equivalent, with respect to the inverting input terminal of amplifier 11a, of the portion of the circuit that includes signal VRAMP and resistors R40, R50 and R60, is equal to the Thevenin equivalent, with respect to the noninverting input terminal of amplifier 11a, of the portion of the circuit that includes voltage VCC and resistors R10, R20 and R30. Therefore, signal VRAMP that is equal to its average value or one-half of voltage VCC, produces deflection current i_y that is nominally zero or close to zero. Signal VRAMP produces current

iy having approximately symmetrical negative and positive peak amplitudes.


The contribution of each of resistors R10, R20 and R30 to the Thevenin equivalent, with respect to the noninverting input terminal of amplifier 11a, is the same as the contribution of each of resistors R40, R50 and R60, respectively, to the Thevenin equivalent with respect to the inverting input terminal. This is so, because the resistors within a given pair of each of the pairs (R10, R40), (R20, R50) and (R30, R60) are of equal values. Advantageously, because the resistors within each of the pairs are of equal value, a closer or better match and temperature tracking is obtained than if the resistor of such pair were of unequal value. Such close temperature tracking occurs because, in the manufacture process, it is more feasible to make a pair of separate resistors having close temperature tracking coefficient, such as 50 ppm/°C, when they are of equal value. By establishing the average value of signal VRAMP equal to one-half of voltage VCC, the pair of resistors R10 and R40 could be made of equal value resistors and also the pair of resistors R20 and R50 could be made of equal value resistors.

Advantageously, because the resistors in each of the pairs are equal, common mode rejection with respect to a vertical rate parabolic voltage developed at terminal 11c of capacitor C6 due to current iy, common mode rejection with respect to variations of supply voltage V+ and common mode rejection with respect to variations of supply voltage VCC are higher and less temperature dependent. Thus, distortion and D.C. current drift in deflection current iy are, advantageously, reduced, within an entire operational temperature range of, for example, 0°C and 40°C. A change in voltage VCC due to, for example, a temperature change, causes both the average value of signal VRAMP, that is coupled to the inverting input terminal of amplifier 11a, and the portion of D.C. voltage VCC, that is coupled to the noninverting input terminal of amplifier 11a, to vary in the same direction and approximately by the same amounts. Therefore, advantageously, D.C. centering is made less dependent on variation of voltage VCC.

For the purpose of television receiver field adjustment or factory adjustment, it may be desirable to collapse the vertical

raster and to establish the electron beam in CRT 49 of FIGURE 1c at or close to the vertical center of the display screen.

In accordance with an aspect of the invention, a signal SERVICE of FIGURE 1a that is produced in a bus interface unit 30 from input data generated by microprocessor 17 is coupled via "OR" gate 20 to "reset" input R of flip-flop 12, during service mode operation. Consequently, current IDRAMP is decoupled from capacitor 14. Instead, signal SERVICE that is coupled to a control terminal 31a of a switch 31, causes switch 31 to couple a current ISERV produced in a V/I converter 32 to terminal 18a of capacitor 14. V/I converter 32 generates current ISERV at a magnitude that is proportional to a difference between signal VRAMP and D.C. voltage VCENT produced in a manner that was described before. As a result of the negative feedback via V/I converter 32, signal VRAMP is established at a constant level that is equal to voltage VCENT, when signal SERVICE is generated. Signal VRAMP at the level of voltage VCENT produces a small or zero D.C. current *iy* of FIGURE 1c that causes the vertical raster to collapse at the vertical center of the screen of CRT 49. Thus, horizontal scanning produced by a horizontal deflection circuit, not shown, occurs continuously at a vertical center of the display screen of CRT 49.

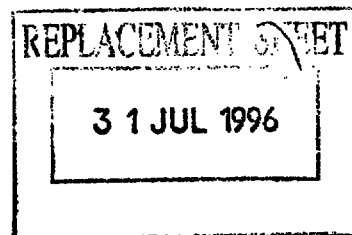

3 1 JUL 1996

WHAT IS CLAIMED IS:

1. A video display deflection apparatus, comprising:
a cathode ray tube (49);
a sawtooth generator (14,18) for generating a sawtooth signal (VRAMP);
a deflection circuit amplifier (11a) responsive to said sawtooth signal and coupled to a vertical deflection winding (L_Y) that is mounted on a neck of said cathode ray tube for generating a vertical deflection current (i_Y) in said deflection winding in accordance with said sawtooth signal, said deflection current periodically varying a position of a beam spot on a screen of said cathode ray tube in a vertical direction, during normal operation; characterized by
means (17,31a) for generating a service mode control signal (SERVICE); and
means (32,31) responsive to said service mode control signal for disabling the vertical position variation of said beam spot and for applying a signal (VCENT) that is indicative of normal operation vertical centering to said deflection winding to vertically center said beam spot.
2. An apparatus according to Claim 1 characterized in that said deflection circuit (11a, L_Y) forms a D.C. coupled deflection circuit with respect to said sawtooth signal (VRAMP).
3. An apparatus according to Claim 2 characterized in that said vertical centering indicative signal (VCENT) is D.C. coupled to said deflection winding (L_Y) via said sawtooth generator (18) when said service mode control signal (SERVICE) is generated.
4. An apparatus according to Claim 1 characterized in that said vertical centering indicative signal (VCENT) is coupled to said deflection winding (L_Y) via a signal path formed between an input (inverting input terminal) and an output of said amplifier (18).



THIS SHEET HAS BEEN
REPLACED


-13-

**SERVICE SWITCH FOR VIDEO
DISPLAY DEFLECTION APPARATUS**


ABSTRACT


5 A sawtooth signal generator (18) of a D.C. coupled
vertical deflection circuit is responsive, during service mode of
operation, to a first signal (VCENT) at a D.C. level that is indicative
of vertical centering. During the service mode operation, the
generation of the sawtooth signal (VRAMP) is disabled and,
instead, the generator generates a D.C. signal (at output of 18) that
is D.C. coupled via a vertical deflection amplifier (11a, Fig. 1c) to a
10 vertical deflection winding (L_Y) in a manner to position an
electron beam at the vertical center of a display screen.

FIGURE 1a



This Sheet Has Been Replaced



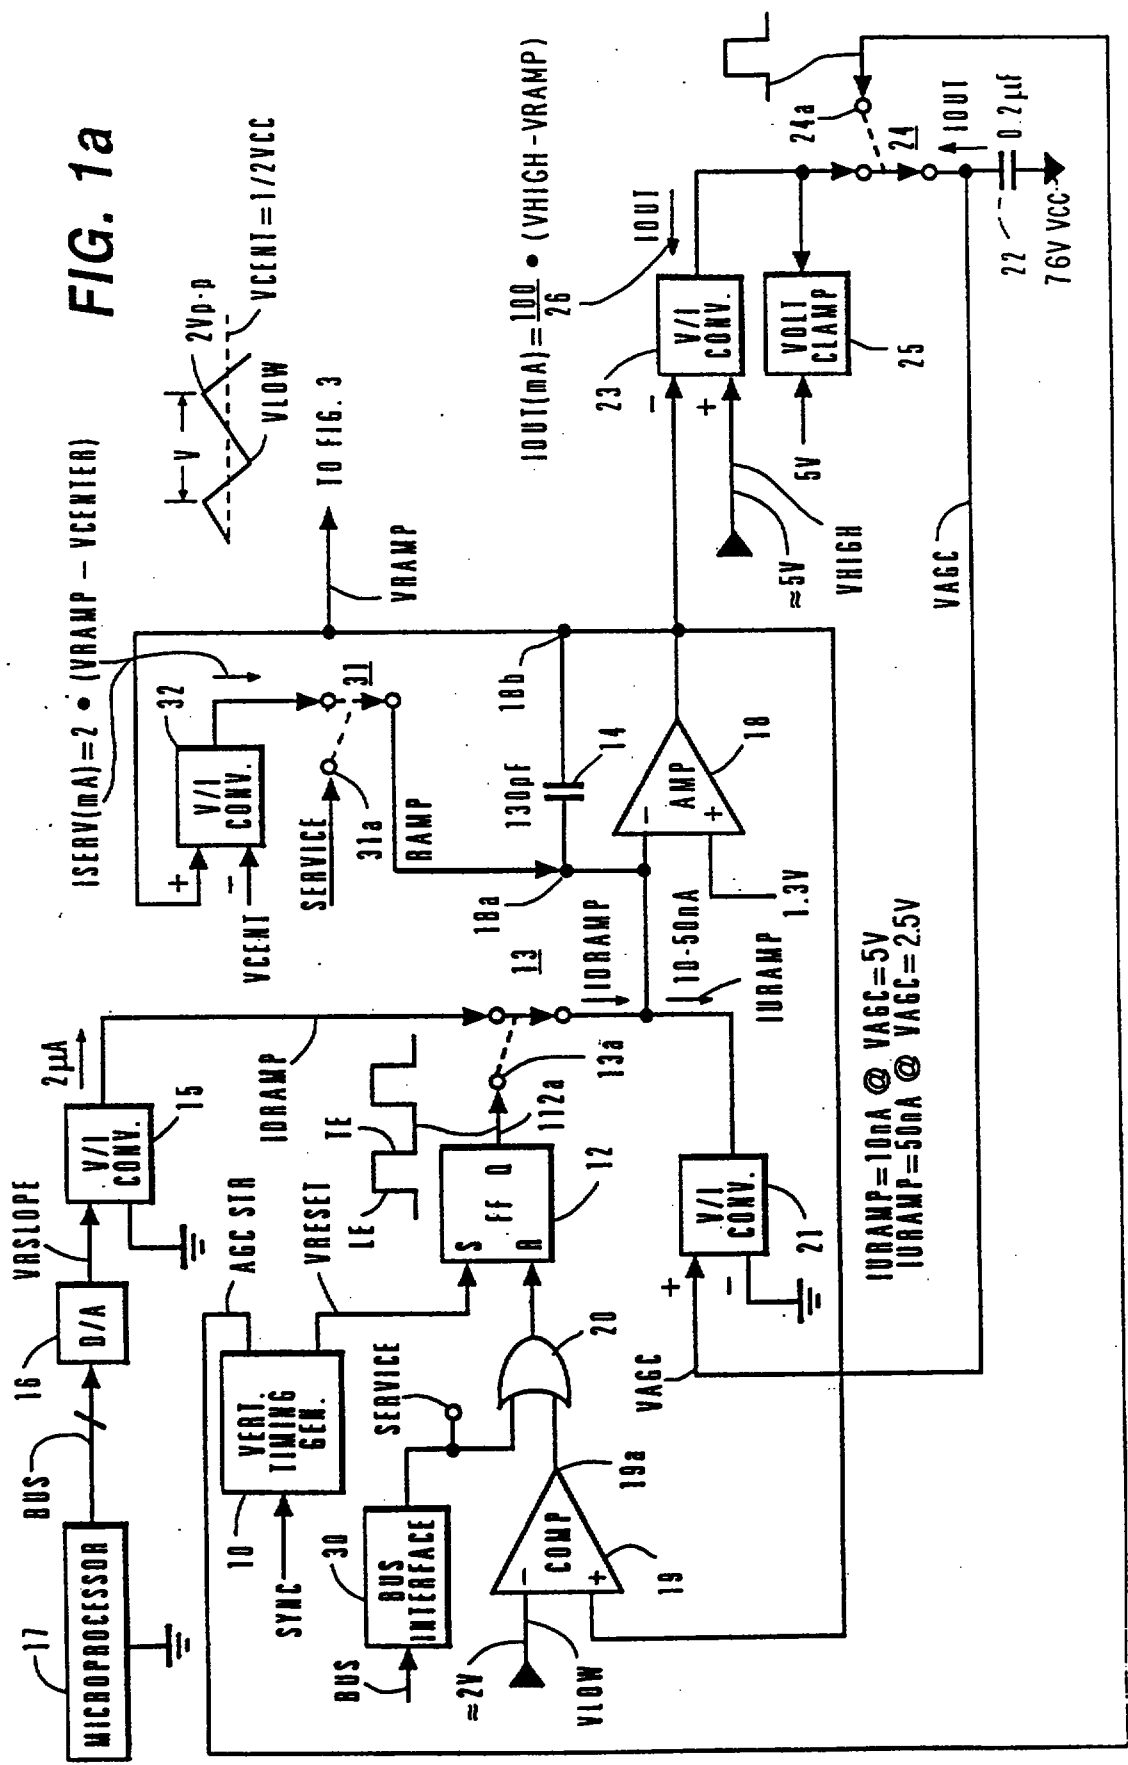






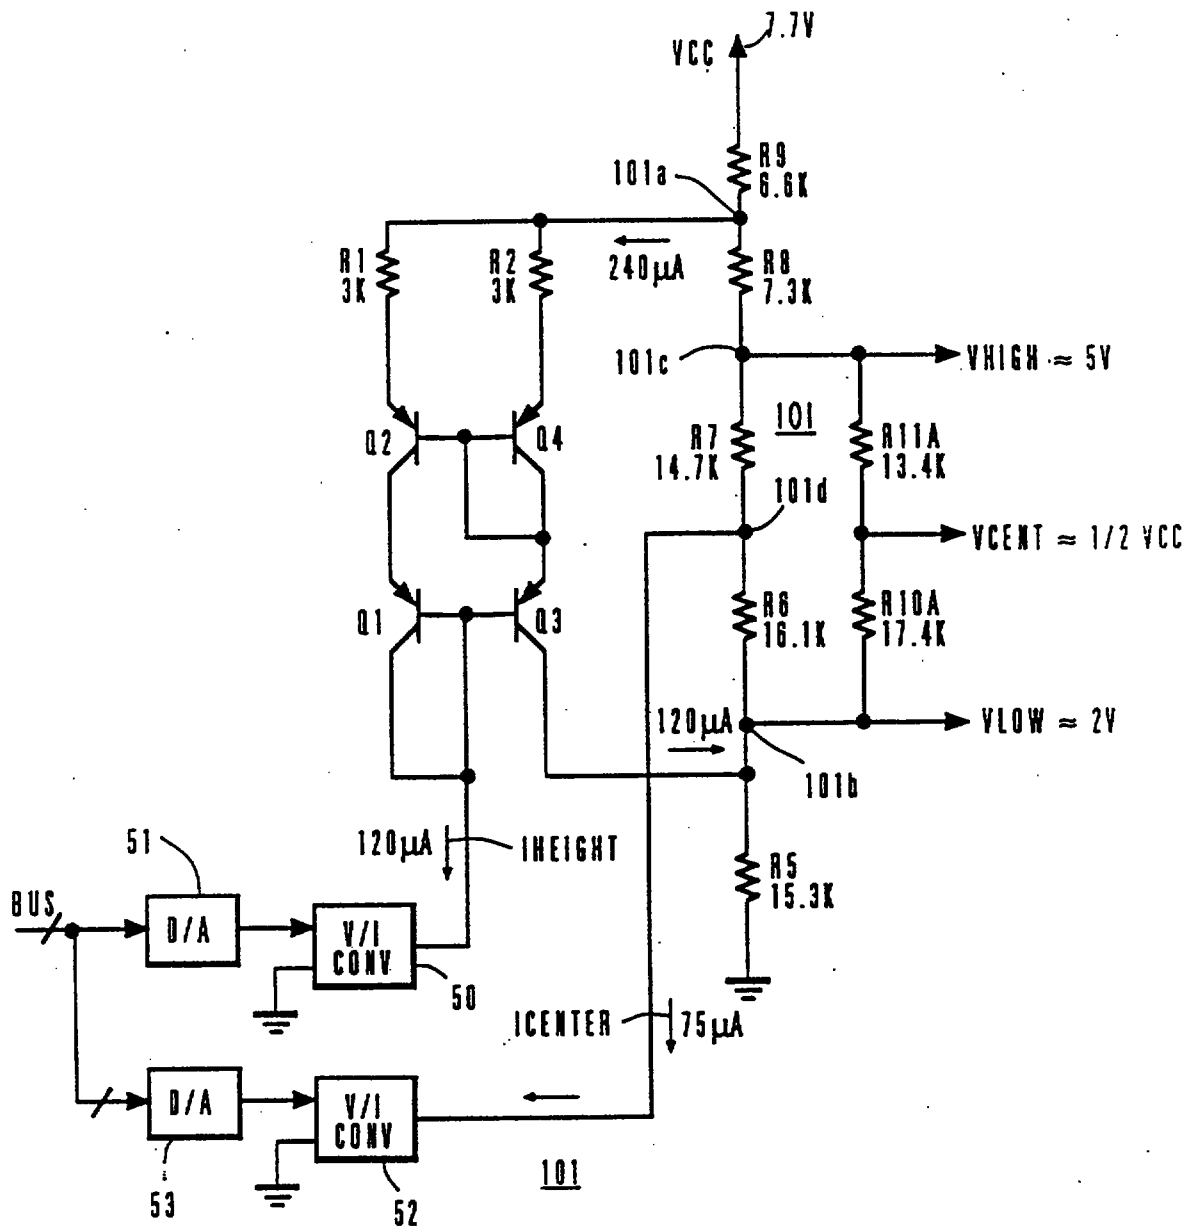


FIG. 1b

FIG. 1C

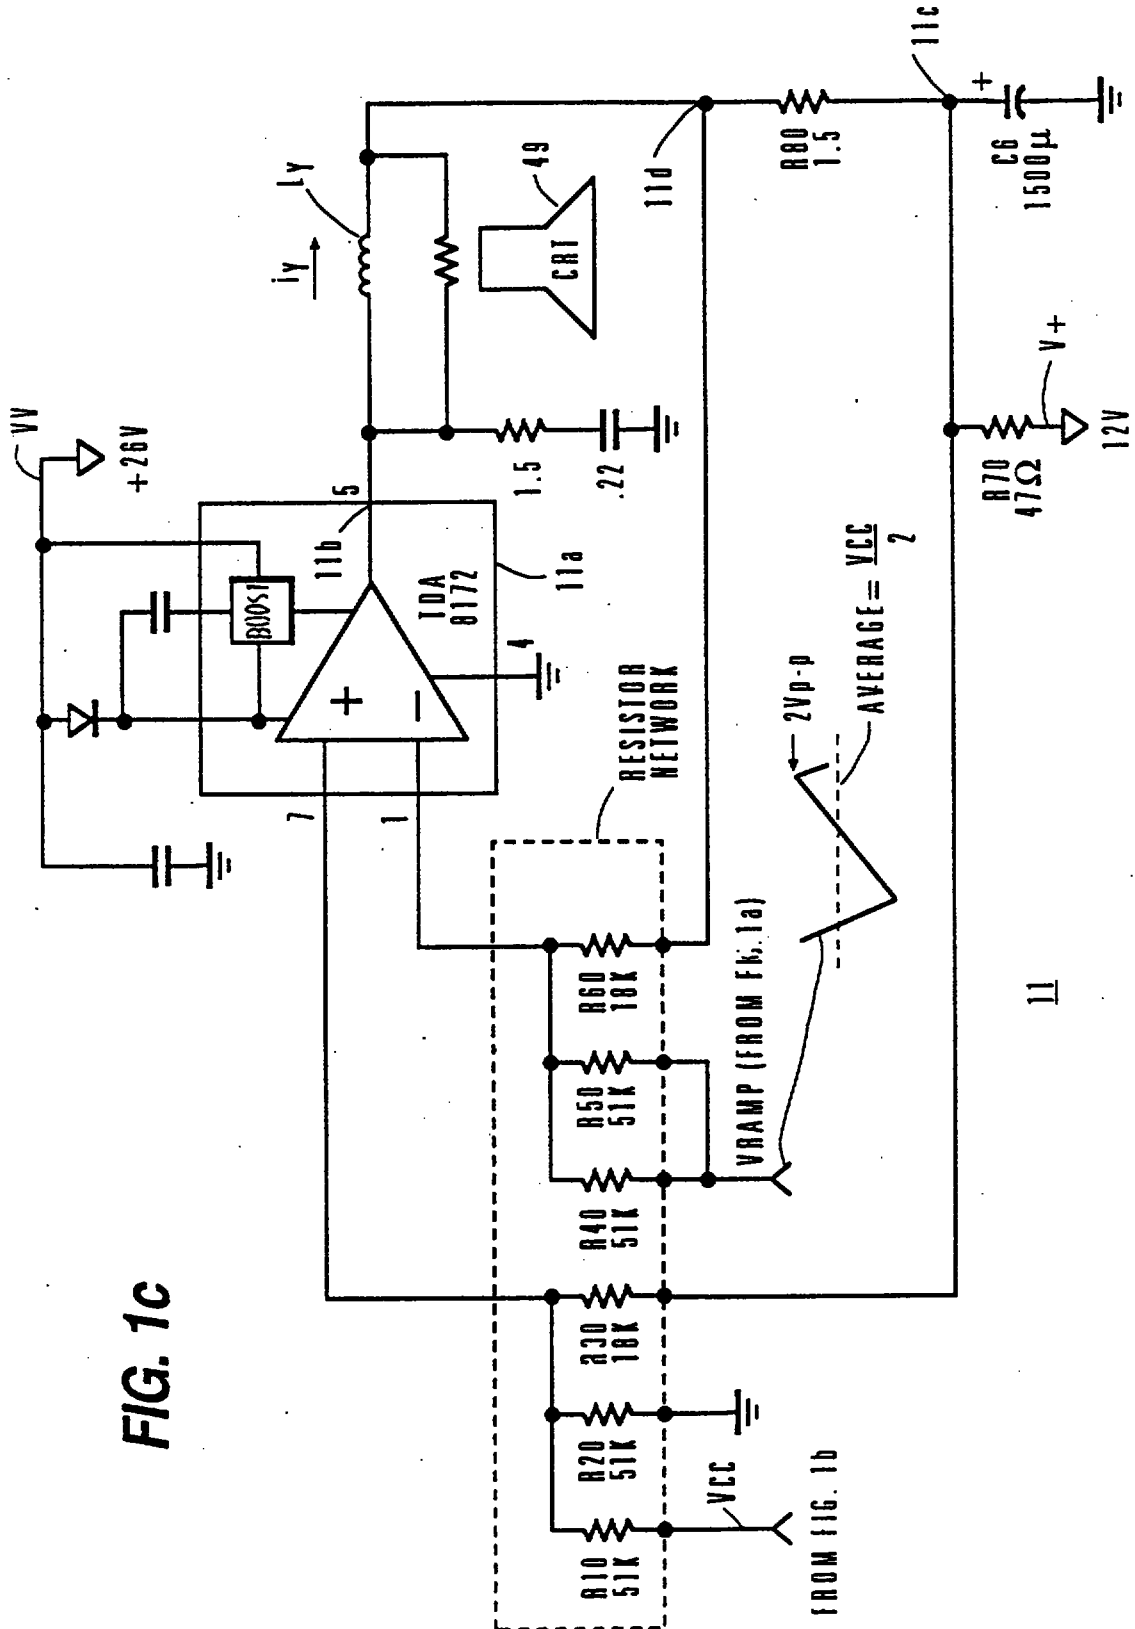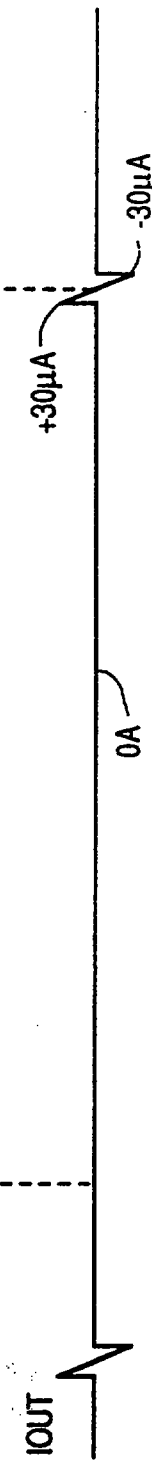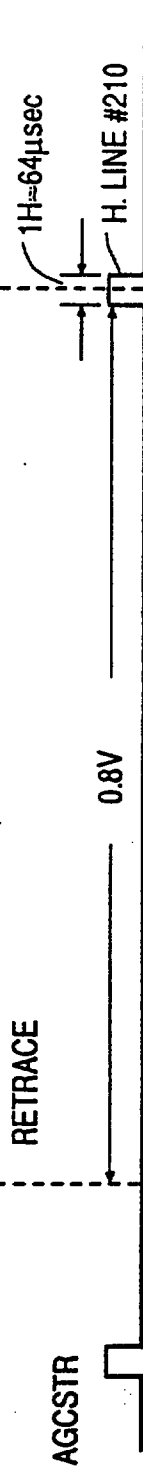

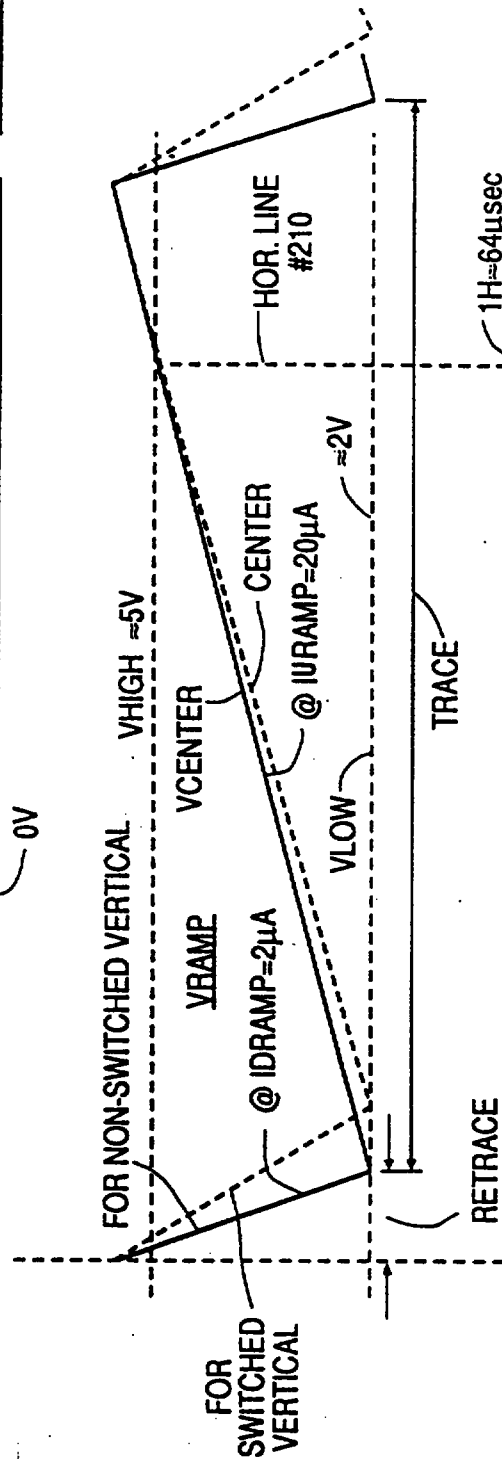

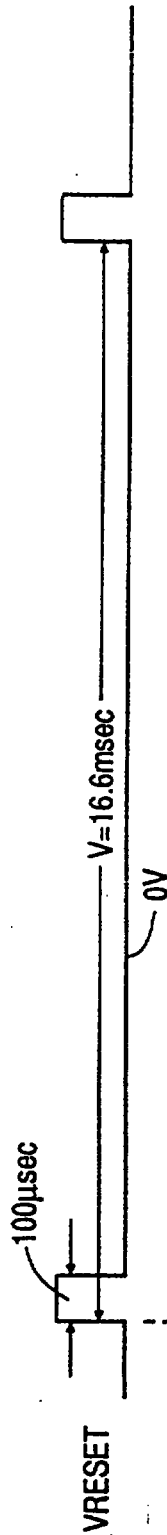

TEXT OF THE ABSTRACT

SERVICE SWITCH FOR VIDEO DISPLAY DEFLECTION APPARATUS

A sawtooth signal generator (18) of a D.C. coupled vertical deflection circuit is responsive, during service mode of operation, to a first signal (VCENT) at a D.C. level that is indicative of vertical centering. During the service mode operation, the generation of the sawtooth signal (VRAMP) is disabled and, instead, the generator (18) generates a D.C. signal (at output of 18) that is D.C. coupled via a vertical deflection amplifier to a vertical deflection winding (L_Y) in a manner to position an electron beam at the vertical center of a display screen.

Fig. 1a

REPLACEMENT SHEET

08 OCT 1999