

22/08/03
2003045820

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
6 September 2002 (06.09.2002)

PCT

(10) International Publication Number
WO 02/068270 A1

- (51) International Patent Classification⁷: **B65B 31/02**
- (21) International Application Number: PCT/KR01/00747
- (22) International Filing Date: 9 May 2001 (09.05.2001)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
2001/10585 28 February 2001 (28.02.2001) KR
- (71) Applicant and
(72) Inventor: **LEE, Gul-joo** [KR/KR]; 108-201 Samsung Apt., Jungwang-Dong, Siheung-Si, Kyungki-Do 429-450 (KR).
- (74) Agent: **L & K PATENT FIRM**; 701, Dackun Building, 822-5, Yeoksam-Dong, Kangnam-Gu, Seoul 135-080 (KR).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SI, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- Published:**
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.




162162



ACTION

(54) Title: PORTABLE VACUUM PACKAGING MACHINE

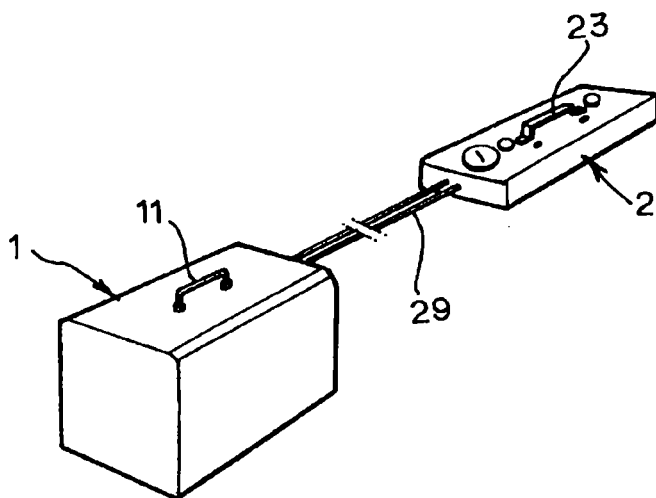

(57) Abstract: The present invention relates to a portable vacuum packaging machine which, other than a conventional vacuum packaging machine composed of a bulky and weighty single component element, is configured in such a way as to be divided into a body section (1) and a head section (2), whereby a vacuum packaging work can be conveniently implemented using the head section (2) without requiring movement of the body section (1) irrespective of place so long as a flat condition is satisfied.

WO 02/068270 A1