20020317 48

25 MAY 2002



162162

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
14 June 2001 (14.06.2001)

PCT

(10) International Publication Number
WO 01/41956 A1

(51) International Patent Classification[7]: B22D 41/28

(21) International Application Number: PCT/BE00/00144

(22) International Filing Date: 5 December 2000 (05.12.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
99870258.3 10 December 1999 (10.12.1999) EP

(71) Applicant *(for all designated States except US)*: VESUVIUS CRUCIBLE COMPANY [US/US]; Suite 200, 103 Foulk Road, Wilmington, DE 19803 (US).

(72) Inventors; and

(75) Inventors/Applicants *(for US only)*: ROTHFUSS, Hans [DE/DE]; Scheidertalstrasse 36a, 65232 Taunusstein (DE). BOISDEQUIN, Vincent [BE/BE]; 60B, rue Haute Folie, B-7062 Naast (BE).

(74) Agent: DEBLED, Thierry; Vesuvius Group S.A., Intellectual Property Dept., Rue de Douvrain, 17, B-7011 Ghlin (BE).

(81) Designated States *(national)*: AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) Designated States *(regional)*: ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:
— *With international search report.*

[Continued on next page]

(54) Title: CRACK RESISTANT VALVE PLATE FOR A SLIDE GATE VALVE

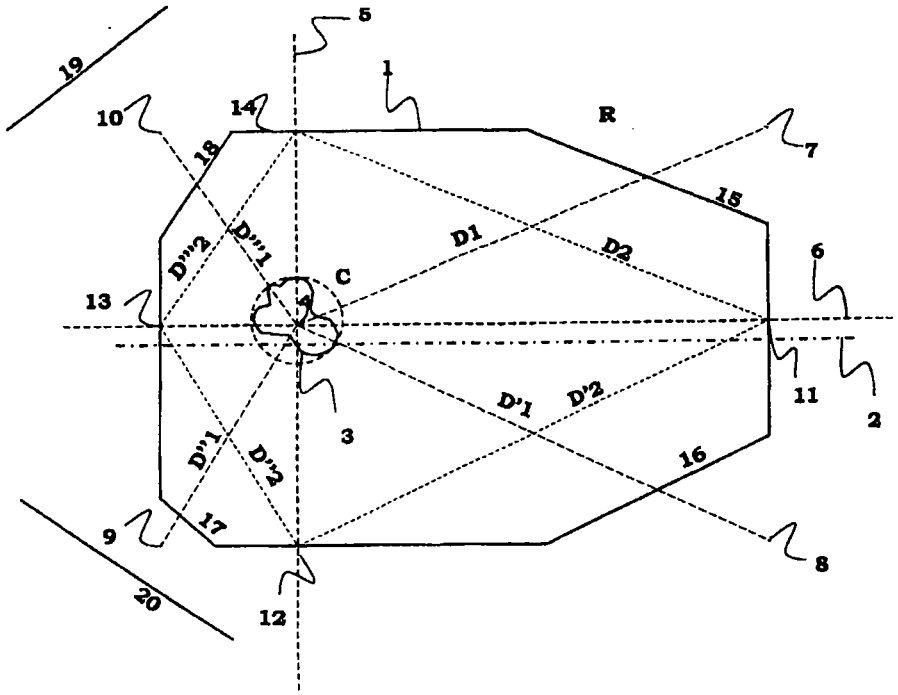

(57) Abstract: The invention relates to a refractory plate (1) for a slide gate valve, having a pouring hole (3), circumscribed by a circle C of center (4), at least a portion of the edges (15, 16, 17, 18) of the plate (1) are angularly oriented so as to focus the clamping forces optimally in the throttling area and around the pouring hole.

WO 01/41956 A1



ACTION

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.