

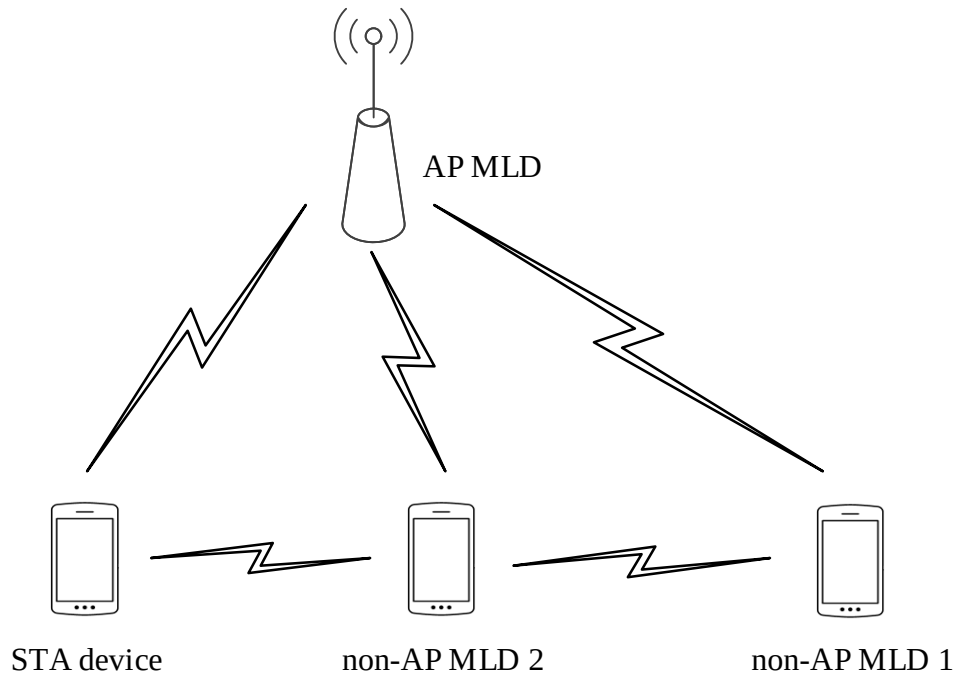


FIG. 1

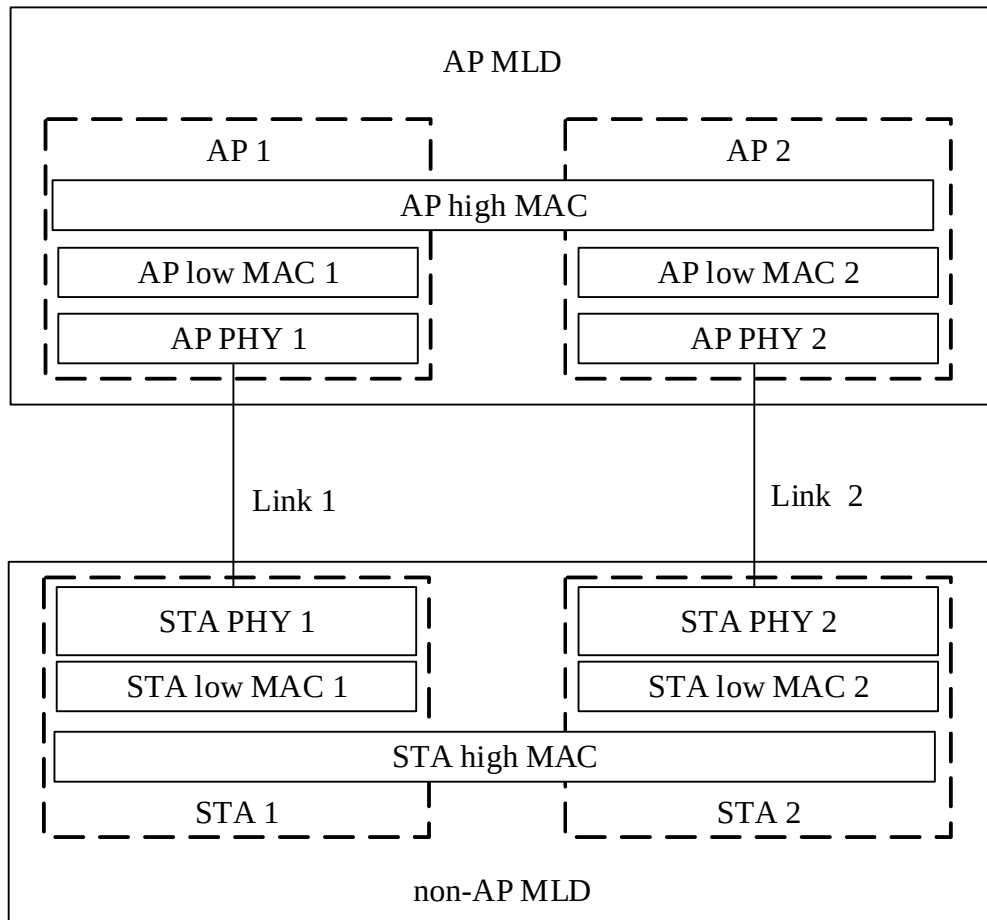


FIG. 2

3/12

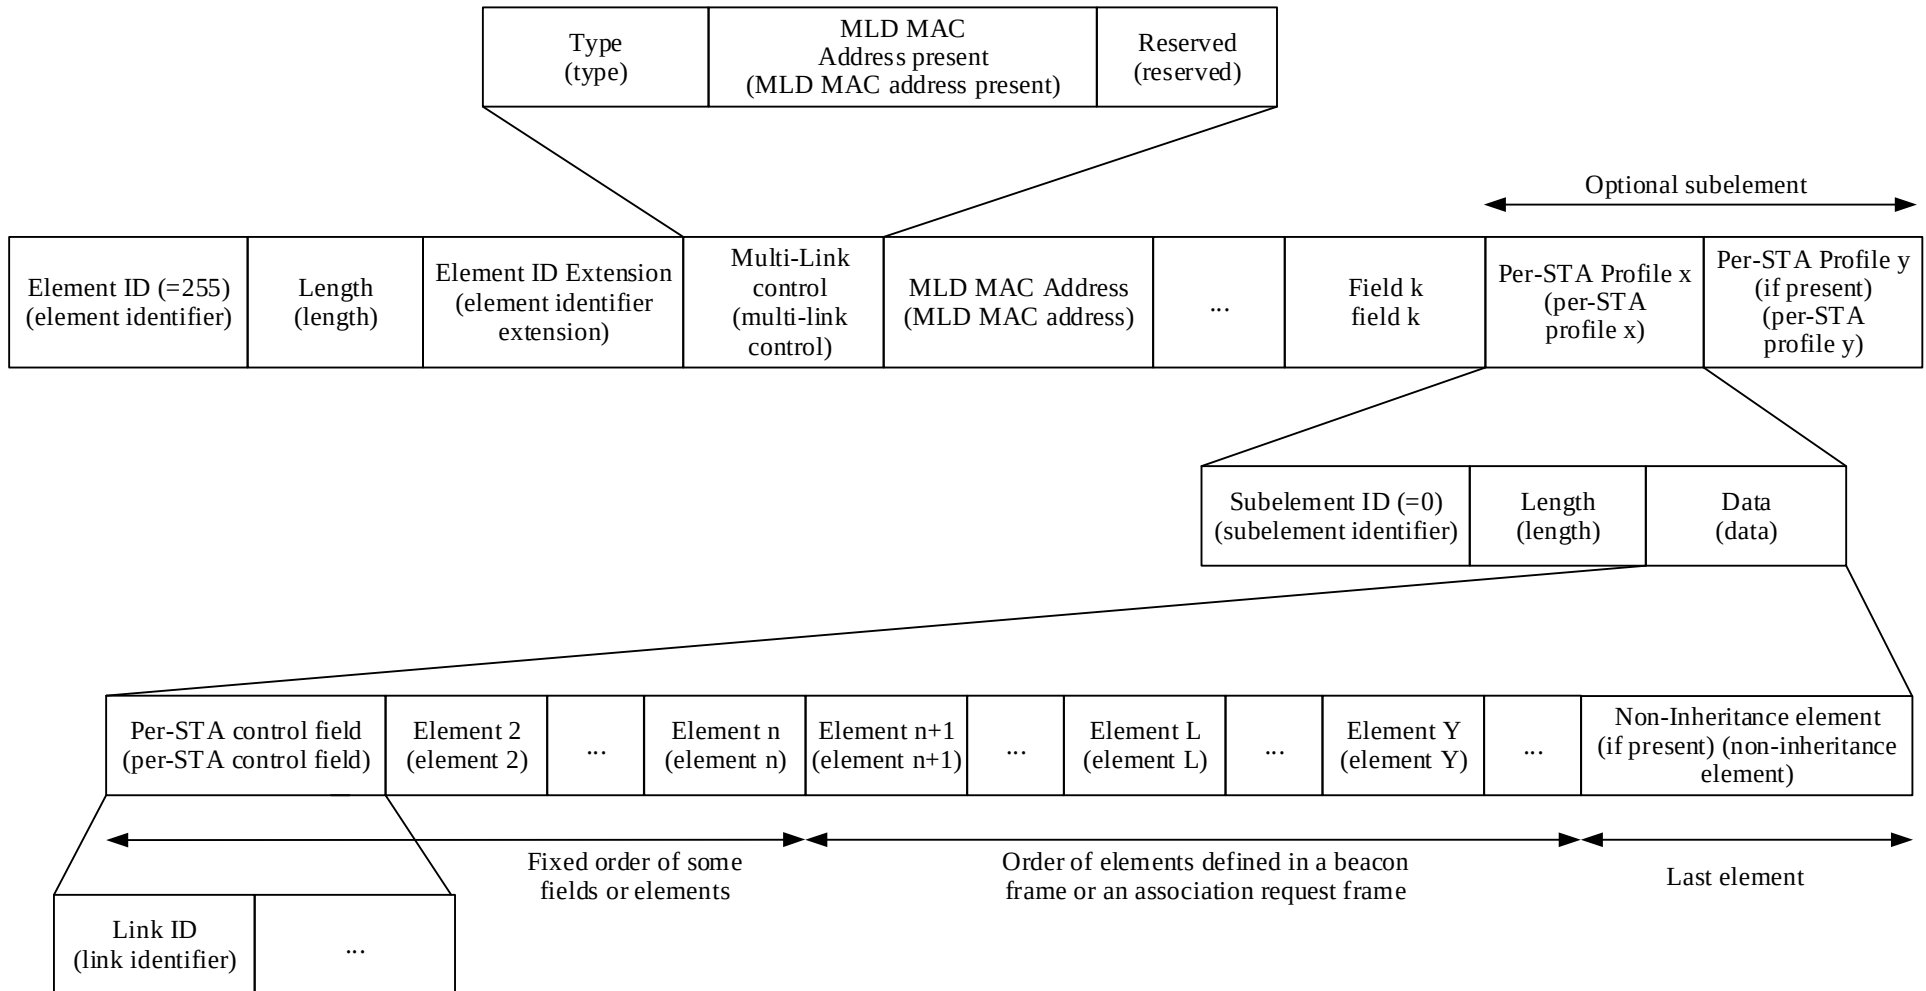


FIG. 3

Element ID (element identifier)	Length (length)	BSSID (BSS identifier)	TDLS Initiator STA Address (TDLS initiator address)	TDLS Responder STA Address (TDLS responder address)
---------------------------------------	--------------------	------------------------------	---	---

FIG. 4

Frame Control (frame control)	Address1 (address1)	Address2 (address2)	Address3 (address3)	Sequence Control (sequence control)	Address4 (address4)	QoS Control (QoS control)
--	------------------------	------------------------	------------------------	--	------------------------	------------------------------------

FIG. 5

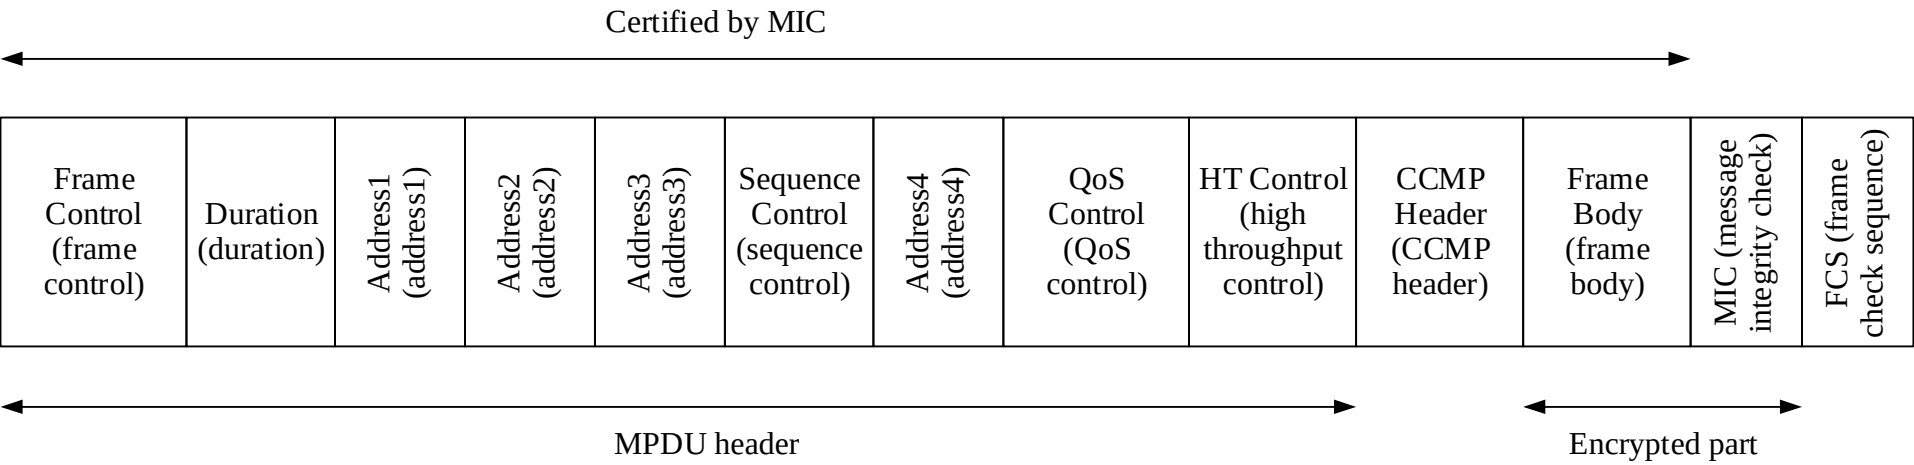


FIG. 6

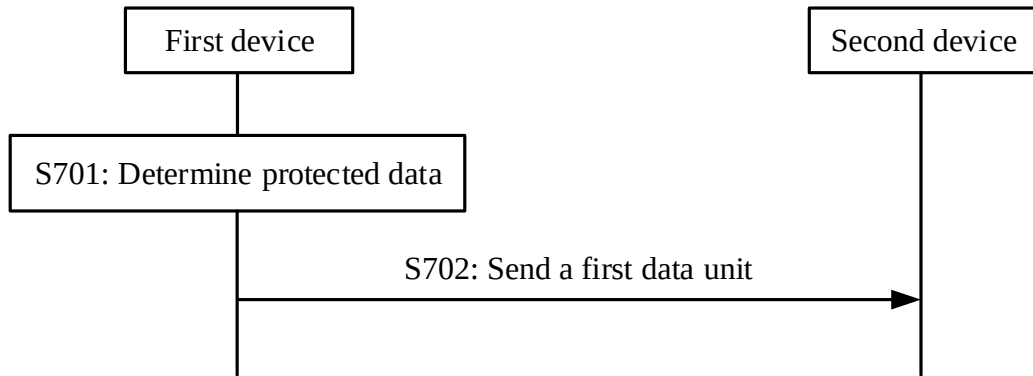


FIG. 7

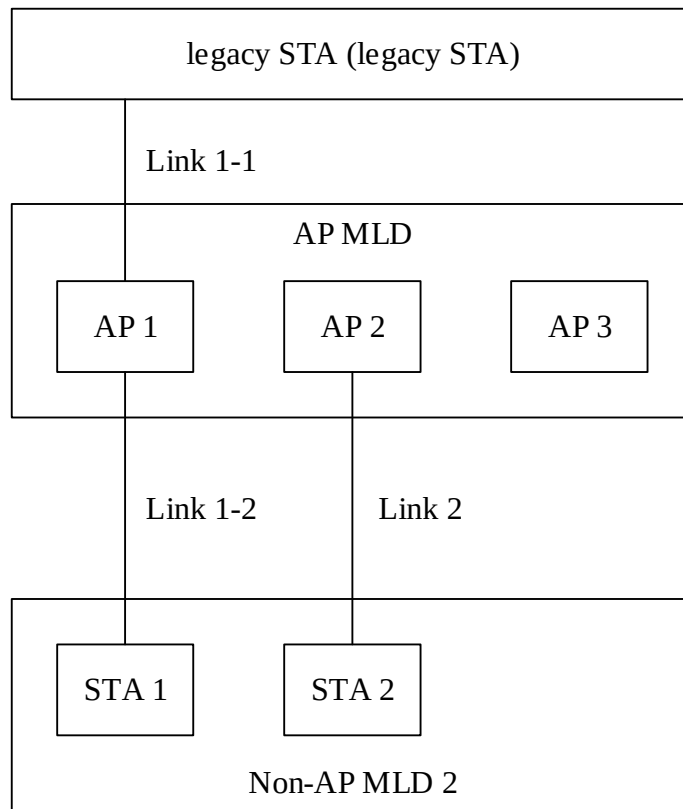


FIG. 8

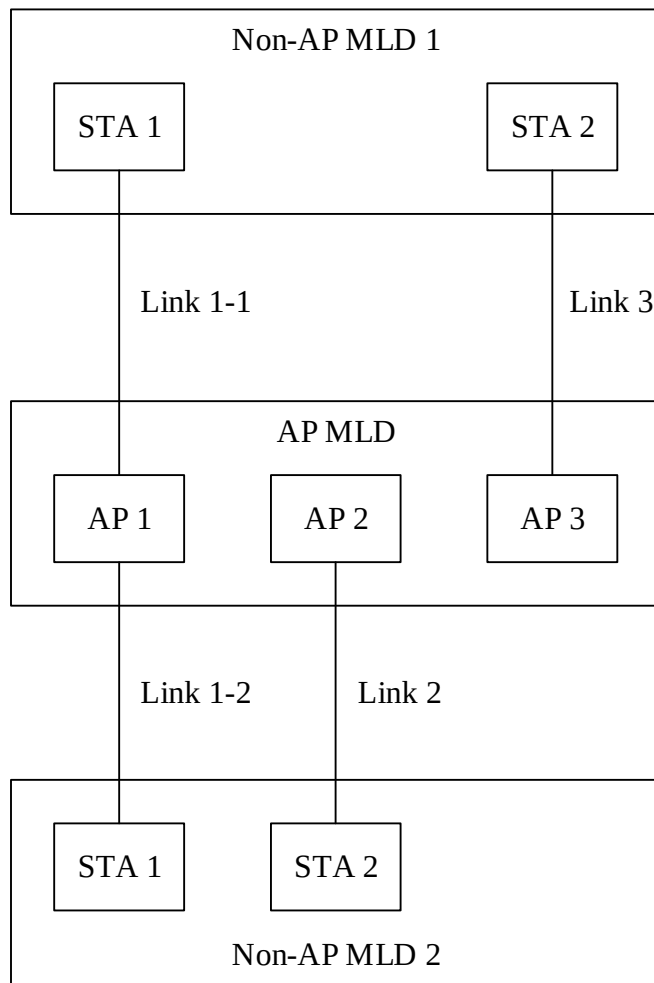


FIG. 9

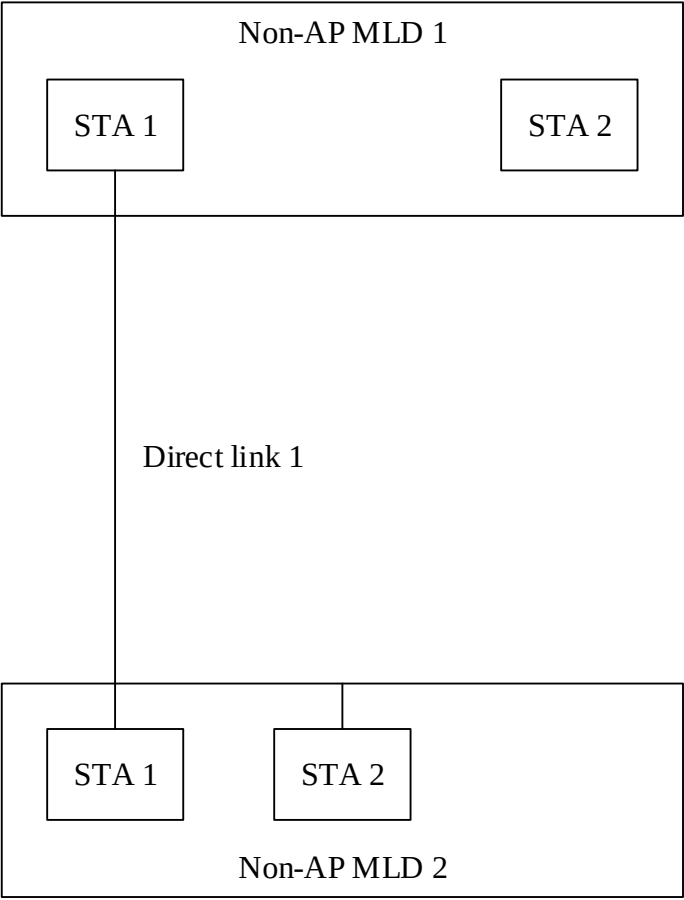


FIG. 10

Element ID (element identifier)	Length (length)	Offset (offset)	Interval (interval)	Awake window Slots (awake window slots)	Maximum Awake Window Duration (maximum awake window duration)	Idle Count (idle count)
---------------------------------------	--------------------	--------------------	------------------------	--	--	----------------------------------

FIG. 11

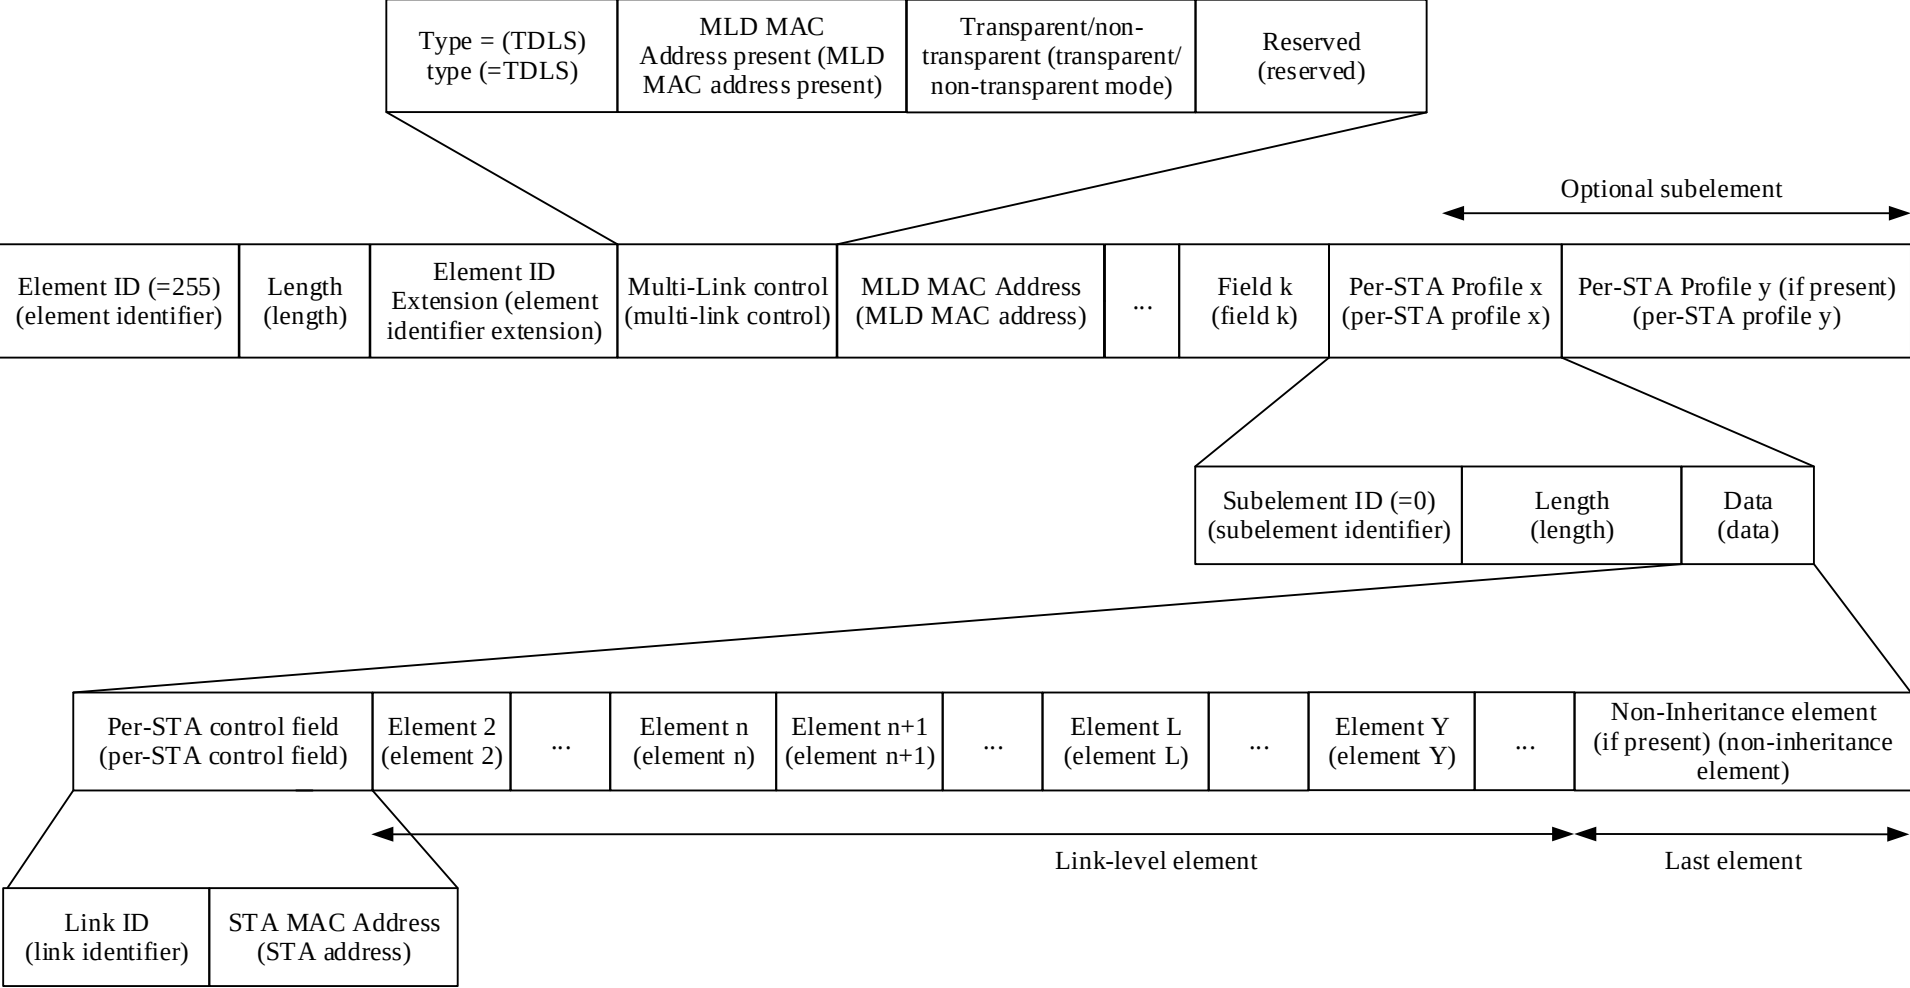


FIG. 12

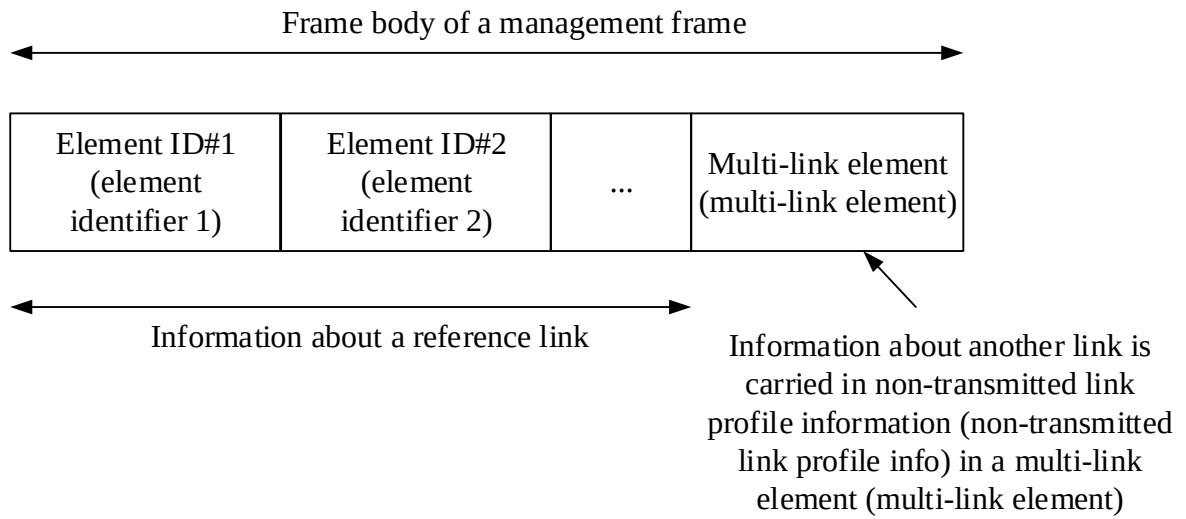


FIG. 13

Element ID (element identifier)	Length (length)	Number of Direct links (number of direct links)	Direct link Identifier (direct link identifier)
------------------------------------	--------------------	--	--

FIG. 14

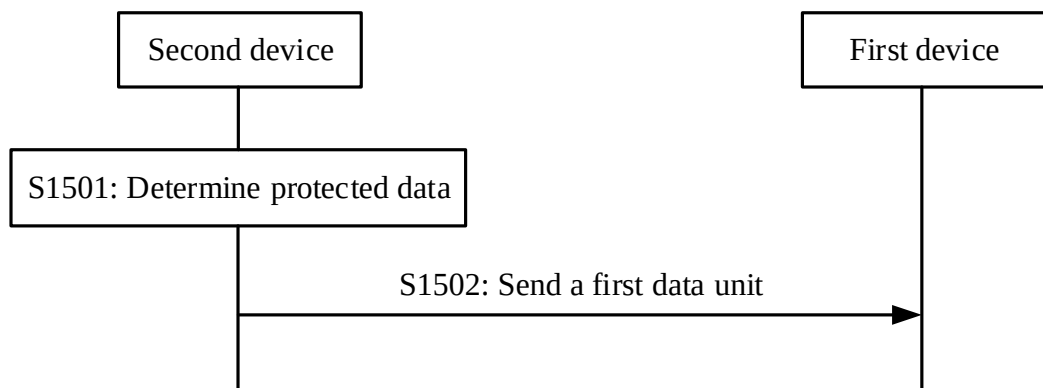


FIG. 15

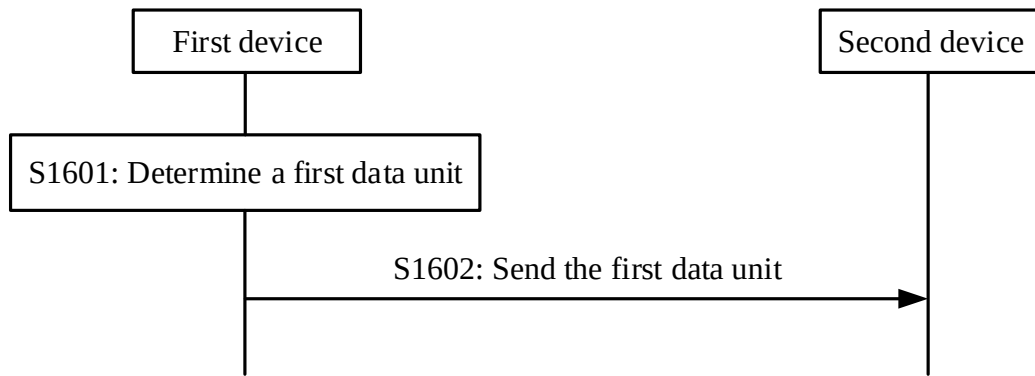


FIG. 16

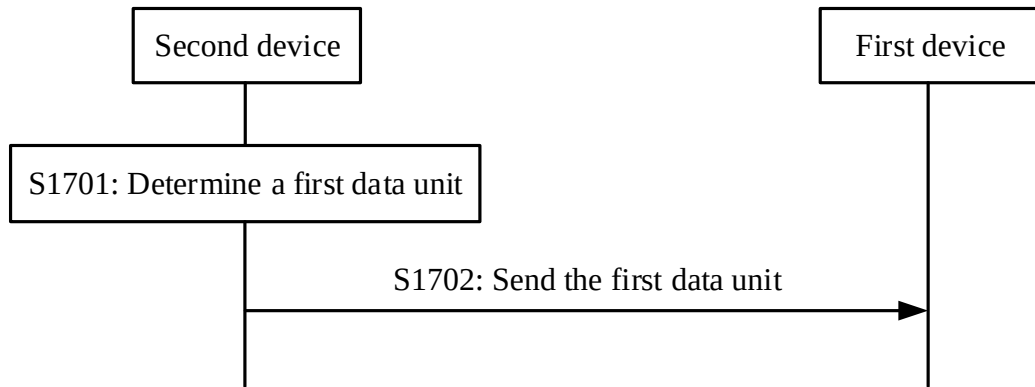


FIG. 17

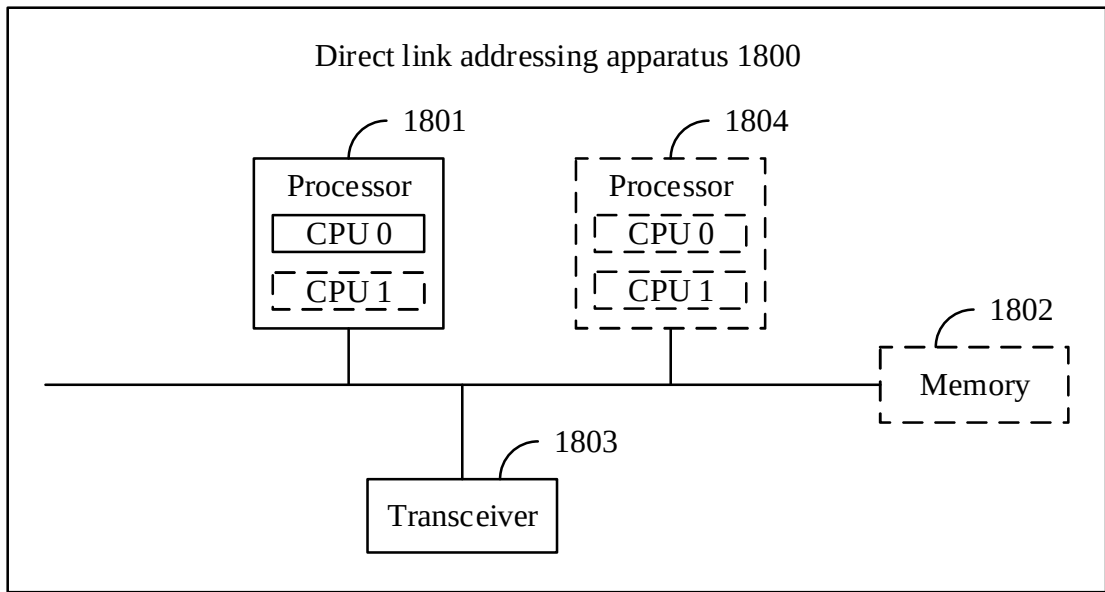


FIG. 18

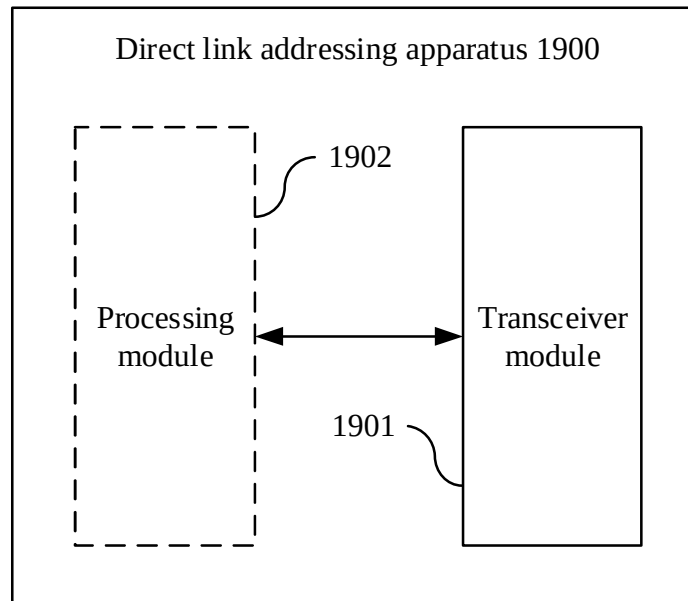


FIG. 19