A MODULAR MIRRORED CACHE MEMORY BATTERY BACKUP SYSTEM

Field of the Invention

The present invention relates to a system for storing and retrieving data in a computer cache dynamic random access memory (DRAM). More specifically, the invention is a high reliability cache memory system that includes a battery backup power supply, a battery operated DRAM refresh generator, a primary cache DRAM and a completely redundant secondary cache DRAM containing a copy (mirror image) of the primary cache memory contents for correcting read errors. The mirrored cache memory battery backup system is configured as a separable module with an integral battery power supply for providing the retention of data in a computer cache memory upon power loss or controller loss by using the battery backup supply.

Background of the Invention

A computer memory cache is a fast memory in which frequently used data is stored for efficient use by the associated central processing unit (CPU). Cache memories were introduced to achieve a significant increase in the performance of the CPU at a very modest increase in cost. The cache memory (or simply "cache") is a high speed storage unit that is designed to operate with the CPU and the generally slower main memory unit. Because the cache is transparent to the program at the instructional level, it can be added to a computer system design without changing the instruction set and without modifying existing programs.

A cache memory can be used in a free-standing computer system for speeding-up CPU access to main memory (dedicated or shared), or used in conjunction with a host processor in an embedded computer system for speeding-up

memory access. Also, main memory can be a collection of one or more storage devices using one or more storage technologies. However, for purposes of explaining the present invention, the free-standing computer system application will be used because the application of the present invention to other computer systems will become apparent to those practicing the art.

The use of a cache in a computer system is based upon two observations with respect to a referenced stored item: soon after being referenced, the referenced stored item will tend to be referenced again; and items stored near the referenced item will also tend to be referenced soon after. The cache provides efficient access to frequently used data by storing segments (lines or pages) of main memory in a fast memory local to the CPU.

When the CPU makes a request of memory, the CPU generates an address and searches the cache for the desired item. If the item is found in cache, a "hit" results and the item is applied to the CPU. If the item is not in cache, a "miss" results and the address is passed on to main memory. When a segment of main memory containing the referenced item is returned, a copy of the segment is stored in cache. If no cache storage space is available, the cache controller typically provides the necessary space by replacing the least recently used (LRU) segment with the latest referenced segment.

A common form of cache memory is based on MOS (metal oxide semiconductor) technology in which binary data is efficiently stored as a charge on a MOS transistor gate. This form of memory cell has low power dissipation and conserves chip area relative to bistable flip-flop memory cells. For an N-channel (NMOS) device, a sufficiently small positive charge capacitively stored on the gate will turn the device on while removing the charge will turn the device off (non-conducting). The on

state may be interpreted as either a logic 1 or 0. These cells, either NMOS or PMOS, are charge storage capacitors with driver transistors. The memory also requires means for sensing the presence or absence of a charge and for placing or removing the charge from the gate.

The disadvantage to the use of these MOS memory cells is that the capacitively stored charge eventually leaks off and causes the stored data to be lost. In addition, the read process is destructive because a stored charge is discharged when the state is read. Because of the leakage and because of the destructive read characteristic, means are provided for restoring the prior state of the cell after reading. Thus, by periodically reading the contents of memory and restoring the data, a "refresh" mode is established that can preserve stored data indefinitely unless a failure of the refresh mode or the power supply occurs. This refresh mode gives rise to the term "dynamic" memory cell. Despite this disadvantage, dynamic random access memories (DRAMs) formed from an array of dynamic memory cells have found widespread use because of the high bit packing densities that can be achieved on a chip.

Because solid state random access memories (RAMs) are volatile, i.e. they lose their memory when the power is turned off, it is common prior art practice to provide a battery backup power supply for the cache memory controller which in turn provides power from the cache memory controller to the cache memory cell array. This precaution allows the memory to function and retain its memory during a power outage.

Figure 1 shows an example of a prior art computer system 10 that includes a cache memory system 20. Data and control signals are distributed through system 10 by system bus 115 which interconnects cache memory system 20, CPU 110, and main memory 120. Cache memory system 20

includes cache DRAM 200 for storing data, cache controller 22 for controlling the operating modes of cache DRAM 200 (such as read/write to cache and to main memory, and refresh of cache DRAM 200), and battery backup unit 23 to provide power to cache controller 22 and cache DRAM 200. An additional data and control path 116 may be provided for allowing CPU 110 a direct communication channel with cache memory system 20.

Figure 2 shows the basic architecture of a cache DRAM 200 suitable for use in the cache memory system 20 of Figure 1. The cache DRAM is organized around the storage element, DRAM array 201. A set of interfaces are provided: address buffer register and address decode 202 for decoding input data addresses, read/write (r/w) control 205 for selecting a read or write operating mode, input data register 204 for receiving write data, and output data register 205 for outputting read data. In addition, a refresh logic and address counter 206 is used to periodically refresh the contents of DRAM array 201 by reading, and then writing back into the same address, the contents of DRAM array 201 by using an internal address counter to generate all of the addresses in DRAM array 201. The refresh logic control is provided by cache controller 22 (Fig. 1) on input lines 311. Input lines 311 also carry the power required (V_{cc}) by cache memory system 20 (Fig. 1). Power to cache DRAM 200 is provided through cache controller 22 (Fig. 1).

Referring again to Fig. 1, in the case of power (V_{cc}) failure to cache controller unit 22 of Figure 1, battery unit 23 is switched in by cache controller 22 for keeping both the cache controller and cache DRAM functioning. However, prior art backup methods, such as described and shown in Figure 1, do not provide cache memory protection in the case of a cache controller failure because the refresh function and the backup

battery switching action is controlled by and through controller 22.

Therefore, there is a need for a cache memory system that is capable of saving cached data in the event of either a general power failure or a controller failure by providing battery backup power directly to the memory array and by providing for the DRAM refresh function on a separate assembly so that the DRAM continues to retain its memory until the faulty controller is replaced or the DRAM memory array with backup can be transferred to a system with a working cache controller.

Also, if a read error should occur in a prior art cache memory, the presence of a read error can be detected by means of a parity bit for each line of cache memory. However, the presence of a parity bit only allows detection of an odd number (1, 3,...) of bit errors and does not provide for error correction. Thus, a cache memory read error, if detected, would require that the erroneous data be replaced either by accessing main memory or by accessing main memory and recomputing any intermediate results that may have been generated by the associated CPU. The reconstruction of the erroneous data is time consuming and hence reduces the computer system throughput.

In order to increase the overall reliability by providing protection against power failure, cache controller failure, and cache memory read errors, the present invention provides for a battery backup cache memory system configured as a detachable cache module with an integral battery power supply and refresh logic circuit, and a dual cache memory array for storing the cache data in one array and its mirror image in the other, each array having independent parity for error detection.

Summary of the Invention

Briefly, the invention consists of a battery backup mirrored cache memory modular assembly for use in a computer system for providing a cache DRAM battery backup system that is physically separable from the associated cache memory controller. The modular assembly is normally powered by a system power supply. A refresh control signal normally provided by an external source generates a set of refresh signals for refreshing the cache memory. The modular assembly includes:

(1) a first and a second cache DRAM, each for caching the same data for an associated CPU, each having a parity bit for each line in memory, a parity checker for computing the parity bit for each access and detecting a read error by computing a parity bit for each accessed line and comparing the computed parity bit with the stored parity bit of the accessed line, and each DRAM simultaneously addressable using a common address;

(2) a selector for selecting a read request output from one of the two cache DRAMs, the selected cache DRAM having a correct parity bit; and

(3) a battery backup system having a battery power source for operating the two cache DRAMs, a refresh generator powered by the battery power source, and a controller for selecting between the system power supply and the battery power source for providing power to the modular assembly when the system power falls below a predetermined level, and for connecting the refresh generator to the cache memory arrays, by monitoring the system power supply output level.

The modular assembly can be physically disconnected from the host computer system for the life of the battery power source without losing the cache memory contents.

Brief Description of the Drawing

The present invention will be more fully understood from the detailed description given below and from the accompanying drawings of the preferred embodiments of the invention, which, however should not be taken to limit the invention to the specific embodiment but are for explanation and better understanding only.

Figure 1 is a block diagram of a typical prior art computer system with a cache memory system that includes a cache controller, a cache DRAM, and a battery backup unit.

Figure 2 is a block diagram of a prior art cache DRAM including refresh control.

Figure 3 is a block diagram of a computer system using the mirrored cache memory battery backup module.

Figure 4 shows a controller for detecting power failure and for operating the mirrored cache memory battery backup module.

Figure 5 is a logic table used in the operation of the preferred embodiment of the mirrored cache memory battery backup module.

Figure 6 is a logic diagram for the alternative selector (MUX) shown in Figure 4.

Figure 7 is a flow diagram showing the method of operating the cache memory backup module.

Figure 8 is a flow diagram showing the method of operating the mirrored cache.

Description of the Preferred Embodiments

Figure 3 is a block diagram of a computer system 100 that includes a cache memory system 300 with a modular assembly backup system 400 that overcomes the limitations of prior art backup systems.

Figure 3 shows a computer system which includes

CPU 110, main memory 120, and cache memory system 300 as computer system elements that are interconnected by system bus 115. Alternate communication path 116 between cache memory system 300 and CPU 110 provides a direct path between cache memory and CPU and thus reduces the traffic on system bus 115. System power supply 130 provides operating power to all active elements of the computer system.

Cache memory system 300 includes cache controller 310 and modular assembly backup system 400. Modular backup system 400 includes dual cache arrays 200 in place of the prior art single cache DRAM shown in Figure 1, backup controller and selector (SEL) 210, battery backup unit 220, and refresh unit 230. Backup controller and selector 210 monitors the state of the power (V_{cc}) supplied by cache controller 310 on lines 311. Lines 311 also carry the necessary refresh control signals required by the refresh logic and address counter 206 shown in cache DRAM array 200 in Figure 2. The outputs of battery unit 220 and refresh unit 230 is connected to backup controller and selector 210 by lines 401 that carry the backup power (V_{cc}) from battery unit 220 needed to operate cache arrays 200 and the output refresh control signals from refresh unit 230. Output lines 402 provide the refresh control signals selected by backup controller and selector 210 for operating the refresh logic and address counter of both cache DRAMs 200. Output lines 402 from controller and selector 210 provides the power needed to operate refresh logic 206 of Figure 2.

Battery unit 220 is a standby V_{cc} source for supplying power to all active components of modular backup system 400 through controller and selector 180.

Refresh unit 230 in Fig. 3 generates a set of control signals matched to the requirements of the refresh logic 206 shown in Figure 2. Because refresh

logic 206 includes an address counter, only a system clock is required to drive refresh logic 206. For example, cache DRAM 200 can be implemented by using an Intel 21256 DRAM that provides an on-chip refresh control and address counter that only requires that a two phase clock (RAS and CAS) be supplied by cache controller 310 (Fig. 3) for operating the chip.

Figure 4 is a detailed circuit block diagram of the controller and selector 210 of Figure 3. Referring to both Figs. 3 and 4, the normal input from cache controller 310 is provided on input lines 311 that supply V_{cc} for distribution to all active components in modular backup system 400, refresh control signals for driving the refresh control logic of cache array 200, and a cache state line for indicating if the cache data is "dirty" i.e. not exclusively owned and modified.

The V_{cc} supplied through lines 311 is applied to diode 214 which is connected as shown so that current flows into diode 214 from the cache controller. The output from the diode is connected to line 215 for distribution of power throughout the modular backup assembly. (Details of the distribution of power are well known in the art and are therefore omitted in order to more clearly describe the invention.) Line 215 is also connected to the V_{cc} output of battery unit 220 through isolation diode 222 for supplying backup power to the modular backup assembly. The V_{cc} supplied from the cache controller by input lines 311 provides a trickle charge to battery 189 through isolation diode 191 and resistor 223. Input 311 also supplies the necessary current required by the active circuits of the modular backup assembly. If the cache controller supplied V_{cc} should drop below the V_{cc} level supplied by battery unit 220, diode 222 is backward biased and isolates (disconnects) the cache controller V_{cc} source from battery unit 220, and

diode 222 in battery unit 220 is forward biased for providing a low resistance path for the battery supplied current. Conversely, if the power level supplied by the cache controller returns to normal after having dropped, the cache controller-supplied V_{cc} is restored. In this manner, a smooth transition between the primary cache controller-supplied power and the backup battery power is achieved.

The V_{cc} line from input 311 is also applied to an input of voltage comparator 182 and the reference input is connected to the threshold voltage (V_T) output of voltage divider R1, R2. The threshold voltage is pre-fixed at the lowest acceptable level for V_{cc} so that if V_{cc} falls below that level, the output from comparator 182 is at the logic low level. Otherwise, voltage comparator 182 output is at the logic high state.

The cache state line of input 311 carries a binary signal indicating if the cache is dirty, and is stored in flip-flop 213. The output state of flip-flop 213, together with the output of comparator 212, forms a 2-bit binary selector code on lines 215, applied to the select input of MUX 211. When the cache state is dirty, the output of flip-flop 213 is at the high logic level; otherwise, it is at the low logic level.

MUX 211 has four sets of inputs labeled 0-3 and one output set of lines 402 for delivering the refresh control signals to cache array 200. The particular set of inputs selected is determined by the state of the 2-bit select code as shown in the first two columns of the logic table of Figure 5. Referring to Figs. 4 and 5, the output from comparator 212 is labeled "msb" (most significant bit) while the output of flip/flop 213 is labeled "lsb" (least significant bit). The second and third columns give the physical meaning: the msb is low when the cache controller supplied V_{cc} is greater than the

threshold voltage, V_T, input to comparator 182, and high otherwise. The lsb low state indicates that the cache is not dirty, while the high state means that the cache contents are dirty. The fifth and sixth columns indicate which set of input lines are selected for outputting. Thus, for msb/lsb input (0,0), no refresh control signal is supplied because the cache data is not modified and hence can be restored from main memory. For input (0,1), refresh unit 230 output refresh control signal set is selected. Whenever msb=1 (high), the cache controller 310 supplies V_{cc}, the refresh control signal set, and also deactivates DC/DC converter 221 by means of control line 192 that is connected to the on/off control.

Referring back to Fig. 4, battery unit 220 includes a battery power source 224 which is a single cell nickel-cadmium (nicad) battery that produces an output voltage, V_B, of approximately 2.4 volts. Battery 224 provides the power required to drive DC to DC voltage converter 221 for producing a backup output voltage, V_{cc}. A typical value of V_{cc} for operating the DRAM array is 5.0 ± 0.5 volts. Thus, DC/DC converter 221 supplies the backup power through diode 222 when the V_{cc} level supplied by cache controller 310 on input line 161 drops below the V_{cc} voltage level supplied by DC/DC converter 221. Thus, the nominal V_{cc} output level from DC/DC converter 221 should be set lower than the nominal V_{cc} level supplied on input lines 311.

Figure 6 is a logic diagram showing an alternative implementation of MUX 211 that includes lsb and msb input lines 215, inverters I1 and I2, two input AND-gates A1 and A2, and a set of and gates A3, A4, and A5 for selecting one set of input lines: either cache controller refresh lines, refresh unit 230 refresh lines, or low logic level lines to prevent supplying a set of refresh control signals when the cache controller-supplied V_{cc} is

below threshold voltage, V_T, and the cache contents are not dirty. The latter choice is an option that allows the cache memory contents to be lost because the non-dirty state means that the cache contents have not been modified and hence are recoverable from main memory. If this option is not exercised, the selector (MUX) 211 implementation can be further simplified by eliminating the logic components associated with selecting the set of low logic level lines (I1, A1, and A5). OR-gate OR1 selects the active set of lines from either A3, A4, or A5 for outputting on output lines 402.

Figure 7 is a flow diagram that summarizes the method (SAVE CACHE 500) by which the cache memory backup apparatus of Figure 4 functions. Step 505 checks if the cache controller supplied V_{cc} is less than the threshold voltage, V_T, and if so proceeds to step 510. Otherwise, the cache continues to operate until $V_{cc}<V_T$. Step 510 checks if the cache is in a dirty state and, if so, the backup battery is switched-in at step 530 to supply the cache backup module with V_{cc} and proceeds to step 535 where the required refresh control signals to preserve the cache contents are supplied to the cache array by the refresh signal generation unit. If the cache is not dirty, step 515 inhibits the refresh control signals by not supplying the cache DRAM with the required refresh control signals, or by not supplying backup V_{cc} power to the cache array. Step 520 monitors the cache controller-supplied V_{cc} for the return of normal power in step 525 and when restored, power and refresh control signals are again provided by the cache controller. The method returns to step 505 to await another V_{cc} failure.

Referring to Fig. 3, cache memory backup module 400 also includes a pair of "mirrored" DRAM cache arrays 200 operating in parallel under control of cache controller 310 under normal operating conditions as

described above. Access to main memory 120 is provided by system bus 115. Primary access to both cache arrays 200 by CPU 110 is provided by cache bus 116 through cache selector 280. When data from system bus 115, or from CPU 110 over bus 116, is written to cache memory system 300, a parity bit is generated and, together with the data, is stored in each cache array 200 at the same address through cache selector 230. When data is read from cache memory, both cache arrays 200 are read simultaneously using the same address and the results are presented to cache selector 230 which checks the parity of the data from each cache array with the associated stored parity bit. If both cache array output data shows the correct parity, the output data of one of the pair of cache arrays 200 is selected for outputting by cache selector 280. If only one cache array output data has correct parity, that output is selected by cache selector 280 for outputting. If neither cache array parity is correct, a system error flag is set. Cache controller 310 selects whether the output of cache select 280 goes to bus 116, or system bus 115, based on whether the read access is a read request from CPU or a write-back request to main memory 120. The simplest method of selecting which cache array 200 output is to be used when both parity checks are correct is by designating one of the cache arrays as the primary cache array from which data is selected when no parity error is detected. Alternatively, the selection could be by rotation or by randomly selecting one of the pair of cache arrays.

If a single parity error is detected, cache controller 310 causes the output data of the cache array with correct parity to be written into the other cache array at the same address that was used to access the original data. In this manner, the paired (mirrored) cache arrays provide increased reliability maintaining

the integrity of the cache memory.

Fig. 8 is a flow diagram of the method (Mirrored Cache Operation 600) described above for using the mirrored cache memory system 300 of Fig. 3 to correct for parity errors. The method begins at step 601 where the method awaits a cache system memory access. When an access is initiated, step 602 determines if it is a read or write access request. If it is a write request, the method goes to step 503 where a parity bit is computed from the data by exclusive-oring the data bits. In step 604, the parity bit is stored together with the data at the designated address in both cache arrays (banks) and the method returns to step 601. If the access is determined to be a read request in step 602, step 605 reads both cache banks. Step 606 checks the output of each bank for a parity error by computing the parity of each bank's output data and comparing the computed parity with the stored parity bit that was computed when the data was originally stored. If no parity error is detected for either bank's output, step 607 moves the process to step 608 where data for outputting is selected from the bank that has designated as the primary bank and the method returns to step 501. Otherwise step 604 moves the process to step 609 where the output of the other (mirrored) bank is selected. At step 609, the output data from the mirrored bank is checked for a parity error. If the computed parity for the mirrored bank data is correct, the process, at step 610, moves to step 611. Step 611 outputs the mirrored bank output data, corrects the primary bank by copying the outputted data from the mirrored bank, and returns to step 601. Otherwise, step 612 reports a double parity error fault and then returns to step 601. The host operating system can decide how to handle the double parity data error, depending on the state of the cached data (owned, shared, dirty, etc.).

It should be noted that an important optional feature of the backup system is the physically separable module 400 of Figure 3. By being physically separable from the cache controller and the host computer system, battery backup module 400 can be removed from the failed physical environment and "plugged" into another system with an operating cache controller. This allows the contents of cache to be accessed by the new host system for updating main memory and/or resuming execution of the program during which the cache controller failure occurred. An industry standard single in-line memory module (SIMM) type physical configuration is suitable.

As will be understood by those skilled in the art, many changes in the methods and apparatus described above may be made by the skilled practitioner without departing from the spirit and scope of the invention, which should be limited only as set forward in the claims which follow.

CLAIMS

What is claimed is:

1. A mirrored cache memory battery backup system for a cache dynamic random access memory (DRAM) for use in a computer system, the cache DRAM controlled by a cache controller that normally provides refresh signals for the cache memory and powered by a computer system power supply, the battery backup system for providing power and refresh signals to the DRAM cache memory if the computer system power supply should fail, the battery backup system comprising:

(a) a mirrored cache memory that includes a first and a second DRAM bank addressable by a common address for storing a copy of stored data in each DRAM bank, and for providing a redundant backup memory for read error correction, each DRAM bank having a refresh input for accepting a set of refresh signals, and a bank selector controlled by the cache controller for selecting data access to and from the first and second DRAM bank;

(b) a battery power source;

(c) a refresh generator for generating a set of refresh signals for refreshing the mirrored cache memory; and

(d) a backup system controller for sensing the computer system power supply voltage and selecting the computer system power supply for supplying power to the battery backup system when the system power supply is supplying a specified output voltage level and, otherwise, the battery source, the battery backup system controller also connecting the set of refresh signals supplied by the cache controller to the first and second DRAM bank refresh signal input when the system power supply is supplying the specified output voltage level, and connecting the refresh generator signal output to the first and second DRAM bank refresh signal input when the

system power supply is not supplying the specified output voltage level.

2. The battery backup mirrored cache memory system of claim 1 wherein the first and the second DRAM bank each include refresh logic for refreshing each DRAM bank.

3. The battery backup mirrored cache memory system of claim 1 wherein a write parity bit is stored for each data write access, the bank selector computes a read parity bit from the output data of the first and from the output data of the second DRAM bank in response to a read access and compares the read parity bit with the write parity bit stored with the accessed data fro determining a parity error when the read parity bit and the write parity bit do not match, and, for outputting data, selects a DRAM bank whose read parity bit matches the stored write parity bit.

4. The battery backup mirrored cache memory system of claim 3 wherein a DRAM bank parity error is corrected, when only one of the DRAM banks produces a parity error, by writing the output data and parity bit from the DRAM bank without a parity error to the other DRAM bank.

5. The battery backup mirrored cache memory system of claim 3 wherein a cache memory fault flag is generated by the cache selector when both DRAM banks produce a parity error.

6. A modular battery backup cache system for a mirrored cache dynamic random access memory (DRAM) for use in a computer system, the mirrored cache DRAM controlled by a cache controller that normally provides refresh signals for the mirrored DRAM and operating power from the system power supply, the battery backup system for providing power and refresh signals to the cache DRAM if the system power supply fails, the modular battery backup cache system physically configured as a module that can be disconnected from the computer system and

associated cache controller while preserving the mirrored cache DRAM contents, the modular battery backup cache system comprising:

(a) a mirrored cache DRAM comprising a first and a second cache DRAM, each cache DRAM comprising an array of dynamic memory cells and refresh circuitry with a refresh input for accepting a set of refresh control signals for refreshing the cache DRAM contents;

(b) a battery power source for providing power for operating the cache memory and the battery backup system;

(c) a refresh generator for generating a set of refresh control signals for refreshing the cache DRAM; and

(d) a backup system controller for selecting the system power supply for supplying power to the battery backup system when the system power supply is operating at a proper output voltage level, and for selecting the battery power source output otherwise, the backup system controller also for connecting the first and the second refresh input to the cache controller refresh control signal output when the system power supply is supplying a specified output voltage level, and for connecting the first and the second cache DRAM refresh input to the refresh generator refresh control signal output when the system power supply is not supplying the specified output voltage level.

7. The modular battery backup cache system of claim 6 further comprising a trickle charge circuit for charging the battery power source from the computer system power supply.

8. The modular battery backup cache system of claim 6 further comprising:

(a) an input for accepting a cache status signal from the cache controller that indicates if each cache DRAM contents are dirty; and

(b) inhibiting the refresh generator from applying a set of refresh signals to each cache DRAM when the cache status signal indicates that each cache DRAM contents are not dirty and when the system power supply is not supplying the specified output voltage level.

9. The modular battery backup cache system of claim 6 wherein the physical module is a single in-line memory module (SIMM).

10. The modular battery backup cache system of claim 6 wherein the first and the second DRAM bank includes refresh logic for refreshing both DRAM banks.

11. The modular battery backup cache system of claim 6 wherein a write parity bit is stored by each data write access, the bank selector computes a read parity bit from the output data of the first and from the output data of the second DRAM bank in response to a read access and compares the read parity bit with the write parity bit stored with the accessed data for determining a parity error when the read parity bit and the write parity bit do not match, and, for outputting data, selects a DRAM bank whose read parity bit matches the stored write parity bit.

12. The modular battery backup cache system of claim 11 wherein a DRAM bank parity error is corrected, when only one of the DRAM banks produces a parity error, by writing the output data and parity bit from the DRAM bank without a parity error to the other DRAM bank.

13. The modular battery backup cache system of claim 11 wherein a cache memory fault flag is generated by the cache selector when both DRAM banks produce a parity error.

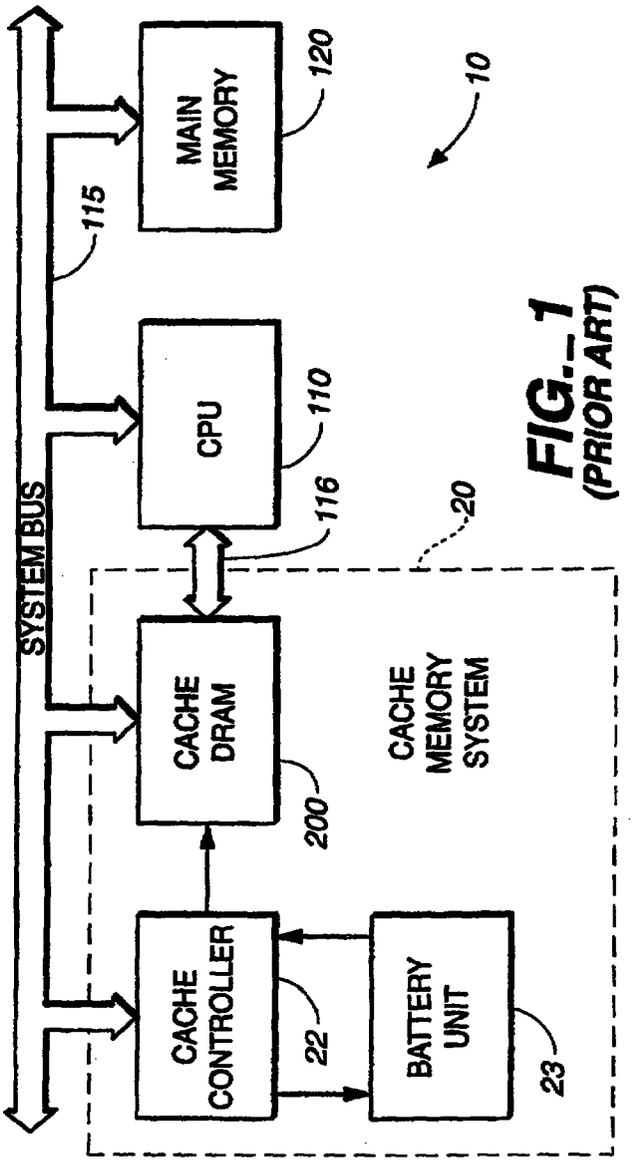


FIG._1
(PRIOR ART)

SUBSTITUTE SHEET (RULE 26)

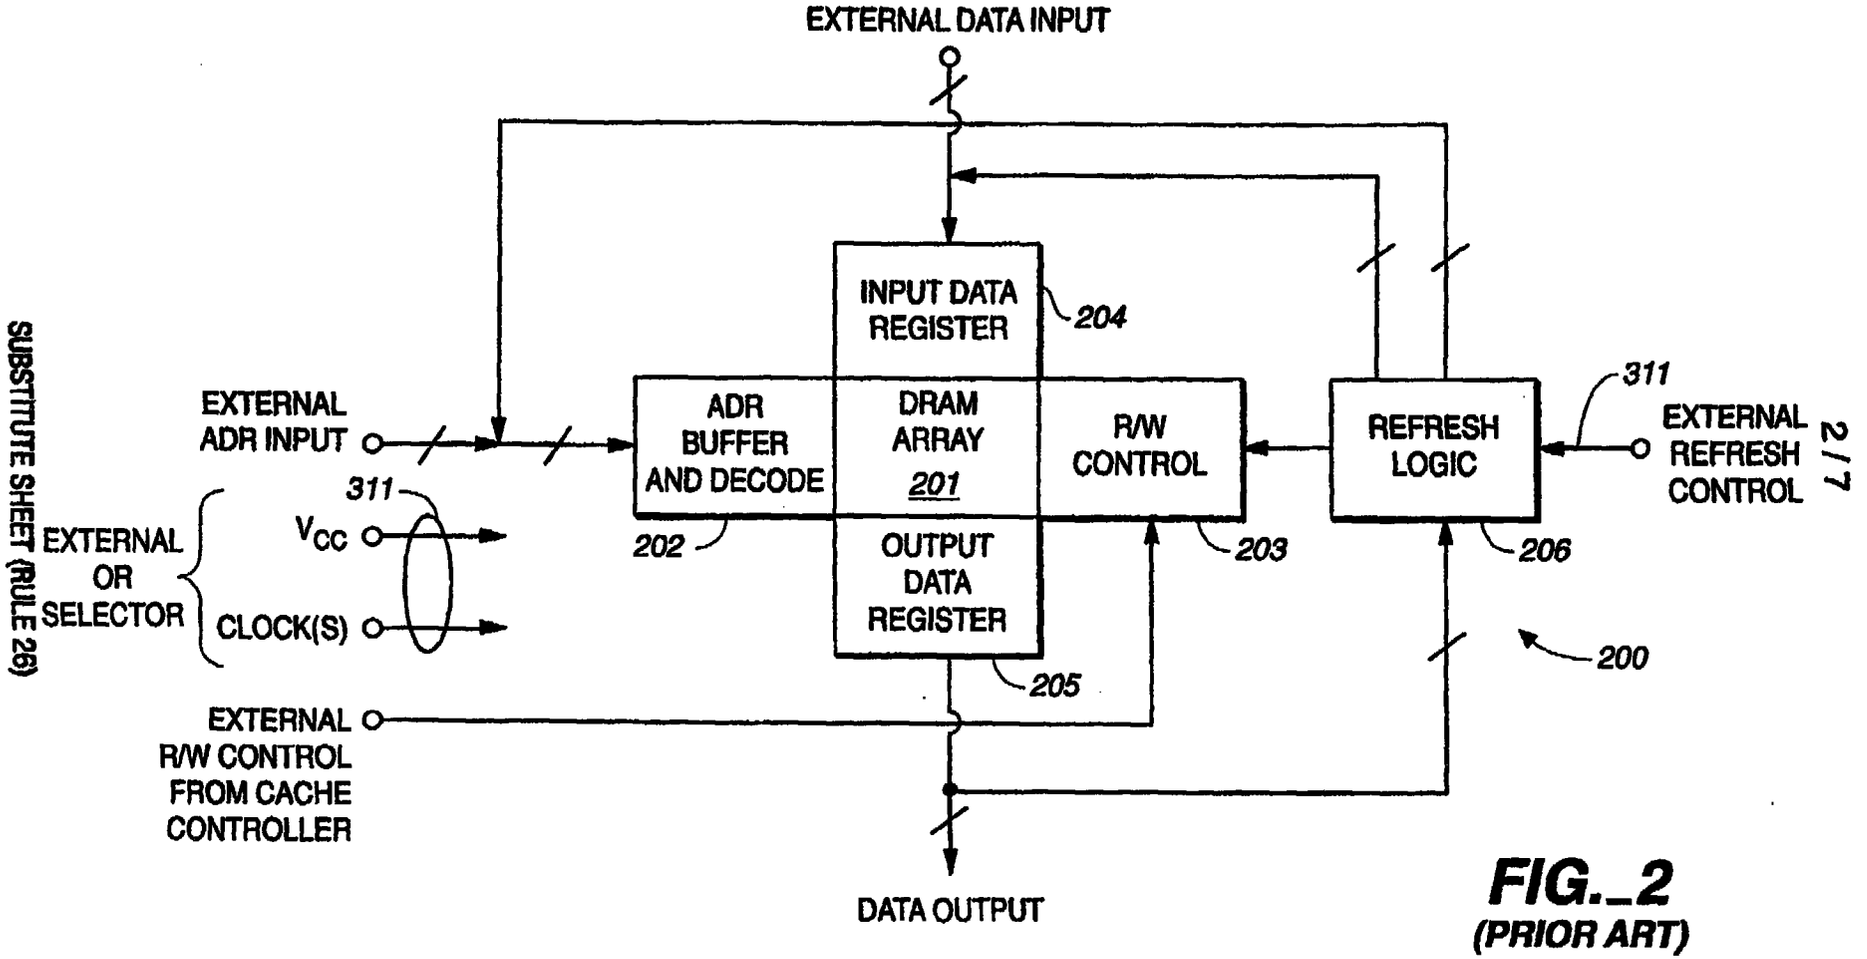


FIG._2
(PRIOR ART)

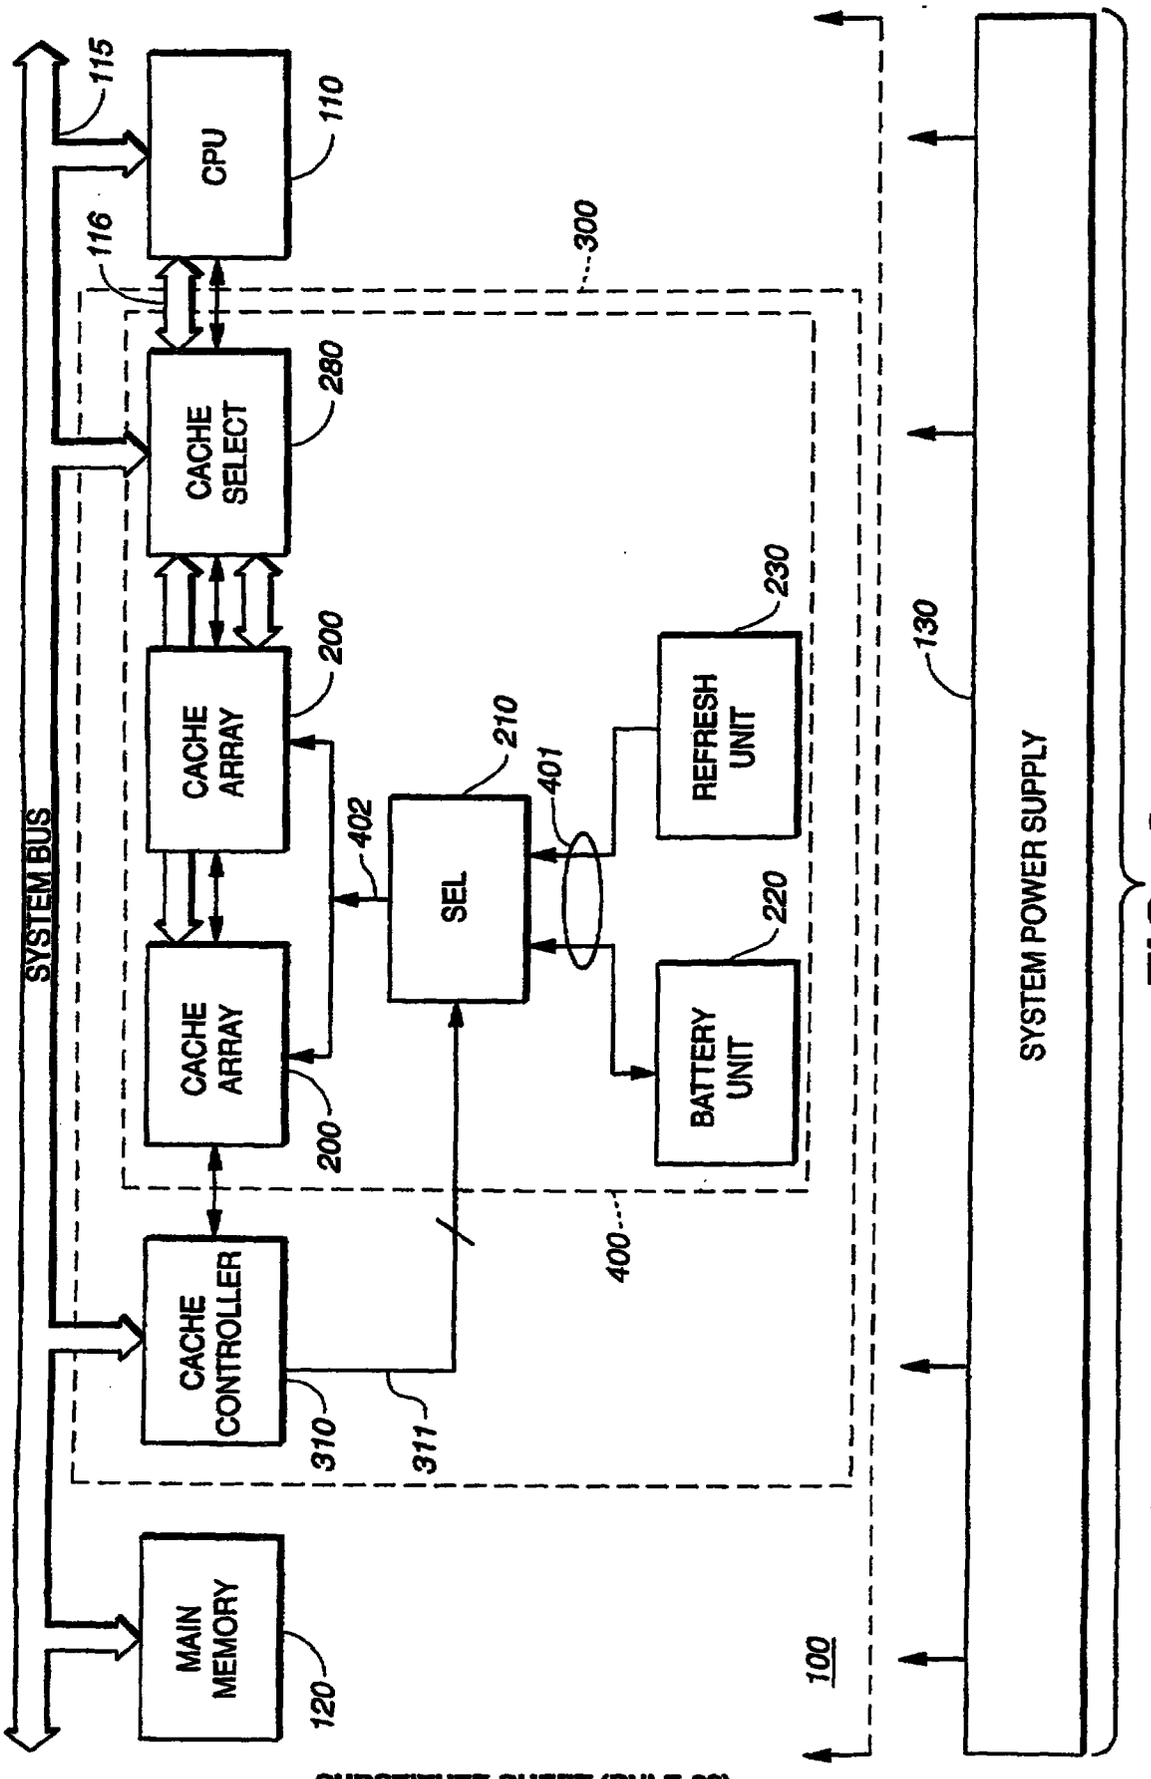

SYSTEM BUS
115
CPU
110
116
300
CACHE SELECT
280
CACHE ARRAY
200
CACHE ARRAY
200
402
SEL
210
401
REFRESH UNIT
230
BATTERY UNIT
220
130
SYSTEM POWER SUPPLY
CACHE CONTROLLER
310
311
400
MAIN MEMORY
120
100

FIG._3

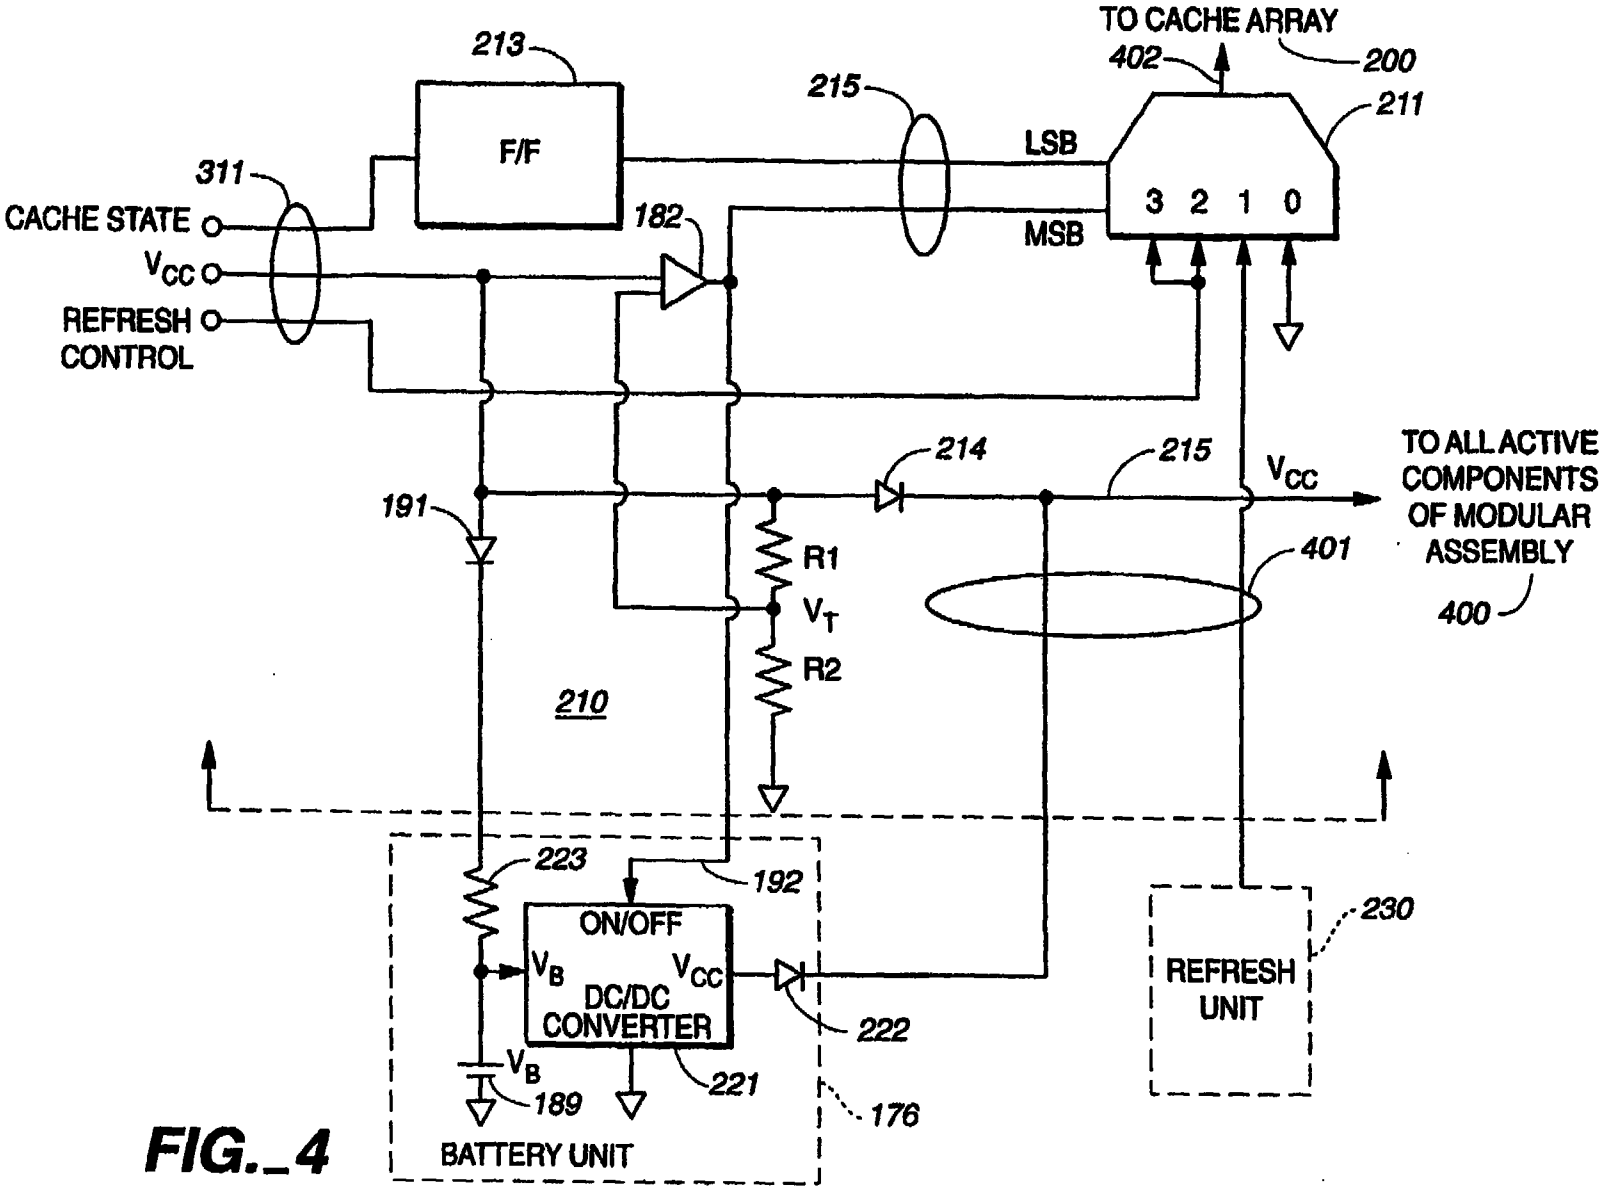

TO CACHE ARRAY
402
200
211
213
F/F
215
LSB
MSB
3 2 1 0
311
CACHE STATE
V_{CC}
REFRESH CONTROL
182
214
215
V_{CC}
TO ALL ACTIVE COMPONENTS OF MODULAR ASSEMBLY
400
401
191
R1
V_T
R2
210
223
192
ON/OFF
V_B
V_{CC}
DC/DC CONVERTER
222
221
V_B
189
176
BATTERY UNIT
REFRESH UNIT
230

FIG._4

INPUT CODE MSB	INPUT CODE LSB	$V_{CC} > V_T$	CACHE STATE	INPUT SET SELECTED	OUTPUT TO CACHE ARRAY 200
0	0	NO	NOT DIRTY	0	LOW LOGIC
0	1	NO	DIRTY	1	REFRESH UNIT
1	0	YES	NOT DIRTY	2,3	CACHE CONTROLLER
1	1	YES	DIRTY	2,3	CACHE CONTROLLER

FIG._5

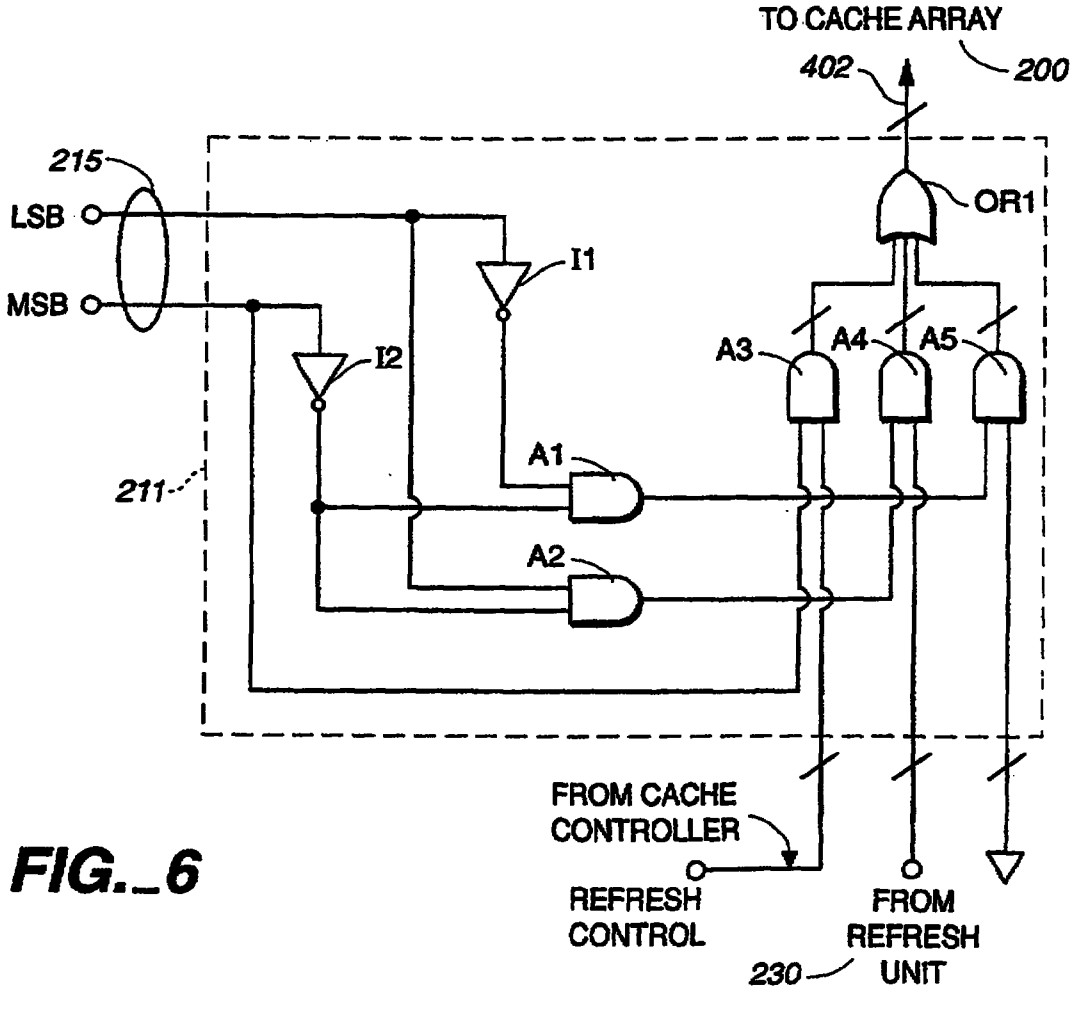


FIG._6

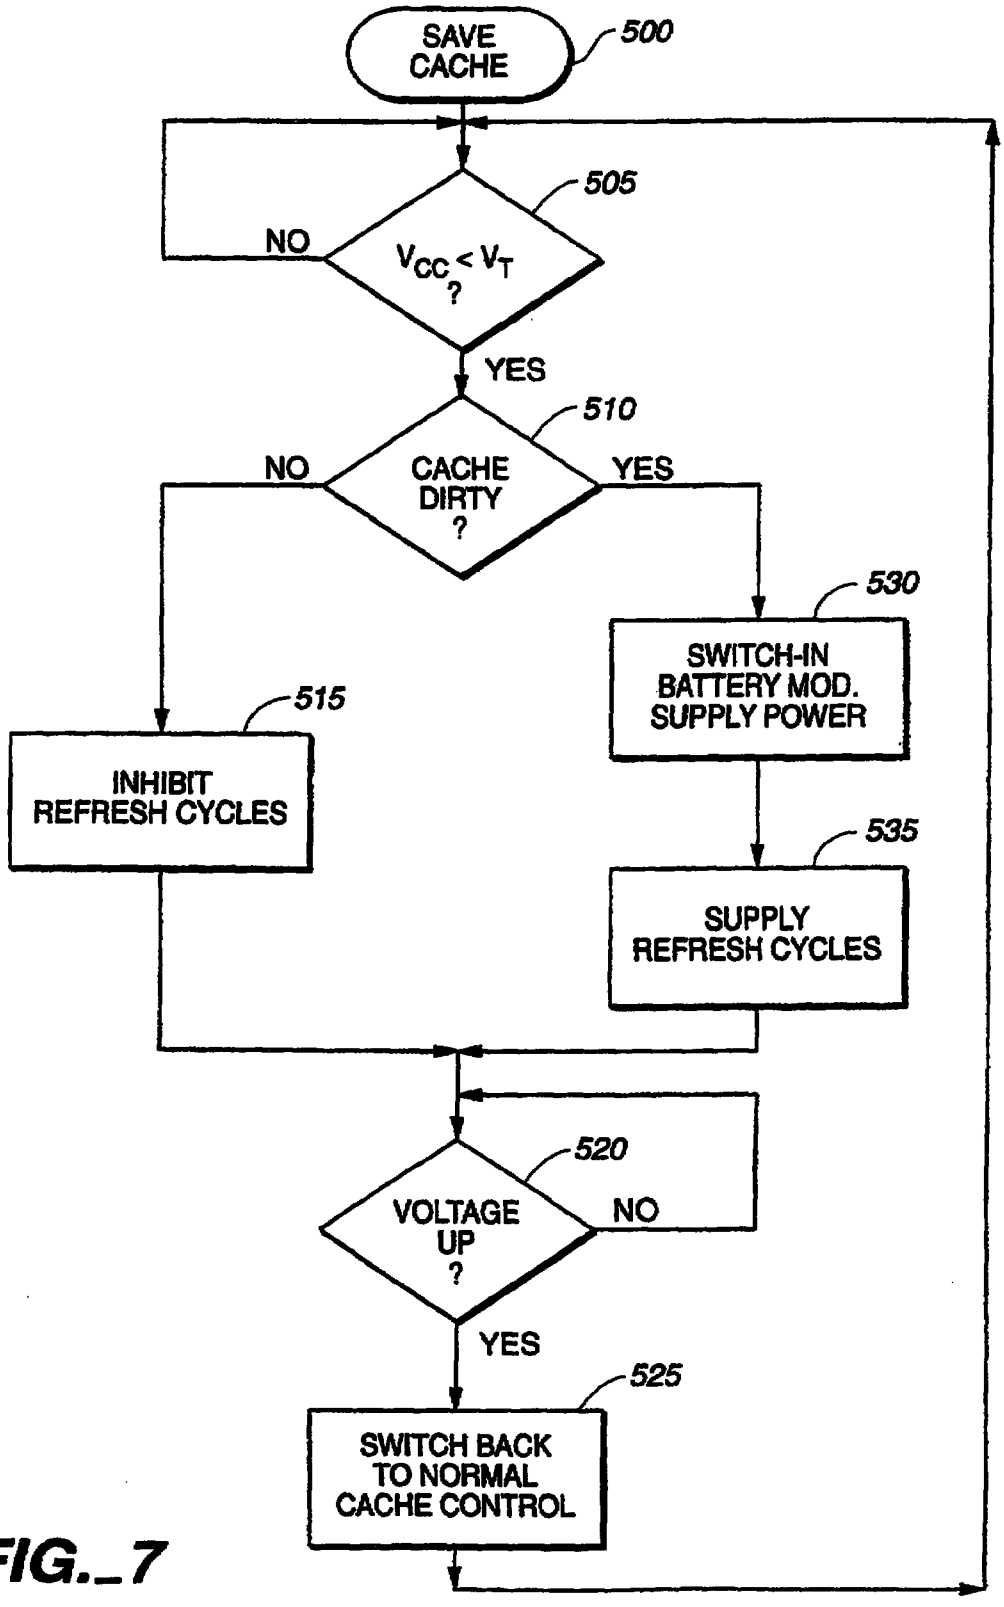
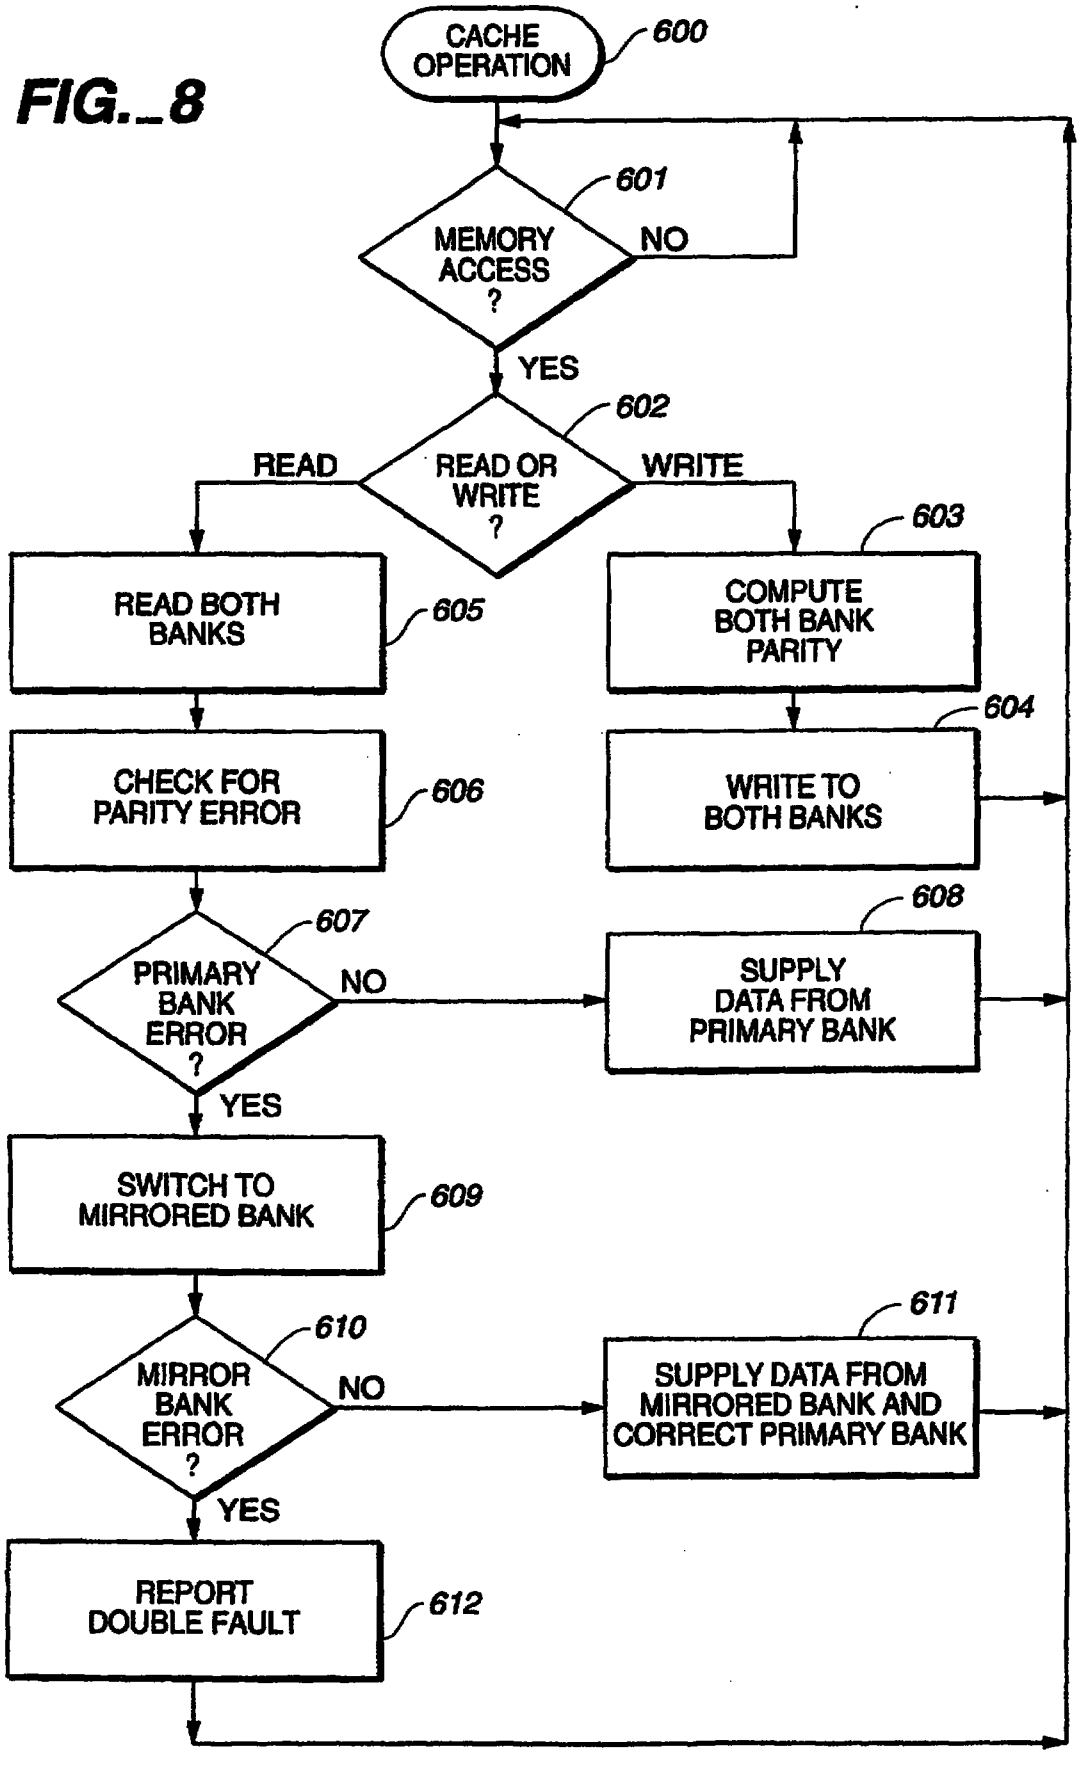

SAVE CACHE
500
505
NO
$V_{CC} < V_T$?
YES
510
NO
CACHE DIRTY ?
YES
530
SWITCH-IN BATTERY MOD. SUPPLY POWER
515
INHIBIT REFRESH CYCLES
535
SUPPLY REFRESH CYCLES
520
VOLTAGE UP ?
NO
YES
525
SWITCH BACK TO NORMAL CACHE CONTROL

FIG._7

FIG._8


CACHE OPERATION
600
MEMORY ACCESS ?
601
NO
YES
READ OR WRITE ?
602
READ
WRITE
READ BOTH BANKS
605
COMPUTE BOTH BANK PARITY
603
CHECK FOR PARITY ERROR
606
WRITE TO BOTH BANKS
604
PRIMARY BANK ERROR ?
607
NO
SUPPLY DATA FROM PRIMARY BANK
608
YES
SWITCH TO MIRRORED BANK
609
MIRROR BANK ERROR ?
610
NO
SUPPLY DATA FROM MIRRORED BANK AND CORRECT PRIMARY BANK
611
YES
REPORT DOUBLE FAULT
612

9705739-2
IPOS

PCT WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : G06F 13/00 — A1

(11) International Publication Number: **WO 97/33229**

(43) International Publication Date: 12 September 1997 (12.09.97)

(21) International Application Number: PCT/US97/03786

(22) International Filing Date: 7 March 1997 (07.03.97)

(30) Priority Data: 08/613,080 — 8 March 1996 (08.03.96) — US

(71) Applicant: MYLEX CORPORATION [US/US]; 34551 Ardenwood Boulevard, Fremont, CA 94555 (US).


(72) Inventors: LIONG, Thomas, Singkiat; 1112 Casaba Creek Court, San Jose, CA 95120 (US). NAGARAJ, Ashwath; 33701 Whimbel Road, Fremont, CA 94555 (US). RAO, Krishnakumar, 32875 Bluebird Court, Fremont, CA 94555 (US).

(74) Agents: BOROVOY, Roger, S. et al.; Fish & Richardson P.C., Suite 100, 2200 Sand Hill Road, Menlo Park, CA 94025 (US).

(81) Designated States: AU, BR, CA, JP, KR, MX, SG, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).

Published
With international search report.
Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.

(54) Title: A MODULAR MIRRORED CACHE MEMORY BATTERY BACKUP SYSTEM

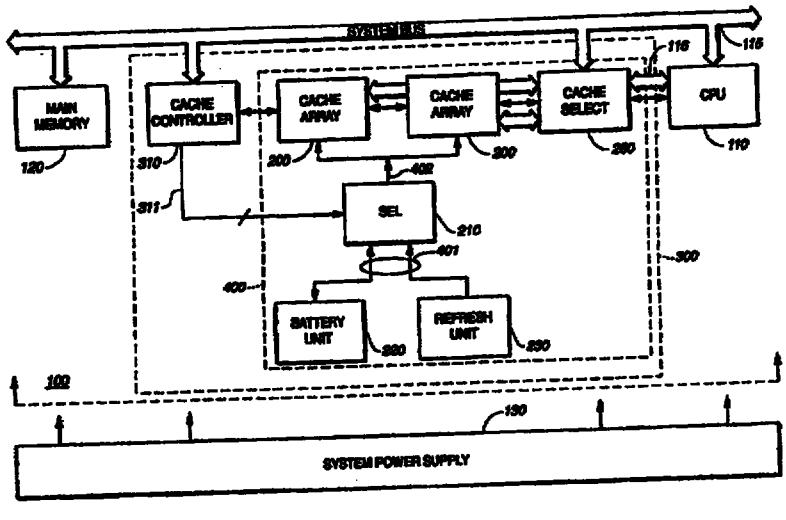

(57) Abstract

A battery backup mirrored cache memory module (210) for a cache dynamic random access memory (DRAM (200)) system that senses the V^{cc} level supplied through the cache controller (310) to the cache memory and, if the cache controller supplied V^{cc} falls below a preset threshold level, the battery backup apparatus (400) switches (210) the cache memory array to a backup battery V^{cc} source (220), and a backup refresh control generator unit (230) that is also powered by the backup battery V^{cc} source (220). The cache DRAM (200), backup battery (220), and backup refresh generator are physically contained in a single module (400) that can be disconnected from the cache controller and host while preserving cache memory contents. The backup system is installed in an operating system for recovery of the cache memory contents and/or resumption of execution of the program that was running when the V^{cc} power failure occurred.