



9601966-6 . 9

1P09

NEGATIVE FEEDBACK CONTROL CIRCUIT HAVING A COMMON LINE FOR
INPUT AND OUTPUT SIGNALS

BACKGROUND

5 The present invention generally concerns a negative feedback control circuit having a common line for input and output signals, and more particularly, a television receiver tuner having a local oscillator which is controlled by a phase-locked loop.

10 Television receivers include a tuner section for heterodyning in a mixer received signals, e.g., broadcast or cable RF signals, to produce an intermediate frequency (IF) signal. The IF signal is processed by the IF signal section and the picture and sound components are further processed by respective signal processing sections to produce a video picture signal for displaying an image on a
15 CRT, and to produce an audio signal for producing an audio response by a loudspeaker.

20 The tuner section includes at least one controlled local oscillator and at least one RF amplifier wherein both have voltage controlled tuning circuits controlled in response to the magnitude of a tuning voltage (TV), generated in the exemplary embodiment by the PLL, responsive to the selected channel. Typically the tuned circuits include combinations of inductors and varactor diodes which are reverse biased so as to exhibit a variable capacitive reactance having a value determined by the magnitude of the tuning voltage.

25 Phase locked loop (PLL) tuning systems employ a closed loop negative feedback arrangement for controlling the frequency of the local oscillator signal. The closed loop arrangement includes programmable digital counters as programmable frequency dividers by which a signal is generated which is the frequency to the local
30 oscillator signal divided by a programmable factor related to the selected channel. The programmable frequency divider can be preceded by an optional prescaler circuit which frequency divides the incoming signal by a constant factor. As used herein, functional statements referring to frequency division, prescaler, and frequency
35 dividers are independent of whether or not the frequency division is programmable.

 The frequency and phase of the latter signals are compared by a phase detector to a reference frequency signal to derive a control voltage for controlling the frequency of the controlled local oscillator.

For a tuning system employing a PLL, tuning voltage (TV) for tuning the RF amplifiers is also derived from the PLL control voltage developed in response to the channel selected.

5 The output line from the local oscillator provides an input signal for the PLL. The return output line from the PLL provides the input control signal for the controllable local oscillator. These two lines go from proximally spaced terminals at the PLL to another pair of proximally spaced terminals at the local oscillator. These lines carry high frequency signals which can radiate, and carry pick-up
1 0 sensitive tuning voltage signals. It is desirable to minimize these adverse effects. Such minimization can be achieved by reducing the length of the lines and/or reducing the number of lines. In particular, reducing the number of lines has the advantage of simplifying printed circuit board layout and reducing the pick-up and radiation produced
1 5 by printed circuit wiring leads.

SUMMARY OF THE INVENTION

Briefly, the present invention relates to a television receiver having an electronically controlled tuner. A controlled local
2 0 oscillator provides a local oscillator signal for the mixer. The controlled local oscillator includes an first input terminal for receiving a control signal for controlling its frequency and a first output terminal for providing an output local oscillator signal. A phase-locked loop includes a second input terminal for receiving the local oscillator signal
2 5 and a second output terminal for providing a signal back to the first input terminal of the controlled local oscillator for controlling its frequency. At least a portion of the coupling between the first output terminal and the second input terminal, and the second output terminal and the first input terminal, have a common line.

3 0

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a block diagram of a television receiver and a tuner according to aspects of the present invention.

Figure 2 is a partial detailed schematic of the controllable local
3 5 oscillator and phase-locked loop of Figure 1.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

The television receiver 10 of FIGURE 1 includes a signal source 12 for receiving radio frequency (RF) television signals and



tuning controlled RF amplifiers 14 for tuning and amplifying the received signals. The processed RF signals are combined in a mixer 18 with local oscillator signals generated by a local oscillator 42 controlled by a phase-locked loop 16 to form an intermediate frequency (IF) signal. The IF signal is amplified, filtered and further processed in an IF processing unit 20 and a signal processing unit 22 to provide chrominance, luminance, synchronization, and sound signal components. The chrominance and luminance signals are coupled for providing an image display on kinescope 24 with the sound signals being coupled to a loudspeaker 26.

RF amplifiers 14 typically include a plurality of varactor diodes (not shown) which change capacitive reactance in response to a variable tuning signal in the form of a tuning voltage (TV). Voltage controlled oscillator 42 typically includes a plurality of varactor diodes and inductances with the frequency of oscillation frequency being controlled by control of the capacitance of the varactor diodes by a tuning voltage (TV).

The output signal (LO) of oscillator 42 is coupled to a programmable/prescaler frequency divider 46 which divides the frequency of LO by a factor determined by a channel selector 48 in accordance with the channel number and band of the selected channel. In particular, BCD signals generated by channel selection unit 48 are applied to programmable counters in frequency divider 46. Additionally, band selector 49, generates band selection signals responsive to the band of the selected channel. The band selection signals are coupled to appropriate PIN switching diodes in amplifier 14 and oscillator 42 for changing the circuit configuration for optimizing operation of the respective members in the selected frequency bands.

The output signal of frequency divider 46 is coupled to an input of phase detector 38. Phase detector 38 compares the frequency of the output signal of frequency divider 46 with a reference frequency signal derived from reference frequency generator 34. Generator 34 typically is a crystal oscillator with an output signal which is sometimes frequency divided by an optional frequency divider 36. Phase detector 38 develops an output signal representing the phase and/or frequency deviation between its two input signals. A typical phase detector provides a series of pulses at the reference frequency whose duration is related to the phase and frequency deviation between its two input signals. The output signal of phase detector 38 (error signal) is coupled



to a low pass filter 40 which integrates the error signal to provide a very low frequency or DC signal, the amplitude of which varies in accordance with the detected phase and frequency deviations. This variable DC signal (TV) is coupled to the voltage controlled oscillator 42 to control its frequency of oscillation. In operation, the output signal of filter 40 controls the frequency of the local oscillator signal until the frequency and phase of the output signals of dividers 36 and 46 are in a predetermined relationship, e.g., substantially equal. At this point, phase-locked loop 16 is said to be "locked". The filtered error signal is also used for providing the tuning voltage (TV) for RF amplifiers 14.

As seen in Figure 1, line 50 provides tuning voltage TV to oscillator 42 and amplifier 14. Additionally, the same line 50 also provides the local oscillator signal LO from oscillator 42 to frequency divider 46. Thus, both the input signal and the output signal from the negative feedback control circuit, which in the exemplary embodiment is a PLL, are on a single line, and as explained above, permit a reduction of the number of lines which must be used with the advantage of simplifying printed circuit board layout, and reducing the pick-up and radiation produced by the printed circuit wiring leads.

Figure 2 shows particular details of the coupling circuit between local oscillator (LO) 42 and PLL 16. The voltage controlled oscillator 42, generally shown Figure 1, actually comprises two oscillators, a UHF LO 42U and a VHF LO 42V. In the exemplary embodiment, these oscillators are portions of the CXA1594L integrated circuit manufactured by the Sony Corporation. Components of the PLL 16, i.e., frequency divider 46, phase detector 38, etc. can be any appropriate PLL IC, the exemplary IC being a Siemens MGP 3002X.

Tuning varactor diodes 52a,b, padder capacitor 54, and coupling capacitor 56 are coupled to LO 42V at terminals 42a,b. Resistor 58 provides a DC ground return for varactor diode 52a. The output signal from LO 42V at node 60 is coupled to line 50 via resistor RV, with the tuning voltage from line 50 being applied via node 60 to tuning varactor diodes 52a,b.

Tuning varactor diodes 62, 64, padder capacitor 66, and coupling capacitors 68a,b are coupled to LO 42U at terminals 42c,d. Resistor 70 provides a DC ground return for varactor diodes 62, 64. Coil 71 helps LO 42U maintain oscillation across its band of frequencies. The output signal from LO 42U at node 72 is coupled to line 50 via

resistor RU, with the tuning voltage from line 50 being applied via node 72 to tuning varactor diodes 62, 64.

Line 50 provides input signals from VHF LO 42V and UHF LO 42U, coupled through capacitor 74 to the LO input of PLL 16, e.g.,
5 divider 46. In the exemplary embodiment, only one of local oscillators 42V and 42U are "turned on" at any one time. The phase pulses from phase detector 38 (error signal) are low pass filtered by transistor 76 having a low pass feedback network of capacitor 78 and resistor 80, and further filtered by low pass network 82. The output signal of
1 0 network 82 provides the tuning voltage TV and is fed back to oscillator 42 via line 50. The tuning voltage TV is fed via line 50 and resistors RV and RU to respective varactor diodes of oscillators 42V and 42U for controlling the oscillation frequency of said oscillators in a manner discussed above in connection with Figure 1. Tuning signal TV is
1 5 blocked from the frequency divider 46 by capacitor 74 which is only 8 picofarads (pf).

The values of resistors RU and RV are chosen to accommodate conflicting requirements. It is desirable that the values of resistors RU and RV be small so that a higher and more reliable
2 0 prescaler drive voltage will be provided to PLL 16. However, if resistors RU and RV are too small, the tank circuits of the oscillators may be sufficiently loaded by the low input impedance of the PLL, which in the exemplary embodiment is bipolar, so that the oscillators may not reliably oscillate. In the exemplary embodiment, values of
2 5 one kohm for each of resistors RU and RV were found to work well.

In the VHF frequency range, a bandswitching signal from band selector 49 is fed to terminal 84 and low pass filtered by resistor 86 and capacitor 88. In the lower frequency range of the VHF band, the bandswitching voltage at terminal 84 is low and PIN switching
3 0 diode 90 remains open. In this mode, series inductances 92 and 94 provide maximum inductance to VHF oscillator 42V for a lower frequency of oscillation. For bandswitching to the higher VHF band, the bandswitching voltage at terminal 84 is high causing PIN diode 90 to conduct and shunts capacitor 88 across inductance 94 effectively
3 5 removing inductance 94 from the circuit. Thus, for the higher VHF band, the inductance in the VHF oscillator circuit 42V is lower for generating a higher frequency of oscillation.





5

CLAIMS

1. An electronic tuning apparatus comprising:
 - a controlled local oscillator (42) for supplying a local oscillator signal, said local oscillator having a first output terminal for providing an output of the local oscillator signal, and an first input terminal for receiving a tuning signal for controlling the frequency of the local oscillator signal,
 - a phase-locked loop (16) for controlling the frequency of said local oscillator, said phase-locked loop comprising:
 - a frequency divider means (46) having a second input terminal for receiving said local oscillator signal from said first output terminal and providing a frequency divided version of the local oscillator signal,
 - a channel selection device (48) for controlling the frequency division ratio of said frequency divider,
 - a reference frequency signal generator (34) for providing a reference frequency signal,
 - a phase detector (38) for comparing the frequency divided version of the local oscillator signal and the reference frequency signal, and
 - a low pass filter (40) including a second output terminal for providing a tuning signal derived from said phase detector (38) back to the first input terminal of said controlled local oscillator (42) for controlling the frequency of said controlled local oscillator,
2. The electronic tuning apparatus according to claim 1 wherein said local oscillator (42) includes a variable reactance element, the reactance of which varies in response to said tuning signal.





3. An electronic tuning apparatus comprising:
a controlled local oscillator (42) having a first output
terminal for providing an output signal of the local oscillator, and an
first input terminal for receiving a tuning signal for controlling the
5 frequency of the local oscillator signal, and
a phase-locked loop (16) for controlling the frequency of
said oscillator, said phase-locked loop (16) including a second input
terminal for receiving said local oscillator signal from said first
output terminal and a second output terminal for providing a tuning
10 signal to the first input terminal of said controlled local oscillator for
controlling the frequency of said controlled local oscillator,
characterized by at least a portion of the coupling between the first
output terminal and the second input terminal, and the second
output terminal and the first input terminal, having a common line
15 (50).

4. A feedback control apparatus comprising:
a controllable circuit (42) having a first output terminal
for providing an output signal, and a first input terminal for
20 receiving a control signal, and
a negative feedback control circuit (16) for controlling
the controllable circuit, said negative feedback control circuit
including a second input terminal for receiving said output signal,
and a second output terminal for providing the control signal back to
25 the first input terminal, characterized by at least a portion of the
coupling between the first output terminal and the second input
terminal, and the second output terminal and the first input
terminal, having a common line (50).

30 5. A television receiver having an electronically
controllable tuner comprising:

a controlled local oscillator (42) for supplying a local
oscillator signal, said local oscillator having a first output terminal
for providing an output of the local oscillator signal, and an first
35 input terminal for receiving a tuning signal for controlling the
frequency of the local oscillator signal, and





a phase-locked loop (16) for controlling the frequency of said oscillator in response to a channel selection device, said phase-locked loop (16) including a second input terminal for receiving said local oscillator signal from said first output terminal and a second
5 output terminal for providing a signal back to the first input terminal of said controlled local oscillator for controlling the frequency of said controlled local oscillator, characterized by at least a portion of the coupling between the first output terminal and the second input terminal, and the second output terminal and the first input
10 terminal, having a common line (50).

6. The electronic tuning apparatus according to claim 5 wherein said local oscillator (42) includes a variable reactance element, the reactance of which varies in response to said tuning
15 signal.



ABSTRACT


A television receiver having an electronically controlled tuner is presented. A controlled local oscillator (42) provides a local oscillator signal for the mixer (18). The controlled local oscillator (42) includes an first input terminal for receiving a control signal for controlling its frequency and a first output terminal for providing an output local oscillator signal. A phase-locked loop (16) includes a second input terminal for receiving the local oscillator signal and a second output terminal for providing a signal back to the first input terminal of the controlled local oscillator for controlling its frequency. At least a portion of the coupling between the first output terminal and the second input terminal, and the second output terminal and the first input terminal, have a common line (50).

This Sheet Has Been Replaced





FIG. 2

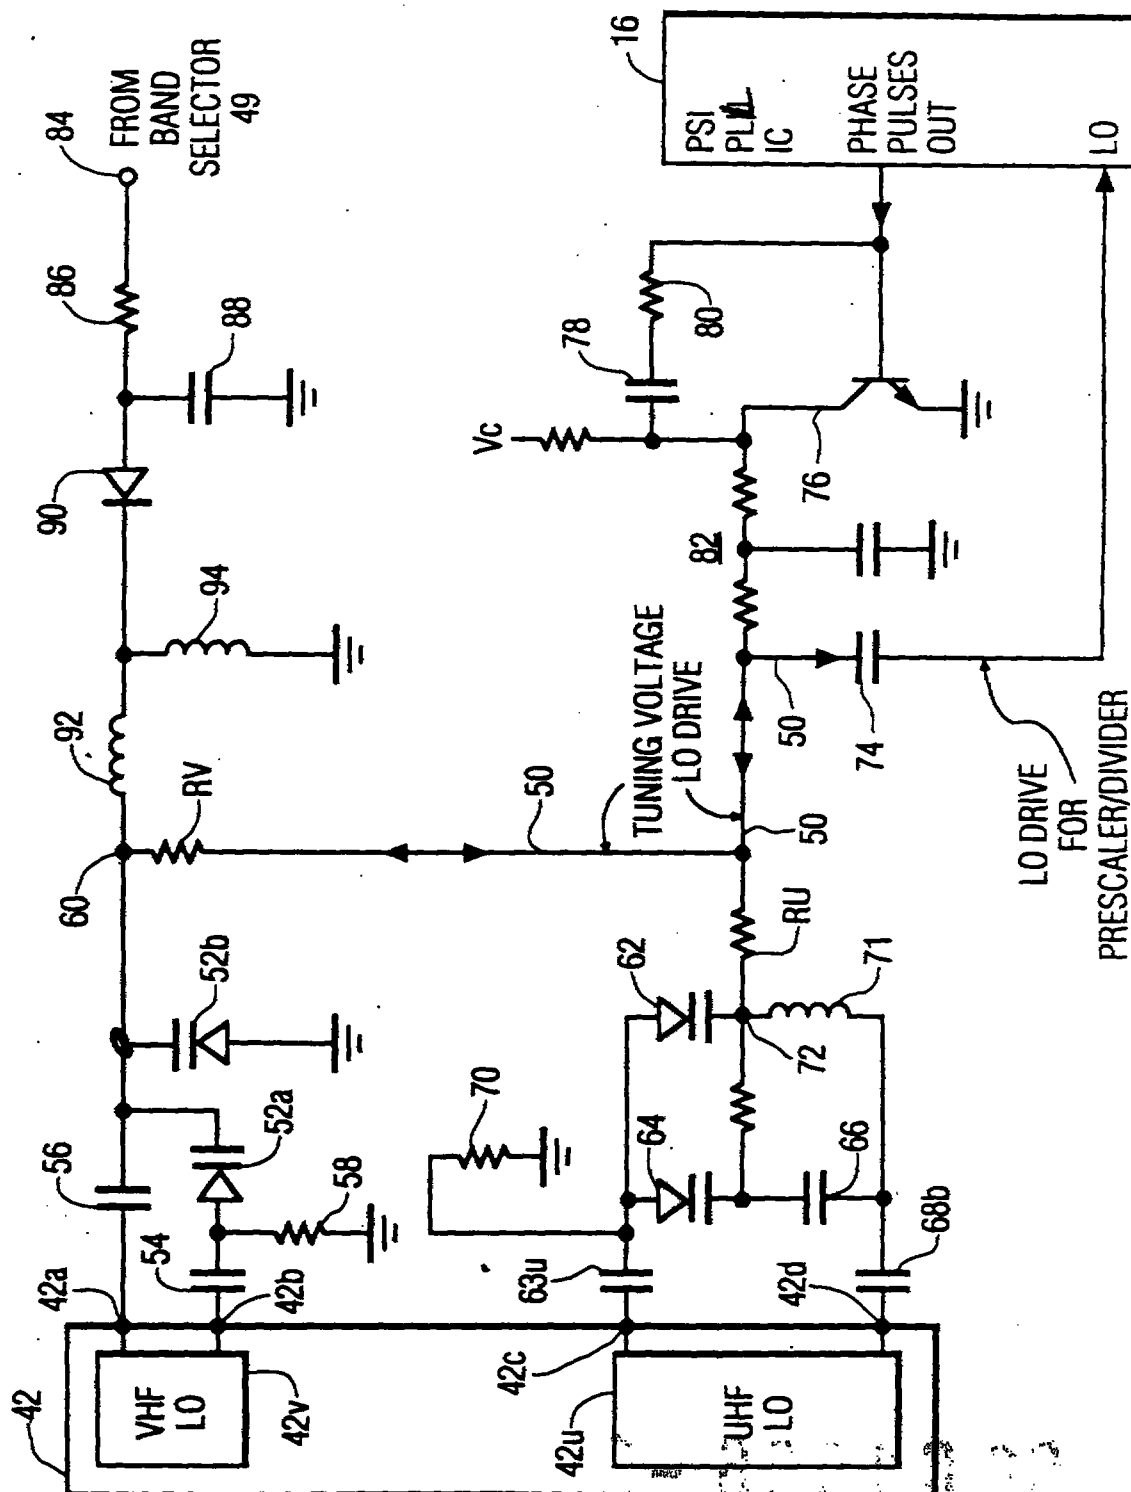

REPLACEMENT SHEETS		SG
☒	Description	: paged 01 to paged 06
☒	Claim(s)	: paged 06 to paged 08
☒	Drawing(s)	: paged 02 to paged 03
☒	Abstract	: paged 01 to paged 01
DATE OF RECEIPT 11/07/96		

9601966-6
IPOS

1

NEGATIVE FEEDBACK CONTROL CIRCUIT HAVING A COMMON LINE FOR INPUT AND OUTPUT SIGNALS

BACKGROUND

5 The present invention generally concerns a negative feedback control circuit having a common line for input and output signals, and more particularly, a television receiver tuner having a local oscillator which is controlled by a phase-locked loop.

1 0 Television receivers include a tuner section for heterodyning in a mixer received signals, e.g., broadcast or cable RF signals, to produce an intermediate frequency (IF) signal. The IF signal is processed by the IF signal section and the picture and sound components are further processed by respective signal processing sections to produce a video picture signal for displaying an image on a
1 5 CRT, and to produce an audio signal for producing an audio response by a loudspeaker.

The tuner section includes at least one controlled local oscillator and at least one RF amplifier wherein both have voltage controlled tuning circuits controlled in response to the magnitude of a
2 0 tuning voltage (TV), generated in the exemplary embodiment by the PLL, responsive to the selected channel. Typically the tuned circuits include combinations of inductors and varactor diodes which are reverse biased so as to exhibit a variable capacitive reactance having a value determined by the magnitude of the tuning voltage.

2 5 Phase locked loop (PLL) tuning systems employ a closed loop negative feedback arrangement for controlling the frequency of the local oscillator signal. The closed loop arrangement includes programmable digital counters as programmable frequency dividers by which a signal is generated which is the frequency to the local
3 0 oscillator signal divided by a programmable factor related to the selected channel. The programmable frequency divider can be preceded by an optional prescaler circuit which frequency divides the incoming signal by a constant factor. As used herein, functional statements referring to frequency division, prescaler, and frequency
3 5 dividers are independent of whether or not the frequency division is programmable.

The frequency and phase of the latter signals are compared by a phase detector to a reference frequency signal to derive a control voltage for controlling the frequency of the controlled local oscillator.

This is the replacement sheet

Date: 11 JUL 1996

For a tuning system employing a PLL, tuning voltage (TV) for tuning the RF amplifiers is also derived from the PLL control voltage developed in response to the channel selected.

5 The output line from the local oscillator provides an input signal for the PLL. The return output line from the PLL provides the input control signal for the controllable local oscillator. These two lines go from proximally spaced terminals at the PLL to another pair of proximally spaced terminals at the local oscillator. These lines carry high frequency signals which can radiate, and carry pick-up
1 0 sensitive tuning voltage signals. It is desirable to minimize these adverse effects. Such minimization can be achieved by reducing the length of the lines and/or reducing the number of lines. In particular, reducing the number of lines has the advantage of simplifying printed circuit board layout and reducing the pick-up and radiation produced
1 5 by printed circuit wiring leads.

SUMMARY OF THE INVENTION

Briefly, the present invention relates to a television receiver having an electronically controlled tuner. A controlled local
2 0 oscillator provides a local oscillator signal for the mixer. The controlled local oscillator includes an first input terminal for receiving a control signal for controlling its frequency and a first output terminal for providing an output local oscillator signal. A phase-locked loop includes a second input terminal for receiving the local oscillator signal
2 5 and a second output terminal for providing a signal back to the first input terminal of the controlled local oscillator for controlling its frequency. At least a portion of the coupling between the first output terminal and the second input terminal, and the second output terminal and the first input terminal, have a common line.

3 0

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a block diagram of a television receiver and a tuner according to aspects of the present invention.

Figure 2 is a partial detailed schematic of the controllable local
3 5 oscillator and phase-locked loop of Figure 1.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

The television receiver 10 of FIGURE 1 includes a signal source 12 for receiving radio frequency (RF) television signals and

This is the replacement sheet

Date: 11 JUL 1996

tuning controlled RF amplifiers 14 for tuning and amplifying the received signals. The processed RF signals are combined in a mixer 18 with local oscillator signals generated by a local oscillator 42 controlled by a phase-locked loop 16 to form an intermediate frequency (IF) signal. The IF signal is amplified, filtered and further processed in an IF processing unit 20 and a signal processing unit 22 to provide chrominance, luminance, synchronization, and sound signal components. The chrominance and luminance signals are coupled for providing an image display on kinescope 24 with the sound signals being coupled to a loudspeaker 26.

RF amplifiers 14 typically include a plurality of varactor diodes (not shown) which change capacitive reactance in response to a variable tuning signal in the form of a tuning voltage (TV). Voltage controlled oscillator 42 typically includes a plurality of varactor diodes and inductances with the frequency of oscillation frequency being controlled by control of the capacitance of the varactor diodes by a tuning voltage (TV).

The output signal (LO) of oscillator 42 is coupled to a programmable/prescaler frequency divider 46 which divides the frequency of LO by a factor determined by a channel selector 48 in accordance with the channel number and band of the selected channel. In particular, BCD signals generated by channel selection unit 48 are applied to programmable counters in frequency divider 46. Additionally, band selector 49, generates band selection signals responsive to the band of the selected channel. The band selection signals are coupled to appropriate PIN switching diodes in amplifier 14 and oscillator 42 for changing the circuit configuration for optimizing operation of the respective members in the selected frequency bands.

The output signal of frequency divider 46 is coupled to an input of phase detector 38. Phase detector 38 compares the frequency of the output signal of frequency divider 46 with a reference frequency signal derived from reference frequency generator 34. Generator 34 typically is a crystal oscillator with an output signal which is sometimes frequency divided by an optional frequency divider 36. Phase detector 38 develops an output signal representing the phase and/or frequency deviation between its two input signals. A typical phase detector provides a series of pulses at the reference frequency whose duration is related to the phase and frequency deviation between its two input signals. The output signal of phase detector 38 (error signal) is coupled

This is the replacement sheet

Date: 11 JUL 1995

to a low pass filter 40 which integrates the error signal to provide a very low frequency or DC signal, the amplitude of which varies in accordance with the detected phase and frequency deviations. This variable DC signal (TV) is coupled to the voltage controlled oscillator 42 to control its frequency of oscillation. In operation, the output signal of filter 40 controls the frequency of the local oscillator signal until the frequency and phase of the output signals of dividers 36 and 46 are in a predetermined relationship, e.g., substantially equal. At this point, phase-locked loop 16 is said to be "locked". The filtered error signal is also used for providing the tuning voltage (TV) for RF amplifiers 14.

As seen in Figure 1, line 50 provides tuning voltage TV to oscillator 42 and amplifier 14. Additionally, the same line 50 also provides the local oscillator signal LO from oscillator 42 to frequency divider 46. Thus, both the input signal and the output signal from the negative feedback control circuit, which in the exemplary embodiment is a PLL, are on a single line, and as explained above, permit a reduction of the number of lines which must be used with the advantage of simplifying printed circuit board layout, and reducing the pick-up and radiation produced by the printed circuit wiring leads.

Figure 2 shows particular details of the coupling circuit between local oscillator (LO) 42 and PLL 16. The voltage controlled oscillator 42, generally shown Figure 1, actually comprises two oscillators, a UHF LO 42U and a VHF LO 42V. In the exemplary embodiment, these oscillators are portions of the CXA1594L integrated circuit manufactured by the Sony Corporation. Components of the PLL 16, i.e., frequency divider 46, phase detector 38, etc. can be any appropriate PLL IC, the exemplary IC being a Siemens MGP 3002X.

Tuning varactor diodes 52a,b, padder capacitor 54, and coupling capacitor 56 are coupled to LO 42V at terminals 42a,b. Resistor 58 provides a DC ground return for varactor diode 52a. The output signal from LO 42V at node 60 is coupled to line 50 via resistor RV, with the tuning voltage from line 50 being applied via node 60 to tuning varactor diodes 52a,b.

Tuning varactor diodes 62, 64, padder capacitor 66, and coupling capacitors 68a,b are coupled to LO 42U at terminals 42c,d. Resistor 70 provides a DC ground return for varactor diodes 62, 64. Coil 71 helps LO 42U maintain oscillation across its band of frequencies. The output signal from LO 42U at node 72 is coupled to line 50 via

resistor RU, with the tuning voltage from line 50 being applied via node 72 to tuning varactor diodes 62, 64.

Line 50 provides input signals from VHF LO 42V and UHF LO 42U, coupled through capacitor 74 to the LO input of PLL 16, e.g., divider 46. In the exemplary embodiment, only one of local oscillators 42V and 42U are "turned on" at any one time. The phase pulses from phase detector 38 (error signal) are low pass filtered by transistor 76 having a low pass feedback network of capacitor 78 and resistor 80, and further filtered by low pass network 82. The output signal of network 82 provides the tuning voltage TV and is fed back to oscillator 42 via line 50. The tuning voltage TV is fed via line 50 and resistors RV and RU to respective varactor diodes of oscillators 42V and 42U for controlling the oscillation frequency of said oscillators in a manner discussed above in connection with Figure 1. Tuning signal TV is blocked from the frequency divider 46 by capacitor 74 which is only 8 picofarads (pf).

The values of resistors RU and RV are chosen to accommodate conflicting requirements. It is desirable that the values of resistors RU and RV be small so that a higher and more reliable prescaler drive voltage will be provided to PLL 16. However, if resistors RU and RV are too small, the tank circuits of the oscillators may be sufficiently loaded by the low input impedance of the PLL, which in the exemplary embodiment is bipolar, so that the oscillators may not reliably oscillate. In the exemplary embodiment, values of one kohm for each of resistors RU and RV were found to work well.

In the VHF frequency range, a bandswitching signal from band selector 49 is fed to terminal 84 and low pass filtered by resistor 86 and capacitor 88. In the lower frequency range of the VHF band, the bandswitching voltage at terminal 84 is low and PIN switching diode 90 remains open. In this mode, series inductances 92 and 94 provide maximum inductance to VHF oscillator 42V for a lower frequency of oscillation. For bandswitching to the higher VHF band, the bandswitching voltage at terminal 84 is high causing PIN diode 90 to conduct and shunts capacitor 88 across inductance 94 effectively removing inductance 94 from the circuit. Thus, for the higher VHF band, the inductance in the VHF oscillator circuit 42V is lower for generating a higher frequency of oscillation.

CLAIMS

1. An electronic tuning apparatus comprising:
 - a controlled local oscillator (42) for supplying a local oscillator signal, said local oscillator having a first output terminal
 - 5 for providing an output of the local oscillator signal, and an first input terminal for receiving a tuning signal for controlling the frequency of the local oscillator signal,
 - a phase-locked loop (16) for controlling the frequency of said local oscillator, said phase-locked loop comprising: - 10 a frequency divider means (46) having a second input terminal for receiving said local oscillator signal from said first output terminal and providing a frequency divided version of the local oscillator signal,
 - a channel selection device (48) for controlling the frequency
 - 15 division ratio of said frequency divider,
 - a reference frequency signal generator (34) for providing a reference frequency signal,
 - a phase detector (38) for comparing the frequency divided version of the local oscillator signal and the reference frequency
 - 20 signal, and
 - a low pass filter (40) including a second output terminal for providing a tuning signal derived from said phase detector (38) back to the first input terminal of said controlled local oscillator (42) for controlling the frequency of said controlled local oscillator,
 - 25 characterized by at least a portion of the coupling between the first output terminal of the local oscillator and the second input terminal of the frequency divider means, and the second output terminal of the low pass filter and the first input terminal of the local oscillator, having a common line (50).
 - 30
2. The electronic tuning apparatus according to claim 1 wherein said local oscillator (42) includes a variable reactance element, the reactance of which varies in response to said tuning signal.
- 35

This Sheet Has Been Replaced



This is the replacement sheet

Date: 11 JUL 1996



3. An electronic tuning apparatus comprising:
a controlled local oscillator (42) having a first output terminal for providing an output signal of the local oscillator, and an first input terminal for receiving a tuning signal for controlling the
5 frequency of the local oscillator signal, and
a phase-locked loop (16) for controlling the frequency of said oscillator, said phase-locked loop (16) including a second input terminal for receiving said local oscillator signal from said first output terminal and a second output terminal for providing a tuning
10 signal to the first input terminal of said controlled local oscillator for controlling the frequency of said controlled local oscillator, characterized by at least a portion of the coupling between the first output terminal and the second input terminal, and the second output terminal and the first input terminal, having a common line
15 (50).
4. A feedback control apparatus comprising:
a controllable circuit (42) having a first output terminal for providing an output signal, and a first input terminal for
20 receiving a control signal, and
a negative feedback control circuit (16) for controlling the controllable circuit, said negative feedback control circuit including a second input terminal for receiving said output signal, and a second output terminal for providing the control signal back to
25 the first input terminal, characterized by at least a portion of the coupling between the first output terminal and the second input terminal, and the second output terminal and the first input terminal, having a common line (50).
- 30 5. A television receiver having an electronically controllable tuner comprising:
a controlled local oscillator (42) for supplying a local oscillator signal, said local oscillator having a first output terminal for providing an output of the local oscillator signal, and an first
35 input terminal for receiving a tuning signal for controlling the frequency of the local oscillator signal, and

This Sheet Has Been Replaced



This is the replacement sheet


Date: 11 JUL 1996



a phase-locked loop (16) for controlling the frequency of said oscillator in response to a channel selection device, said phase-locked loop (16) including a second input terminal for receiving said local oscillator signal from said first output terminal and a second
5 output terminal for providing a signal back to the first input terminal of said controlled local oscillator for controlling the frequency of said controlled local oscillator, characterized by at least a portion of the coupling between the first output terminal and the second input terminal, and the second output terminal and the first input
10 terminal, having a common line (50).

6. The electronic tuning apparatus according to claim 5 wherein said local oscillator (42) includes a variable reactance element, the reactance of which varies in response to said tuning
15 signal.

This Sheet Has Been Replaced



This is the replacement sheet

Date: 11 JUL 1998

NEGATIVE FEEDBACK CONTROL CIRCUIT HAVING A COMMON LINE
FOR INPUT AND OUTPUT SIGNALS

ABSTRACT

A television receiver having an electronically controlled tuner is presented. A controlled local oscillator (42) provides a local
5 oscillator signal for the mixer (18). The controlled local oscillator (42) includes an first input terminal for receiving a control signal for controlling its frequency and a first output terminal for providing an output local oscillator signal. A phase-locked loop (16) includes a
10 second input terminal for receiving the local oscillator signal and a second output terminal for providing a signal back to the first input terminal of the controlled local oscillator for controlling its frequency. At least a portion of the coupling between the first output terminal and the second input terminal, and the second output terminal and the first input terminal, have a common line (50).

15


FIGURE 1

This Sheet Has Been Replaced



This is the replacement sheet


Date: 11 JUL 1996

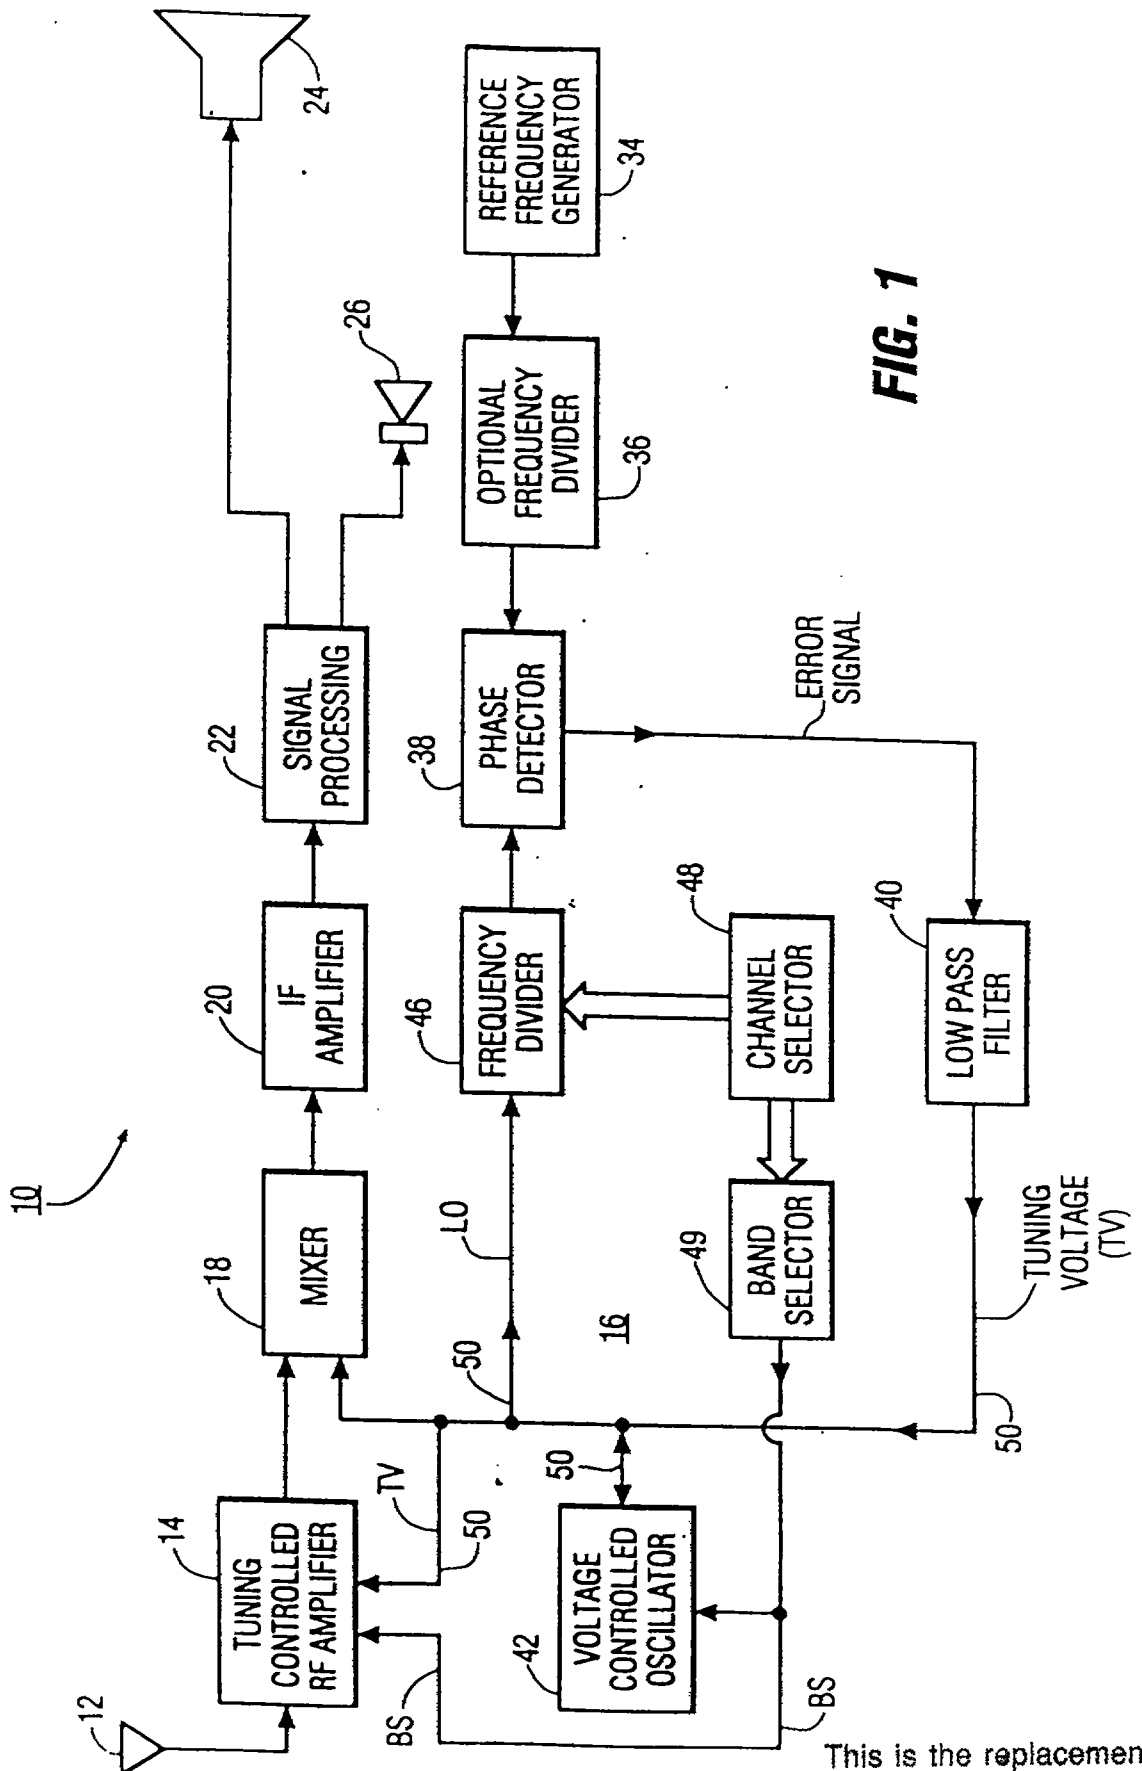

This is the replacement sheet

Date: 11 JUL 1996

FIG. 2

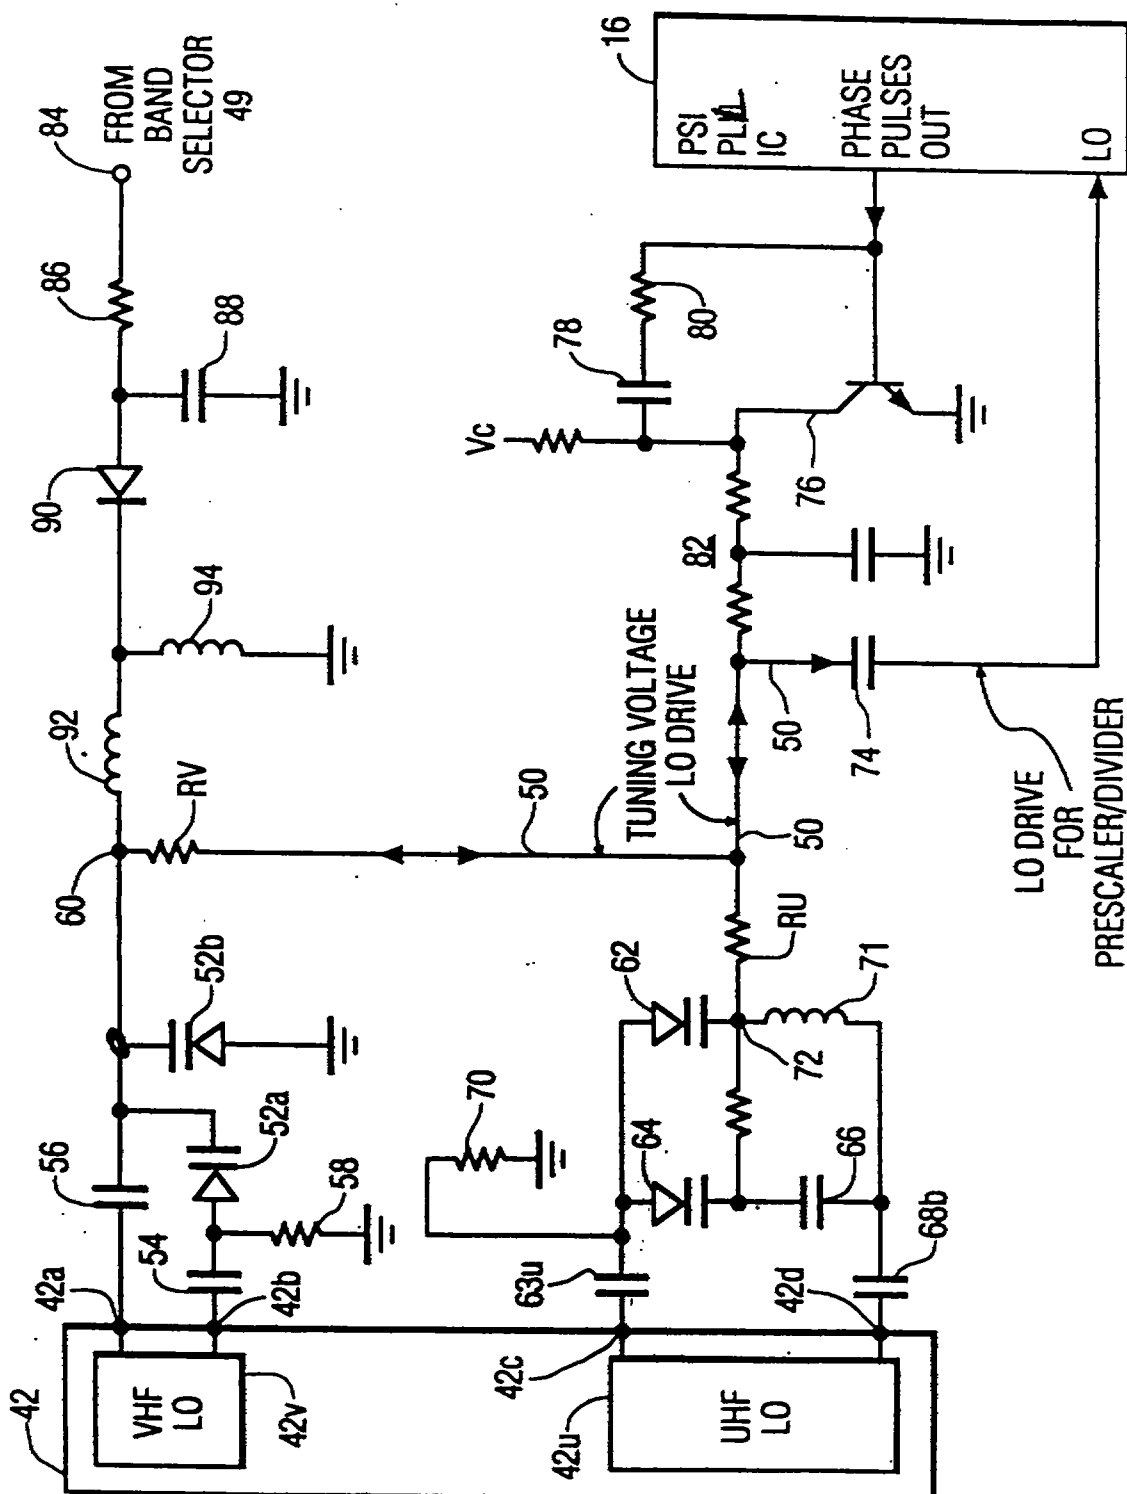

This is the replacement sheet

Date: 11 JUL 1996



9601466-6

1102

6

REPLACEMENT SHEETS		SG
☒	Description : paged 01 to paged 05	05
☒	Claim(s) : paged 06 to paged 08	08
☒	Drawing(s) : paged 09 to paged 11	11
☒	Abstract : paged 11 to paged 11	11
DATE OF RECEIPT		7/10/97
		1102

CLAIMS

1. Electronic apparatus comprising:

a controlled oscillator having an input-output node;

said input-output node receiving a control signal (TV) for controlling the frequency of said controlled oscillator and providing an output signal of said controlled oscillator;

a phase and/or frequency detector having first and second inputs and an output;

said first input of said phase and/or frequency detector coupled to a source of a reference frequency signal;

said output of said phase and/or frequency detector coupled to said input-output node of said oscillator via a low pass network; and

said second input of said phase and/or frequency detector coupled to said input-output node of said controlled oscillator via a blocking capacitor.

2. Apparatus as recited in Claim 1, wherein:

said oscillator includes a variable reactance element that is coupled to said input-output node and the reactance of said element varies in response to said control signal (TV).

This is the replacement sheet

Date: 17 SEP 1999

NEGATIVE FEEDBACK CONTROL CIRCUIT HAVING A COMMON LINE
FOR INPUT AND OUTPUT SIGNALS

ABSTRACT

5 A television receiver having an electronically controlled
tuner is presented. A controlled local oscillator (42) provides a local
oscillator signal for the mixer (18). The controlled local oscillator
(42) includes an first input terminal for receiving a control signal for
controlling its frequency and a first output terminal for providing an
output local oscillator signal. A phase-locked loop (16) includes a
10 second input terminal for receiving the local oscillator signal and a
second output terminal for providing a signal back to the first input
terminal of the controlled local oscillator for controlling its frequency.
At least a portion of the coupling between the first output terminal
and the second input terminal, and the second output terminal and
15 the first input terminal, have a common line (50).

FIGURE 1

This is the replacement sheet

Date: **17 SEP 1999**