

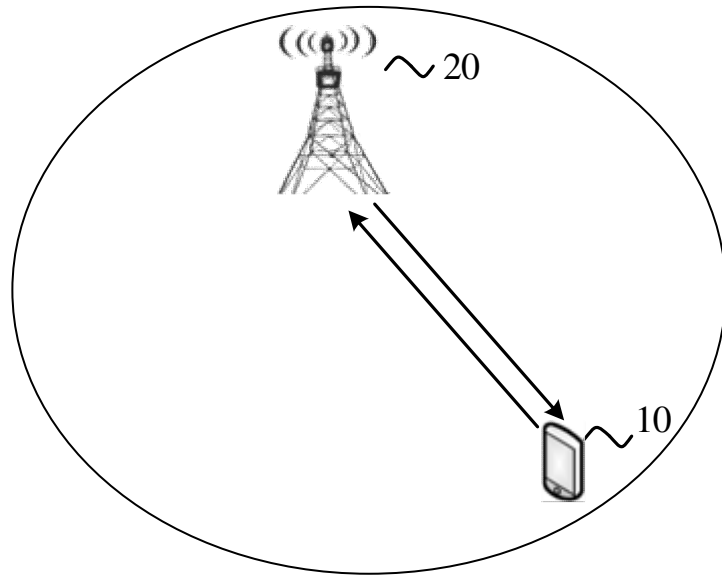


FIG. 1

100

a first device determines a basic transmission interval and at least one basic numerology

S110

the first device takes the basic transmission interval as a time domain unit and employs parameters in the at least one basic numerology to perform transmission of at least one of data or a pilot signal with a second device.

S120

FIG. 2

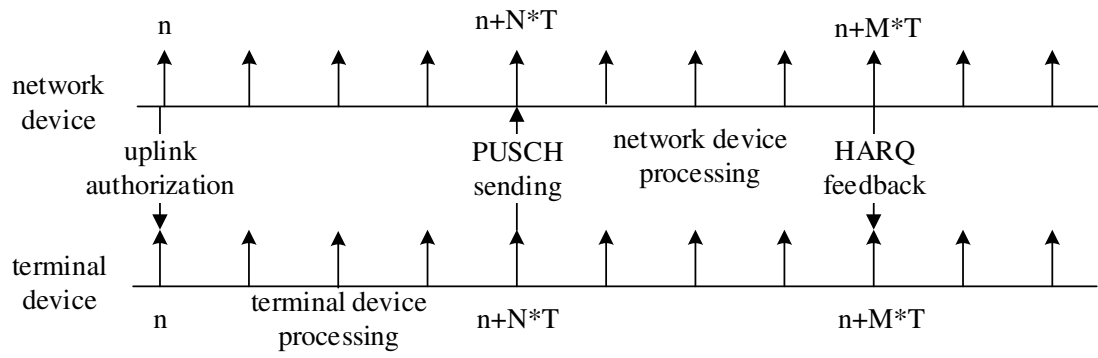
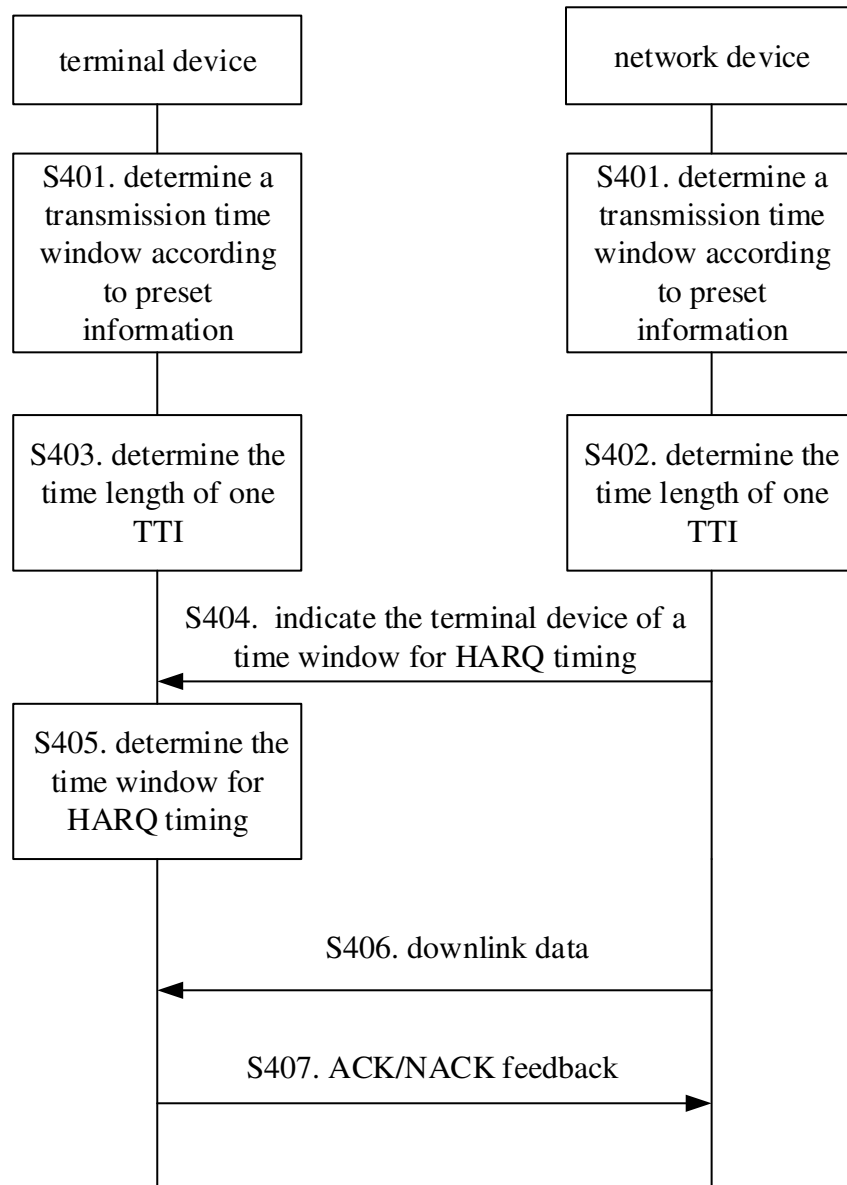


FIG. 3

**FIG. 4**

500

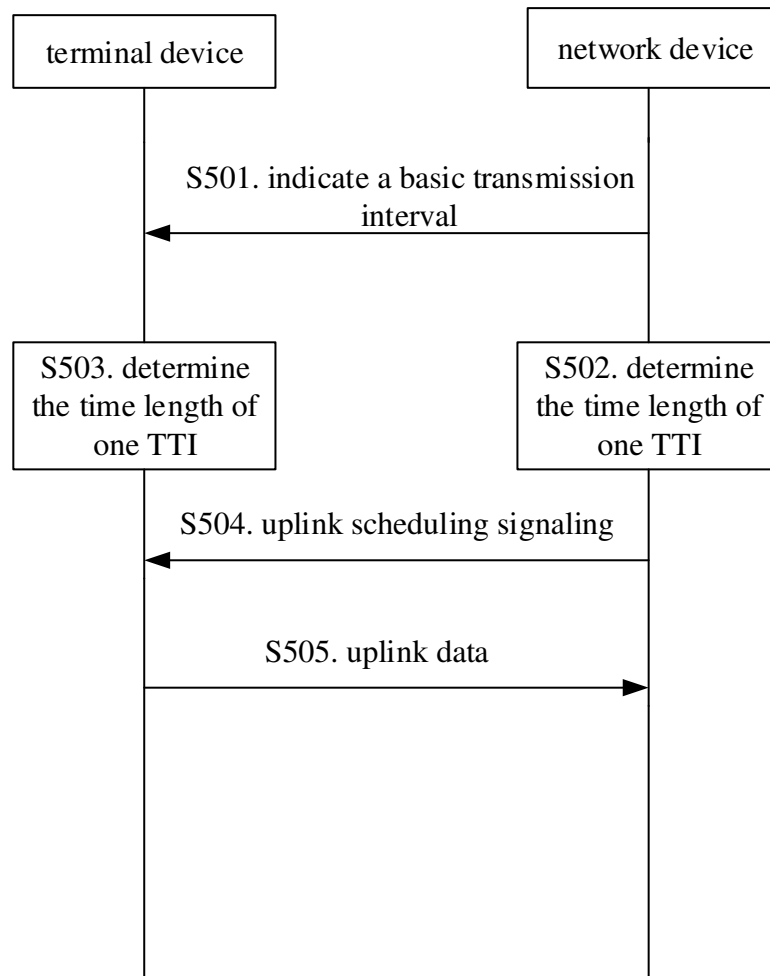


FIG. 5

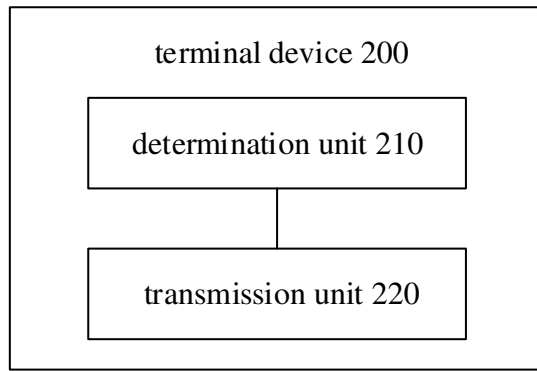


FIG. 6

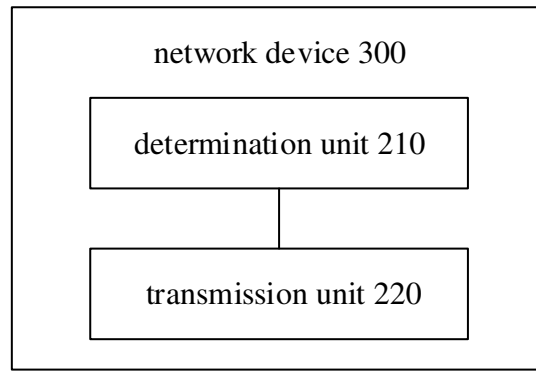


FIG. 7

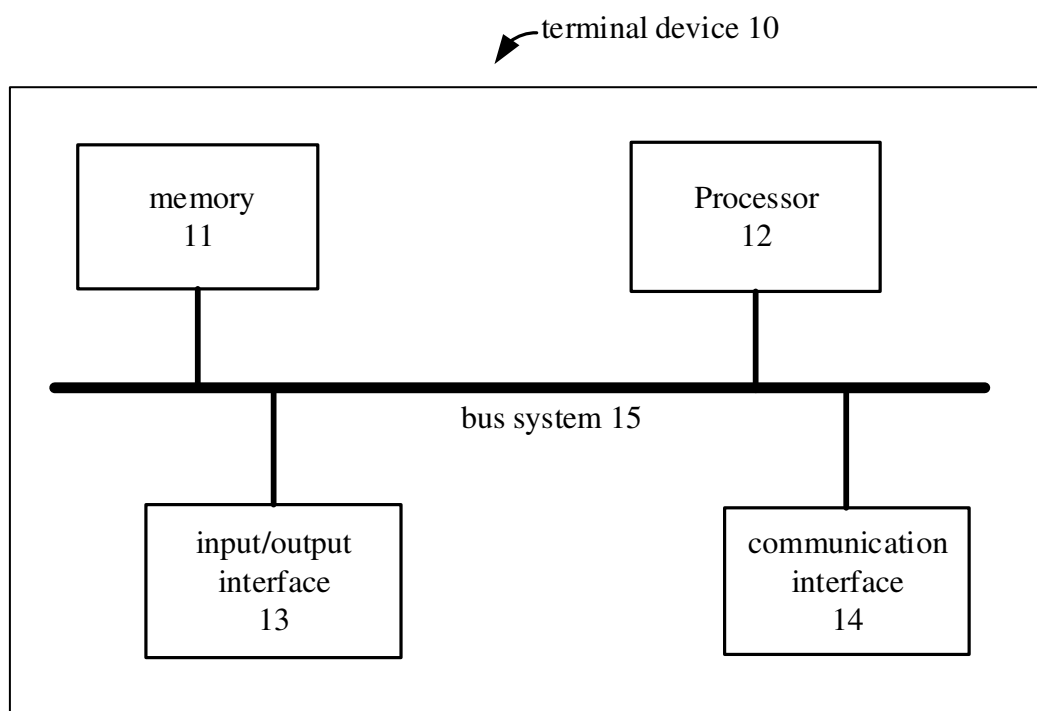


FIG. 8

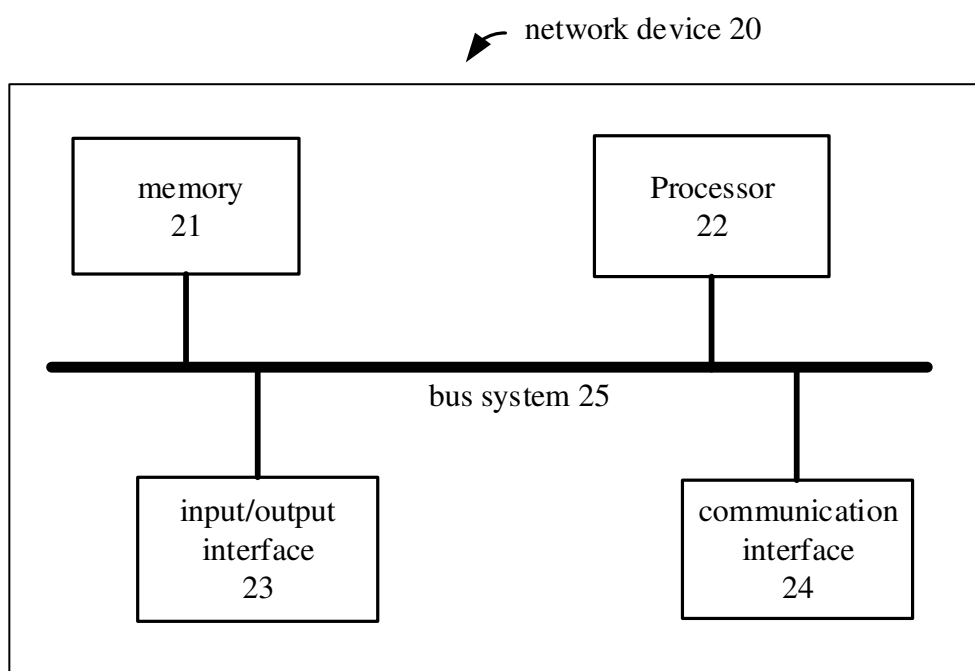


FIG. 9