



9600233-1

Ipos copy

PHN 14.285

1

05.02.1993

"A direct conversion receiver "

REPLACED SHEETS		SG
☒ Description	: paged ..1... to paged ..10...	
☒ Claim(s)	: paged ..11... to paged ..13...	
☒ Drawing(s)	: paged ..13... to paged ..313...	
☒ Abstract	: paged ..14... to paged	

The present invention relates to a direct conversion receiver comprising a local frequency generating arrangement which is coupled to a pair of quadrature related mixers for mixing down an rf input signal to quadrature related signals, a demodulator for demodulating the quadrature related signals into demodulated data, and a.f.c. means for providing a control signal for the local frequency generating arrangement, the a.f.c. means being coupled to quadrature paths. Such direct conversion receivers can be digital paging receivers or transceivers using an FSK (Frequency Shift Keying) modulation scheme, but also transceivers for cordless telephony or the like.

10

A direct conversion receiver of this kind is known from the British Patent Application GB 2 180 419. In the known direct conversion receiver, an a.f.c. (automatic frequency control) signal for a local oscillator with inherent correct polarity is derived from so-called I- and Q-channel receiver paths. For this purpose, a baseband I-channel signal is fed to a phase detector, together with a Q-channel signal, which is also fed to a frequency discriminator. Output signals of the phase detector and the frequency discriminator are fed to a multiplier, an output of which providing the control signal, which is fed to the local oscillator via a low pass filter as a loop filter. The a.f.c. means are complex in that a closed loop a.f.c. is used comprising a loop filter. Other known direct conversion receivers such as paging receivers, with a crystal oscillator as the local oscillator, are subject to frequency drift problems due to crystal aging and temperature drift, the more difficult to overcome, the higher the data rates.

25

It is an object of the present invention to provide a direct conversion receiver not having the drawbacks of known receivers, and having reduced complexity.

To this end a direct conversion receiver according to the present invention is characterized in that the a.f.c. means comprise a digital-to-analog conversion

arrangement for providing the control signal, signal quality determining means for determining a valid data signal from the demodulated data, storage means for storing a valid data range during scanning intervals, and means for adjusting an output signal of the digital-to-analog conversion arrangement to an adjustment value within the valid data range. A very simple a.f.c. means is achieved, a loop filter being dispensed with. The a.f.c. means essentially is based upon open loop control, the control signal being updated from time to time, preferably on a regular basis. By looking at particular parts of the received signal or by examining other received signal characteristics during the scanning intervals, while stepping through a range of output values of the digital-to-analog conversion arrangement, the valid data range is obtained. The present invention is based upon the insight that such scanning need not be repeated very often, temperature drift or aging being slow processes.

It is to be noticed that the international application WO 92/08294 discloses an a.f.c. for a superheterodyne receiver having a digital-to-analog converter for supplying a control signal to a local oscillator, but this a.f.c. essentially is a digital closed loop a.f.c., i.e. a closed loop error signal is computed on the basis of a measured offset frequency. Furthermore, a separate RSSI circuit (Received Signal Strength Indication) is necessary, the disclosed method only working for strong signals.


In an embodiment of the direct conversion receiver according to the present invention, the adjustment value is a value around a mid-range value within the valid data range. In this way a more reliable adjustment value is obtained as would be obtained more at the boundaries of the valid data range where transition from valid to invalid data occurs more easily, with oscillator drift.

In a further embodiment of the direct conversion receiver according to the present invention, in a first operating mode a first range is scanned, and in a second operating mode a second, limited, range is scanned around a previous adjustment value. It is achieved that frequency scanning time is reduced once an operating point has been adjusted previously.

In a further embodiment of the direct conversion receiver according to the present invention, valid data scanning is halted during expected data frames. It is achieved, when scanning overlaps expected data frames, that these data frames are not lost. In practice, for robust detection of valid data, such overlap would occur. Thus, the scanning can be done in between data frames.

This Sheet Has Been Replaced





In an embodiment of the direct conversion receiver according to the present invention, the signal quality determining means comprise a frequency-to-voltage converter coupled to an analog-to-digital conversion arrangement or to a comparison arrangement, for determining the valid data signal. In this embodiment, the signal quality is determined on the basis of a threshold of operation with respect to BER (bit error rate). The signal frequency at the threshold of operation can be differentiated from the frequency of a noise signal alone, i.e. where no data are present.

In another embodiment of the direct conversion receiver according to the present invention, the signal quality determining means comprise a microcontroller coupled to a gated counter for determining the valid data signal. In this embodiment, the control signal value is preferably chosen such that a minimum counter value is achieved, corresponding to a mid-range value within the valid data range.

In another embodiment of a direct conversion receiver according to the present invention, the signal quality determining means determine the valid data signal on the basis of signal characteristics of the demodulated data, such as a valid CRC, a CRC with a unique error syndrome, a data frame preamble, a sync pattern, or a BER. The acronym CRC means Cyclic Redundancy Code, and the acronym BER means Bit Error Rate. In this embodiment preferably a microcontroller is to be used, evaluating the signal characteristics. Detection of the signal characteristics can be done according to relevant standards, e.g. the POGSAG paging standard.

In a further embodiment of a direct conversion receiver according to the present invention, the local frequency generating arrangement comprises a thermally insulated crystal. It is achieved that a period between consecutive scans is prolonged. Especially in a direct conversion communication device as a handheld device, usually being powered by means of batteries, this leads to battery saving.

A further embodiment of a direct conversion receiver according to the present invention is characterized in that the receiver comprises first a.f.c. means as claimed in any one of the claims 1 to 11, second a.f.c. means particularly suitable for relatively strong rf input signals, and RSSI-means for determining a signal strength of the input signal, the direct conversion communication being arranged for switching over from the first to the second a.f.c. means if the determined signal strength exceeds a predetermined threshold value. An optimal a.f.c. means is thus achieved. The first a.f.c. means are optimised for relatively low rf input signal power, whereas the second



a.f.c. means are optimised for relatively high rf input power, leading to an overall optimal a.f.c. performance.

5 The present invention will now be described, by way of example, with reference to the accompanying drawings, wherein

Fig. 1 schematically shows a direct conversion receiver according to the present invention,

10 Fig. 2 shows an embodiment of signal quality determining means according to the present invention,

Fig. 3 shows a frequency-to-voltage converter in signal quality determining means according to the present invention,

Fig. 4 shows another embodiment of signal quality determining means according to the present invention,

15 Fig. 5 shows ranges according to the present invention,

Fig. 6 shows frequencies of signals according to the present invention, and

Fig. 7 shows a flow chart for second a.f.c. means in a direct conversion receiver according to the present invention.

20

Figure 1 schematically shows a direct conversion receiver 1 according to the present invention. The direct conversion receiver 1, which can be a paging transceiver, comprises an antenna 2 for receiving an rf (radio frequency) input signal rf, which can be an rf FSK (Frequency Shift Keying) signal carrying FSK modulated digital signals. The rf input signal rf is fed to a low noise rf amplifier 3, which is coupled to quadrature paths 4 and 5, so-called I- and Q-channels, for mixing down the rf input signal rf to quadrature related signals I and Q. The quadrature path 4 comprises a phase shifting device 6 causing a +45 degrees phase shift of the amplified rf signal. 25 The phase shifting device 6 is coupled to a mixer 7 for mixing down the rf signal rf to the signal I, an output of the mixer 7 being filtered and limited by means of a respective filter 8 and a limiter 9. Similarly, the quadrature path 5 comprises a phase shifting device 10 causing a -45 degrees phase shift of the amplified rf signal, a mixer 11, a 30



filter 12, and a limiter 13 for achieving the signal Q. The filters 8 and 12 are provided for limiting the noise bandwidth and for channel selectivity. By AC-coupling of the filters 8 and 12 to the mixers 7 and 11, DC-offset effects are avoided. The limiters 9 and 13 are provided for removing amplitude signal variations. The mixers 7 and 11 are further coupled to a local frequency generating arrangement 14, e.g. a crystal oscillator having a crystal 15 as a frequency determining element, via a frequency multiplication arrangement 16. The local frequency generating arrangement 14 can also be a more elaborate arrangement, e.g. a frequency synthesizer having a crystal oscillator for providing a reference frequency. Such frequency synthesizers can operate on the basis of a PLL (phase locked loop). In a direct conversion receiver the mixing frequency, i.e. an output frequency f_L of the multiplication arrangement 16, further denoted as oscillator frequency, is chosen such that zero intermediate-frequency signals I and Q are obtained, with respect to a carrier frequency f_c . Instead of two phase shifting devices, with +45 degrees and -45 degrees phase shifting, respectively, a single 90 degrees phase shifting device can be applied, for phase shifting the oscillator signal for one of mixer signals. E.g. for FSK modulated rf signals with a frequency deviation of +4 kHz and -4kHz around a 900 MHz carrier frequency f_c , the carrier not physically being present in the received rf input signal rf, representing logical "0" and logical "1" transmitted signals, the signals I and Q are 4 kHz signals, though differing in relative phase, if $f_L = f_c$. In case of a frequency offset of the oscillator frequency f_L with respect to the rf input signal rf, i.e. with respect to the carrier frequency f_c , the baseband signals I and Q have equal frequencies which have different values during data "1" and data "0". For obtaining demodulated data, the direct conversion receiver 1 comprises a demodulator 18 to which the quadrature related signals I and Q are fed. The demodulator 18 can be a lead-lag phase detector for demodulating FSK data. The demodulator 18 is coupled via a data filter 19 to a microcontroller 20 with RAM and ROM memory 21 and 22 and an I/O-interface 23. Such microcontrollers are well known in the art. The demodulator 18 provides demodulated data dta, and the data filter 19 provides filtered demodulated data fdta. For a paging transceivers, various output signals may be provided for such as a speech signal via an amplifier 24 and a speech reproducing device 25, an information message via a display unit 26, a audible tone signal via a bleeper 27, and a visual alert signal via an LED 28. In case of a paging transceiver, transmission means 29 are provided for sending a return message, which



means 29 are controlled by the microcontroller 20, the transmission means being coupled to a transmitting aerial 29. According to the present invention, the direct conversion receiver 1 comprises a.f.c. means comprising a digital-to-analog conversion arrangement 31 for providing a control signal ct for the local oscillator 14, signal quality determining means 32 for determining a valid data signal vdata from the demodulated data dta, from the filtered demodulated data fdta, from one of the signals I and Q, i.e. from an output signal of the limiter 9 or 13, or from a product of the signals I and Q, storage means for storing a valid data range during scanning intervals, the storage means being the RAM memory 21 e.g., and means for adjusting the output signal ct of the digital-to-analog conversion arrangement 31 to an adjustment value within the valid data range. The operation of various embodiments will be described together with the description of the embodiments. In more general terms, on the basis of a particular quality criterion, the signal quality determining means 32 determine the quality of the received signal rf for a stepping range of the digital-to-analog conversion means 31, the stepping being controlled by the microcontroller 20, during scanning intervals. The microcontroller 20 determines a valid data range and adjusts the control signal ct to an adjustment value within the valid data range, preferably a mid-range value. The scanning preferably is at regular intervals, e.g. every 5 or 10 minutes. The scanning can be interrupted in case of overlap with expected data frames, an old adjustment value still being used as the control signal ct. In a first mode a whole output range of the digital-to-analog conversion can be stepped, whereas in a second mode, after an initial first scanning, only a limited stepping can be done around an operating point of the control signal ct, being the last adjustment value obtained during a previous scanning. In case of a no signal or weak signal condition during normal data reception intervals, there is no need to start the scanning procedure immediately, since such condition could be due to signal fading, or even due to an interruption of signal transmission. If during regular scanning no valid data is detected, the scanning could be repeated more often. In between scanning intervals, normal reception could be tried using the last adjustment value of the control signal ct. The present invention allows for quite higher data rates as with known paging receivers, since the offset frequency is made very small by the a.f.c. means. The signal quality determining means 32 can be implemented in hardware or software, in the latter case stored in the ROM memory 22. The digital-to-analog conversion arrangement 31 can be built into the microcontroller



20, as shown, but can also be a separate device. Also, the a.f.c. means can be implemented as a separate IC (Integrated Circuit). As to the advantage of having a simple a.f.c. means, furthermore, as compared with known receivers using crystal oscillators without applying an a.f.c. control signal thereto, no complicated temperature drift or aging drift compensation schemes are necessary. E.g., a less than 2.8 ppm temperature drift or aging drift compensation in such known receivers in the 900 MHz band would be expensive or even impractical in paging receivers. The present invention allows for using crystals without temperature compensation. For prolonging periods between scanning, the crystal 15 is thermally insulated. Such insulation as such is well known in the art. A lot of heat transfer from the crystal to the environment thereof occurs via electrical connection leads of the crystal. By applying long connection leads which are helically wound while at the same time insulated, a good heat insulation is obtained.

Fig. 2 shows an embodiment of the signal quality determining means 32 according to the present invention, the same reference numerals having been used for corresponding features. The signal quality determining means 32 comprise a frequency-to-voltage converter 40 coupled to a comparator 41 of which an output 42 provides the valid data signal vdta, e.g. a logic "0" signal representing valid data, and a logic "1" signal representing invalid data. As an input signal to an input 43 of the frequency-to-voltage converter 40, the demodulated data dta can be applied, as shown, but also the filtered demodulated data fdta, one of the quadrature related signals I or Q, being output signals of the limiters 9 and 13, or the product if the signals I and Q.

Fig. 3 shows an embodiment of the frequency-to-voltage converter 40 in signal quality determining means 32 according to the present invention. The frequency-to-voltage converter 40 comprises an opamp 50 with a plus input 51 coupled to ground, and with a parallel arrangement of a resistor 52 and a capacitor 53 coupled between a minus input 54 and an output 55 of the opamp 50, the output 55 being an output 56 of the frequency-to-voltage converter 40. Coupled between an input 57 of the frequency-to-voltage converter 40 and the input 54 is a series arrangement of a capacitor 58 and a diode 59, and between a connection point 60 of the capacitor 58 and the diode 59 a diode 61 connected to ground. The converter 40 operates as a diode-pump frequency indicator on digital input data. The determination of a valid data signal is based upon the idea that the presence of a signal can be distinguished from noise alone or a too bad



signal from BER (Bit Error Rate) point of view. When a valid data signal is present, the measured frequency of the signal I and Q would be around a modulation deviation frequency Δf , e.g. $\Delta f = 4$ kHz, whereas for no data or bad data the frequency will be substantially higher due to presence of mainly noise and higher baseband frequencies due to the frequency offset. Distinction between valid or invalid data is made by comparing an output of the frequency-to-voltage converter 40 with a threshold value thr, if the comparator 41 is used. Instead of the comparator 41 an analog-to-digital converter can be used, which then provides digital values to the microcontroller 20. In the latter case, the microcontroller 20 determines the valid data signal vdt.

Fig. 4 shows another embodiment of the signal quality determining means according to the present invention, comprising a gated counter 70 coupled with a counter output 71, and with a gate input 72 to the microcontroller 20, which provides the control signal ct. The demodulated data dta, as shown, or the filtered demodulated data fdta, or one of the signals I or Q, or the product of the signals I and Q, is fed to a counter input 73. For valid data, the counter exhibits a range of output values around a minimum counter value, whereas higher counter values correspond to invalid data. It has been shown that use of limiter output data gives a more reliable valid data determination, use of demodulated data possibly giving rise to local minima at which an incorrect decision can be made.

Fig. 5 shows ranges of an output of the digital-to-analog converter 31 according to the present invention. Shown are a full output voltage range DAR of the digital-to-analog conversion arrangement 31, scanned during the first operating mode, a valid data range VR during a scanning interval, and a limited range LR, scanned during the second operating mode. Preferably, an adjustment value for the control signal ct is chosen as a mid-range value or in the vicinity thereof, as it should be realized that there is no sharp transition between valid and invalid data at edges of the valid data range VR. In the second operating mode, the limited range LR is preferably centered around the adjustment value set during the first operating mode.

Fig. 6 shows frequencies of signals according to the present invention. Shown are the (fictitious) carrier frequency f_c , the oscillator frequency f_L , a frequency deviation Δf of data "0" and data "1" FSK modulated signals with respect to the fictitious carrier frequency f_c , a frequency offset δf of the oscillator frequency f_L with respect to the carrier frequency f_c , and f_0 and f_1 signals, representing demodulated



signals for data "0" and data "1", respectively.

- Fig. 7 shows a flow chart for second a.f.c. means in a direct conversion communication device according to the present invention, which are embodied by means of a stored program in the ROM 22 of the microcontroller 20. The described a.f.c. means according to the present invention form first a.f.c. means. A further embodiment of a direct conversion communication device 1 according to the present invention is arranged for switching over from the first a.f.c. means to the second a.f.c. means and vice versa on the basis of the signal strength of the input signal rf. For determining the signal strength of the input signal rf, the direct conversion receiver is provided with
- 10 RSSI-means (Received Signal Strength Indication), which can be conventional RSSI-means (not shown), or a gated counter such as described in relation to figure 4. In the latter case the signal strength is determined on the basis of the frequency of a counter input signal, being the signal I or Q, or the product of the signals I and Q. A conventional analog RSSI-signal can be obtained from one of the limiters 9 and 13, which analog
- 15 RSSI-signal can then be compared with a predetermined threshold value thr1 by means of a comparator 33. An output signal sdta of the comparator 33, indicating that the limiter signal is above the threshold value thr1, ie. a relatively strong signal, is fed to the microcontroller 20, implementing the second a.f.c. means. The microcontroller switches over from the first to the second a.f.c. means on the basis of the signal sdta.
- 20 The second a.f.c. means are now described with the help of the flow chart of figure 6. Shown is a program begin block 10. In a test block 11, the stored program in the ROM 22 tests the signal sdta. If the signal sdta has got a logical value "1", corresponding to a relatively strong rf input signal, the microcontroller 20 switches over to the second a.f.c. means, being particularly optimized for strong input signals rf. Otherwise the
- 25 microcontroller 20 controls the first a.f.c. means, as described, indicated with an acronym FAFC, meaning First A.F.C. means, i.e. the valid data scanning according to the present invention, in block 12. The program routine then ends with an end block 13. The second a.f.c. means, indicated with an acronym SAFC, meaning Second A.F.C. means, first comprise measuring of the f_0 and f_1 signals in block 14, e.g. with counter
- 30 means as described, i.e. if the demodulated data is "0", f_0 is measured, whereas f_1 is measured if the demodulated data is "1". In a test block 15 it is tested if $f_1 > 2\Delta f'$ or $f_0 > 2\Delta f'$, i.e. whether $|df| > \Delta f$. It is to be noticed that $\Delta f' \approx \Delta f$, whereby the exact value of $\Delta f'$ depends on an applied pre-modulation de-emphasis. If the condition in

block 15 is not true, i.e. an in-range situation applies, δf is calculated in block 16, according to $\delta f = (f_0 - f_1)/2$. If the condition in block 15 is true, i.e. an out-of-range situation applies, δf is calculated in block 17, according to $[\text{sign}(f_0 - f_1)] * [(f_0 + f_1)/2]$, sign being the well known mathematical sign function. In block 18, the microcontroller
5 determines an input value for the digital-to-analog conversion arrangement 31, providing the control signal ct, the input value e.g. being determined by applying the calculated frequency offset value δf as an address value for a lookup table LUT in the ROM 22, the lookup table LUT comprising digital representations of control values ct. The lookup-table can be filled with data reflecting a known or measured a.f.c. behaviour of
10 the direct conversion device 1. At last an end block 19 is shown. The first and second a.f.c. means can be optimised such that an overall a.f.c. performance is approximately linear with the signal power of the input signal rf.

This Sheet Has Been Replaced



4

CLAIMS:

1. A direct conversion receiver (1) comprising a local frequency generating arrangement (14, 15, 16) which is coupled to a pair of quadrature related mixers (7, 11) for mixing down an rf input signal (rf) to quadrature related signals (I, Q), a demodulator (18) for demodulating the quadrature related signals into demodulated data (dta), and a.f.c. means for providing a control signal (ct) for the local frequency generating arrangement (14), the a.f.c. means being coupled to quadrature paths (4, 5), characterized in that the a.f.c. means comprise a digital-to-analog conversion arrangement (31) for providing the control signal (ct), signal quality determining means (32) for determining a valid data signal (vdta) from the demodulated data (dta), storage means (21) for storing a valid data range (VR) during scanning intervals, and means for adjusting (20, 22) an output signal of the digital-to-analog conversion arrangement (31) to an adjustment value within the valid data range (VR).
2. A direct conversion receiver (1) as claimed in claim 1, wherein the adjustment value is a value around a mid-range value within the valid data range (VR).
3. A direct conversion receiver as claimed in claim 1 or 2, wherein in a first operating mode a first range (DAR) is scanned, and in a second operating mode a second, limited, range (LR) is scanned around a previous adjustment value (ct).
4. A direct conversion receiver (1) as claimed in claim 1, 2 or 3, wherein valid data scanning is halted during expected data frames.
5. A direct conversion receiver (1) as claimed in claim 1, 2, 3 or 4, wherein the scanning is repeated on a regular basis.
6. A direct conversion receiver (1) as claimed in any one of claims 1 to 5, wherein the signal quality determining means (32) comprise a frequency-to-voltage converter (40) coupled to an analog-to-digital conversion arrangement or to a comparison arrangement (41), for determining the valid data signal (vdta).
7. A direct conversion receiver (1) as claimed in any one of the claims 1 to 5, wherein the signal quality determining means (32) comprise a microcontroller (20) coupled to a gated counter (70) for determining the valid data signal (vdta).





8. A direct conversion receiver (1) as claimed in any one of the claims 1 to 5, wherein the signal quality determining means (32) determine the valid data signal (vdta) on the basis of signal characteristics of the demodulated data (dta), such as a valid CRC, a CRC with a unique error syndrome, a data frame preamble, a sync pattern, or a BER.
9. A direct conversion communication device (1) as claimed in any one of the claims 1 to 7, wherein filtered demodulated data (fdta) are used for determining the valid data signal (vdta) instead of the demodulated data (dta).
10. A direct conversion receiver as claimed in any one of the claims 1 to 7, comprising limiters (9, 13) in the quadrature paths (4, 5), wherein an output signal of one of the limiters (9, 13) or a product of the output signals of the limiters (9, 13) is used for determining the valid data signal (vdta) instead of the demodulated data (dta).
11. A direct conversion receiver (1) as claimed in any one of the preceding claims, wherein the local frequency generating arrangement (14) comprises a thermally insulated crystal (15).
12. A direct conversion receiver (1) comprising a local frequency generating arrangement (14, 15, 16) which is coupled to a pair of quadrature related mixers (7, 11) for mixing down an rf input signal (rf) to quadrature related signals (I, Q), a demodulator (18) for demodulating the quadrature related signals into demodulated data (dta), and a.f.c. means for providing a control signal (ct) for the local frequency generating arrangement (14), the a.f.c. means being coupled to quadrature paths (4, 5), characterized in that the direct conversion receiver (1) comprises first a.f.c. means as claimed in any one of the preceding claims, second a.f.c. means (14, 15, 16, 17, 18, 20, 21, 22) particularly suitable for relatively strong rf input signals, and RSSI-means (33) for determining a signal strength of the rf input signal (rf), the direct conversion receiver (1) being arranged for switching over from the first to the second a.f.c. means if the determined signal strength exceeds a predetermined threshold value (thr1).
13. A direct conversion receiver as claimed in claim 12, wherein the second a.f.c. means comprise means (17, 20, 22) for determining a frequency offset (δf) of the local frequency generating arrangement (14) on the basis of measured frequencies (f_0 , f_1) of the demodulated data (dta), for an in-range and an out-of-range situation, respectively, and means (LUT) for determining the control signal (ct) on the basis of the determined frequency offset.





PHN 14.285

13

05.02.1993

14. A direct conversion receiver as claimed in claim 13, wherein the means for determining the control signal (ct) comprise a lookup-table (LUT) comprising predetermined control signal values, the determined frequency offset (δf) being an address value for addressing the lookup-table.

This Sheet Has Been Replaced



ABSTRACT:

"A direct conversion receiver"

In known direct conversion receivers, e.g. for paging, for getting a correct polarity a.f.c. signal, the a.f.c. signal is derived by multiplying demodulated data with an error voltage obtained with a frequency discriminator. Apart from the fact that this requires an elaborate circuit, data filter delay has to be compensated for before multiplying the demodulated data with an output signal of the frequency discriminator.

5 The direct conversion receiver (1) according to the present invention comprises a.f.c. means comprising a digital-to-analog converter (31) for providing a control signal (ct) for a local oscillator (14). The control signal (ct) is determined on a valid data scanning basis, i.e. during scanning intervals, signal quality determining means (32) determine

10 valid data (vdta) while a controller (20) steps through an output range (DAR) of the digital-to-analog converter (31). The control signal (ct) is adjusted within a valid data range (VR), and the scanning is repeated on a regular basis. The present invention provides a simple a.f.c. means, an otherwise necessary loop filter being dispensed with. Signal quality can be based on measured signal frequency or on other criteria such as a

15 valid CRC, a CRC with a unique error syndrome, or the like.

Fig. 1

This Sheet Has Been Replaced



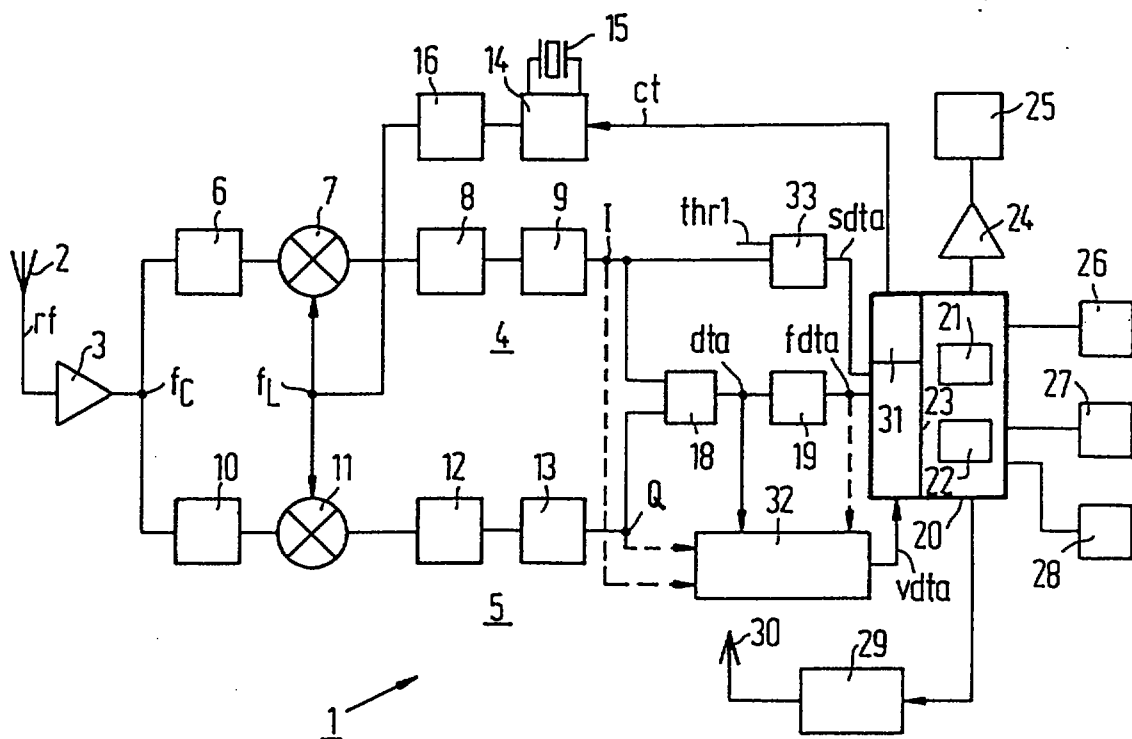


FIG. 1

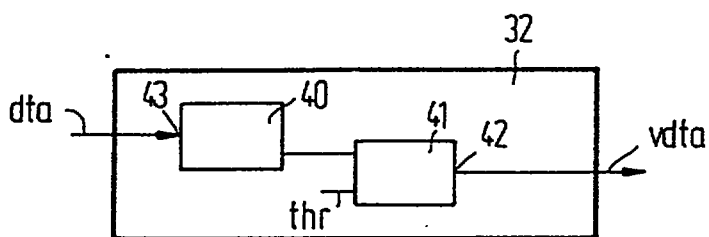


FIG. 2

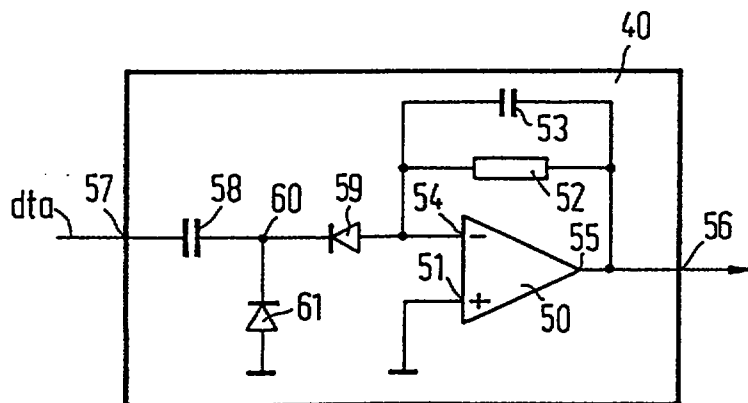


FIG. 3

This Sheet Has Been Replaced



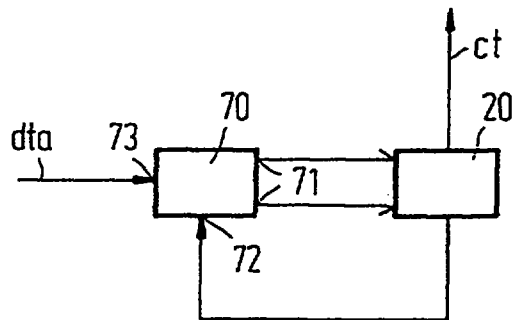


FIG. 4

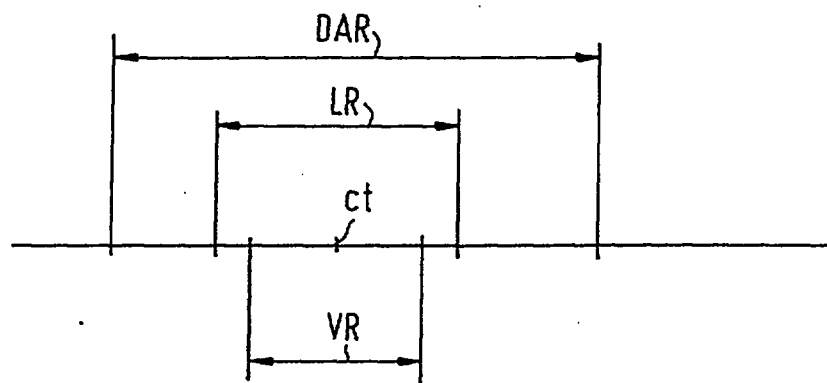


FIG. 5

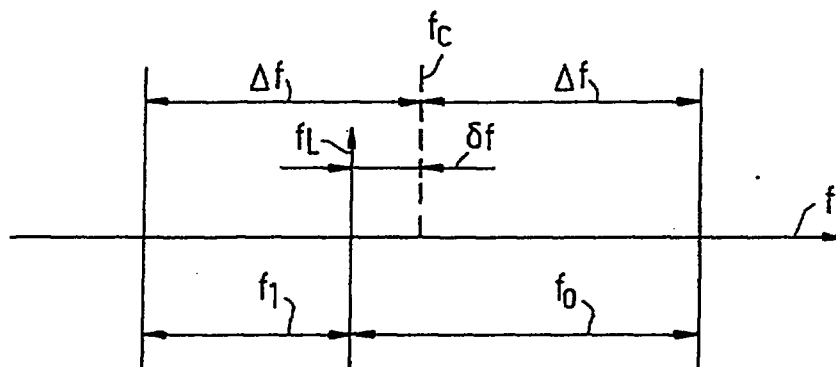


FIG. 6

This Sheet Has Been Replaced



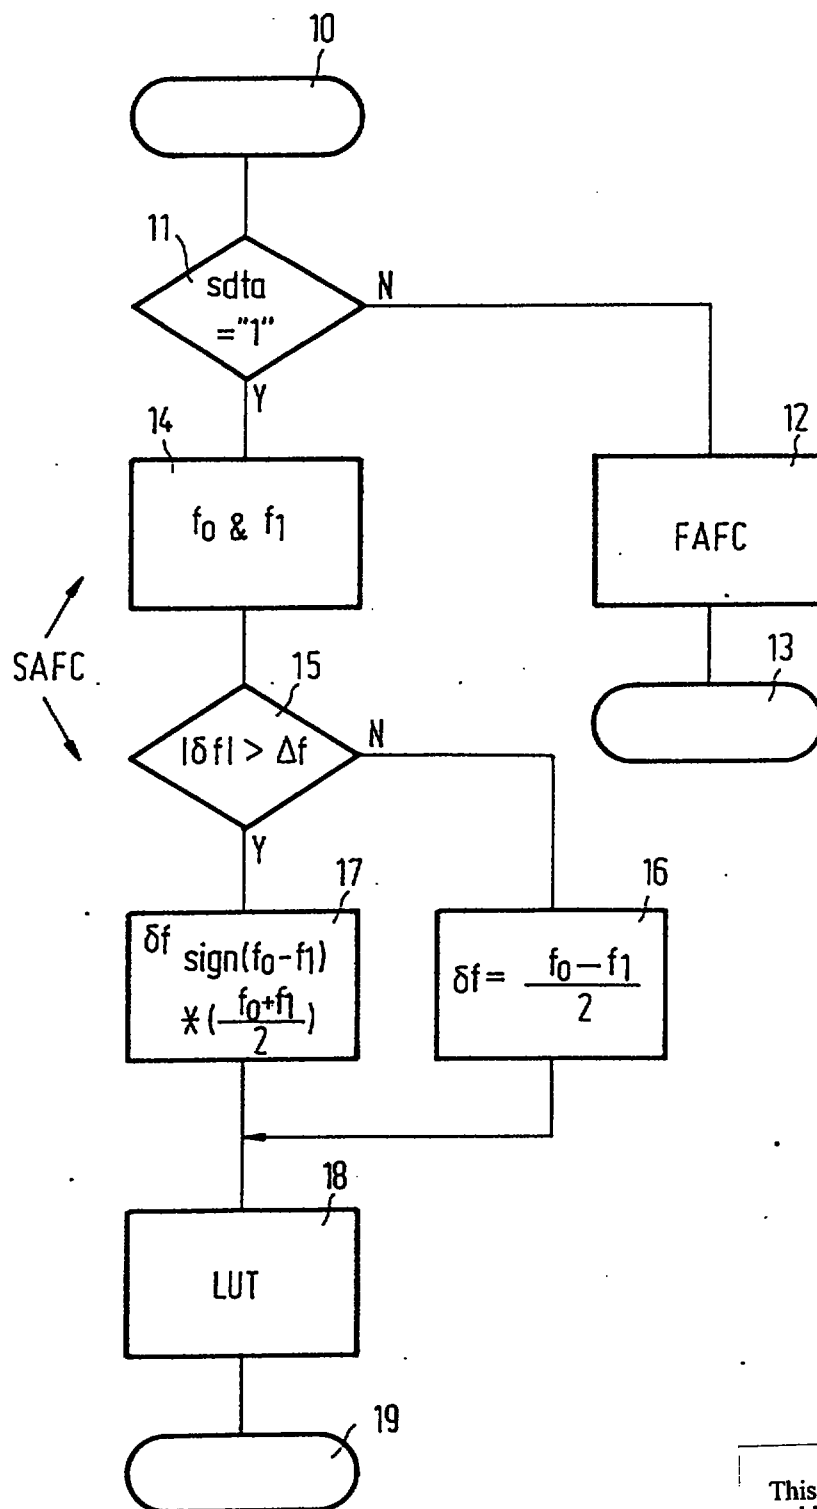


FIG. 7

This Sheet Has Been Replaced



REPLACED SHEETS SG

☒ Description : paged 1 to paged 10
☒ Claim(s) : paged 11 to paged 13
☒ Drawing(s) : paged 1 to paged 3
☒ Abstract : paged 14 to paged -

"A direct conversion receiver"

REPLACEMENT SHEET

03 MAR 1997

This Sheet Has Been Replaced



1

REPLACEMENT SHEETS SG

☒ Description : paged 1 to paged 10
☒ Claim(s) : paged 11 to paged 13
☒ Drawing(s) : paged 1 to paged 3
☒ Abstract : paged 14 to paged -

DATE OF RECEIPT 3/3/97

The present invention relates to a direct conversion receiver comprising a local frequency generating arrangement which is coupled to a pair of quadrature related mixers for mixing down an rf input signal to quadrature related signals, a demodulator for demodulating the quadrature related signals into demodulated data, and a f.c. means for providing a control signal for the local frequency generating arrangement, the a.f.c. means being coupled to quadrature paths. Such direct conversion receivers can be digital paging receivers or transceivers using an FSK (Frequency Shift Keying) modulation scheme, but also transceivers for cordless telephony or the like.


A direct conversion receiver of this kind is known from the British Patent Application GB 2 180 419. In the known direct conversion receiver, an a.f.c. (automatic frequency control) signal for a local oscillator with inherent correct polarity is derived from so-called I- and Q-channel receiver paths. For this purpose, a baseband I-channel signal is fed to a phase detector, together with a Q-channel signal, which is also fed to a frequency discriminator. Output signals of the phase detector and the frequency discriminator are fed to a multiplier, an output of which providing the control signal, which is fed to the local oscillator via a low pass filter as a loop filter. The a.f.c. means are complex in that a closed loop a.f.c. is used comprising a loop filter. Other known direct conversion receivers such as paging receivers, with a crystal oscillator as the local oscillator, are subject to frequency drift problems due to crystal aging and temperature drift, the more difficult to overcome, the higher the data rates.

It is an object of the present invention to provide a direct conversion receiver not having the drawbacks of known receivers, and having reduced complexity.

To this end a direct conversion receiver according to the present invention

comprises a digital-to-analog conversion

This Sheet Has Been Replaced

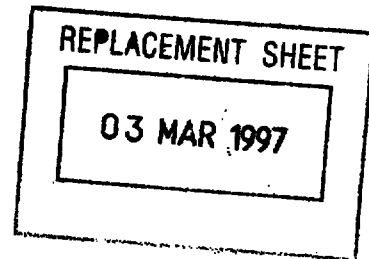

arrangement for providing the control signal, signal quality determining means for determining a valid data signal from the demodulated data, storage means for storing a valid data range during scanning intervals, and means for adjusting an output signal of the digital-to-analog conversion arrangement to an adjustment value within the valid data range. A very simple a.f.c. means is achieved, a loop filter being dispensed with. The a.f.c. means essentially is based upon open loop control, the control signal being updated from time to time, preferably on a regular basis. By looking at particular parts of the received signal or by examining other received signal characteristics during the scanning intervals, while stepping through a range of output values of the digital-to-analog conversion arrangement, the valid data range is obtained. The present invention is based upon the insight that such scanning need not be repeated very often, temperature drift or aging being slow processes.


It is to be noticed that the international application WO 92/08294 discloses an a.f.c. for a superheterodyne receiver having a digital-to-analog converter for supplying a control signal to a local oscillator, but this a.f.c. essentially is a digital closed loop a.f.c., i.e. a closed loop error signal is computed on the basis of a measured offset frequency. Furthermore, a separate RSSI circuit (Received Signal Strength Indication) is necessary, the disclosed method only working for strong signals.

In an embodiment of the direct conversion receiver according to the present invention, the adjustment value is a value around a mid-range value within the valid data range. In this way a more reliable adjustment value is obtained as would be obtained more at the boundaries of the valid data range where transition from valid to invalid data occurs more easily, with oscillator drift.

In a further embodiment of the direct conversion receiver according to the present invention, in a first operating mode a first range is scanned, and in a second operating mode a second, limited, range is scanned around a previous adjustment value. It is achieved that frequency scanning time is reduced once an operating point has been adjusted previously.

In a further embodiment of the direct conversion receiver according to the present invention, valid data scanning is halted during expected data frames. It is achieved, when scanning overlaps expected data frames, that these data frames are not lost. In practice, for robust detection of valid data, such overlap would occur. Thus, the scanning can be done in between data frames.

This Sheet Has Been Replaced



REPLACEMENT SHEET

03 MAR 1997

3

In an embodiment of the direct conversion receiver according to the present invention, the signal quality determining means comprise a frequency-to-voltage converter coupled to an analog-to-digital conversion arrangement or to a comparison arrangement, for determining the valid data signal. In this embodiment, the signal quality is determined on the basis of a threshold of operation with respect to BER (bit error rate). The signal frequency at the threshold of operation can be differentiated from the frequency of a noise signal alone, i.e. where no data are present.

In another embodiment of the direct conversion receiver according to the present invention, the signal quality determining means comprise a microcontroller coupled to a gated counter for determining the valid data signal. In this embodiment, the control signal value is preferably chosen such that a minimum counter value is achieved, corresponding to a mid-range value within the valid data range.

In another embodiment of a direct conversion receiver according to the present invention, the signal quality determining means determine the valid data signal on the basis of signal characteristics of the demodulated data, such as a valid CRC, a CRC with a unique error syndrome, a data frame preamble, a sync pattern, or a BER. The acronym CRC means Cyclic Redundancy Code, and the acronym BER means Bit Error Rate. In this embodiment preferably a microcontroller is to be used, evaluating the signal characteristics. Detection of the signal characteristics can be done according to relevant standards, e.g. the POGSAG paging standard.

In a further embodiment of a direct conversion receiver according to the present invention, the local frequency generating arrangement comprises a thermally insulated crystal. It is achieved that a period between consecutive scans is prolonged. Especially in a direct conversion communication device as a handheld device, usually being powered by means of batteries, this leads to battery saving.

A further embodiment of a direct conversion receiver according to the present invention is characterized in that the receiver comprises first a.f.c. means as claimed in any one of the claims 1 to 11, second a.f.c. means particularly suitable for relatively strong rf input signals, and RSSI-means for determining a signal strength of the input signal, the direct conversion communication being arranged for switching over from the first to the second a.f.c. means if the determined signal strength exceeds a predetermined threshold value. An optimal a.f.c. means is thus achieved. The first a.f.c. means are optimised for relatively low rf input signal power, whereas the second

This Sheet Has Been Replaced



REPLACEMENT SHEET

03 MAR 1997

4

a.f.c. means are optimised for relatively high rf input power, leading to an overall optimal a.f.c. performance.

The present invention will now be described, by way of example, with reference to the accompanying drawings, wherein

Fig. 1 schematically shows a direct conversion receiver according to the present invention,

Fig. 2 shows an embodiment of signal quality determining means according to the present invention,

Fig. 3 shows a frequency-to-voltage converter in signal quality determining means according to the present invention,

Fig. 4 shows another embodiment of signal quality determining means according to the present invention,

Fig. 5 shows ranges according to the present invention,

Fig. 6 shows frequencies of signals according to the present invention,

and

Fig. 7 shows a flow chart for second a.f.c. means in a direct conversion receiver according to the present invention.

Figure 1 schematically shows a direct conversion receiver 1 according to the present invention. The direct conversion receiver 1, which can be a paging transceiver, comprises an antenna 2 for receiving an rf (radio frequency) input signal rf, which can be an rf FSK (Frequency Shift Keying) signal carrying FSK modulated digital signals. The rf input signal rf is fed to a low noise rf amplifier 3, which is coupled to quadrature paths 4 and 5, so-called I- and Q-channels, for mixing down the rf input signal rf to quadrature related signals I and Q. The quadrature path 4 comprises a phase shifting device 6 causing a +45 degrees phase shift of the amplified rf signal. The phase shifting device 6 is coupled to a mixer 7 for mixing down the rf signal rf to the signal I, an output of the mixer 7 being filtered and limited by means of a respective filter 8 and a limiter 9. Similarly, the quadrature path 5 comprises a phase shifting device 10 causing a -45 degrees phase shift of the amplified rf signal a mixer 11 a

This Sheet Has Been Replaced



5

REPLACEMENT SHEET

03 MAR 1997

filter 12, and a limiter 13 for achieving the signal Q. The filters 8 and 12 are provided for limiting the noise bandwidth and for channel selectivity. By AC-coupling of the filters 8 and 12 to the mixers 7 and 11, DC-offset effects are avoided. The limiters 9 and 13 are provided for removing amplitude signal variations. The mixers 7 and 11 are further coupled to a local frequency generating arrangement 14, e.g. a crystal oscillator having a crystal 15 as a frequency determining element, via a frequency multiplication arrangement 16. The local frequency generating arrangement 14 can also be a more elaborate arrangement, e.g. a frequency synthesizer having a crystal oscillator for providing a reference frequency. Such frequency synthesizers can operate on the basis of a PLL (phase locked loop). In a direct conversion receiver the mixing frequency, i.e. an output frequency f_L of the multiplication arrangement 16, further denoted as oscillator frequency, is chosen such that zero intermediate-frequency signals I and Q are obtained, with respect to a carrier frequency f_C . Instead of two phase shifting devices, with +45 degrees and -45 degrees phase shifting, respectively, a single 90 degrees phase shifting device can be applied, for phase shifting the oscillator signal for one of mixer signals. E.g. for FSK modulated rf signals with a frequency deviation of +4 kHz and -4kHz around a 900 MHz carrier frequency f_C , the carrier not physically being present in the received rf input signal rf, representing logical "0" and logical "1" transmitted signals, the signals I and Q are 4 kHz signals, though differing in relative phase, if $f_L = f_C$. In case of a frequency offset of the oscillator frequency f_L with respect to the rf input signal rf, i.e. with respect to the carrier frequency f_C , the baseband signals I and Q have equal frequencies which have different values during data "1" and data "0". For obtaining demodulated data, the direct conversion receiver 1 comprises a demodulator 18 to which the quadrature related signals I and Q are fed. The demodulator 18 can be a lead-lag phase detector for demodulating FSK data. The demodulator 18 is coupled via a data filter 19 to a microcontroller 20 with RAM and ROM memory 21 and 22 and an I/O-interface 23. Such microcontrollers are well known in the art. The demodulator 18 provides demodulated data dta, and the data filter 19 provides filtered demodulated data fdta. For a paging transceivers, various output signals may be provided for such as a speech signal via an amplifier 24 and a speech reproducing device 25, an information message via a display unit 26, a audible tone signal via a bleeper 27, and a visual alert signal via an LED 28. In case of a paging transceiver, transmission means 29 are provided for sending data.

This Sheet Has Been Replaced



REPLACEMENT SHEET

03 MAR 1997

means 29 are controlled by the microcontroller 20, the transmission means being coupled to a transmitting aerial 29. According to the present invention, the direct conversion receiver 1 comprises a.f.c. means comprising a digital-to-analog conversion arrangement 31 for providing a control signal ct for the local oscillator 14, signal quality determining means 32 for determining a valid data signal $vdta$ from the demodulated data dta , from the filtered demodulated data $fdta$, from one of the signals I and Q , i.e. from an output signal of the limiter 9 or 13, or from a product of the signals I and Q , storage means for storing a valid data range during scanning intervals, the storage means being the RAM memory 21 e.g., and means for adjusting the output signal ct of the digital-to-analog conversion arrangement 31 to an adjustment value within the valid data range. The operation of various embodiments will be described together with the description of the embodiments. In more general terms, on the basis of a particular quality criterion, the signal quality determining means 32 determine the quality of the received signal rf for a stepping range of the digital-to-analog conversion means 31, the stepping being controlled by the microcontroller 20, during scanning intervals. The microcontroller 20 determines a valid data range and adjusts the control signal ct to an adjustment value within the valid data range, preferably a mid-range value. The scanning preferably is at regular intervals, e.g. every 5 or 10 minutes. The scanning can be interrupted in case of overlap with expected data frames, an old adjustment value still being used as the control signal ct . In a first mode a whole output range of the digital-to-analog conversion can be stepped, whereas in a second mode, after an initial first scanning, only a limited stepping can be done around an operating point of the control signal ct , being the last adjustment value obtained during a previous scanning. In case of a no signal or weak signal condition during normal data reception intervals, there is no need to start the scanning procedure immediately, since such condition could be due to signal fading, or even due to an interruption of signal transmission. If during regular scanning no valid data is detected, the scanning could be repeated more often. In between scanning intervals, normal reception could be tried using the last adjustment value of the control signal ct . The present invention allows for quite higher data rates as with known paging receivers, since the offset frequency is made very small by the a.f.c. means. The signal quality determining means 32 can be implemented in hardware or software, in the latter case stored in the ROM memory 22.



03 MAR 1997

20, as shown, but can also be a separate device. Also, the a.f.c. means can be implemented as a separate IC (Integrated Circuit). As to the advantage of having a simple a.f.c. means, furthermore, as compared with known receivers using crystal oscillators without applying an a.f.c. control signal thereto, no complicated temperature drift or aging drift compensation schemes are necessary. E.g., a less than 2.8 ppm temperature drift or aging drift compensation in such known receivers in the 900 MHz band would be expensive or even impractical in paging receivers. The present invention allows for using crystals without temperature compensation. For prolonging periods between scanning, the crystal 15 is thermally insulated. Such insulation as such is well known in the art. A lot of heat transfer from the crystal to the environment thereof occurs via electrical connection leads of the crystal. By applying long connection leads which are helically wound while at the same time insulated, a good heat insulation is obtained.

Fig. 2 shows an embodiment of the signal quality determining means 32 according to the present invention, the same reference numerals having been used for corresponding features. The signal quality determining means 32 comprise a frequency-to-voltage converter 40 coupled to a comparator 41 of which an output 42 provides the valid data signal *vdta*, e.g. a logic "0" signal representing valid data, and a logic "1" signal representing invalid data. As an input signal to an input 43 of the frequency-to-voltage converter 40, the demodulated data *dta* can be applied, as shown, but also the filtered demodulated data *fdta*, one of the quadrature related signals I or Q, being output signals of the limiters 9 and 13, or the product of the signals I and Q.

Fig. 3 shows an embodiment of the frequency-to-voltage converter 40 in signal quality determining means 32 according to the present invention. The frequency-to-voltage converter 40 comprises an opamp 50 with a plus input 51 coupled to ground, and with a parallel arrangement of a resistor 52 and a capacitor 53 coupled between a minus input 54 and an output 55 of the opamp 50, the output 55 being an output 56 of the frequency-to-voltage converter 40. Coupled between an input 57 of the frequency-to-voltage converter 40 and the input 54 is a series arrangement of a capacitor 58 and a diode 59, and between a connection point 60 of the capacitor 58 and the diode 59 a diode 61 connected to ground. The converter 40 operates as a diode-pump frequency indicator on digital input data. The determination of a valid data signal is based upon the idea that the presence of a signal can be distinguished from noise alone or a too bad



03 MAR 1997

signal from BER (Bit Error Rate) point of view. When a valid data signal is present, the measured frequency of the signal I and Q would be around a modulation deviation frequency Δf , e.g. $\Delta f = 4$ kHz, whereas for no data or bad data the frequency will be substantially higher due to presence of mainly noise and higher baseband frequencies due to the frequency offset. Distinction between valid or invalid data is made by comparing an output of the frequency-to-voltage converter 40 with a threshold value thr , if the comparator 41 is used. Instead of the comparator 41 an analog-to-digital converter can be used, which then provides digital values to the microcontroller 20. In the latter case, the microcontroller 20 determines the valid data signal $vdta$.

Fig. 4 shows another embodiment of the signal quality determining means 32 according to the present invention, comprising a gated counter 70 coupled with a counter output 71, and with a gate input 72 to the microcontroller 20, which provides the control signal ct . The demodulated data dta , as shown, or the filtered demodulated data $fdta$, or one of the signals I or Q, or the product of the signals I and Q, is fed to a counter input 73. For valid data, the counter exhibits a range of output values around a minimum counter value, whereas higher counter values correspond to invalid data. It has been shown that use of limiter output data gives a more reliable valid data determination, use of demodulated data possibly giving rise to local minima at which an incorrect decision can be made.

Fig. 5 shows ranges of an output of the digital-to-analog converter 31 according to the present invention. Shown are a full output voltage range DAR of the digital-to-analog conversion arrangement 31, scanned during the first operating mode, a valid data range VR during a scanning interval, and a limited range LR, scanned during the second operating mode. Preferably, an adjustment value for the control signal ct is chosen as a mid-range value or in the vicinity thereof, as it should be realized that there is no sharp transition between valid and invalid data at edges of the valid data range VR. In the second operating mode, the limited range LR is preferably centered around the adjustment value set during the first operating mode.

Fig. 6 shows frequencies of signals according to the present invention. Shown are the (fictitious) carrier frequency f_c , the oscillator frequency f_L , a frequency deviation Δf of data "0" and data "1" FSK modulated signals with respect to the fictitious carrier frequency f_c , a frequency offset δf of the oscillator frequency f_L with respect to the carrier frequency f_c , and f_{-} and f_{+} signals, representing demodulated



03 MAR 1997

signals for data "0" and data "1", respectively.

Fig. 7 shows a flow chart for second a.f.c. means in a direct conversion communication device according to the present invention, which are embodied by means of a stored program in the ROM 22 of the microcontroller 20. The described a.f.c. means according to the present invention form first a.f.c. means. A further embodiment of a direct conversion communication device 1 according to the present invention is arranged for switching over from the first a.f.c. means to the second a.f.c. means and vice versa on the basis of the signal strength of the input signal rf. For determining the signal strength of the input signal rf, the direct conversion receiver is provided with RSSI-means (Received Signal Strength Indication), which can be conventional RSSI-means (not shown), or a gated counter such as described in relation to figure 4. In the latter case the signal strength is determined on the basis of the frequency of a counter input signal, being the signal I or Q, or the product of the signals I and Q. A conventional analog RSSI-signal can be obtained from one of the limiters 9 and 13, which analog RSSI-signal can then be compared with a predetermined threshold value thr1 by means of a comparator 33. An output signal sdta of the comparator 33, indicating that the limiter signal is above the threshold value thr1, i.e. a relatively strong signal, is fed to the microcontroller 20, implementing the second a.f.c. means. The microcontroller switches over from the first to the second a.f.c. means on the basis of the signal sdta. The second a.f.c. means are now described with the help of the flow chart of figure 6. Shown is a program begin block 10. In a test block 11, the stored program in the ROM 22 tests the signal sdta. If the signal sdta has got a logical value "1", corresponding to a relatively strong rf input signal, the microcontroller 20 switches over to the second a.f.c. means, being particularly optimized for strong input signals rf. Otherwise the microcontroller 20 controls the first a.f.c. means, as described, indicated with an acronym FAFC, meaning First A.F.C. means, i.e. the valid data scanning according to the present invention, in block 12. The program routine then ends with an end block 13. The second a.f.c. means, indicated with an acronym SAFC, meaning Second A.F.C. means, first comprise measuring of the f_0 and f_1 signals in block 14, e.g. with counter means as described, i.e. if the demodulated data is "0", f_0 is measured, whereas f_1 is measured if the demodulated data is "1". In a test block 15 it is tested if $f_1 > 2\Delta f$ or $f_0 > 2\Delta f$, i.e. whether $|sf| > \Delta f$. It is to be noticed that $\Delta f \approx \Delta F$, whereby the exact value of Δf depends on an applied pre-modulation de-emphasis. If the condition in

REPLACEMENT SHEET


03 MAR 1997

10

block 15 is not true, i.e. an in-range situation applies, δf is calculated in block 16, according to $\delta f = (f_0 - f_1)/2$. If the condition in block 15 is true, i.e. an out-of-range situation applies, δf is calculated in block 17, according to $[\text{sign}(f_0 - f_1)] * [(f_0 + f_1)/2]$, sign being the well known mathematical sign function. In block 18, the microcontroller determines an input value for the digital-to-analog conversion arrangement 31, providing the control signal ct, the input value e.g. being determined by applying the calculated frequency offset value δf as an address value for a lookup table LUT in the ROM 22, the lookup table LUT comprising digital representations of control values ct. The lookup-table can be filled with data reflecting a known or measured a.f.c. behaviour of the direct conversion device 1. At last an end block 19 is shown. The first and second a.f.c. means can be optimised such that an overall a.f.c. performance is approximately linear with the signal power of the input signal rf.

This Sheet Has Been Replaced




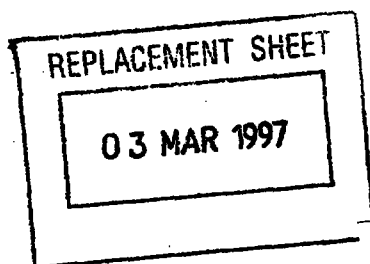


11

CLAIMS:

This Sheet Has Been Replaced




1. A direct conversion receiver (1) comprising a local frequency generating arrangement (14, 15, 16) which is coupled to a pair of quadrature related mixers (7, 11) for mixing down an rf input signal (rf) to quadrature related signals (I, Q), a demodulator (18) for demodulating the quadrature related signals into demodulated data (dta), and a.f.c. means for providing a control signal (ct) for the local frequency generating arrangement (14), the a.f.c. means being coupled to quadrature paths (4, 5), characterized in that the a.f.c. means comprise a digital-to-analog conversion arrangement (31) for providing the control signal (ct), signal quality determining means (32) for determining a valid data signal (vdta) from the demodulated data (dta), storage means (21) for storing a valid data range (VR) during scanning intervals, and means for adjusting (20, 22) an output signal of the digital-to-analog conversion arrangement (31) to an adjustment value within the valid data range (VR).
2. A direct conversion receiver (1) as claimed in claim 1, wherein the adjustment value is a value around a mid-range value within the valid data range (VR).
3. A direct conversion receiver as claimed in claim 1 or 2, wherein in a first operating mode a first range (DAR) is scanned, and in a second operating mode a second, limited, range (LR) is scanned around a previous adjustment value (ct).
4. A direct conversion receiver (1) as claimed in claim 1, 2 or 3, wherein valid data scanning is halted during expected data frames.
5. A direct conversion receiver (1) as claimed in claim 1, 2, 3 or 4, wherein the scanning is repeated on a regular basis.
6. A direct conversion receiver (1) as claimed in any one of claims 1 to 5, wherein the signal quality determining means (32) comprise a frequency-to-voltage converter (40) coupled to an analog-to-digital conversion arrangement or to a comparison arrangement (41), for determining the valid data signal (vdta).
7. A direct conversion receiver (1) as claimed in any one of the claims 1 to 5, wherein the signal quality determining means (32) comprise a microcontroller (20) coupled to a gated counter (70) for determining the valid data signal (vdta).

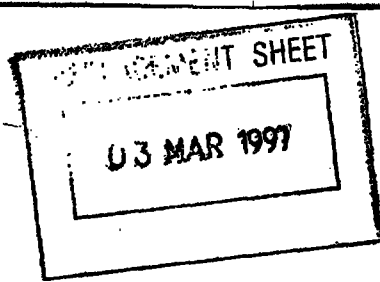

8. A direct conversion receiver (1) as claimed in any one of the claims 1 to 5, wherein the signal quality determining means (32) determine the valid data signal (vdta) on the basis of signal characteristics of the demodulated data (dta), such as a valid CRC, a CRC with a unique error syndrome, a data frame preamble, a sync pattern, or a BER.
9. A direct conversion communication device (1) as claimed in any one of the claims 1 to 7, wherein filtered demodulated data (fdta) are used for determining the valid data signal (vdta) instead of the demodulated data (dta).
10. A direct conversion receiver as claimed in any one of the claims 1 to 7, comprising limiters (9, 13) in the quadrature paths (4, 5), wherein an output signal of one of the limiters (9, 13) or a product of the output signals of the limiters (9, 13) is used for determining the valid data signal (vdta) instead of the demodulated data (dta).
11. A direct conversion receiver (1) as claimed in any one of the preceding claims, wherein the local frequency generating arrangement (14) comprises a thermally insulated crystal (15).
12. A direct conversion receiver (1) comprising a local frequency generating arrangement (14, 15, 16) which is coupled to a pair of quadrature related mixers (7, 11) for mixing down an rf input signal (rf) to quadrature related signals (I, Q), a demodulator (18) for demodulating the quadrature related signals into demodulated data (dta), and a.f.c. means for providing a control signal (ct) for the local frequency generating arrangement (14), the a.f.c. means being coupled to quadrature paths (4, 5), characterized in that the direct conversion receiver (1) comprises first a.f.c. means as claimed in any one of the preceding claims, second a.f.c. means (14, 15, 16, 17, 18, 20, 21, 22) particularly suitable for relatively strong rf input signals, and RSSI-means (33) for determining a signal strength of the rf input signal (rf), the direct conversion receiver (1) being arranged for switching over from the first to the second a.f.c. means if the determined signal strength exceeds a predetermined threshold value (thr1).
13. A direct conversion receiver as claimed in claim 12, wherein the second a.f.c. means comprise means (17, 20, 22) for determining a frequency offset (δf) of the local frequency generating arrangement (14) on the basis of measured frequencies (f_0 , f_1) of the demodulated data (dta), for an in-range and an out-of-range situation, respectively, and means (LUT) for determining the control signal (ct) on the basis of the determined frequency offset.



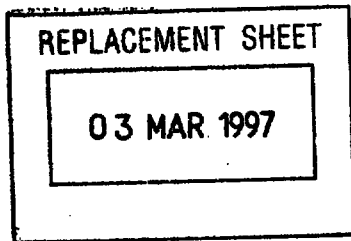


13

14. A direct conversion receiver as claimed in claim 13, wherein the means for determining the control signal (ct) comprise a lookup-table (LUT) comprising predetermined control signal values, the determined frequency offset (δf) being an address value for addressing the lookup-table.

This Sheet Has Been Replaced



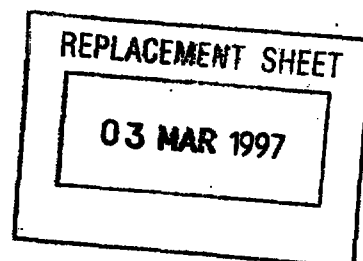

ABSTRACT:

"A direct conversion receiver"

In known direct conversion receivers, e.g. for paging, for getting a correct polarity a.f.c. signal, the a.f.c. signal is derived by multiplying demodulated data with an error voltage obtained with a frequency discriminator. Apart from the fact that this requires an elaborate circuit, data filter delay has to be compensated for before multiplying the demodulated data with an output signal of the frequency discriminator. The direct conversion receiver (1) according to the present invention comprises a.f.c. means comprising a digital-to-analog converter (31) for providing a control signal (ct) for a local oscillator (14). The control signal (ct) is determined on a valid data scanning basis, i.e. during scanning intervals, signal quality determining means (32) determine valid data (vdta) while a controller (20) steps through an output range (DAR) of the digital-to-analog converter (31). The control signal (ct) is adjusted within a valid data range (VR), and the scanning is repeated on a regular basis. The present invention provides a simple a.f.c. means, an otherwise necessary loop filter being dispensed with. Signal quality can be based on measured signal frequency or on other criteria such as a valid CRC, a CRC with a unique error syndrome, or the like.

Fig. 1



REPLACEMENT SHEET

03 MAR 1997

1

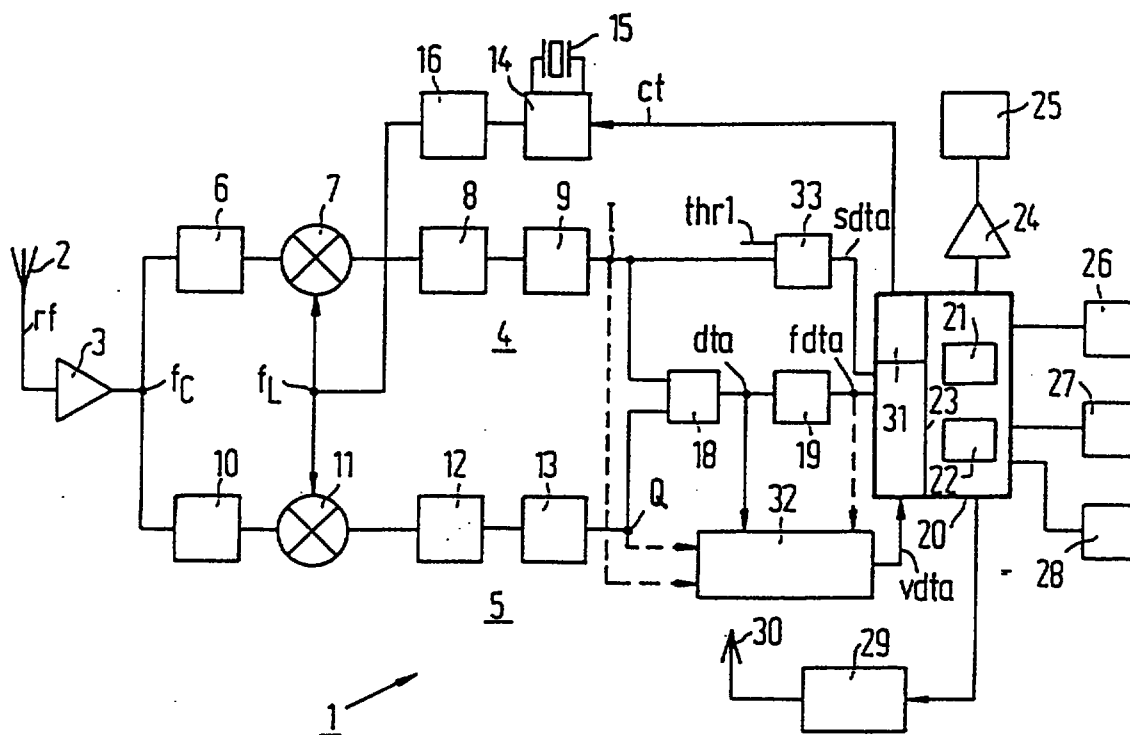


FIG.1

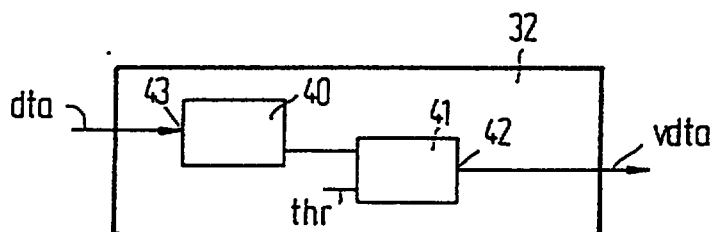


FIG.2

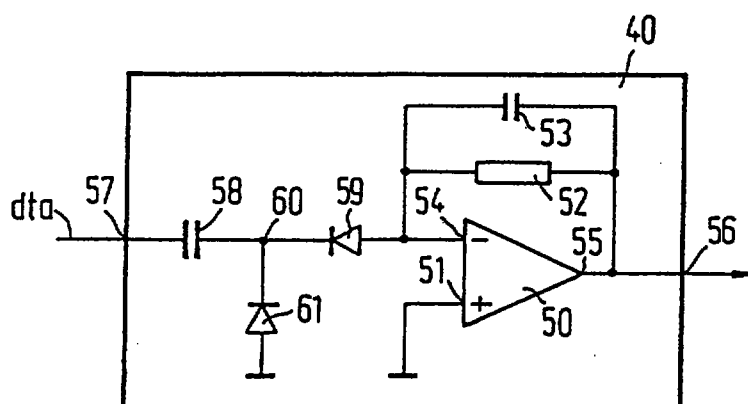


FIG.3

This Sheet Has Been Replaced



03 MAR 1997

2

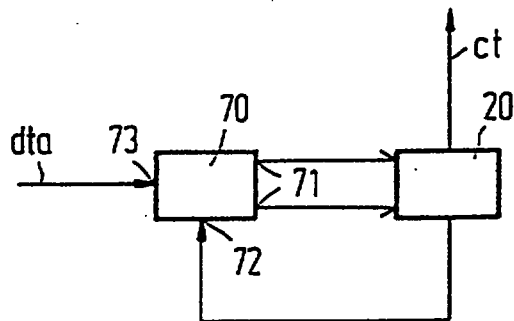


FIG. 4

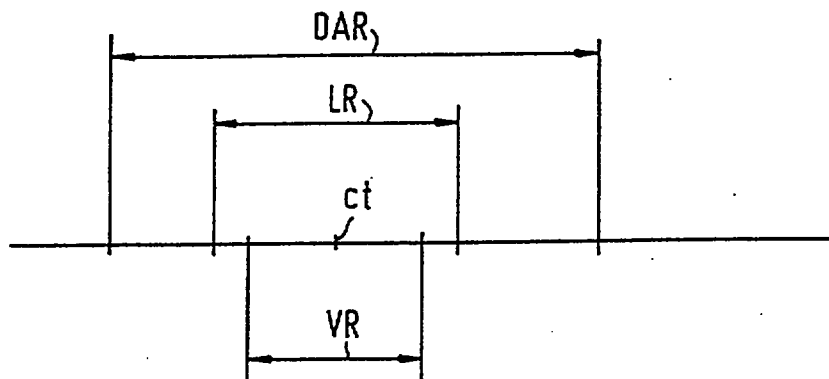


FIG. 5

This Sheet Has Been Replaced


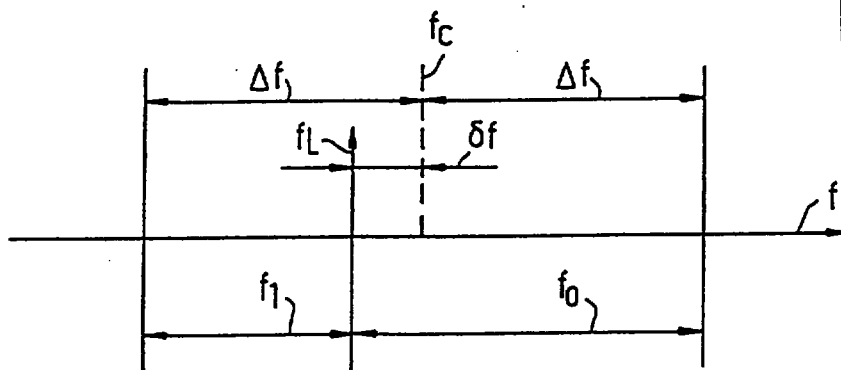


FIG. 6

REPLACEMENT SHEET


03 MAR 1997

3

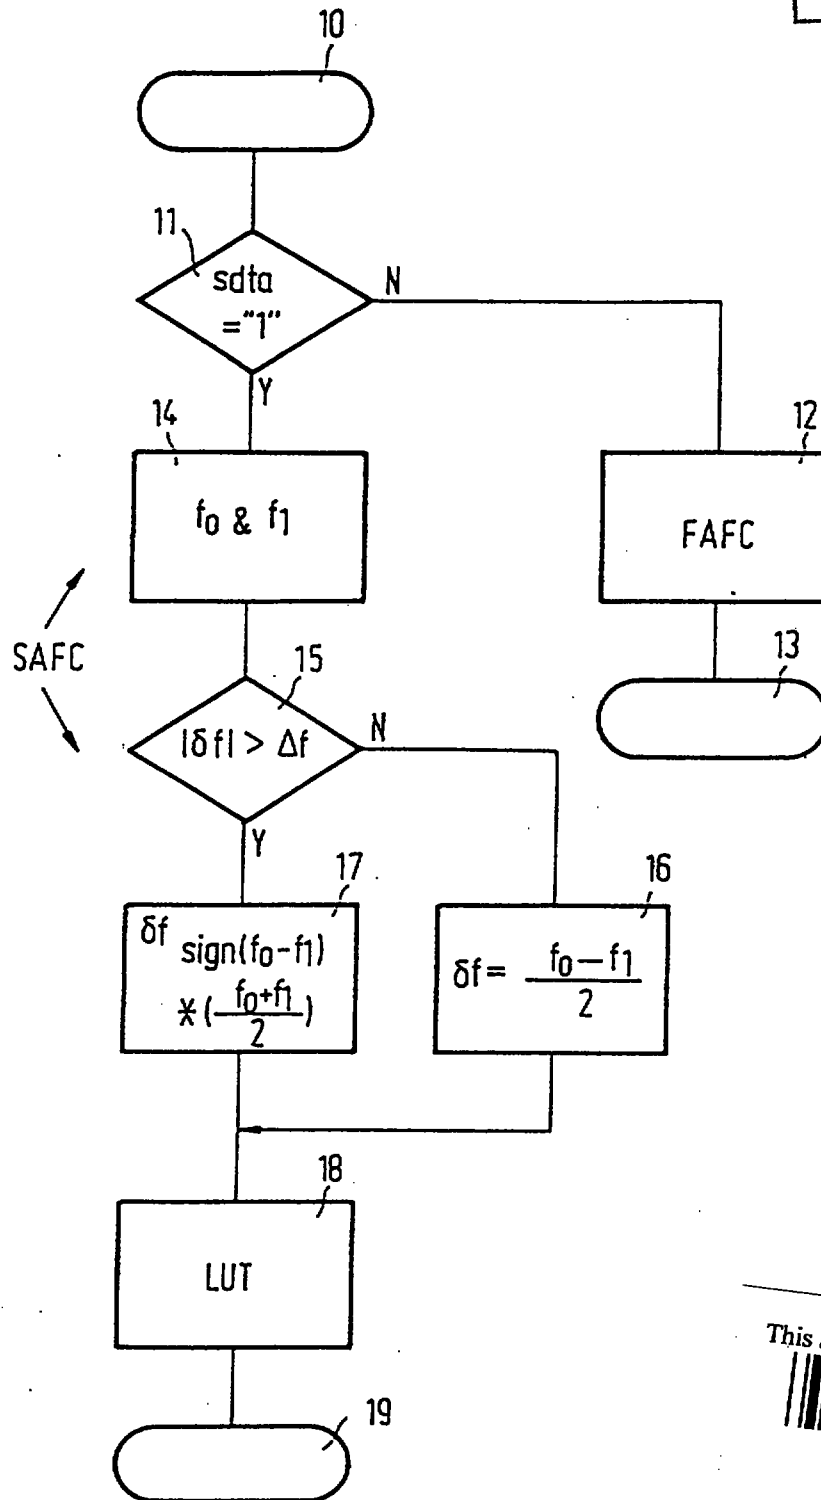

This Sheet Has Been Replaced

FIG. 7

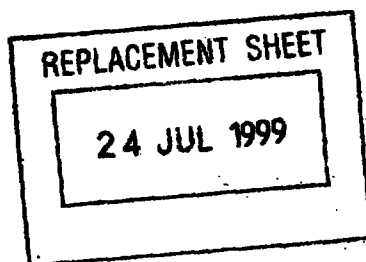

1

REPLACEMENT SHEETS		SG
☒ Description	: paged 1... to paged 10	
☒ Claim(s)	: paged 11... to paged 13	
☒ Drawing(s)	: paged 1... to paged 3...	
☒ Abstract	: paged 14... to paged	
DATE OF RECEIPT		24/7/99

A DIRECT CONVERSION RECEIVER

The present invention relates to a direct conversion receiver comprising a local frequency generating arrangement which is coupled to a pair of quadrature related mixers for mixing down an rf input signal to quadrature related signals, a demodulator for demodulating the quadrature related signals into demodulated data, and a.f.c. means for providing a control signal for the local frequency generating arrangement, the a.f.c. means being coupled to quadrature paths. Such direct conversion receivers can be digital paging receivers or transceivers using an FSK (Frequency Shift Keying) modulation scheme, but also transceivers for cordless telephony or the like.

A direct conversion receiver of this kind is known from the British Patent Application GB 2 180 419. In the known direct conversion receiver, an a.f.c. (automatic frequency control) signal for a local oscillator with inherent correct polarity is derived from so-called I- and Q-channel receiver paths. For this purpose, a baseband I-channel signal is fed to a phase detector, together with a Q-channel signal, which is also fed to a frequency discriminator. Output signals of the phase detector and the frequency discriminator are fed to a multiplier, an output of which providing the control signal, which is fed to the local oscillator via a low pass filter as a loop filter. The a.f.c. means are complex in that a closed loop a.f.c. is used comprising a loop filter. Other known direct conversion receivers such as paging receivers, with a crystal oscillator as the local oscillator, are subject to frequency drift problems due to crystal aging and temperature drift, the more difficult to overcome, the higher the data rates.

It is an object of the present invention to provide a direct conversion receiver not having the drawbacks of known receivers, and having reduced complexity.

To this end a direct conversion receiver according to the present invention is characterized in that the a.f.c. means comprise a digital-to-analog conversion

24 JUL 1999

arrangement for providing the control signal, signal quality determining means for determining a valid data signal from the demodulated data, storage means for storing a valid data range during scanning intervals, and means for adjusting an output signal of the digital-to-analog conversion arrangement to an adjustment value within the valid data range. A very simple a.f.c. means is achieved, a loop filter being dispensed with. The a.f.c. means essentially is based upon open loop control, the control signal being updated from time to time, preferably on a regular basis. By looking at particular parts of the received signal or by examining other received signal characteristics during the scanning intervals, while stepping through a range of output values of the digital-to-analog conversion arrangement, the valid data range is obtained. The present invention is based upon the insight that such scanning need not be repeated very often, temperature drift or aging being slow processes.

It is to be noticed that the international application WO 92/08294 discloses an a.f.c. for a superheterodyne receiver having a digital-to-analog converter for supplying a control signal to a local oscillator, but this a.f.c. essentially is a digital closed loop a.f.c., i.e. a closed loop error signal is computed on the basis of a measured offset frequency. Furthermore, a separate RSSI circuit (Received Signal Strength Indication) is necessary, the disclosed method only working for strong signals.

In an embodiment of the direct conversion receiver according to the present invention, the adjustment value is a value around a mid-range value within the valid data range. In this way a more reliable adjustment value is obtained as would be obtained more at the boundaries of the valid data range where transition from valid to invalid data occurs more easily, with oscillator drift.

In a further embodiment of the direct conversion receiver according to the present invention, in a first operating mode a first range is scanned, and in a second operating mode a second, limited, range is scanned around a previous adjustment value. It is achieved that frequency scanning time is reduced once an operating point has been adjusted previously.

In a further embodiment of the direct conversion receiver according to the present invention, valid data scanning is halted during expected data frames. It is achieved, when scanning overlaps expected data frames, that these data frames are not lost. In practice, for robust detection of valid data, such overlap would occur. Thus, the scanning can be done in between data frames.

24 JUL 1999

In an embodiment of the direct conversion receiver according to the present invention, the signal quality determining means comprise a frequency-to-voltage converter coupled to an analog-to-digital conversion arrangement or to a comparison arrangement, for determining the valid data signal. In this embodiment, the signal quality is determined on the basis of a threshold of operation with respect to BER (bit error rate). The signal frequency at the threshold of operation can be differentiated from the frequency of a noise signal alone, i.e. where no data are present.

In another embodiment of the direct conversion receiver according to the present invention, the signal quality determining means comprise a microcontroller coupled to a gated counter for determining the valid data signal. In this embodiment, the control signal value is preferably chosen such that a minimum counter value is achieved, corresponding to a mid-range value within the valid data range.

In another embodiment of a direct conversion receiver according to the present invention, the signal quality determining means determine the valid data signal on the basis of signal characteristics of the demodulated data, such as a valid CRC, a CRC with a unique error syndrome, a data frame preamble, a sync pattern, or a BER. The acronym CRC means Cyclic Redundancy Code, and the acronym BER means Bit Error Rate. In this embodiment preferably a microcontroller is to be used, evaluating the signal characteristics. Detection of the signal characteristics can be done according to relevant standards, e.g. the POGSAG paging standard.

In a further embodiment of a direct conversion receiver according to the present invention, the local frequency generating arrangement comprises a thermally insulated crystal. It is achieved that a period between consecutive scans is prolonged. Especially in a direct conversion communication device as a handheld device, usually being powered by means of batteries, this leads to battery saving.

A further embodiment of a direct conversion receiver according to the present invention is characterized in that the receiver comprises first a.f.c. means as claimed in any one of the claims 1 to 11, second a.f.c. means particularly suitable for relatively strong rf input signals, and RSSI-means for determining a signal strength of the input signal, the direct conversion communication being arranged for switching over from the first to the second a.f.c. means if the determined signal strength exceeds a predetermined threshold value. An optimal a.f.c. means is thus achieved. The first a.f.c. means are optimised for relatively low rf input signal power, whereas the second

24 JUL 1999

a.f.c. means are optimised for relatively high rf input power, leading to an overall optimal a.f.c. performance.

The present invention will now be described, by way of example, with reference to the accompanying drawings, wherein

Fig. 1 schematically shows a direct conversion receiver according to the present invention,

Fig. 2 shows an embodiment of signal quality determining means according to the present invention,

Fig. 3 shows a frequency-to-voltage converter in signal quality determining means according to the present invention,

Fig. 4 shows another embodiment of signal quality determining means according to the present invention,

Fig. 5 shows ranges according to the present invention,

Fig. 6 shows frequencies of signals according to the present invention, and

Fig. 7 shows a flow chart for second a.f.c. means in a direct conversion receiver according to the present invention.

Figure 1 schematically shows a direct conversion receiver 1 according to the present invention. The direct conversion receiver 1, which can be a paging transceiver, comprises an antenna 2 for receiving an rf (radio frequency) input signal rf, which can be an rf FSK (Frequency Shift Keying) signal carrying FSK modulated digital signals. The rf input signal rf is fed to a low noise rf amplifier 3, which is coupled to quadrature paths 4 and 5, so-called I- and Q-channels, for mixing down the rf input signal rf to quadrature related signals I and Q. The quadrature path 4 comprises a phase shifting device 6 causing a +45 degrees phase shift of the amplified rf signal. The phase shifting device 6 is coupled to a mixer 7 for mixing down the rf signal rf to the signal I, an output of the mixer 7 being filtered and limited by means of a respective filter 8 and a limiter 9. Similarly, the quadrature path 5 comprises a phase shifting device 10 causing a -45 degrees phase shift of the amplified rf signal, a mixer 11, a

24 JUL 1999

filter 12, and a limiter 13 for achieving the signal Q. The filters 8 and 12 are provided for limiting the noise bandwidth and for channel selectivity. By AC-coupling of the filters 8 and 12 to the mixers 7 and 11, DC-offset effects are avoided. The limiters 9 and 13 are provided for removing amplitude signal variations. The mixers 7 and 11 are further coupled to a local frequency generating arrangement 14, e.g. a crystal oscillator having a crystal 15 as a frequency determining element, via a frequency multiplication arrangement 16. The local frequency generating arrangement 14 can also be a more elaborate arrangement, e.g. a frequency synthesizer having a crystal oscillator for providing a reference frequency. Such frequency synthesizers can operate on the basis of a PLL (phase locked loop). In a direct conversion receiver the mixing frequency, i.e. an output frequency f_L of the multiplication arrangement 16, further denoted as oscillator frequency, is chosen such that zero intermediate-frequency signals I and Q are obtained, with respect to a carrier frequency f_C . Instead of two phase shifting devices, with +45 degrees and -45 degrees phase shifting, respectively, a single 90 degrees phase shifting device can be applied, for phase shifting the oscillator signal for one of mixer signals. E.g. for FSK modulated rf signals with a frequency deviation of +4 kHz and -4kHz around a 900 MHz carrier frequency f_C , the carrier not physically being present in the received rf input signal rf, representing logical "0" and logical "1" transmitted signals, the signals I and Q are 4 kHz signals, though differing in relative phase, if $f_L = f_C$. In case of a frequency offset of the oscillator frequency f_L with respect to the rf input signal rf, i.e. with respect to the carrier frequency f_C , the baseband signals I and Q have equal frequencies which have different values during data "1" and data "0". For obtaining demodulated data, the direct conversion receiver 1 comprises a demodulator 18 to which the quadrature related signals I and Q are fed. The demodulator 18 can be a lead-lag phase detector for demodulating FSK data. The demodulator 18 is coupled via a data filter 19 to a microcontroller 20 with RAM and ROM memory 21 and 22 and an I/O-interface 23. Such microcontrollers are well known in the art. The demodulator 18 provides demodulated data dta, and the data filter 19 provides filtered demodulated data fdta. For a paging transceivers, various output signals may be provided for such as a speech signal via an amplifier 24 and a speech reproducing device 25, an information message via a display unit 26, a audible tone signal via a bleeper 27, and a visual alert signal via an LED 28. In case of a paging transceiver, transmission means 29 are provided for sending a return message, which

24 JUL 1999

means 29 are controlled by the microcontroller 20, the transmission means being coupled to a transmitting aerial 29. According to the present invention, the direct conversion receiver 1 comprises a.f.c. means comprising a digital-to-analog conversion arrangement 31 for providing a control signal ct for the local oscillator 14, signal quality determining means 32 for determining a valid data signal $vdta$ from the demodulated data dta , from the filtered demodulated data $fdta$, from one of the signals I and Q , i.e. from an output signal of the limiter 9 or 13, or from a product of the signals I and Q , storage means for storing a valid data range during scanning intervals, the storage means being the RAM memory 21 e.g., and means for adjusting the output signal ct of the digital-to-analog conversion arrangement 31 to an adjustment value within the valid data range. The operation of various embodiments will be described together with the description of the embodiments. In more general terms, on the basis of a particular quality criterion, the signal quality determining means 32 determine the quality of the received signal rf for a stepping range of the digital-to-analog conversion means 31, the stepping being controlled by the microcontroller 20, during scanning intervals. The microcontroller 20 determines a valid data range and adjusts the control signal ct to an adjustment value within the valid data range, preferably a mid-range value. The scanning preferably is at regular intervals, e.g. every 5 or 10 minutes. The scanning can be interrupted in case of overlap with expected data frames, an old adjustment value still being used as the control signal ct . In a first mode a whole output range of the digital-to-analog conversion can be stepped, whereas in a second mode, after an initial first scanning, only a limited stepping can be done around an operating point of the control signal ct , being the last adjustment value obtained during a previous scanning. In case of a no signal or weak signal condition during normal data reception intervals, there is no need to start the scanning procedure immediately, since such condition could be due to signal fading, or even due to an interruption of signal transmission. If during regular scanning no valid data is detected, the scanning could be repeated more often. In between scanning intervals, normal reception could be tried using the last adjustment value of the control signal ct . The present invention allows for quite higher data rates as with known paging receivers, since the offset frequency is made very small by the a.f.c. means. The signal quality determining means 32 can be implemented in hardware or software, in the latter case stored in the ROM memory 22. The digital-to-analog conversion arrangement 31 can be built into the microcontroller

24 JUL 1999

20, as shown, but can also be a separate device. Also, the a.f.c. means can be implemented as a separate IC (Integrated Circuit). As to the advantage of having a simple a.f.c. means, furthermore, as compared with known receivers using crystal oscillators without applying an a.f.c. control signal thereto, no complicated temperature drift or aging drift compensation schemes are necessary. E.g., a less than 2.8 ppm temperature drift or aging drift compensation in such known receivers in the 900 MHz band would be expensive or even impractical in paging receivers. The present invention allows for using crystals without temperature compensation. For prolonging periods between scanning, the crystal 15 is thermally insulated. Such insulation as such is well known in the art. A lot of heat transfer from the crystal to the environment thereof occurs via electrical connection leads of the crystal. By applying long connection leads which are helically wound while at the same time insulated, a good heat insulation is obtained.

Fig. 2 shows an embodiment of the signal quality determining means 32 according to the present invention, the same reference numerals having been used for corresponding features. The signal quality determining means 32 comprise a frequency-to-voltage converter 40 coupled to a comparator 41 of which an output 42 provides the valid data signal *vdta*, e.g. a logic "0" signal representing valid data, and a logic "1" signal representing invalid data. As an input signal to an input 43 of the frequency-to-voltage converter 40, the demodulated data *dta* can be applied, as shown, but also the filtered demodulated data *fdta*, one of the quadrature related signals I or Q, being output signals of the limiters 9 and 13, or the product of the signals I and Q.

Fig. 3 shows an embodiment of the frequency-to-voltage converter 40 in signal quality determining means 32 according to the present invention. The frequency-to-voltage converter 40 comprises an opamp 50 with a plus input 51 coupled to ground, and with a parallel arrangement of a resistor 52 and a capacitor 53 coupled between a minus input 54 and an output 55 of the opamp 50, the output 55 being an output 56 of the frequency-to-voltage converter 40. Coupled between an input 57 of the frequency-to-voltage converter 40 and the input 54 is a series arrangement of a capacitor 58 and a diode 59, and between a connection point 60 of the capacitor 58 and the diode 59 a diode 61 connected to ground. The converter 40 operates as a diode-pump frequency indicator on digital input data. The determination of a valid data signal is based upon the idea that the presence of a signal can be distinguished from noise alone or a too bad

24 JUL 1999

signal from BER (Bit Error Rate) point of view. When a valid data signal is present, the measured frequency of the signal I and Q would be around a modulation deviation frequency Δf , e.g. $\Delta f = 4$ kHz, whereas for no data or bad data the frequency will be substantially higher due to presence of mainly noise and higher baseband frequencies due to the frequency offset. Distinction between valid or invalid data is made by comparing an output of the frequency-to-voltage converter 40 with a threshold value thr , if the comparator 41 is used. Instead of the comparator 41 an analog-to-digital converter can be used, which then provides digital values to the microcontroller 20. In the latter case, the microcontroller 20 determines the valid data signal $vdta$.

Fig. 4 shows another embodiment of the signal quality determining means 32 according to the present invention, comprising a gated counter 70 coupled with a counter output 71, and with a gate input 72 to the microcontroller 20, which provides the control signal ct . The demodulated data dta , as shown, or the filtered demodulated data $fdta$, or one of the signals I or Q, or the product of the signals I and Q, is fed to a counter input 73. For valid data, the counter exhibits a range of output values around a minimum counter value, whereas higher counter values correspond to invalid data. It has been shown that use of limiter output data gives a more reliable valid data determination, use of demodulated data possibly giving rise to local minima at which an incorrect decision can be made.

Fig. 5 shows ranges of an output of the digital-to-analog converter 31 according to the present invention. Shown are a full output voltage range DAR of the digital-to-analog conversion arrangement 31, scanned during the first operating mode, a valid data range VR during a scanning interval, and a limited range LR , scanned during the second operating mode. Preferably, an adjustment value for the control signal ct is chosen as a mid-range value or in the vicinity thereof, as it should be realized that there is no sharp transition between valid and invalid data at edges of the valid data range VR . In the second operating mode, the limited range LR is preferably centered around the adjustment value set during the first operating mode.


Fig. 6 shows frequencies of signals according to the present invention. Shown are the (fictitious) carrier frequency f_c , the oscillator frequency f_L , a frequency deviation Δf of data "0" and data "1" FSK modulated signals with respect to the fictitious carrier frequency f_c , a frequency offset δf of the oscillator frequency f_L with respect to the carrier frequency f_c , and f_0 and f_1 signals, representing demodulated


24 JUL 1999

signals for data "0" and data "1", respectively.


Fig. 7 shows a flow chart for second a.f.c. means in a direct conversion communication device according to the present invention, which are embodied by means of a stored program in the ROM 22 of the microcontroller 20. The described a.f.c. means according to the present invention form first a.f.c. means. A further embodiment of a direct conversion communication device 1 according to the present invention is arranged for switching over from the first a.f.c. means to the second a.f.c. means and vice versa on the basis of the signal strength of the input signal r_f . For determining the signal strength of the input signal r_f , the direct conversion receiver is provided with RSSI-means (Received Signal Strength Indication), which can be conventional RSSI-means (not shown), or a gated counter such as described in relation to figure 4. In the latter case the signal strength is determined on the basis of the frequency of a counter input signal, being the signal I or Q, or the product of the signals I and Q. A conventional analog RSSI-signal can be obtained from one of the limiters 9 and 13, which analog RSSI-signal can then be compared with a predetermined threshold value $thr1$ by means of a comparator 33. An output signal $sdta$ of the comparator 33, indicating that the limiter signal is above the threshold value $thr1$, i.e. a relatively strong signal, is fed to the microcontroller 20, implementing the second a.f.c. means. The microcontroller switches over from the first to the second a.f.c. means on the basis of the signal $sdta$. The second a.f.c. means are now described with the help of the flow chart of figure 6. Shown is a program begin block 10. In a test block 11, the stored program in the ROM 22 tests the signal $sdta$. If the signal $sdta$ has got a logical value "1", corresponding to a relatively strong r_f input signal, the microcontroller 20 switches over to the second a.f.c. means, being particularly optimized for strong input signals r_f . Otherwise the microcontroller 20 controls the first a.f.c. means, as described, indicated with an acronym FAFC, meaning First A.F.C. means, i.e. the valid data scanning according to the present invention, in block 12. The program routine then ends with an end block 13. The second a.f.c. means, indicated with an acronym SAFC, meaning Second A.F.C. means, first comprise measuring of the f_0 and f_1 signals in block 14, e.g. with counter means as described, i.e. if the demodulated data is "0", f_0 is measured, whereas f_1 is measured if the demodulated data is "1". In a test block 15 it is tested if $f_1 > 2\Delta f$ or $f_0 > 2\Delta f$, i.e. whether $|df| > \Delta f$. It is to be noticed that $\Delta f' = \Delta f$, whereby the exact value of $\Delta f'$ depends on an applied pre-modulation de-emphasis. If the condition in

block 15 is not true, i.e. an in-range situation applies, δf is calculated in block 16, according to $\delta f = (f_0 - f_1)/2$. If the condition in block 15 is true, i.e. an out-of-range situation applies, δf is calculated in block 17, according to $[\text{sign}(f_0 - f_1)] * [(f_0 + f_1)/2]$, sign being the well known mathematical sign function. In block 18, the microcontroller determines an input value for the digital-to-analog conversion arrangement 31, providing the control signal ct, the input value e.g. being determined by applying the calculated frequency offset value δf as an address value for a lookup table LUT in the ROM 22, the lookup table LUT comprising digital representations of control values ct. The lookup-table can be filled with data reflecting a known or measured a.f.c. behaviour of the direct conversion device 1. At last an end block 19 is shown. The first and second a.f.c. means can be optimised such that an overall a.f.c. performance is approximately linear with the signal power of the input signal rf.

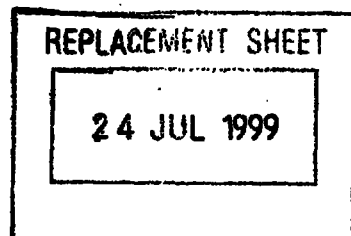

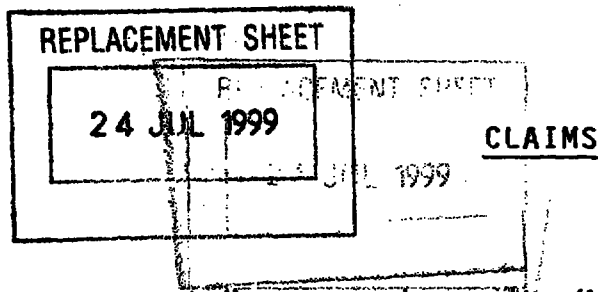

1. A direct conversion receiver (1) comprising a local frequency generating arrangement (14, 15, 16) which is coupled to a pair of quadrature related mixers (7, 11) for mixing down an rf input signal (rf) to quadrature related signals (I, Q), a demodulator (18) for demodulating the quadrature related signals into demodulated data (dta), and a.f.c. means for providing a control signal (ct) for the local frequency generating arrangement (14), the a.f.c. means being coupled to quadrature paths (4, 5), characterized in that the a.f.c. means comprise a digital-to-analog conversion arrangement (31) for providing the control signal (ct), signal quality determining means (32) for determining a valid data signal (vdta) from the demodulated data (dta), storage means (21) for storing a valid data range (VR) during scanning intervals, and means for adjusting (20, 22) an output signal of the digital-to-analog conversion arrangement (31) to an adjustment value within the valid data range (VR).
2. A direct conversion receiver (1) as claimed in claim 1, wherein the adjustment value is a value around a mid-range value within the valid data range (VR).
3. A direct conversion receiver as claimed in claim 1 or 2, wherein in a first operating mode a first range (DAR) is scanned, and in a second operating mode a second, limited, range (LR) is scanned around a previous adjustment value (ct).
4. A direct conversion receiver (1) as claimed in claim 1, 2 or 3, wherein valid data scanning is halted during expected data frames.
5. A direct conversion receiver (1) as claimed in claim 1, 2, 3 or 4, wherein the scanning is repeated on a regular basis.
6. A direct conversion receiver (1) as claimed in any one of claims 1 to 5, wherein the signal quality determining means (32) comprise a frequency-to-voltage converter (40) coupled to an analog-to-digital conversion arrangement or to a comparison arrangement (41), for determining the valid data signal (vdta).
7. A direct conversion receiver (1) as claimed in any one of the claims 1 to 5, wherein the signal quality determining means (32) comprise a microcontroller (20) coupled to a gated counter (70) for determining the valid data signal (vdta).

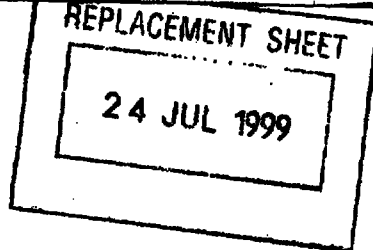

8. A direct conversion receiver (1) as claimed in any one of the claims 1 to 5, wherein the signal quality determining means (32) determine the valid data signal (vdta) on the basis of signal characteristics of the demodulated data (dta), such as a valid CRC, a CRC with a unique error syndrome, a data frame preamble, a sync pattern, or a BER.
9. A direct conversion communication device (1) as claimed in any one of the claims 1 to 7, wherein filtered demodulated data (fdta) are used for determining the valid data signal (vdta) instead of the demodulated data (dta).
10. A direct conversion receiver as claimed in any one of the claims 1 to 7, comprising limiters (9, 13) in the quadrature paths (4, 5), wherein an output signal of one of the limiters (9, 13) or a product of the output signals of the limiters (9, 13) is used for determining the valid data signal (vdta) instead of the demodulated data (dta).
11. A direct conversion receiver (1) as claimed in any one of the preceding claims, wherein the local frequency generating arrangement (14) comprises a thermally insulated crystal (15).
12. A direct conversion receiver (1) comprising a local frequency generating arrangement (14, 15, 16) which is coupled to a pair of quadrature related mixers (7, 11) for mixing down an rf input signal (rf) to quadrature related signals (I, Q), a demodulator (18) for demodulating the quadrature related signals into demodulated data (dta), and a.f.c. means for providing a control signal (ct) for the local frequency generating arrangement (14), the a.f.c. means being coupled to quadrature paths (4, 5), characterized in that the direct conversion receiver (1) comprises first a.f.c. means as claimed in any one of the preceding claims, second a.f.c. means (14, 15, 16, 17, 18, 20, 21, 22) particularly suitable for relatively strong rf input signals, and RSSI-means (33) for determining a signal strength of the rf input signal (rf), the direct conversion receiver (1) being arranged for switching over from the first to the second a.f.c. means if the determined signal strength exceeds a predetermined threshold value (thr1).
13. A direct conversion receiver as claimed in claim 12, wherein the second a.f.c. means comprise means (17, 20, 22) for determining a frequency offset (δf) of the local frequency generating arrangement (14) on the basis of measured frequencies (f_0 , f_1) of the demodulated data (dta), for an in-range and an out-of-range situation, respectively, and means (LUT) for determining the control signal (ct) on the basis of the determined frequency offset.


REPLACEMENT SHEET

24 JUL 1999

13



14. A direct conversion receiver as claimed in claim 13, wherein the means for determining the control signal (ct) comprise a lookup-table (LUT) comprising predetermined control signal values, the determined frequency offset (δf) being an address value for addressing the lookup-table.

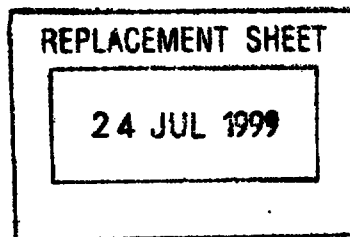




14

ABSTRACT

A DIRECT CONVERSION RECEIVER

In known direct conversion receivers, e.g. for paging, for getting a correct polarity a.f.c. signal, the a.f.c. signal is derived by multiplying demodulated data with an error voltage obtained with a frequency discriminator. Apart from the fact that this requires an elaborate circuit, data filter delay has to be compensated for before multiplying the demodulated data with an output signal of the frequency discriminator. The direct conversion receiver (1) according to the present invention comprises a.f.c. means comprising a digital-to-analog converter (31) for providing a control signal (ct) for a local oscillator (14). The control signal (ct) is determined on a valid data scanning basis, i.e. during scanning intervals, signal quality determining means (32) determine valid data (vdta) while a controller (20) steps through an output range (DAR) of the digital-to-analog converter (31). The control signal (ct) is adjusted within a valid data range (VR), and the scanning is repeated on a regular basis. The present invention provides a simple a.f.c. means, an otherwise necessary loop filter being dispensed with. Signal quality can be based on measured signal frequency or on other criteria such as a valid CRC, a CRC with a unique error syndrome, or the like.

Fig. 1

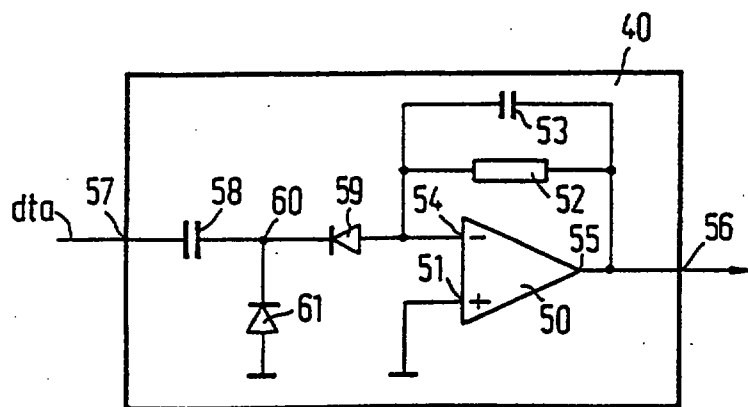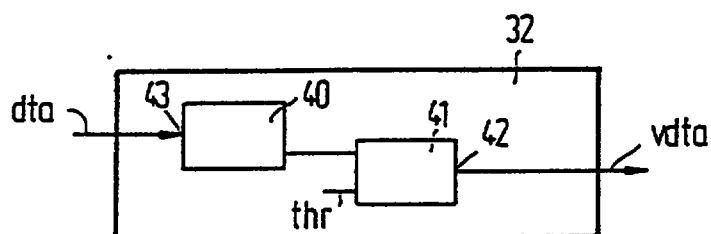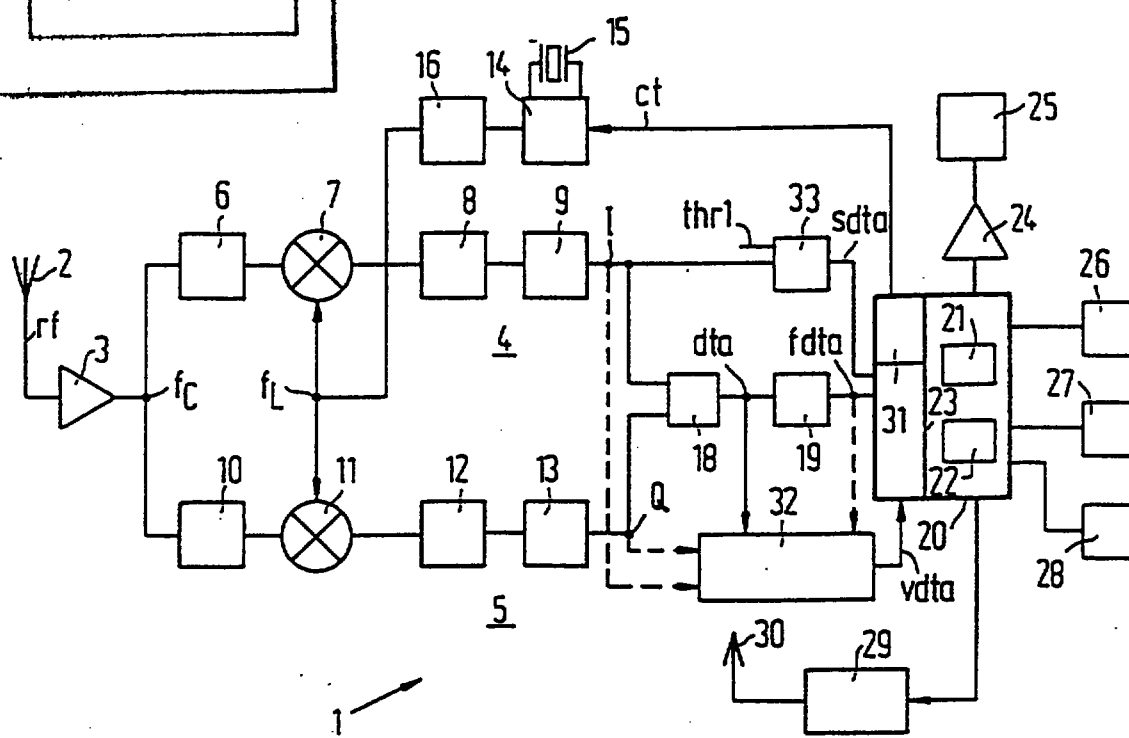

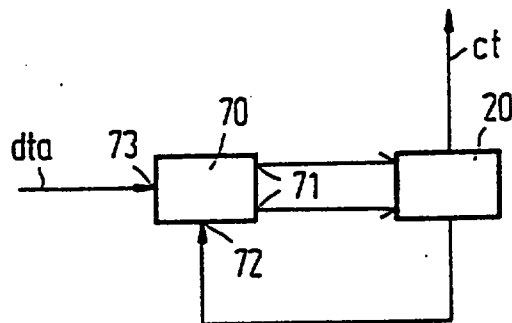
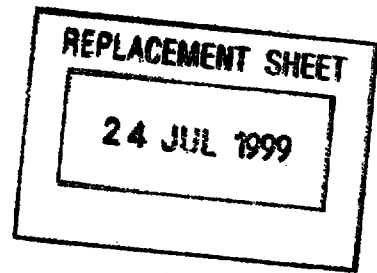


FIG. 4

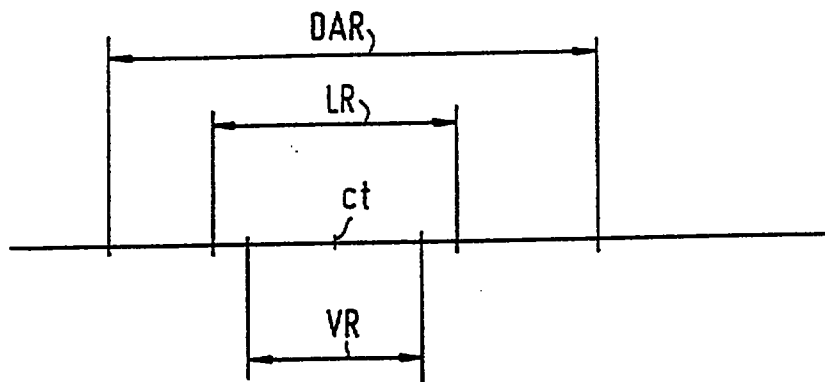


FIG. 5

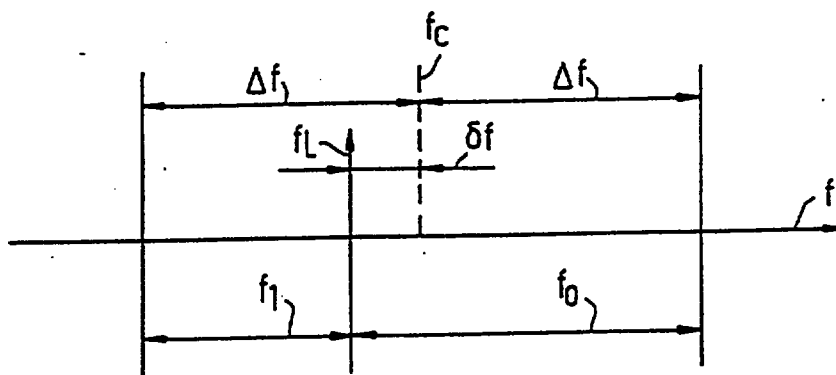


FIG. 6

24 JUL 1999

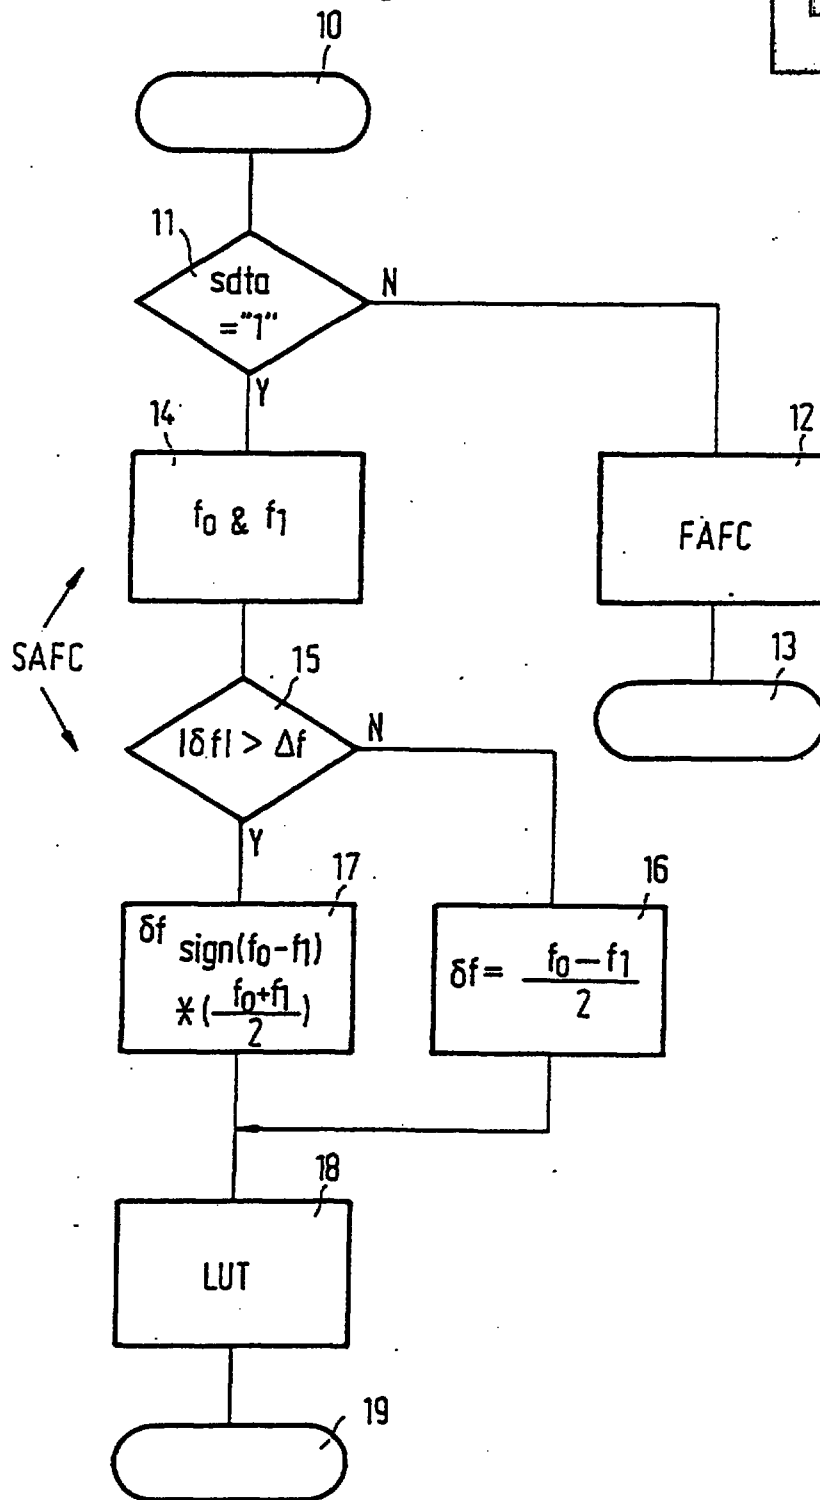


FIG. 7