



(51) International Patent Classification:

C10G 1/00 (2006.01) C10G 29/00 (2006.01)
C10G 1/10 (2006.01) C10G 31/06 (2006.01)
C10G 17/04 (2006.01) C10G 53/04 (2006.01)
C10G 19/02 (2006.01) C10G 53/10 (2006.01)
C10G 21/08 (2006.01) C10G 53/12 (2006.01)
C10G 21/28 (2006.01) C02F 1/66 (2023.01)

(21) International Application Number:

PCT/FI2024/050457

(22) International Filing Date:

02 September 2024 (02.09.2024)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

20236002 07 September 2023 (07.09.2023) FI

(71) Applicant: NESTE OYJ [FI/FI]; Keilaranta 21, 02150
ESPOO (FI).

(72) Inventors: PAASIKALLIO, Ville; c/o Neste Oyj / IPR,
POB 310, 06101 Porvoo (FI). KAUPPI, Inkeri; c/o Neste

Oyj / IPR, POB 310, 06101 Porvoo (FI). PASANEN, Antti;
c/o Neste Oyj / IPR, POB 310, 06101 Porvoo (FI). MALI-
NEN, Pekka; c/o Neste Oyj / IPR, POB 310, 06101 Porvoo
(FI).


(74) Agent: TBK; Bavariaring 4-6, 80336 Munich (DE).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CV, CZ, DE, DJ, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IQ, IR, IS, IT, JM, JO, JP, KE, KG,
KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY,
MA, MD, MG, MK, MN, MU, MW, MX, MY, MZ, NA,
NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO,
RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH,
TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS,
ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, CV,
GH, GM, KE, LR, LS, MW, MZ, NA, RW, SC, SD, SL, ST,
SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ,

(54) Title: METHOD FOR TREATMENT OF LIQUEFIED WASTE PLASTIC

FIG. 1

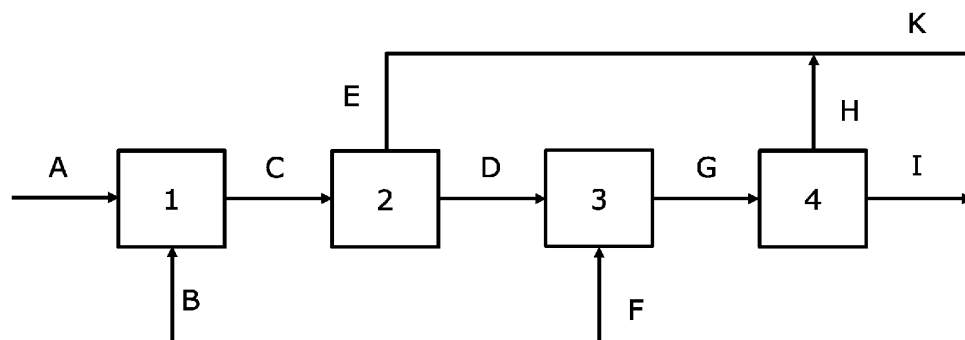

(57) Abstract: The invention relates to an improved method for treating liquefied waste plastics including providing a volume of the liquefied waste plastics-based oil, subjecting the volume of LWP-based oil to a heat treatment, phase separating the resulting heat-treated mixture volume a first aqueous phase volume and a first oil phase volume, isolating the first aqueous phase volume, adjusting the pH of the first aqueous phase volume to pH 9.0 or below, and phase-separating the pH adjusted volume into at least a second aqueous phase volume and a second oil phase volume.

[Continued on next page]

RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, ME, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))