



(51) International Patent Classification:

A61F 13/15 (2006.01) A61F 13/539 (2006.01)
A61F 13/472 (2006.01)

(21) International Application Number:

PCT/JP2011/059130

(22) International Filing Date:

6 April 2011 (06.04.2011)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

2010-087989 6 April 2010 (06.04.2010) JP

(71) Applicant (for all designated States except US):
UNICHARM CORPORATION [JP/JP]; 182, Shimobun, Kinsei-cho, Shikokuchuo-shi, Ehime, 7990111 (JP).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **KUDO, Jun** [JP/JP]; c/o Technical Center of UNICHARM CORPORATION, 1531-7, Wadahama, Toyohama-cho, Kanonji-

shi, Kagawa, 7691602 (JP). **KINOSHITA, Hideyuki** [JP/JP]; c/o Technical Center of UNICHARM CORPORATION, 1531-7, Wadahama, Toyohama-cho, Kanonji-shi, Kagawa, 7691602 (JP). **TAKAHASHI, Yuji** [JP/JP]; c/o Technical Center of UNICHARM CORPORATION, 1531-7, Wadahama, Toyohama-cho, Kanonji-shi, Kagawa, 7691602 (JP). **MINAMI, Mari** [JP/JP]; c/o Technical Center of UNICHARM CORPORATION, 1531-7, Wadahama, Toyohama-cho, Kanonji-shi, Kagawa, 7691602 (JP).


(74) Agents: **MIYOSHI, Hidekazu** et al.; Toranomon Kotohira Tower, 2-8, Toranomon 1-chome, Minato-ku, Tokyo, 1050001 (JP).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE,

[Continued on next page]

(54) Title: ABSORBENT ARTICLE AND METHOD OF MANUFACTURING ABSORBENT ARTICLE

FIG.1

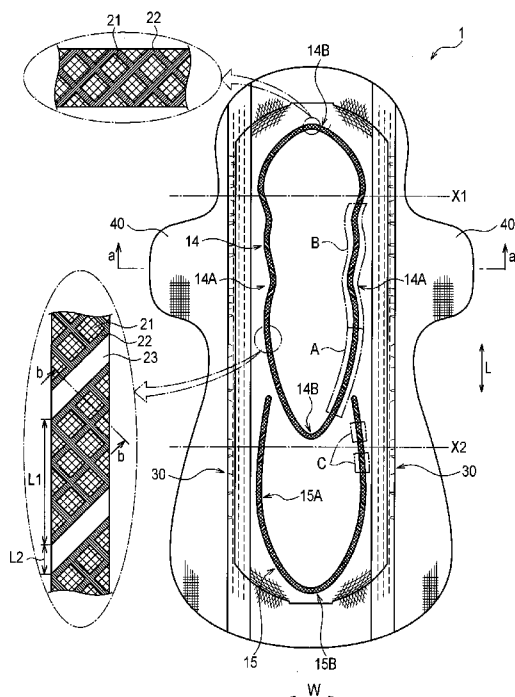

(57) Abstract: In an absorbent article 1 according to the present invention, a longitudinal-direction compression groove 14A is formed along a longitudinal direction L of the absorbent article 1 by a compression process performed from the topsheet 12 side, a width-direction compression grooves 14B are formed along a width direction W of the absorbent article 1 by a compression process performed from the topsheet 12 side, wherein the longitudinal-direction compression groove 14A includes a high compression region 21, a medium compression region 22, and a low compression region 23 and the width direction compression groove 14B includes the high compression region 21 and the medium compression region 22, and the low compression region 23 is disposed over the longitudinal-direction compression groove 14A in the width direction W.



SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT,
TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG,
ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,

EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*