



- (51) **International Patent Classification:**
F25D 11/02 (2006.01)
- (21) **International Application Number:**
PCT/US2011/060535
- (22) **International Filing Date:**
14 November 2011 (14.11.2011)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
61/416,815 24 November 2010 (24.11.2010) US
- (71) **Applicant (for all designated States except US):** **CARRIER CORPORATION** [US/US]; One Carrier Place, Farmington, Connecticut 06034 (US).
- (72) **Inventors; and**
- (75) **Inventors/Applicants (for US only):** **TARAS, Michael F.** [US/US]; 5424 Springview Drive, Fayetteville, New York 13066 (US). **PERKOVICH, Mark J.** [US/US]; 5003 Saddlebrook Drive, Fayetteville, New York 13066 (US).
- (74) **Agent:** **HABELT, William W.**; CANTOR COLBURN LLP, 20 Church Street, 22nd Floor, Hartford, Connecticut 06103 (US).
- (81) **Designated States (unless otherwise indicated, for every kind of national protection available):** AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) **Designated States (unless otherwise indicated, for every kind of regional protection available):** ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))

Published:

- without international search report and to be republished upon receipt of that report (Rule 48.2(g))

(54) **Title:** REFRIGERATION UNIT WITH CORROSION DURABLE HEAT EXCHANGER

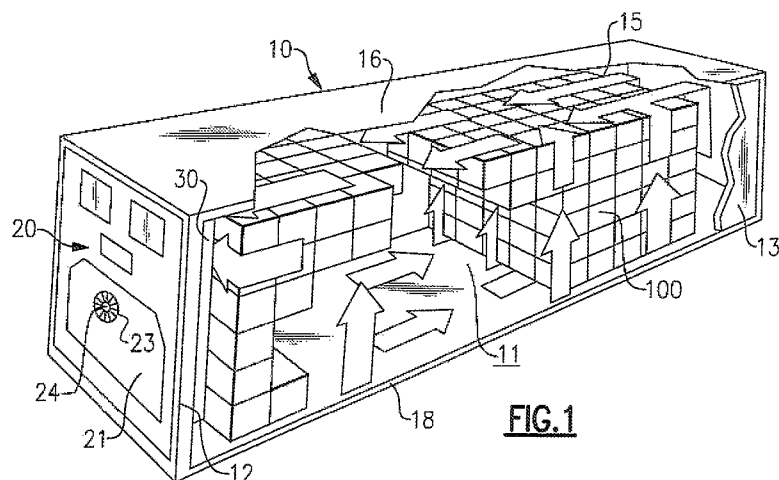

(57) **Abstract:** A transport refrigeration unit is provided which having a refrigerant heat rejection heat exchanger (condenser/gas cooler) that promotes adequate water drainage and corrosion durability. A wraparound finned tube coil has a plurality of heat exchange tube loops and a plurality of plate fins mounted to the plurality of heat exchange tube loops. Each heat exchange tube loop is formed by a plurality of linear tube segments or hairpin tube segments connected by return bends, with each linear tube segment or hairpin segment extending longitudinally at an inclination angle with respect to vertical of at least 20 degrees.

