

CONTINUOUS ELECTRIC POWER SUPPLY CIRCUIT
REGULATED BY A REVERSIBLE CONVERTER

The present invention concerns in a general manner the field of continuous electric power supply circuits, in particular for timepieces.

Some timepieces comprise in fact a solar cell, or an other intermittent electrical source, which provides the necessary electrical energy to an electric movement and/or to electronic circuits, for example, for the regulation of the movement. Unfortunately, when the timepieces is not illuminated, the photovoltaic cell does not anymore provide electricity. To avoid the interruption of the movement or the functioning of the electronic circuit, it is necessary to provide an energy storing device, such as a capacitor, which is connected between the solar cell and the circuit/movement in question for storing the energy provided by the solar cell when it is producing such. This energy storing device is then used as a direct power supply source of the circuit/movement.

However, the supply voltage needed to operate several circuits/movements is often very low. This is in particular the case in low power circuits in the field of watches. Given the fact that the quantity of energy E which may be stored by using such an energy storing device is a function of the supply voltage U which it provides (for a capacitor, for example, this function is given by the formula $E = 1/2.C.U^2$ in which C is the capacity of the capacitor), this stored quantity of energy is limited. Consequently, the functioning of the circuit/movement can only be assured for a reduced period of time after the end of the illumination of the solar cell.

To overcome these inconveniences, it would be possible to add a secondary or a backup power supply in such a supply circuit. This backup supply may be obtained

by an electrical battery or even by an electrochemical accumulator which stores energy, such as a nickel-cadmium (Ni-Cd) battery and could be used as a supply source in the case that the energy stored by an energy storing source is exhausted. However, these components have the inconvenience of being large and of having a limited life-time.

An aim of the present invention is to provide an electric continuous supply circuit which overcomes at least partially, these inconveniences.

Another aim of the invention is to provide an electric continuous supply circuit occupying minimal space.

The invention also has as aim to provide an electric continuous supply circuit which allows for a long supply life-time.

Another aim of the invention is also to provide an electric continuous supply circuit which is simple and which requires a small number of components for its fabrication.

Finally, the invention has as aim to provide a miniature supply device which is well adapted to watch applications.

The invention thus has as object a continuous supply circuit, in particular for a timepiece, comprising a power supply source of said electronic circuit arranged to store energy for supplying the latter; and an intermittent electric source intended to provide energy to said supply source. The supply circuit is characterised in that it further comprises secondary energy storing means arranged to provide energy to said power supply source when said intermittent electric source does not provide energy to said power supply source; and an electric dc/dc reversible converter coupled, on the one hand, to said power supply source, and, on the other hand, to the secondary energy storing means, the converter comprising switching means which modifie the converter's configuration between a

first configuration in which the converter transfers, in a forward direction, the energy coming from the intermittent electric source to the secondary energy storing means, and a second configuration in which the converter releases, in the opposite direction, the energy stored by the secondary energy storing means to said power supply source.

Such a converter allows in fact to recharge the secondary energy storing means at a high voltage. In case of failure of the power supply, the reversible converter releases this energy to the supply circuit. Preferably, the energy is released at a normal supply voltage V_{DD} which has a low value with respect to the charging voltage U . This disposition allows to supply electronic circuits or motors which have a low consumption, thus further increasing the lifetime of the timepiece.

The invention is preferably embodied by a reversible dc/dc converter, this converter converting a continuous voltage to another continuous voltage and being a voltage multiplier in the first configuration and being a voltage divider in the second configuration.

Other features and advantages of the present invention will appear when reading the description and the drawings which follow, given solely by way of a non-limitative example, and in which :

- figure 1 represents a continuous electric power supply circuit according to the invention comprising a dc/dc reversible converter, coupled to a capacitor;
- figure 2 represents a diagram of a part of the electric continuous power supply circuit of figure 1 when the latter is in a normal charging state;
- figure 3 represents a diagram of a part of the electric continuous power supply circuit of figure 1 when the latter is in a backup state;
- figure 4 represents another embodiment of the electric continuous supply circuit according to the invention;

- figure 5 represents a diagram of the electric continuous power supply circuit of figure 4, and

- figure 6 represents another embodiment of the electric continuous power supply circuit according to the invention.

In its embodiment as represented schematically and by way of a non-limitative example in figure 1, the continuous supply circuit 1 normally provides a continuous voltage at supply terminals V_{DD} and GND, the reference voltage being conventionally taken at the terminal GND, which is connected to the ground.

Continuous supply circuit 1 comprises an intermittent electric source G which may be a current generator or a voltage generator, such as a photovoltaic battery, or an alternating electric generator driven for example by a mechanical movement. This source G is preferably connected to a regulator 2 connected to supply terminals V_{DD} and GND, the regulator 2 equalising the output voltage V_{DD} .

These circuits are well known to specialists and will not be described in detail here. It will be simply mentioned that a classical regulator 2 comprises a capacitor 3 and possibly a rectifying diode 4, or a diode which avoids a returning of the current to the source. The terminals V_{DD} and GND constitute here the power supply output. Electric power consuming circuits, such as a motor or such as electronic regulating circuits of the movement of a timepiece, are connected to these terminals V_{DD} and GND. Capacitor 3 functions as a principal supply source of circuits/motors which are connected to these terminals V_{DD} and GND because the energy generated by the intermittent electric source G is stored, at least initially, across its electrodes.

Continuous supply circuit 1 further comprises a converter 5 coupled to secondary energy storing means 6, constituted by a capacitor C. Converter 5 is coupled in parallel to capacitor 3 by terminals B_0 and B_1 .

In a normal state, the intermittent electric source G and, as the case may be, diode 4 provide the electric power to capacitor 3 which is intended for the consuming circuit. Converter 5 deviates a part of this electric power and transfers it to storing means 6. The electrostatic energy stored in capacitor C thus increases. In the normal state, converter 5 is preferably a voltage multiplying dc/dc converter. Thus, the continuous low voltage $V_1 = V_{DD} - GND$ normally used in timepieces for supplying the low consumption circuits, may be raised to a relatively high voltage V_2 corresponding to a stored energy which is evaluated at $E = 1/2.C.V_2^2$ which allows to dispose of an increased autonomy with respect to the energy accumulated in a capacity with the voltage V_{DD} ($E = 1/2.C.V_{DD}^2$).

During the secondary or backup state, when intermittent electric voltage G is failing, the energy E stored in capacitor C is released to the power supply 1 by electric converter means 5. This power must be provided at a substantially normal supply voltage V_{DD} . To this effect, the invention provides reversible converter means 5. Energy E which is stored at the continuous voltage V_2 of a large value is preferably reconverted by converter means 5 into an electric energy provided at a low voltage V_1 . In the backup state, reversible converter means 5 thus preferably comprise a voltage dividing dc/dc converter.

It may also be possible to provide for converter means 5 which comprise two parallelly disposed converting circuits, a first converter functioning in the forward direction as a voltage multiplier during the normal state, and the other converter functioning in the opposite direction as a voltage divider during the backup state.

However, the invention provides for converter means 5 which preferably comprise a unique reversible converter, the converter having two configurations corresponding to the two aforementioned operating modes. Converter 5 comprises to this effect integrated switching means, which

are preferably static, i.e. which switch without mechanical movement, such as field effect transistor or thyristors. By acting on these switching means, the electric diagram of the converter is modified such that the direction and the electric conversion ratio are inverted.

The invention further provides for power measuring means of the power supplied and for control means of these static switches. These means allow to detect any lowering of the supply power and to control a modification of the configuration of converter 5 to restore the energy to the power supply. The preferred embodiment of the invention as illustrated in figure 1 thus comprises a reversible voltage multiplying dc/dc converter 5 in the forward direction in the first configuration, and switching means allowing the converter to obtain a second configuration in which it is a voltage divider in the opposite direction. In the forward direction, the continuous voltage V_1 at terminals B_0 , B_1 of reversible converter 5, is multiplied to a continuous voltage V_2 at the terminals of capacitor C, voltage V_2 having a value which is larger than voltage V_1 . In the opposite direction, continuous voltage V_2 at terminals +, - of capacitor C is divided into a continuous voltage V_1 provided at terminals B_0 , B_1 , of reversible converter 5, voltage V_1 thus having a value which is smaller than voltage V_2 .

Reversible converting circuit 5 of figure 1 comprises, for example, at least an inductance L and a switching circuit comprising four static switches T_1 , T_2 , T_3 , T_4 and a diode D. The switching circuit has the shape of the Latin letter "A". One end B_2 of inductance L is connected to a terminal B_3 via a static switch T_3 , terminal B_3 being connected to a terminal "-" of capacitor C via switch T_1 . Furthermore, the end B_2 of inductance L is connected to a terminal B_4 via a static switch T_4 , terminal B_4 being connected to a terminal "+" of capacitor C via the switch T_2 . Diode D connects terminal B_3 to

terminal B₄, the cathode of the diode being oriented toward terminal B₄. Finally, terminal "-" of capacitor C is connected to terminal B₀ of converter 5, terminal B₁ being constituted by the other end B₁ of inductance L. It should be noted that inductance L is connected in series with switching circuit 5 between terminal B₁ and the terminal "+" of capacitor C.

Conventionally speaking, as terminal B₀ is connected to ground GND, its potential is considered being zero. In the following of the description it will further be considered that the source provides a positive voltage V₁, i.e. that the potential of terminal B₁ is positive. During operation, converter 5, in the embodiment according to figure 1, thus provides a positive voltage V₁ to the terminals of capacitor C, i.e. the potential of terminal "+" is positive.

Static switches T₁, T₂, T₃, T₄ are preferably field effect transistors or, more specifically, P-type or N-type MOS transistors obtained by the CMOS technology. They respectively receive control signals s₁, s₂, s₃, s₄ at their gates. In figure 1, to facilitate the understanding, the switches are represented by way of P-channel transistors, i.e. the channel is conducting if the control signal applied to the gate is in the state "0", i.e. that the gate voltage is lower than the source voltage of these FET transistors. Other alternatives of the switch are well known to the skilled person and may be used thereby remaining within the scope of the invention.

In the first configuration, switch 4 is open and switches T₃ and T₂ are closed. Finally, switch T₁ is alternatively closed then opened. For example, the P-channel transistors T₄, T₃, T₂, T₁ as illustrated in figure 1 respectively receive :

- a gate signal s₄ in the state "1";
- a gate signal s₃ in the state "0";
- a gate signal s₂ in the state "0", and

- on the gate of transistor T₁ a pulse signal s₁ varying from state "0" to state "1".

In this configuration the electrical diagram of the converter is equivalent to that of figure 2, with the pulse controlled switch T₁ corresponding to the interrupter K₁. The latter is alternatively closed than opened by a so-called analogue "cut-off" control of control signal s₁. When the interrupter K₁ is closed, the voltage V₁ as visible in figure 1, and corresponding to the voltage V₁ visible in figure 2, is applied to inductance L such that the current I_{in} increases in this inductance. The opening of the interrupter K₁ forces the current I_{in}, which cannot be discontinuous in an inductance, to charge capacitor C via diode D. Diode D avoids a discharge of capacitor C when the interrupter K₁ is closed during the following "cut-off" cycle. At each close-opening cycle of interrupter K₁, capacitor C receives a supplementary charge which increases its voltage V_{out} corresponding to V₂ in figure 2. It should be noted that this configuration of parallel sampling causes a voltage multiplying with the ratio of the output voltage V_{out} and the input voltage V_{in} being multiplied, corresponding to the following equation :

$$\frac{V_{OUT}}{V_{IN}} = \frac{V_2}{V_1} = \frac{1}{1-f}$$

in which f is the closing rate of interrupter K₁, (respectively of switch T₁), i.e. f is the ratio of the duration of the closing with respect to the duration of the closing-opening cycle.

In the second configuration, switches T₄ and T₁ are closed, and switch T₃ is open. Finally, switch T₂ is alterningly closed then opened. For example, the P-channel transistors T₄, T₃, T₂, T₁ as illustrated in figure 1 respectively receive :

- a gate signal s₄ in the state "0";

- a gate signal s_3 in the state "1";
- on the gate of transistor T_2 a pulse signal s_2 which varies from the state "0" to the state "1", and
- a gate signal s_1 in the state "0".

In this second configuration the electrical diagram of the converter is equivalent to the one of figure 3, the pulse controlled switch T_2 corresponding to interrupter K_2 . Thus, the reversible converter of figure 1 is used according to the invention to reconvert the electric power in the opposite direction going from capacitor C to capacitor 3. The converter thus converts electric static energy which is stored in capacitor C at a continuous voltage of V_2 into an electric energy at continuous voltage V_1 for the continuous electric power supply.

In fact, in the second configuration of the reversible converter according to the invention, switch T_2 , which corresponds to interrupter K_2 in figure 3, is alternatively opened or closed by the control s_2 . Control s_2 corresponds to the above-mentioned "cut-off control", the controls s_1 and s_2 are interchangeable when changing configurations. In the second configuration, when switch T_2 corresponding to interrupter K_2 of figure 3 is closed, capacitor C discharges across inductance L with a discharge current i_2 which provides the energy to capacitor 3. Current i_2 , illustrated in figures 1 and 3, provokes a voltage drop when crossing inductance L so that the voltage V_1 between terminals B_1 and B_0 of converter 5 has a lower value than the voltage V_2 of the terminals of capacitor C . When switch T_2 , analogue to interrupter K_2 in figure 3, is open, a current i_2 continues to circulates in diode D , in inductance L and in capacitor 3.

It should be noted that in the second configuration according to the conventions of figures 1 and 3, current i_2 and voltage V_1 are positive such that converter 5 is an electric power generator intended for power supply. In the first configuration, converter 5 is on the contrary a consumer of electric power because voltage V_1 and current

i_1 are positive according to the convention of figure 1 (current i_1 is in the direction opposite to that of current i_2).

It should further be noted that, in this second configuration of series sampling, the converter lowers the voltage with the ratio of the continuous voltage V_2 at the terminals of the capacitor and the continuous voltage V_1 at the terminals of converter 5 being divided corresponding to the following equation :

$$\frac{V_1}{V_2} = f$$

in which f is the closing rate of switch T_2 (or of interrupter K_2), i.e. the ratio of the duration of closing with respect to the duration of the closing-opening cycle of the second configuration.

The values of the ratio of multiplication and of division of the continuous voltages indicated herebefore are however simply indicative. If we would like to obtain a specific value of the supply voltage V_{DD} , it would be preferable to assure that the closing ratio of switches T_1 and T_2 is slaved to a measurement of the value of voltage V_{DD} at the output of the regulator or of the voltage V_1 at the terminals of converter 5.

Advantageously, this measurement may be combined with the measurement of the electric power of the supply or of the source which controls the modification of the configuration of the reversible converter.

An embodiment will now be described with reference to figure 1 which is solely an example of a control circuit of the switching means. Control circuit 7 comprises measurement means C_{mp} of the electric power provided by the source and comprises control means, for example a pulse generator H and a logic circuit, connected to switches T_1 , T_2 , T_3 , T_4 of converter 5. The functioning of the logical circuit of figure 1 will be described by way

of example, considering firstly that the supply voltage V_{DD} is sufficient. Voltage V_1 thus is high and the output of comparator Cmp is in a state "1".

- Signal s_4 , obtained directly, is in a state "1";
- Signal s_3 , obtained at the output of an inverter, is in a state "0";
- Signal s_2 , obtained at the output of a gate &2 performing the logic operation AND between the signal s_3 and the pulse signal H, is in a state "0", and
- Signal s_1 , obtained at the output of a gate &1 performing the logic operation AND between the signal s_4 and the signal of the pulse generator H, duplicates the pulse signal H.

Control circuit 7 thus puts converter 5 into the first configuration.

When the source starts failing or when the electronic circuits of the timepiece start consuming too much electric power, the supply voltage V_{DD} becomes insufficient. Voltage V_1 is thus low and the output of comparator Cmp changes to the state "0".

- Signal s_4 directly obtained is in a state "0";
- Signal s_3 , obtained at the output of an inverter, is in a state "1";
- Signal s_2 duplicates the pulse signal H; and
- Signal s_1 is in a state "0".

When the source starts failing, the control circuit 7 thus disposes the converter 5 in the second configuration.

According to a non-illustrated embodiment, the control means 7 may advantageously control the closing ratio f of switches T_1 or T_2 (according to the configuration). Control circuit 7 may for example comprise a generator of pulses H having variable widths. In the second configuration, the width of the pulses may thus be controlled by the measurement means of the voltage V_1 provided by converter 5. As such any variations of the energy and of voltage V_2 of the capacitor C during its discharge on voltages V_1 and V_{DD} can be avoided. In the

first configuration, a measurement of the charge voltage V_2 of capacitor C may be provided, the measurement controlling the closing ratio f of switch T_1 , so that the ratio f increases according to the charge of the capacitor. As such, one can avoid that the components of converter 5 undergo very high currents and/or voltages.

It should further be mentioned that the control of converter 5 may comprise three phases, two phases corresponding to the aforementioned configurations, the converter being in operation in a forward direction or in a reversed direction, and the supplementary phase corresponding to the none-functioning of the converter. In this phase of none-functioning, the converter does not transmit any electric power, neither in the forward direction towards capacitor C nor in the reverse or opposite direction towards power supply 1. The converter may be simply disconnected, the switch T_1 and T_2 being open (control signals s_1 and s_2 being in the state "0"). Thus, capacitor C conserves the energy E which it had already stored. This phase may be inserted between the passage of one configuration to another to avoid switching problems. More generally, this phase may be controlled when the power of the source G is sufficient to supply the electronic circuits of the timepiece but when this power is too weak to further supply the converter 5 and the capacitor C .

An advantage of the continuous electronic supply circuit according to the invention is that the converter 5 may use the same inductance L and the same diode D in these configurations. More specifically, in a timepiece application, inductance L may be a winding of an inductive motor such as a stepping motor. In this case, an other advantage of the continuous electronic supply circuit according to the invention occurs, i.e. the transistors T_1 to T_4 may be constituted by the control transistors of the watch motor. A continuous electronic supply circuit is

thus advantageously obtained which has small dimensions and which only requires a minimal number of components.

Other embodiments of the dc/dc reversible converter may be foreseen. A second embodiment, illustrated in figure 4, comprises a converter which is coupled, on the onehand, to a capacitor C1 which may be the capacitor of supply 1, and, on the other hand, to a storing capacitor C2.

In this second embodiment, the converter has the shape of the Latin letter "H", the feet of the "H" being connected to the terminals of capacitor C1, and the tops of the "H" being connected to the terminals of the capacitor C2. Inductance L forms here the bar of the "H". Four static switches S1, S2, S3, S4 are disposed in the respective straight ends of the "H". The circuit further comprises two diodes Z1, Z2, respectively disposed in a top part of the "H" and in a bottom part of the "H", each diode being connected in parallel to a switch, for example respectively S1, S2.

As is the case for the preferred embodiment, this second reversible converter may have two configurations. In the first, it converts the voltage V_1 available at the terminals of capacitor C1 into a voltage V_2 applied to capacitor C2. In the second configuration, it reconverses the energy E stored in the capacitor C2 at a voltage V_2 into an electric power which is released to capacitor C1 and to power supply 1 at a voltage V_1 .

In the second embodiment, the switching means S1, S2, S3, S4 configure the inductive accumulating sampling converter. This sampler comprises a switch S connected in series with a diode Z between the terminal "+" of capacitor C1 and a terminal "-" of capacitor C2, the anode of the diode Z being connected to the terminal "-" of capacitor C2. The terminal "-" of capacitor C1 and the terminal "+" of capacitor C2 are connected together by a wire, forming preferably a grounded wire. The inductance L

is connected between the cathode of diode Z and the grounded wire. The sampling circuit thus forms an "H".

During operation, switch S is closed then opened by a pulse signal CK called "sampling control". This sampling configuration has the characteristic of lowering or of increasing the voltage according to the closing rate f of switch S. The ratio of the output voltage V_2 to the input voltage V_1 , such as may be seen in figure 5, is in fact given by the following equation :

$$\frac{V_2}{V_1} = \frac{f}{1-f}$$

In this second embodiment, the converter becomes reversible simply by inverting its configuration. The control of switches S1, S2, S3, S4 is similar to the control of the four switches of the preferred embodiment. It should however be mentioned that in the first configuration, the converter of figure 4 corresponds to the inductive accumulating sampler of figure 5, this sampler converting the voltage V_1 into the voltage V_2 in the forward direction. In the second configuration, it can be seen in figure 4 that the converter may take on a symmetrical configuration of the inductive accumulating sampler in the reverse direction, the voltage V_2 being reconverted into the voltage V_1 . In this embodiment, the converter has a first configuration and a second similar configuration because the voltage in the forward direction may be increased by a closing rate f which is larger than $1/2$ and may be decreased in the opposite direction by a closing rate f which is smaller than $1/2$. Thus, a storing of energy E at a high voltage V_2 in a capacitor C2 may be obtained according to the invention.

In another embodiment, the diode or the diodes mentioned hereabove may be replaced by active diodes, i.e. by diodes which comprise at least one active element, such

as an operational amplifier, a comparator, a transistor or a similar element, which requires a power supply source.

To this effect, figure 6 represents a diagram of a continuous supply circuit 20 comprising an intermittent electric source G, the capacitor 3, inductance L and the aforementioned capacitor C. The continuous supply voltage 20 further comprises active diodes 21, 22 and 23.

The active diodes 21, 22, and 23 respectively comprise comparators 24, 25 and 26 as well as FET transistors 27, 28 and 29. Each of these active diodes functions in an identical manner. When considering the case of active diode 21, the positive input and the negative input of comparator 24 are connected to the drain and to the source of the FET transistor 27. The output of comparator 24 is connected to the gate of transistor 27.

Further, it is known that a parasite diode is created when an FET transistor is diffused in a substrate, this parasite diode being in fact connected between the source and the drain of the FET transistor. Thus, active diodes 21, 22 and 23 further comprise parasite diodes which are referenced 30, 31 and 32 in figure 6.

During starting up, i.e. when a current is provided to active diode 21 for the first time, this current passes through the parasite diode. This creates a voltage drop across active diode 21 which can be around 650 mV. This voltage drop is detected at the input of comparator 24. As a consequence, comparator 24 applies a control signal to the gate of transistor 27 so that the latter becomes conductive and that the parasite diode 30 is short-circuited. This provokes a drop of the residual voltage across active diode 21, for example, from about 650 mV to 50 mV. Active diode 21 stays conductive as long as there is a current provided to this diode, in this case by the intermittent electric source G.

Continuous supply circuit 20 of figure 6 further comprises control circuits 33, 34 and 35 respectively connected between the output of comparator 24 and the gate

of transistor 27, between the output of comparator 25 and the gate of transistor 28 and between the output of comparator 26 and the gate of transistor 29. These logic circuits are arranged so as to decide, as a function of external elements or phenomena (for example the control means 7) if active diodes 21, 22 and 23 are used as actual diodes or if transistors 27, 28 or 29 which are parts of these active diodes, are more used as switching transistors.

Thanks to these control circuits, continuous supply circuit 20 may be configured either according to the diagram of figure 2, or according to the diagram of figure 3. Indeed, if control circuit 35 applies a series of pulses to the gate of transistor 29 so that the latter functions as the switch K1 described hereabove, it can be seen that continuous supply circuit 20 takes on the configuration represented in figure 2. Also, if control circuit 34 applies a series of pulses to the gate of transistor 28 in such a way that the latter functions as does switch K2 described hereabove, it can be seen that continuous supply circuit 20 takes on the configuration as represented in figure 3.

Advantageously, such an arrangement allows to minimise the number of elements which can not be integrated with the continuous supply circuit because external diodes are not anymore necessary. Furthermore, this arrangement allows to considerably reduce the unnecessary voltage losses of the continuous supply circuit.

Other configurations of the reversible converter may be obtained, a large number of variations being known to specialists, as results from the preceding description.



CLAIMS

1. Continuous supply circuit, in particular for a timepiece, comprising :

- a power supply source (3) of said electronic circuit arranged to store energy for supplying the latter;

- an intermittent electric source (G) arranged to provide energy to said supply source characterised in that said supply circuit further comprises :

- secondary energy storing means (6) arranged to provide energy to said power supply source (3) when said intermittent electric source (G) does not provide energy to said power supply source; and

- an electric dc/dc reversible converter (5), coupled, on the one hand, to said power supply source (3), and, on the other hand, to the secondary energy storing means (6),

the converter comprising switching means (T₁, T₂, T₃, T₄), and control means (7) acting on said switching means so as to modify the configuration of said converter between a first configuration in which said converter (5) transfers, in a forward direction, the energy coming from the intermittent electric source (G) to the secondary energy storing means (6), and

a second configuration in which the converter (5) releases, in the opposite direction, the energy stored by the secondary energy storing means (6) to said power supply source.

2. Supply circuit according to claim 1 characterised in that said converter (5) is a dc/dc converter, and in that said control means (7) act on said switching means (T₁, T₂, T₃, T₄) in such a way that said converter is either a voltage multiplier in said first configuration or is a voltage divider in said second configuration.

3. Supply circuit according to anyone of claims 1 or 2, characterised in that said control means (7) act on said switching means (T₁, T₂, T₃, T₄) in such a way that



said converter (5) is a parallel sampler in said first configuration, and that said converter is a series sampler in said second configuration.

4. Supply circuit according to anyone of the claims 1 or 2, characterised in that the converter (5) is an inductive accumulating sampler in each of said configurations, and in that said control means (7) are arranged in such a way as to regulate the cut-off of the sampling so that the converter (5) is a voltage multiplier in said first configuration and so that said converter is a voltage divider in said second configuration.

5. Supply circuit according to anyone of the preceding claims, characterised in that the converter (5) comprises an accumulating inductance (L) in each of said configurations, the same inductance being used in said first and in said second configuration.

6. Timepiece characterised in that it comprises a supply circuit according to anyone of the preceding claims 1 to 5.

7. Timepiece driven by a movement having an inductive electric motor, such as a stepping motor, and comprising a supply circuit according to anyone of the preceding claims 1 to 5, characterised in that at least one sampling inductance (L) is an inductance of the motor.

8. Timepiece according to anyone of the claims 6 or 7, characterised in that the continuous intermittent electric source (G) comprises a photovoltaic battery.

ABSTRACT**CONTINUOUS ELECTRIC POWER SUPPLY CIRCUIT REGULATED BY A
REVERSIBLE CONVERTER**

The field of the invention concerns the protection against power supply failures, in particular of electronic circuits of timepieces whose electric power supply is a photovoltaic battery.

The invention provides an electric continuous power supply comprising :

- an electrical continuous source (G) coupled to a power output (VDD, GND);
- energy storing means (4); and
- a reversible dc/dc electric converter (5) coupled on a one hand to the power output (VDD, GND), and on the other hand to the energy storing means (4); the converter (5) comprising switching means (T1, T2, T3, T4) for modifying its configuration.

According to the invention, the power supply storing means (4) comprise essentially a capacitor (C).

Preferably, the reversible converter (5) is a dc/dc converter, the converter being a voltage multiplier in the first configuration, and being a voltage divider in the second configuration.

Figure 1

Fig. 2

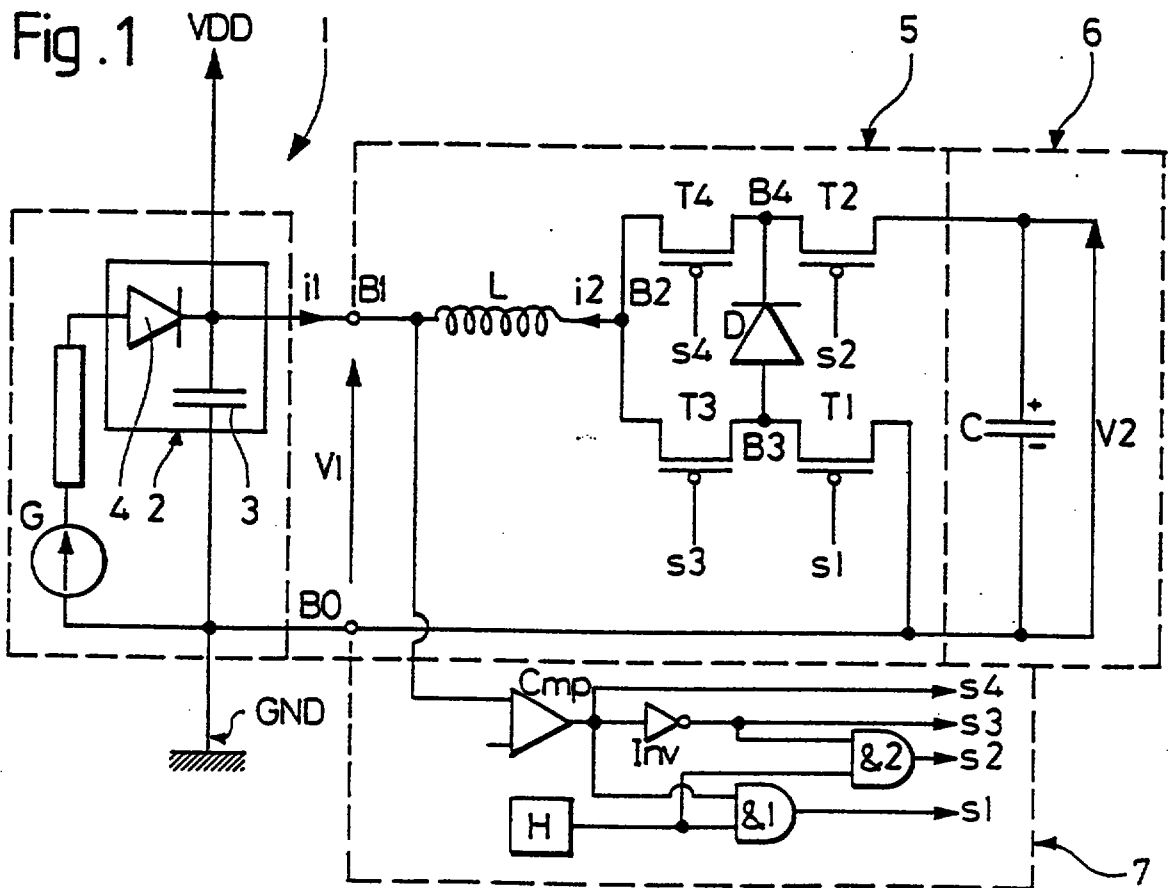
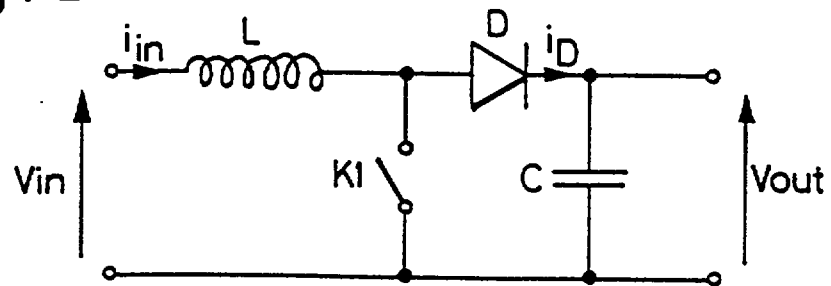


Fig. 3

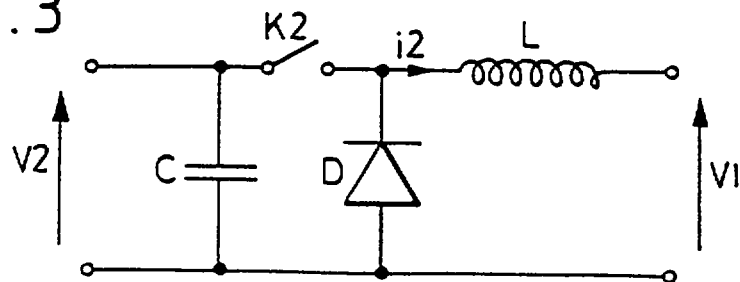


Fig. 4

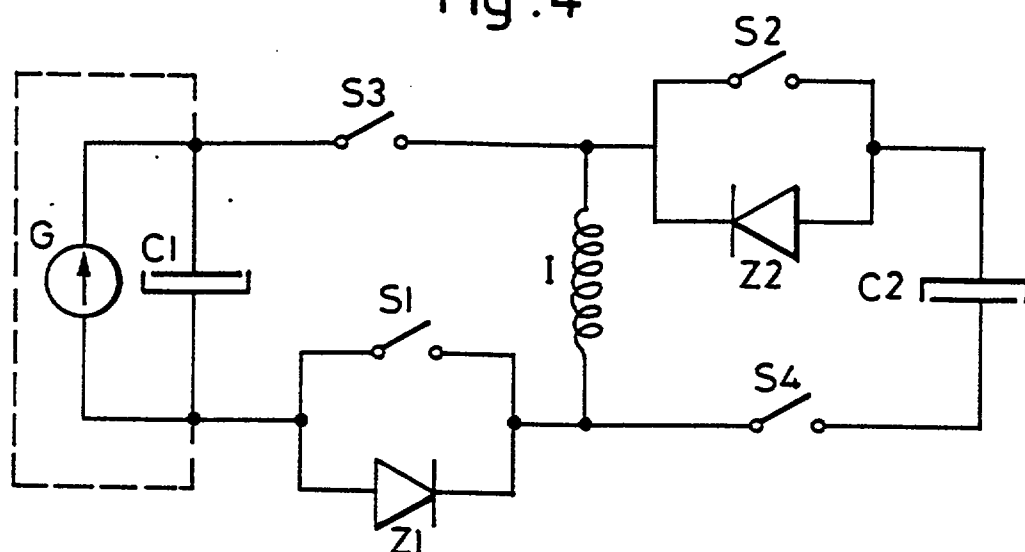


Fig. 5

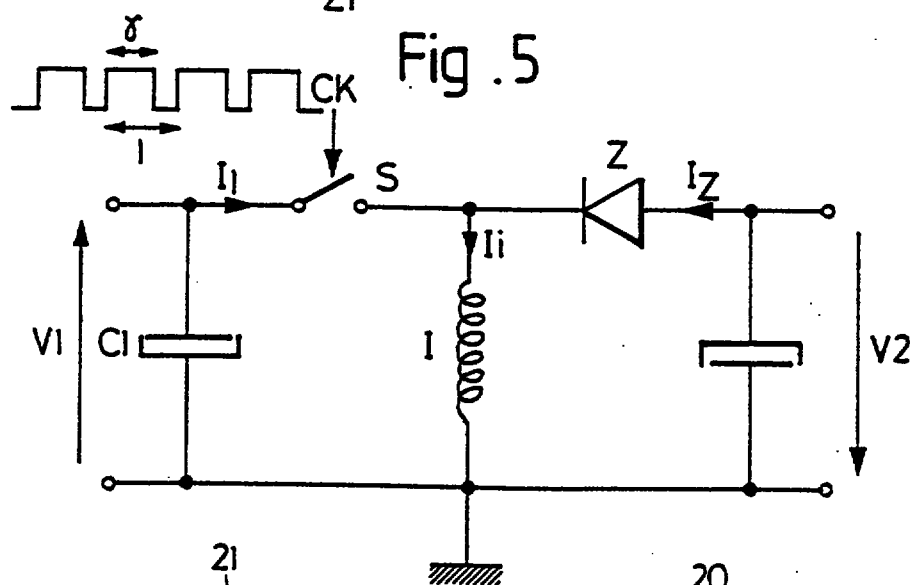


Fig. 6

