

SPECIFICATION

IMPROVEMENT IN COMMUNICATION BETWEEN DATA PROCESSING APPARATUS AND PERIPHERAL DEVICE THEREOF

BACKGROUND OF THE INVENTION

Field of the Invention

The present invention relates to an improvement in communication between a data processing apparatus and a peripheral device to be connected to the data processing apparatus, and more specifically, to a system for identifying communication modes of the peripheral devices connected to a game apparatus and connector configurations suitable to the peripheral devices with various types of communication modes.

Description of Related Art

An image processing system is known as a system which has a display such as a television set, (hereinafter, referred to as a "monitor"), on which images are time-dependently displayed. As is widely known for home use, a game apparatus is one representative of such image processing systems.

The game apparatus comprises a processing unit executing game programs and generating video and audio signals. To the apparatus are connected various types of peripheral devices (frequently, referred to as mere "peripherals") such as manipulating switching assemblies called joy pad, controller, or key board. The processing unit mainly performs not only a predetermined image processing

therein but also a variety of processings including control of the peripheral devices. The peripheral devices are used, for example, for inputting necessary information from an operator into the processing unit and for displaying image data such as graphic and character data supplied from the processing unit. The peripheral devices thus typically include an operator controller and a monitor having a screen and speaker.

When the processing unit to which the monitor and operator controller are connected is activated by a player or an operator, the monitor is able to display images on its screen and to produce sound from its speaker, depending on instructions of a given game software sent from the processing unit. The player can enjoy the game with the game apparatus.

The game apparatus is normally required to be able to carry out various games. This means that there is much possibility that various types of peripheral devices are connected to the processing unit.

Various interfaces are arranged between the processing unit and the peripheral devices in aid of communication therebetween. Further, because communication modes are often varied depending on the peripheral device, the processing unit is required to obtain information (peripheral identification data) representing the type of a connected peripheral device. For this requirement, it is proposed that the type of a connected peripheral device can be identified using logical values acquired through data lines of the peripheral device when the processing unit sends twice the

peripheral device a peripheral selection signal of logical values of "1" firstly, and then of "0". Such prior art is disclosed in Japanese patent Laid-open No.2-62618, for example.

However, the above identification method identifies in fact only the type of a connected peripheral device on the basis of logical values acquired through data lines of the device. In other words, this identification method does not give attention to the communication mode of a connected peripheral device. This results in a drawback that, frequently, connected peripheral devices cannot send data to the processing unit and also the processing unit cannot control the peripheral devices with preferable communication modes to those peripheral devices.

SUMMARY OF THE INVENTION

Accordingly, an object of the present invention is to make it possible for a data processing apparatus to communicate for data transmission employing various types of communication modes with various peripheral devices.

Another object of the present invention is to provide a data processing apparatus adaptable to various types of communication modes.

Still another object of the present invention is to provide a connector plug configuration, which connects a peripheral device to a data processing apparatus adaptable to various types of peripheral devices.

Still another object of the present invention is to provide a

peripheral device having a connector assembly suitable for transmission of control signals and data with a data processing apparatus.

Still another object of the present invention is to provide a data processing apparatus with a system for identifying various types of communication modes of peripheral devices connected to the apparatus.

Still another object of the present invention is to provide a data processing apparatus with a system for controlling various types of peripheral devices connected to the apparatus through a connector with an improved pin configuration.

Still another object of the present invention is to provide a connector used in a peripheral device, the connector incorporating a plug having a terminal pin configuration which efficiently and rapidly transmits to a processing apparatus necessary information in order that the processing apparatus identifies a communication mode inherently given to the peripheral device, thereby a smooth communication being permitted between the processing apparatus and peripheral device on the communication mode.

In order to achieve the objects, according to one aspect of the present invention, there is provided a peripheral device for use with a data processing apparatus, said apparatus having a peripheral port with a set of terminal pins consisting of first to ninth pins and being disposed in a row in the order of the first to the ninth pins, said first pin being assigned for connecting to one of a power source and the ground potential, said ninth pin being

assigned for connecting to the other of the power source and the ground potential, said second, third, seventh and eighth pins being assigned for transmitting data signals, said fourth to sixth pins being assigned for transmitting control signals, said apparatus having means for selecting the communication mode for communicating with the peripheral device connected to the peripheral port based on the data signals transmitted from said second, third, seventh and eighth pins, said peripheral device comprising: a plug connector which is to be detachably connected to said peripheral port, said plug connector having a set of terminal pins consisting of first to ninth pins and being disposed in row in the order of the first to the ninth pins correspondingly to said first to ninth pins of the peripheral port; a cable including a plurality of wires connecting the terminal pins of said plug connector with terminals on a printed circuit board of said peripheral device; and means for transmitting data signals including identification data representing the communication mode of said peripheral device via at least one of said second, third, seventh and eighth pins in synchronization with a clock signal supplied from said apparatus when said plug connector is connected to said peripheral port.

According to another aspect of the invention, there is still provided a combination of a data processing apparatus and a peripheral device, comprising: said apparatus having a peripheral port with a plurality of terminal pins disposed in a row, said terminal pins including a pair of first pins, one assigned for connecting to one of a power source and the ground potential and

the other assigned for connecting to the other of the power source and the ground potential, at least one of second pins assigned for transmitting data signals, a plurality of third pins assigned for transmitting control signals, said apparatus further having means for selecting the communication mode for communicating with the peripheral device connected to the peripheral port based on the data signals transmitted from said at least one second pin, means for transmitting a clock signal via one of said third pins to said peripheral device and means for performing a communication with the connected peripheral device with the selected communication mode; said peripheral device having a plug connector which is to be detachably connected to said peripheral port, said plug connector having a plurality of terminal pins configured as the same in number as and disposed in a row correspondingly to the terminal pins of said peripheral port, said peripheral device further having a cable including a plurality of wires connecting the terminal pins of said plug connector with terminal on a printed circuit board of said peripheral device and means for transmitting data signals including identification data representing the communication mode of said peripheral device via said at least one of second pin to said apparatus in synchronization with said clock signal when said plug connector is connected to said peripheral port.

BRIEF DESCRIPTION OF THE DRAWINGS

In the drawings:

Fig. 1 is a perspective illustration of a game system embodying

the present invention;

Fig. 2 is a basic block diagram showing the game system;

Fig. 3 is a block diagram showing the connection between a main CPU and a sub CPU functioning as a system for managing and controlling peripheral devices and showing the block diagram of the sub CPU;

Fig. 4 shows a connector configuration of peripheral ports;

Figs. 5A to 5C are pin configurations of plug connectors employed in compliance with typical communication modes;

Figs. 6A to 6D are functional block diagrams of typical controllers as peripheral devices;

Figs. 7A to 7D are detailed circuit diagrams of typical controllers as peripheral devices;

Fig. 8 is a flowchart exemplifying a processing carried out by the sub CPU;

Fig. 9 is a flowchart of an access subroutine to peripheral devices;

Fig. 10 shows a flowchart of an access subroutine for a three-wire handshake type of communication mode;

Fig. 11 shows a flowchart of an access subroutine for a clocked parallel type of communication mode;

Fig. 12 is a flowchart of an access subroutine for a clocked serial type of communication mode;

Fig. 13 represents a timing chart of control signals and data for the three-wire handshake type of communication mode;

Fig. 14 represent a timing chart of control signals and data for

the clocked parallel type of communication mode; and

Fig. 15 is a timing chart of control signals and data for the clocked serial type of communication mode.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

An embodiment of the present invention will now be explained with reference to Figs. 1 to 15.

Fig. 1 shows a perspective view of a game system 1 to which the present invention is applied. The game system 1 comprises a game apparatus 2 functioning as the data processing apparatus for processing game programs and controlling various operations and control switch assemblies or controllers 3a and 3b as an example of peripheral devices to the game apparatus. As for the controllers, such control keys disclosed in U. S. patent application S. N. 08/245,446 may be used. The apparatus 2 is provided with connector ports 4a and 4b for connecting peripheral devices. Each of the connector ports 4a and 4b has a socket or a socket connector 4as(4bs) to which a plug or a plug connector 4ap(4bp) can be connected and disconnected.

The plugs 4ap and 4bp are connected to the controllers 3a and 3b through cables 5a and 5b, respectively. The controllers 3a and 3b are electrically and functionally connected to internal circuits of the game apparatus 2 via the cables 5a and 5b when the plugs 4ap and 4bp are inserted into the sockets 4as and 4bs.

Each of the plugs 4ap and 4bp has a configuration of plug pins which ensures transmission of a communication mode employed for

the controllers 3a and 3b to the game apparatus 2. Further, the apparatus 2 comprises a video output terminal and an audio output terminal not shown.

The video output terminal is connected to a video input terminal 7a of a monitor 6, such a television set, through a cable 8a. Also the audio output terminal is connected to an audio input terminal 7b of the monitor 6 through a cable 8b.

The game apparatus 2 has a CD-ROM drive block 14 positioned at the central portion thereof. The CD-ROM drive block 14 is installed with a CD-ROM drive 9 and an optical pickup to read game program data or audio/video software from CD-ROM discs mounted thereto. The apparatus is further provided with a cartridge port 10 positioned at the rear side of the CD-ROM drive block 9. The cartridge port portion 10 is installed therein with a socket connector to which are connected devices such as a ROM/RAM cassette or an optional adapter for providing additional functions (not shown).

The apparatus 2 carries out a wide variety of information processings and controls such as image processings, audio processings and control of peripheral devices as well as processing of game programs. The controllers 3a and 3b provide the apparatus 2 operating signals. A video and audio signals generated by the apparatus 2 are given to the monitor 6 through the cables 8a and 8b.

Fig. 2 exemplifies a block diagram of the game apparatus 2. The apparatus 2 shown therein comprises a processing block 11, video block 12, audio block 13, and auxiliary block or CD-ROM drive

block 14. The cartridge port 10 includes a cartridge interface (I/F) 15 and the auxiliary block 14 includes a compact disk interface (I/F) 16.

The processing block 11 comprises a main processing unit (CPU) 21, RAM 22, ROM 23, system control unit 24, and sub CPU 25. The main CPU 21 is functionally connected, via a bus line 26, to the RAM 22, ROM 23, system control unit 24, and sub CPU 25.

Through the bus line 26, system control unit 24 and a bus line 17, the main CPU 21 is functionally connected with the video block 12, audio block 13, cartridge I/F 15, and CD I/F 16. The CD I/F 16 of the auxiliary block 14 is connected with the CD-ROM drive 9.

The main CPU 21 controls the entire processings of the system. In order to enhance control capability, the main CPU 21 consists of 32-bit RISC types high speed CPUs (two CPU chips called SH-2) and provides an improved, high speed calculating operation which may function similarly as a digital signal processor (DSP).

RAM 22 has, for example, a memory capacity of 32 megabits in all, a memory area of 16 megabits of which is assigned to the main CPU 21, for example. The remaining memory area of the RAM 22 is assigned to the video block 12 and audio block 13. ROM 23 stores initial programs or bootstrap programs for the hardware and for the cassette ROM and the CD-ROM.

The system control unit 24 functions as a co-processor to the main CPU 21 so that the unit 24 interfaces 16-bit bus 17 to which the video block 12, audio block 13 and auxiliary block 14 are connected with 32 bit bus 26 to which the main CPU 21 is

connected.

When the electric power is on and/or a reset button is pushed down, the sub CPU 25 not only resets the entire system but also carries out data collection from the peripheral devices such as the controllers 3a and 3b to control the peripheral devices. Also the sub CPU 25 can change the clock frequency of the entire system.

The sub CPU 25 further includes a connection-exchanging means described below. The connection-exchanging means selectively connects the peripheral devices such as the controllers 3a and 3b connected to the connector ports 4a and 4b with either a CPU core 31 (refer to Fig. 3) in the sub CPU 25 or the main CPU 21.

The video block 12 forms video signals on the basis of video control signals given from the main CPU 21 through the system control unit 24 and provides the monitor 6 the video signals through the cable 8a. This permits the monitor 6 to display images on its screen. The details of the video block 12 may be referred to PCT/JP94/01068 (filed Feb. 24, 1995 in U. S.), PCT/JP94/01067 (filed Feb. 27, 1995 in U. S.), PCT/JP94/01066 (filed Feb. 27, 1995 in U. S.).

The audio block 13 generates digital audio signals on the basis of audio control signals given from the main CPU 21 through the system control unit 24, converts those digital audio signals into corresponding analog audio signals by a digital/analog (DA) converter incorporated therein, and provides the monitor 6 the converted analog audio signals through the cable 8b. Such processing permits an audio speaker of the monitor 6 to produce

sound.

The sub CPU 25 will be explained with reference to Fig. 3. Fig. 3 represents in block diagram the configuration of the sub CPU 25 which acts as a unit for controlling and managing peripheral devices. As shown in the figure, the sub CPU 25 is coupled with the main CPU 21 by way of the bus line 26. The sub CPU 25 comprises a CPU core 31, ROM 32, RAM 33, register table 34, register group 35, multiplexer 36, and I/O interface 37.

The CPU core 31, for example, may be a 4-bit CPU. The CPU core 31 is coupled with the ROM 32 to receive required programs from the ROM 32. Coupled with the CPU core 31 through a bus line 38 are the RAM 33, register table 34, and the register group 35. Further, the register group 35 is coupled with the I/O interface 37 via the multiplexer 36. The register group 35 and multiplexer 36 compose the connection-exchanging means 40.

The register group 35 may be sub-grouped into a main-CPU register group 351, a sub-CPU register group 352, and an I/O section register 353. The main-CPU register group 351 has two terminals; one is connected with the main CPU 21 through a bus line 39 and the bus line 26, while the other is connected with one of the two exchanging terminals of the multiplexer 36. The sub-CPU register group 352 has also two terminals; one is connected with the CPU core 31 through a bus line 38, while the other is connected with the other of the exchanging terminals of the multiplexer 36.

The multiplexer 36 has a common terminal connected with the

I/O interface 37. The interface I/O 37 is connected with the connector ports 4a and 4b. The connector ports 4a and 4b are connected, through cables 5a and 5b, with the controllers 3a and 3b, respectively.

In response to data specified in the I/O section register 353, the multiplexer 36 functionally connects the peripheral devices such as the controllers 3a and 3b selectively to either the CPU core 31 through the register group 352 and bus line 38 or the main CPU 21 through the register group 351 and bus lines 39 and 26.

The CPU core 31 is designed such that, when the CPU core 31 is electrically connected with the peripheral devices via the multiplexer 36, the CPU core 31 communicates with the peripheral devices in the order of "peripheral ID-1", "peripheral ID-2", "data size" and "data", decides a communication mode from those IDs(identification data), and then performs collection, transmission and exchanges etc. of the data.

In this embodiment, the data "peripheral ID-1", which consists of 4-bit data, represents a communication mode in accordance with the type of a peripheral device. The data "peripheral ID-2", which also consists of 4-bit data, is a type of data representing the device model of a peripheral device and consists of a set of data showing a device model focusing on signal types showing whether the signal is, for example, analog or digital. The "data size" represents the total bite number of data from a peripheral device and will be shown by references "DSIZE0 to DSIZE3" in figures described below. The "data" represents data, which are supplied

from a peripheral device, of the total bite number specified by the "data size". The CPU core 31 reads the data having the above total number at every 4-bit, because the CPU core 31 is a 4-bit processor in this embodiment.

Although the register group 35, multiplexer 36 and I/O interface 37 have two-channel circuits, respectively, this embodiment shows only one-channel circuit for simplified explanation.

Details of sub CPU 25 may be referred to co-pending Japanese patent applications Nos.6-246579 and 6-246580.

As shown in Fig. 4 the I/O interface has two channels connected to peripheral ports 4a and 4b. Each of the peripheral ports 4a and 4b has a set of socket pins 1 through 9. Pins 2 through 8 are connected to I/O interface and assigned to send and receive a set of specific signals. Names and functions of the signals are shown in Table 1.

As shown in Fig. 4, each of plugs 4ap and 4bp which are to be connected to the sockets 4as and 4bs respectively has a set of plug pins 1 through 9 corresponding to the socket pins 1 through 9. The plug 4ap and 4bp are connected to main circuits of peripheral devices via cables 5a and 5b.

Table 1

Signal Name	Pin No.	Remarks
TH	4	Control signal from game apparatus
TR	5	Control signal from game apparatus
TL	6	Control signal to game apparatus(ack)
R	7	Data signal (third bit)
L	8	Data signal (second bit)
D	2	Data signal (first bit)
U	3	Data signal (0-th bit)
Vcc	1	Power Source(+5V)
GND	9	GND

Pins nos. 4 to 6 are assigned for control signals. Pin no. 4 is the first control pin and assigned for transmitting a peripheral selection signal TH from the game apparatus 2 to the peripheral device (for example, controllers 3a, 3b). Pin no. 5 is the second control pin and assigned for transmitting a data request signal TR from the game apparatus to the peripheral device. Pin no. 6 is the third control pin and assigned for transmitting a peripheral acknowledgement signal TL from the peripheral device to the game apparatus.

Pins nos. 2, 3, 7 and 8 are assigned for data signals. Pin no. 2 (the first data pin) is assigned for transmitting a bit data D, pin no.

3 (the second data pin) for a bit data U, pin no. 7 (the third data pin) for a bit data R, and pin no. 8 (the fourth data pin) for a bit data L, respectively. The data R is mainly used for data transmission to the game apparatus 2. The input/output directions of data for these signals D, U, R and L can optionally be specified in accordance with the kind of the peripheral device connected to the apparatus 2. The signal R represents the third bit of the data, L the second bit, D the first bit and U the 0-th bit, respectively.

Pins 2 through 8 are connected to an electric power source Vcc by way of resistors 411, respectively, thereby to pull up the voltage levels of the signal lines (pins nos. 2 to 8) to the level of the power source Vcc.

When a peripheral device is not connected to the port 4a (4b) the voltage level on each of pins nos. 2 to 8 is equal to the voltage value of the power source Vcc (i.e. logical value = binary value "1"). Thus, the sub CPU 25 identifies that a peripheral device is not connected to the socket 4as (4bs) when it receives these data of the voltage state "1", for example, for D, U, R and L.

Pins nos. 5 and 6 are mainly assigned for transmitting control signals between the game apparatus and the peripheral devices in the above description. However, pins 5 and 6 may be used for data signal transmission where a peripheral device employs either the clocked parallel communication mode or clocked serial communication mode which will be described below.

Pin no. 1 is assigned to the signal Vcc which represents the power source (voltage: +5V). The pin no. 9 is assigned to the signal

GND which represent the ground potential (voltage: zero).

Figs. 5A to 5C explain a variety of pin configurations for plugs 4ap and 4bp which vary depending on communication modes employed by peripheral devices. Fig. 5A shows a pin configuration for standard communication modes including a TH/TR-selection communication mode and a three-wire handshake communication mode, Fig. 5B shows a pin configuration for a clocked parallel communication mode (clock-synchronized-type parallel communication mode), and Fig. 5C shows a pin configuration for a clocked serial communication mode (clock-synchronized-type serial communication mode), respectively. The clocked parallel and serial communication modes correspond to the non-standard type of modes.

These pin configurations are prepared to easily comply with a large number of types of peripheral devices, such as a control PAD, mouse, key board, modem and memory unit, and with different communication modes which may change according to peripheral devices.

Typical communication modes employed by a variety of peripheral devices are, for example, a TH/TR-selection communication mode, a three-wire handshake mode, a clocked parallel mode, and a clocked serial mode. A peripheral device employing the TH/TR-selection and three-wire handshake communication modes requires all of the socket/plug pins 1 through 9 of the connector port 4a (4b) to be used electrically independently. Accordingly, as shown in Fig. 5A, all the pins 1

through 9 of the plug 4ap (4bp) are not short-circuited to each other.

On the other hand, where a peripheral device employs the clocked parallel communication mode, pin no. 5 assigned for the data request signal TR and pin no. 6 assigned for peripheral acknowledgment signal TL can electrically be short-circuited as shown in Fig. 5B. Further, in case of a peripheral device employing the clocked serial communication mode, the data transmission lines in the connector port 4a (4b) can be reduced to one line in principle, and it is possible to transmit data through the one data line in cooperation with the two peripheral selection line (TH) and data request line (TR). Accordingly, as shown in Fig. 5C, pin no. 2 may be connected to Vcc and pins 6 to 8 may be connected to GND.

As is exemplified above, it is understood that each of the connector ports 4a and 4b have a certain requirement in the number of needed signal lines (i.e., pins), which is determined in accordance with the employed communication mode. The processing apparatus 2 can use logical values on specified signal lines (in other words, specified pins) at the connector ports 4a and 4b to decide communication modes. Namely the apparatus 2 can determine the communication modes according to the logical values on the signal lines (pins).

Thus, in order to identify the employed communication mode, it should be essential to know the numbers of pins required to transmit data and the logical values on each signal line (i.e., each specified pin). In the present embodiment, the pin configurations

of the plugs are designed to be able to transmit effectively to the apparatus 2 the logical values required to decide the communication mode employed by a peripheral device. In consequence, the apparatus 2 can quickly decide the employed communication mode.

Where the communication mode of a peripheral device is clocked parallel mode, the pin configuration of each plug 4ap (4bp) of the connectors are shown in Fig. 5B. In this mode, the apparatus 2 transmits to the controllers 3a and 3b a specified logical value ("1" or "0") as the peripheral selection signal TH and given clock signals as the data request signal TR. In response to this, signals of required logical values are then quickly provided through the data lines from the controllers 3a and 3b in synchronization with the clock signals. As shown in Fig. 5B, the pin 5 for the data request signal TR is short-circuited with the pin 6 for the peripheral acknowledgment signal TL in this clocked parallel communication mode, thereby the signals (voltages) on both the plug pins no. 5 and 6 being the same. Accordingly the signal TR transmitted from the apparatus 2 to pin no. 5 is sent back almost simultaneously from pin no. 6 to the apparatus 2 as the signal TL. Thus, the apparatus 2 identifies the clocked parallel mode by sensing signal TL equal to signal TR.

Further, in case of a peripheral device of the clocked serial communication mode, only one signal line (U) is required to transmit data. In addition, only the peripheral selection signal line (TH) and data request signal line (TR) transmitting clock signals

are required as control lines. And logical values needed to identify this communication mode may be set as $R=L="0"$, $D="1"$, and $U="1"$. These requirements may be realized by such pin configurations of the plugs 4ap and 4bp as shown in Fig. 5C in which plug-pins which are not used for transmitting data and control signals are connected to fixed potentials (V_{cc} and GND). For example, pin no. 2 is connected to the power source V_{cc} and pins nos. 6 to 8 are connected to the ground GND. This plug-pin configuration will make it possible to produce required logical values representing the clocked serial communication mode at the pins of the plugs 4ap and 4bp, thus such logical values being supplied to the apparatus 2.

The short-circuit between the pins in Figs. 5B and 5C may be achieved either by putting a short-circuit wire bridging connecting portions at which the plug pins are connected to the corresponding wires contained in the cable 5a (or 5b) in the plug or by providing a short-circuit pattern on a printed circuit board arranged in the plug 4ap (4bp). This reduces in number wires in the cable 5a (or 5b) connecting the plug 4ap (4bp) to the main circuit of a peripheral device.

The foregoing short-circuit can be achieved within the main circuit of a peripheral device either by putting a short-circuit wire bridging wires of the cable 5a (or 5b) or by forming a specified short-circuit printing pattern on a printed circuit board. Though this short-circuit design cannot reduce the cable 5a (or 5b) in number, the plug can be reduced in size.

Particularly in the case of pin configuration of the plug 4ap

(4bp) shown in Fig. 5C assigned to the clocked serial communication mode, the no. 2 pin is short-circuited and electrically connected to the no. 1 pin (signal Vcc; power source pin) and the pins nos. 6 to 8 are all short-circuited and electrically connected to the no. 9 pin (signal GND; ground pin). And accordingly wires in the cable connecting the plug 4ap (or 4bp) with the main circuit of a peripheral device can largely be decreased in number, because only the lines of the data signal U and the control signals TH and TL are required.

On one hand, when the pin configuration of Fig. 5C is effectively realized within a peripheral device, the lines of the cable, independent of signal transmission, are electrically connected to the power source and the ground potential, which leads to reduced noises which may fall onto the lines.

The functional and hardware schematic diagrams of controllers as representatives of peripheral devices employing the foregoing various communication modes will now be explained, respectively, with reference to Figs. 6A to 6D and 7A to 7D which use part of the same reference numerals as ones described above.

Fig. 6A shows a controller 3a employing the TH/TR-selection communication mode. The controller 3a comprises the plug connector 4ap, the cable 5a having nine wires connected to the nine plug pin nos. 1 to 9 of the plug connector 4ap, and a main circuit 3M to which the wires of the cable 5a are connected. The nine plug pin nos. 1 to 9 are electrically independent from each other and individually connected to the nine wires of the cable 5a. The main

circuit 3M has an operating portion 3Ma and a data generator 3Mb. The operating portion 3Ma, which is operated by a player, includes keys and/or switches. The data generator 3Mb is formed by circuits such as hardware logic circuits or a CPU system such that a specific group of 4-bit data R, L, D, U including data generated at the operating portion 3Ma are selected from other data groups and supplied through the plug pin nos. 2, 3, 7, 8 in response to bit patterns of both the peripheral selection signal TH and data request signal TR.

One detailed hardware schematic diagram of a controller 3a employing the TH/TR-selection communication mode is exemplified in Fig. 7A. As shown therein, the data generator 3Mb consists of a one chip type logic IC containing buffers and other logic gates such as AND and NAND gates for carrying out the foregoing operation. Various key switches arranged on the top cover of the controller 3a and pushed by a player are connected to the logic IC 3Mb. Among them are a start key "START", 4-way directional keys "UP(I)", "DOWN(I)", "LEFT(I)" and "RIGHT(I)", specialized right- and left-steering keys "T R" and "T L", and other keys "T A" to "T C" and "T X" to "T Z" assigned for special functions such as jumping and rotation in a monitor screen. The logic IC 3Mb selects key data of the above key switches every one group (three keys or four keys are combined as one group) in response to bit patterns of the 2-bit data selecting signals TH and TR (i.e., peripheral selection signal TH and data request signal TR).

Fig. 6B shows a controller 3a employing the three-wire

handshake communication mode. The controller 3a comprises the plug connector 4ap, the cable 5a having nine wires connected to the nine plug pin nos. 1 to 9 of the plug connector 4ap, and a main circuit 3M to which the wires of the cable 5a are connected. The nine plug pins 1 to 9 are electrically independent from each other and individually connected to the nine wires of the cable 5a. The main circuit 3M has an operating portion 3Ma and a CPU system 3Mb. The CPU system 3Mb has a CPU and functions as a data generator which is responsive to the operating portion 3Ma. A data generator formed by hardware logic circuits can be adopted as a substitute for the CPU system. The CPU system 3Mb communicates with the game apparatus 2 using the three signals TH, TR, and TL sequentially inputted or outputted through the plug connector 4ap and then supplies 4-bit parallel data R, L, D, U including data generated at the operating portion 3Ma to the game apparatus 2 through the plug connector 4ap. When output signals from an operating portion 3Ma are analog quantities, the operating portion 3Ma includes signal processing circuits such as an A/D convertor.

For example, one controller 3a employing the three-wire handshake communication mode is shown in detail in Fig. 7B, which has a CPU system 3Mb and executing the foregoing signal processing. The CPU system 3Mb includes IC J1 (part No. 74HC157) which functions as a selector for selecting ID data. The selector includes four of 2-inputs/1-output type selecting circuit connecting to another IC J2 which is a 4-bit microcomputer (CPU). Various key switches operated in a video game, for instance, which

composes the operating portion 3Ma, are connected to IC J2. Thus in response to the peripheral selection signal TH and data request signal TR, the microcomputer not only reply by sending out the peripheral acknowledgement signal TL but also reads the states of the key switches, and outputs them as 4-bit data R, L, D, U by way of IC J1.

Fig. 6C shows a controller 3a employing the clocked parallel communication mode. The controller 3a also comprises the plug connector 4ap of nine pin nos. 1 to 9, the cable 5a, and a main circuit 3M. Among the nine plug pin nos. 1 to 9, the pins of nos. 5 and 6 are short-circuited at their pin portions to each other and the remaining pins are still electrically independent. The plug pins of Nos. 1 to 5 and 7 to 9 are coupled with the respective wires of the cable 5a. The main circuit 3M has an operating portion 3Ma and a data generator 3Mb which can be constructed using gate array circuits, for example. The data generator 3Mb, through the plug connector 4ap, sequentially receives the peripheral selection signal TH and data request signal TR (potentially equal to the peripheral acknowledgement signal TL due to the short circuit) and, almost simultaneously with the reception of the signal TR, supplies to the game apparatus 2 4-bit parallel data including data generated at the operating portion 3Ma. The plug pin configuration of this mode reduces the number of wires of the cable 5a by one, as shown in Fig. 6C. The clocked parallel communication mode permits the game apparatus 2 to communicate with the controller 3a in the same manner as the three-wire handshake mode.

Fig. 7C exemplifies the detailed internal block diagram of a controller 3a employing the clocked parallel communication mode. A data generator 3Mb, which consists of gate arrays, plays a key role for the foregoing operation in the controller 3a. The data generator 3Mb includes ICs J3, J4 (part No. 74HC74) and IC J5 (74HC14) which play together a key role for generating a 3-bit data selecting signal supplied to each of four parallel-arranged ICs J6 to J9. ICs J6 to J9 (part No. 74HC151) are selectors of 8-inputs/1-output type and each arranged to receive key data from each of four-divided key groups in the key switches of the operating portion 3Ma. Each of ICs J6 to J9 selects one data (including ID data or key data) responsibility to bit patterns of the supplied 3-bit data selecting signal (i.e., address signal). Thus, 4-bit parallel data R, L, D, U are outputted from ICs J6 to J9.

Fig. 6D shows a controller 3a employing the clocked serial communication mode. The controller 3a also comprises the plug connector 4ap of nine pins of nos. 1 to 9, the cable 5a, and a main circuit 3M. Among the nine plug pins of nos. 1 to 9, the pins of nos. 1 and 2 are short-circuited and the pins of nos. 6 to 9 are short-circuited, respectively, at their pin portions to each other and the remaining pins are still electrically independent. The plug pins of nos. 1, 3 to 5, and 9 are coupled with the respective wires of the cable 5a. The main circuit 3M has an operating portion 3Ma and a data generator 3Mb which can be constructed using gate array circuits, for example. The data generator 3Mb, through the plug connector 4ap, sequentially receives the peripheral selection signal

TH and data request signal TR, and in response to clock pulse inversion, supplies to the game apparatus 2 serial data including data generated at the operating portion 3Ma. The plug pin configuration of this mode remarkably reduces the number of wires of the cable 5a by four, as shown in Fig. 6D.

Fig. 7D shows one detailed example of a controller 3a employing the clocked serial communication mode. The controller 3a has a data generator 3Mb consisting of gate arrays, where included are ICs J10 to J12 (part No. 74LS166), which are cascade-connected, are shift registers. IC J10 placed at the first stage are used for sending ID data in sequence. ICs J11 and J12 placed at the second and third stages are connected to the key switches of the operating portion 3Ma and used for sending serial key data U. Thus in response to the peripheral selection signal TH and data request signal TR, ICs J11 to J12 sends out ID data and key data in sequence. This controller 3a has facilities for a cascade connection of controllers. In other words, there is provided a circuit J13 for recognizing whether serial data from another cascade-connected controller are inputted through a socket connector 4as'.

In Figs. 6C and 6D, and 7C and 7D, such short-circuit configuration can be achieved in the side of the main circuit 3M.

In the present embodiment, when the plug 4ap (or 4bp) connected to the controller 3a (or 3b) is inserted into the socket 4as (or 4bs) arranged in the apparatus 2, the foregoing plug pin configurations permit the sub CPU 25 to communicate to process in

the order of "peripheral ID-1", "peripheral ID-2", "data size", and "data", even though the controller 3a (or 3b) as the peripheral device adopts different communication modes or different device types. Also the foregoing plug pin configuration provides the communication of "peripheral IDs" and "data" in a proper state, although types and/or communication modes of peripheral devices are different.

The operation of the apparatus 2 functionally including the system for identifying communication modes of peripheral devices will now be explained with reference to Figs. 3 to 15 and Table 2 to 6.

As shown in Fig. 8, after being activated, the sub CPU 25 first outputs the control signals TH="1" and TR="1" (refer to Step S101 in Fig. 7). The CPU core 31 of the sub CPU 25 reads logical values of the data signals R, L, D and U produced on pins 7, 8, 2 and 3 by each of the peripheral devices and stores the read logical values into a predetermined memory area of the RAM 33 (Step S102). The CPU core 31 again outputs the control signals TH="0" and TR="1" (Step S103). In response to this, the CPU core 31 again reads logical values of the data signal R, L, D and U produced by the peripheral devices and stores them into a predetermined memory area of the RAM 33 (Step S104: see the intervals T₁₀ in Fig. 12 and T₂₀ in Fig. 13).

The CPU core 31 then calculates the "peripheral ID-1" (Step S105). The "peripheral ID-1" can be calculated using the following formula.

$$\begin{aligned} [\text{ID-1}] = & \{(\text{data R in TH="1"}) \text{ or } (\text{data L in TH="1"})\} \times 8h \\ & + \{(\text{data D in TH="1"}) \text{ or } (\text{data U in TH="1"})\} \times 4h \\ & + \{(\text{data R in TH="0"}) \text{ or } (\text{data L in TH="0"})\} \times 2h \\ & + \{(\text{data D in TH="0"}) \text{ or } (\text{data U in TH="0"})\} \times 1h \end{aligned}$$

, where h represents suffix for hexadecimal number. Using the calculated results of [ID-1], the CPU core 31 identifies the types of peripheral devices (Steps S106 to S110). The following table 2 shows a relation between the types of peripheral devices and the calculated results of [ID-1].

Table 2

Peripheral Device	ID-1
	F
	E
3/6 Button	D
	C
Control PAD	B
	A
	9
	8
Adaptor	7
	6
Controller (Peripheral #1)	5
	4
Mouse	3
	2
	1
Modem	0

In detail, the CPU core 31 first determines whether or not the calculated result [ID-1] is Bh, for instance. When it is determined that the calculated result [ID-1] be Bh (YES at Step S106), it is decided that the peripheral device be a control PAD packed together with the game system. The relation between peripheral devices and

values of ID-1 is shown in Table 2. Thus the CPU core 31 performs the processing of a control PAD access subroutine (Step S111).

When the calculated result [ID-1] is not Bh (NO at Step S106), the CPU core 31 then determines whether or not the calculated result [ID-1] is 5h, for example (Step S107).

When it is determined that the calculated result [ID-1] be 5h (YES at Step S107, also refer to Table 2), a controller access subroutine is processed (Step S112), which is shown in detail in Fig. 9.

When the calculated result [ID-1] is not 5h (NO at Step S107), the sub CPU 25 proceeds to the determination whether the calculated result [ID-1] is 7h, for example (Step S108). When the determination is YES at Step S108 (i.e., the calculated result [ID-1] = 7h), the sub CPU 25 then performs an adaptor access subroutine (Step S113).

When it is determined that the calculated result [ID-1] be not 7h (NO at Step S108), the sub CPU 25 continues to determine if the above calculated result [ID-1] is 3h or not, for example (Step S109). Where the calculated result [ID-1] is determined to be 3h (YES at Step S109, Table 2), a mouse access subroutine is processed (Step S114).

When the above result [ID-1] is not 3h (NO at Step S109), it is then determined whether or not the calculated result [ID-1] be Dh (Step S110). Where this determination shows that the calculated result [ID-1] is Dh (YES at Step S110, Table 2), a 3/6 button access subroutine is then performed (Step S115). When the determination

is NO at Step 110, the processing is continued to Step S116, where a decision that the peripheral device is not connected is made for the calculated result [ID-1] = Fh and a decision to be unknown is made for values of the [ID-1] other than the above exemplified results (refer to Table 2).

As a representative, the control PAD access subroutine will be described. In this subroutine, an access to the control PAD is carried out under the TH/TR-selection communication mode automatically designated. This communication mode uses 2-bit data consisting of combined two signals of the peripheral selection signal TH and data request signal TL to select a group of data generated in the control PAD. The selected group of data is supplied from the control PAD to the game apparatus. In the present embodiment, the TH/TR-selection communication mode is preferably employed in the control PAD and the 2-bit data can select four patterns for, for example, four-bit data R, L, D and U. The table 3 shows a truth values of this mode, in which the references "RIGHT", "LEFT", "DOWN", "UP", "START", and "TRG-A, B, C, X, Y, Z, L, R" are names of the key portions and switch portions. Data of the peripheral acknowledgment signal TL are ignored in the TH/TR-selection communication mode.

Table 3

DATA	TH	TR	TL	R	L	D	U
	bit6 INPUT	bit5 INPUT	bit4 OUT- PUT	bit3 OUT- PUT	bit2 OUT- PUT	bit1 OUT- PUT	bit0 OUT- PUT
1st	1	1	1	TRG- L	1	0	0
2nd	0	1	1	RIGHT	LEFT	DOWN	UP
3rd	1	0	1	STA- RT	TRG- A	TRG- C	TRG- B
4th	0	0	1	TRG- R	TRG- X	TRG- Y	TRG- Z

As another representative, the foregoing controller access subroutine shown in Fig. 9 will now be described also with reference to Table 4 which represents the bit patterns of data R, L, D and U corresponding to typical communication modes used by controllers as peripheral devices.

Table 4

Communication mode	TH=1 TR=1				TH=0 TR=1			
	R	L	D	U	R	L	D	U
Three-wire handshake	0	0	0	1	0	0	0	1
Clocked serial	0	0	1	0	0	0	1	0
Clocked parallel	0	0	1	1	0	0	1	1

In this access subroutine, the CPU core 31 of the sub CPU 25 first determines communication modes by a series of Steps S201 to S203 on the basis of the logical values of the data D and U acquired before. When both the data D is "0" and U is "1" (YES at Step S201), the peripheral device is identified as in the three-wire handshake mode (refer to Table 4), and the processing by the sub CPU 25 proceeds to a three-wire handshake-type access subroutine (Step S204).

When the data D and U are not "0" and "1", respectively (NO at Step S201), the CPU core 31 then determines whether both of the data D and U are "1" and "0", respectively, for example (Step S202). When the determination is YES at Step S202 (i.e., D="1" and U="0", refer to Table 3), the CPU core 31 continues to an access subroutine of the clocked serial communication mode (Step S205).

Furthermore, where the determination is NO at Step S202 (i.e., data D is not "1" and data U is not "0"), the CPU core 31 determines whether or not the data D is "1" and data U is "1" (Step S203). When

being determined that D="1" and U="1" (YES at Step S203, refer to Table 4), the CPU core 31 performs an access subroutine of the clocked parallel communication mode (Step S206).

When the CPU core cannot find the positive answers at any of the above determination processes at Steps S201 to S203 (NO at Steps S201 to S203), it is then determined that any peripheral device be not connected to the apparatus 2 (Step S207), and this subroutine is ended up.

Each access subroutine shown at the above Steps S204 to S206 will now be explained in detail.

First, the access subroutine of the three-wire handshake communication mode, which is shown in Fig. 10, will be explained using the timing chart of each signal shown in Fig. 13 in which the reference t shows time.

During the interval T_{11} in Fig. 13, the CPU core 31 reads the "peripheral ID-2" (Step S301 in Fig. 10). In other words, the data ID-2₃, ID-2₂, ID-2₁ and ID-2₀ of R, L, D and U are taken in by the CPU core 31 during the interval T_{11} and it is determined whether each of those data ID-2₃ to ID-2₀ corresponds to any of "0h" to "Fh" (refer to IDs shown in Table 5).

Table 5

Peripheral Device	ID-2	Remarks
Digital device	0	Control PAD, joystick etc.
Analog device	1	Analog joystick etc.
Pointing device	2	Mouse, tablet etc.
Keyboard	3	Keyboard etc.
Multitap	4	Multitap etc.
	5	
	6	
	7	
	8	
	9	
	A	
	B	
	C	
	D	
Peripheral #2	E	ID for conversion
	F	for non-connection

In addition to the reading, the CPU core 31 looks up Table 5 for each value of the read peripheral ID-2. For example, the CPU core 31 determines that the peripheral device be a digital device for "peripheral ID-2" = 0h, an analog device for "peripheral ID-2" = 1h, a

pointing device for "peripheral ID-2" = 2h, a key board for "peripheral ID-2" = 3h, and so on.

After such determination, the CPU core 31 reads the data size during the next interval T_{12} (Step S302). Namely, as shown in Fig. 13, data DSIZE0 to DSIZE3 of R, L, D and U are taken in for deciding the data size.

The CPU core 31 then reads the data during the following intervals starting from interval T_{13} in Fig. 12 (Step S303). It is then determined whether the amount of the read data reaches the data size (Step S304). If the determination is NO, the processing returns to Step S303 to read the data again. However, the determination is YES at Step S304 (i.e., the data amount that has been read by then reaches the determined data size), this subroutine is ended up.

Further, the access subroutine of the clocked parallel communication mode recited in Fig. 9 will now be explained using Figs. 11 and 14.

Fig. 14 shows the timing chart of the clocked parallel communication mode, which is almost the same as that shown in Fig. 13. Only one difference is that both of the signals TR and TL always change at the same timing, because of the short-circuit of pin nos. 5 and 6 in the plug connector 4ap (4bp).

First, the CPU core 31 reads the "peripheral ID-2" during the interval T_{21} in Fig. 14 (Step S401 in Fig. 11).

In detail, the data ID-2₃, ID-2₂, ID-2₁ and ID-2₀ of R, L, D and U are taken in by the CPU core 31 during the interval T_{21} and it is

determined whether each of the data ID-2₃ to ID-2₀ corresponds to any of "0h" to "Fh" (refer to IDs shown in Table 5). The CPU core 31 looks up Table 5 for each value of the read peripheral ID-2. For example, the CPU core 31 determines that the peripheral device be a digital device for "peripheral ID-2" = 0h, an analog device for "peripheral ID-2" = 1h, a pointing device for "peripheral ID-2" = 2h, a key board for "peripheral ID-2" = 3h, and so on.

After this, during the next interval T₂₂, the CPU core 31 reads the data size by receiving data DSIZE0 to DSIZE3 of R, L, D, U as shown in Fig. 14 (Step S402 in Fig. 11).

The CPU core 31 then reads the data during the following intervals starting from interval T₂₃ in Fig. 14 (Step S403). It is then determined whether the amount of the read data reaches the data size (Step S404). If the determination is NO, the processing returns to Step S403 to read the data again. However, the determination is YES at Step S404 (i.e., the data amount that has been read by then reaches the determined data size), this subroutine is ended up.

Further, the access subroutine of the clocked serial communication mode will be explained according to Figs. 12 and 15 and Table 6. Fig. 15 exemplifies signal changes for the clocked serial mode, where the logical values of only the signals TH, TR and U are expressed along the elapsed time t.

This communication mode enables to obtain the data U only supplied from a peripheral device when the peripheral selection signal TH is "0" and at the same time, the data request signal TR is

repeatedly "1" and "0", both the signals TH and TR being given to the peripheral device from the CPU core 31. The obtained data are exemplified in Table 6.

Table 6

TH	TR	TL	R	L	D	U	Remarks
(input)	(input)	(GND)	(GND)	(GND)	(Vcc)	(DATA)	
1	1	0	0	0	1	0	ID-1 (1st)
0	1	0	0	0	1	0	ID-2 (2nd)
0	↓ ↑	0	0	0	1	SMD ₃	
0	↓ ↑	0	0	0	1	SMD ₂	
0	↓ ↑	0	0	0	1	SMD ₁	
0	↓ ↑	0	0	0	1	SMD ₀	
0	↓ ↑	0	0	0	1	ID-2 ₃	
0	↓ ↑	0	0	0	1	ID-2 ₂	
0	↓ ↑	0	0	0	1	ID-2 ₁	
0	↓ ↑	0	0	0	1	ID-2 ₀	
0	↓ ↑	0	0	0	1	DSIZE ₃	
0	↓ ↑	0	0	0	1	DSIZE ₂	
0	↓ ↑	0	0	0	1	DSIZE ₁	
0	↓ ↑	0	0	0	1	DSIZE ₀	
0	↓ ↑	0	0	0	1	DATA ₇	
:	:	:	:	:	:	:	
:	:	:	:	:	:	:	
0	↓ ↑	0	0	0	1	DATA ₀	

0	↓	↑	0	0	0	1	CCB
0	↓	↑	0	0	0	1	1
0	↓	↑	0	0	0	1	1
0	↓	↑	0	0	0	1	0
1	1	0	0	0	0	1	0
							End M5ID-1st

As shown in Table 6, only when the peripheral selection signal TH is "0", the data request signal TR is repeated at cycles of "1" and "0" (expressed by upward and downward arrows in Table 6), the signal TL and data R and L are all "0", and the data D is "1", various data U including SMD₃ to SMD₀, ID-2₃ to ID-2₀, DSIZE₃ to DSIZE₀, and DATA₇ to DATA₀ are provided in sequence from the line U through the pin 3. Those data are read by the CPU core 31. Among them, the bit pattern of the data ID-2₃ to ID-2₀ are referred to the table 5 to decide the type of a connected peripheral device (Step S501 in Fig. 12).

The CPU core 31 reads the data size expressed by DSIZE₀ to DSIZE₃ (Step S502), so that the data size can be determined.

The data are then received by the CPU core 31 during predetermined intervals in a time sequence shown in Fig. 15 (Step S503). The amount of the read data are referred to the determined data size to determine whether the amount reaches the data size (Step S504). If the determination is NO, the processing returns to Step S503 to repeat the foregoing data read. The determination of YES at Step S504 allows to end up this subroutine.

As having been explained, the CPU core 31 exchanges signals with peripheral devices such that data "DATA" are inputted after information of "peripheral ID-1", "peripheral ID-2" and data size "DSIZE".

When the data are inputted into the CPU core 31, the CPU core 31 is to exchange data with the main CPU 21 through the register table 34.

In the above embodiment, although the sub CPU 25 controls the peripheral devices, the main CPU 21 can also perform the above-described processing instead of the sub CPU 25, if the main CPU 21 is directly connected to the peripheral devices.

Further, another identifying method of a communication mode can be used in the present invention. As is described above, the control signals TR and TL are equal in logical values ($TR = TL$) in the clocked parallel communication mode and the logical values on only specified pins (D, TL, R, L) are changed in specific manners. In case of the three-wire handshake mode, the control signals TR and TL are changed differently. This enables to calculate identification data of peripheral devices based on the pin configurations of the connectors and decide communication modes using the identification data.

Although the present invention has been described with reference to particular embodiments, the description is only an example of the invention's application and should not be taken as a limitation. In particular, the connector, the communication mode identifying system, and the peripheral device controlling system of

the present invention is not limited to use with the game apparatus and can also be applied to any other system which use a processing unit and at least one peripheral device thereof.

claims

THIS SHEET HAS BEEN REPLACED

1. A peripheral device for use with a data processing apparatus, said apparatus having a peripheral port with a set of terminal pins consisting of first to ninth pins and being disposed in a row in the order of the first to the ninth pins, said first pin being assigned for connecting to one of a power source and the ground potential, said ninth pin being assigned for connecting to the other of the power source and the ground potential, said second, third, seventh and eighth pins being assigned for transmitting data signals, said fourth to sixth pins being assigned for transmitting control signals, said apparatus having means for selecting the communication mode for communicating with the peripheral device connected to the peripheral port based on the data signals transmitted from said second, third, seventh and eighth pins, said peripheral device comprising:

a plug connector which is to be detachably connected to said peripheral port, said plug connector having a set of terminal pins consisting of first to ninth pins and being disposed in row in the order of the first to the ninth pins correspondingly to said first to ninth pins of the peripheral port;

a cable including a plurality of wires connecting the terminal pins of said plug connector with terminals on a printed circuit board of said peripheral device; and

means for transmitting data signals including identification data representing the communication mode of said peripheral

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

device via at least one of said second, third, seventh and eighth pins in synchronization with a clock signal supplied from said apparatus when said plug connector is connected to said peripheral port.

2. The peripheral device of claim 1, wherein said fourth pins are assigned for transmitting a signal for activating the peripheral device, said fifth pins are assigned for transmitting the clock signal, wherein said peripheral device further comprises means for transmitting an acknowledgement signal to the apparatus via said sixth pins, and means for transmitting data signals to the apparatus via said second, third, seventh and eighth pins in synchronization with the clock signal.

3. The peripheral device of claim 1, wherein said fourth pins are assigned for transmitting a signal for activating the peripheral device, said fifth pins are assigned for transmitting the clock signal, wherein said peripheral device further comprises means for short-circuiting said sixth pin with said fifth pin, and means for transmitting parallel data signals to the apparatus via said third second, third, seventh and eighth pins in synchronization with the clock signal.

4. The peripheral device of claim 1, wherein said fourth pins are assigned for transmitting a signal for activating the peripheral device, said fifth pins are assigned for transmitting the clock

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

signal, wherein said peripheral device further comprises means for short-circuiting said second pin with said first pin, means for short-circuiting said sixth to eighth pins with said ninth pin, means for transmitting serial data signals to the apparatus via said third pin in synchronization with the clock signal.

5. A peripheral device for use with a data processing apparatus having a peripheral port to which a plug connector of said peripheral device is detachably connected, said peripheral device comprising:

a plug connector which is to be detachably connected to said peripheral port, said plug connector having a set of terminal pins including first to ninth pins and being disposed in a row in the order of the first to the ninth pins, said first pin being assigned for connecting to one of a power source and the ground potential, said ninth pin being assigned for connecting to the other of the power source and the ground potential, said second, third, seventh and eighth pins being assigned for transmitting data signals, said fourth to sixth pins being assigned for transmitting control signals;

a cable including a plurality of wires connecting the terminal pins of said plug connector with terminals on a printed circuit board of said peripheral device; and

means for transmitting data signals including identification data representing the communication mode of said peripheral device to the apparatus via at least one of said second, third,

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

seventh and eighth pins in synchronization with a clock signal supplied from said apparatus when said plug connector is connected to said peripheral port.

6. A peripheral device for use with a data processing apparatus having a socket connector with a set of socket pins to which a plug connector of the peripheral device is detachably connected, said peripheral device comprising:

a plug connector which is to be detachably connected to the socket connector, said plug connector having a set of plug pins disposed in a row and correspondingly to the socket pins, said plug pins including a pair of first pins assigned for connecting to fixed potentials, at least one second pin assigned for transmitting data signals, and third pins assigned for transmitting control signals;

mean for configuring said set of plug pins so that the configuring arrangement is indicative of the communication mode of the peripheral device;

a cable including a plurality of wires connecting the plug pins with terminals on a printed circuit board of said peripheral device; and

means for transmitting data signals including identification data representing the communication mode of said peripheral device via said at least one second pin in synchronization with a clock signal supplied via one of said third pins from said apparatus when said plug connector is connected to said peripheral port.

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

7. The peripheral device of claim 6, wherein said configuring means includes means for short-circuiting specified pins.

8. A peripheral device for use with a data processing apparatus having a socket connector with nine of socket pins to which a plug connector of the peripheral device is detachably connected, said peripheral device comprising:

a plug connector which is to be detachably connected to said socket connector, said plug connector having nine of plug pins disposed correspondingly to the socket pins, said plug pins including a pair of first pins assigned for connecting to fixed potentials, four of second pins assigned for transmitting data signals, and three of third pins assigned for transmitting control signals;

a cable including a plurality of wires connecting the terminal pins of said plug connector with terminals on a printed circuit board of said peripheral device;

means for short-circuiting two of said third pins with one another; and

means for transmitting parallel data signals including identification data representing the communication mode of said peripheral device via said second pins in synchronization with a clock signal supplied via one of said third pins from said apparatus when said plug connector is connected to said peripheral port.

9. The peripheral device of claim 8, wherein said short-circuiting

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

means is formed on said plug connector.

10. The peripheral device of claim 9, wherein the wires of said cable are less in number than said socket pins.

11. A peripheral device for use with a data processing apparatus having a socket connector with nine of socket pins to which a plug connector of the peripheral device is detachably connected, said peripheral device comprising:

a plug connector which is to be detachably connected to said socket connector, said plug connector having nine of plug pins disposed correspondingly to the socket pins, said plug pins including a pair of first pins assigned for connecting to fixed potentials, a second pin assigned for transmitting data signals, and two of third pins assigned for transmitting control signals;

a cable including a plurality of wires connecting the terminal pins of said plug connector with terminals on a printed circuit board of said peripheral device;

means for short-circuiting the remaining pins other than said first to third pins to at least one of said first pins; and

means for transmitting serial data signals including identification data representing the communication mode of said peripheral device via said second pin in synchronization with a clock signal supplied via one of said third pins from said apparatus when said plug connector is connected to said peripheral port.

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

12. The peripheral device of claim 11, wherein said short-circuiting means are formed in said plug connector.

13. The peripheral device of claim 11, wherein the wires in said cable are less in number than said socket pins.

14. In combination of a data processing apparatus and a peripheral device, comprising:

said apparatus having a peripheral port with a plurality of terminal pins disposed in a row, said terminal pins including a pair of first pins, one assigned for connecting to one of a power source and the ground potential and the other assigned for connecting to the other of the power source and the ground potential, at least one of second pins assigned for transmitting data signals, a plurality of third pins assigned for transmitting control signals, said apparatus further having means for selecting the communication mode for communicating with the peripheral device connected to the peripheral port based on the data signals transmitted from said at least one second pin, means for transmitting a clock signal via one of said third pins to said peripheral device and means for performing a communication with the connected peripheral device with the selected communication mode;

said peripheral device having a plug connector which is to be detachably connected to said peripheral port, said plug connector having a plurality of terminal pins configured as the same in number as and disposed in a row correspondingly to the terminal

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

pins of said peripheral port, said peripheral device further having a cable including a plurality of wires connecting the terminal pins of said plug connector with terminal on a printed circuit board of said peripheral device and means for transmitting data signals including identification data representing the communication mode of said peripheral device via said at least one of second pin to said apparatus in synchronization with said clock signal when said plug connector is connected to said peripheral port.

15. The invention of claim 14, wherein said peripheral port comprises four of the second pins and three of the third pins, said second and third pins being disposed in positions of the row between said pair of first pins.

16. The invention of claim 15, wherein said plug connector comprises a pair of first pins, four of the second pins and three of the third pins, each being disposed correspondingly to those in said peripheral port.

17. The invention of claim 16, wherein said apparatus further comprising means for transmitting a signal for activating said peripheral device via one of said third pins in the peripheral port different from the one for transmitting the clock signal, said peripheral device further comprises means for transmitting an acknowledging signal to the apparatus via the remaining one of said third pins in said peripheral port, and the data signals are

This Sheet Has Been Replaced



transmitted via said four of the second pins.

THIS SHEET HAS BEEN
REPLACED

18. The invention of claim 16, wherein said apparatus further comprising means for transmitting a signal for activating said peripheral device via one of said third pins in the peripheral port different from the one for transmitting the clock signal, said peripheral device further comprises means for short-circuiting two of the third pins other than one through which the activating signal is transmitted, and means for transmitting parallel data signals via said four of the second pins.

19. The invention of claim 16, wherein said apparatus further comprising means for transmitting a signal for activating said peripheral device via one of said third pins in the peripheral port different from the one for transmitting the clock signal, said peripheral device further comprises means for transmitting serial data signals via one of the second pins to said apparatus, and means for short-circuiting the remaining one of the third pins and the remaining three of the second pins with the said first pins.

20. In combination of a data processing apparatus and a peripheral device, comprising:

said apparatus having a socket connector with a set of socket pins consisting of first to ninth pins disposed in a row in the order of the first to the ninth pins, said first pin being assigned for connecting to one of a power source and the ground potential, said

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

ninth pin being assigned for connecting to the other of the power source and the ground potential, said second, third, seventh and eighth pins being assigned for transmitting data signals, said fourth to sixth pins assigned for transmitting control signals,

said apparatus further comprising first means for supplying to said fourth pin a signal for activating said peripheral device, second means for reading data signals produced at said second, third, seventh and eighth pins, third means for selecting the communication mode for communicating with the peripheral device connected to the peripheral port based on the data signals read by said second means, fourth means for transmitting a clock signal to said fifth pin, and fifth means for performing a communication with the connected peripheral device with the selected communication mode;

said peripheral device having a plug connector which is to be detachably connected to said socket connector, said plug connector having a set of plug pins consisting of first to ninth pins configured as the same in number as, and disposed in a row in the order of the first to the ninth pins correspondingly with said socket pins,

said peripheral device further comprising a cable including a plurality of wires connecting the plug pins with terminals on a printed circuit board of said peripheral device and sixth means for transmitting data signals including identification data representing the communication mode of said peripheral device via at least one of said second, third, seventh and eighth plug pins to said apparatus in synchronization with said clock signal when said

This Sheet Has Been Replaced



THIS SHEET HAS BEEN REPLACED

plug connector is connected to said socket connector.

21. The invention of claim 20, wherein said peripheral device further comprises seventh means for transmitting an acknowledge signal to the apparatus via the sixth plug pin, and the data signals are transmitted via said second, third, seventh and eighth plug pins.

22. The invention of claim 20, wherein said peripheral device further comprises seventh means for short-circuiting the sixth plug pin with fifth plug pin, and eighth means for transmitting parallel data signals via said second, third, seventh and eighth plug pins.

23. The invention of claim 20, wherein said peripheral device further comprises seventh means for transmitting serial data signals via the third plug pin, eighth means for short-circuiting the second plug pin with the first plug pin, and ninth means for short-circuiting the sixth to eighth plug pins with the ninth plug pin.

24. A peripheral device for use with an information processing apparatus, said apparatus having a peripheral port with a set of terminal pins consisting of first to ninth pins and being disposed in a row in the order of the first to the ninth pins, said first pin being assigned for connecting to one of a power source and the ground potential, said ninth pin being assigned for connecting to the other of the power source and the ground potential, said second, third,

This Sheet Has Been Replaced



seventh and eighth pins being assigned for transmitting data signals, said fourth to sixth pins being assigned for transmitting control signals, said apparatus having means for selecting the communication mode for communicating with the peripheral device connected to the peripheral port based on the data signals transmitted from said second, third, seventh and eighth pins, said peripheral device comprising:

a plug connector which is to be detachably connected to said peripheral port, said plug connector having a set of terminal pins consisting of first to ninth pins and being disposed in row in the order of the first to the ninth pins correspondingly to said first to ninth pins of the peripheral port; and

means for transmitting data signals including identification data representing the communication mode of said peripheral device via at least one of said second, third, seventh and eighth pins in synchronization with a clock signal supplied from said apparatus when said plug connector is connected to said peripheral port.

25. A peripheral device for use with an information processing apparatus having a socket connector with a set of socket pins to which a plug connector of the peripheral device is detachably connected, said peripheral device comprising:

a plug connector which is to be detachably connected to the socket connector, said plug connector having a set of plug pins disposed in a row and correspondingly to the socket pins, said plug



THIS SHEET HAS BEEN
REPLACED

pins including a pair of first pins assigned for connecting to fixed potentials, at least one second pin assigned for transmitting data signals, and third pins assigned for transmitting control signals, said set of plug pins being configured so that the configuring arrangement is representative of the communication mode of the peripheral device; and

means for transmitting data signals including identification data representing the communication mode of said peripheral device via said at least one second pin in synchronization with a clock signal supplied via one of said third pins from said apparatus when said plug connector is connected to said peripheral port.

26. A peripheral device for a game apparatus having a socket connector with a set of nine (9) socket pins to which a plug connector of the peripheral device is detachably connected, said peripheral device comprising:

a plug connector which is detachably connected to the socket connector, said plug connector having a set of nine (9) plug pins disposed in a row from the first to ninth pins and correspondingly to said socket pins, the first pin being assigned to a power source potential, the ninth pin being assigned to the ground potential, the sixth pin being assigned for transmitting control signals from the peripheral device to the game apparatus, and

means for transmitting to the game apparatus data signals representing a three-wire handshake type communication mode, including means, when a control signal of "1" to the fourth pin and

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

"1" to the fifth pin and a control signal of "0" to the fourth pin and "1" to the fifth pin are supplied from the game apparatus, for supplying a data signal of "0" to the seventh pin, "0" to the eighth pin, "0" to the second pin and "1" to the third pin, respectively, wherein "1" stands for the power source potential and "0" stands for the ground potential, whereby the game apparatus determines that the peripheral device connected to the socket connector is of the three-wire handshake type communication mode.

27. A peripheral device for a game apparatus having a socket connector with a set of nine (9) socket pins to which a plug connector of the peripheral device is detachably connected, said peripheral device comprising:

a plug connector which is detachably connected to the socket connector, said plug connector having a set of nine (9) plug pins disposed in a row from the first to ninth pins and correspondingly to said socket pins, the first pin being assigned to a power source potential, the second pin being assigned to the ground potential, the sixth pin being assigned for transmitting control signals from the peripheral device to the game apparatus, and

means for transmitting to the game apparatus data signals representing a clocked parallel type communication mode, including means for connecting the fifth pin with the sixth pin and means, when a control signal of "1" to the fourth pin and "1" to the fifth pin and a control signal of "0" to the fourth pin and "1" to the fifth pin are supplied from the game apparatus, for supplying a data signal of

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

"0" to the seventh pin, "0" to the eighth pin, "1" to the second pin and "1" to the third pin, respectively, wherein "1" stands for the power source potential and "0" stands for the ground potential, whereby the game apparatus determines that the peripheral device connected to the socket connector is of the clocked parallel type communication mode.

28. A peripheral device for a game apparatus having a socket connector with a set of nine (9) socket pins to which a plug connector of the peripheral device is detachably connected, said peripheral device comprising:

a plug connector which is detachably connected to the socket connector, said plug connector having a set of nine (9) plug pins disposed in a row from the first to ninth pins and correspondingly to said socket pins, the first pin being assigned to a power source potential, the ninth pin being assigned to the ground potential, and

means for transmitting to the game apparatus data signals representing a clocked serial type communication mode, including means for connecting the second pin with the first pin, means for connecting the sixth, the seventh and the eighth pins with ninth pin, and means, when a control signal of "1" to the fourth pin and "1" to the fifth pin and a control signal of "0" to the fourth pin and "1" to the fifth pin are supplied from the game apparatus, for supplying a data signal of "0" to the seventh pin, "0" to the eighth pin, "1" to the second pin and "0" to the third pin, respectively, wherein "1" stands for the power source potential and "0" stands for the ground

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

potential, whereby the game apparatus determines that the peripheral device connected to the socket connector is of the clocked serial type communication mode.

29. A peripheral device for a game apparatus having a connector port to which a plug connector of the peripheral device is detachably connected, comprising:

a plug connector which is detachably connected to the socket port, said plug connector having a set of nine (9) plug pins disposed in a row from the first to ninth pins, the first pin being supplied with a power source, the ninth pin being supply with the ground potential, and

means for transmitting to the game apparatus data signals indicative of a three-wire handshake type communication mode, including means for supplying a data signal of "0" to the second pin and "1" to the third pin in response to a control signal from the game apparatus wherein "1" sands for the power source potential and "0" stands for the ground potential, whereby the game apparatus determines that the peripheral device connected to the connector port is of the three-wire handshake type communication mode.

30. A peripheral device for a game apparatus having a connector port to which a plug connector of the peripheral device is detachably connected, comprising:

a plug connector which is detachably connected to the socket

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

port, said plug connector having a set of nine (9) plug pins disposed in a row from the first to ninth pins, the first pin being supplied with a power source, the ninth pin being supplied with the ground potential, and

means for transmitting to the game apparatus data signals indicative of a clocked parallel type communication mode, including means for connecting the fifth pin with the sixth pin and means for supplying a data signal of "1" to the second pin and "1" to the third pin in response to a control signal from the game apparatus wherein "1" stands for the power source potential and "0" stands for the ground potential, whereby the game apparatus determines that the peripheral device connected to the connector port is of the clocked parallel type communication mode.

31. A peripheral device for a game apparatus having a connector port to which a plug connector of the peripheral device is detachably connected, comprising:

a plug connector which is detachably connected to the socket port, said plug connector having a set of nine (9) plug pins disposed in a row from the first to ninth pins, the first pin being supplied with a power source, the ninth pin being supplied with the ground potential, and

means for transmitting to the game apparatus data signals indicative of a clocked serial type communication mode, including means for connecting the second pin with the first pin, means for connecting the sixth, the seventh and the eighth pins with the ninth

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

pin, and means for supplying a data signal of "1" to the second pin and "0" to the third pin in response to a control signal from the game apparatus, wherein "1" stands for the power source potential and "0" stands for the ground potential, whereby the game apparatus determines that the peripheral device connected to the connector port is of the clocked serial type communication mode.

32. A peripheral device for a game apparatus used by being connected to a socket connector of said game apparatus, said peripheral device having a plug connector to be detachably connected to said socket connector, said plug connector having nine (9) connector pins disposed in a row corresponding to said socket connector, said connector pins including a first pin, a second pin, a third pin, a fourth pin, a fifth pin, a seventh pin, an eighth pin, and a ninth pin, the first pin being supplied with a power source potential and the ninth pin being supplied with a ground potential from said game apparatus, said plug connector for supplying said game apparatus with data from said peripheral device via the seventh pin, the eighth pin, the second pin and the third pin when, under the condition that "1" stands for the power source potential and "0" stands for the ground potential, said peripheral device being supplied with control signals from said game apparatus alternatively in a first mode or a second mode, such that in the first mode the fourth pin becomes "1" and the fifth pin becomes "1," and such that in the second mode the fourth pin becomes "0" and the fifth pin becomes "1," wherein when the control signals are in

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

the first mode or in the second mode then the game apparatus determines a peripheral ID based upon the data from the seventh pin, the eighth pin, the second pin, and the third pin, and the game apparatus determines that a selection mode between the peripheral device and the game adaptor is a TH/TR-selection communication mode.

33. A peripheral device for a game apparatus according to Claim 32, said peripheral device comprising a standard control pad with a plurality of keys disposed thereon to be manually operated by a player.

34. A peripheral device for a game apparatus according to Claim 33, said peripheral device constructed such that when said game apparatus supplies said control pad with control signals to make the fourth pin "1" and the fifth pin "1," the control pad transmits data back to said game apparatus making the seventh pin a "signal assigned to one key," the eighth pin "1," the second pin "0," and the third pin "0," and when said game apparatus supplies said control pad with control signals to make the fourth pin "0" and the fifth pin "1," the control pad transmits data back to said game apparatus to make the seventh pin, the eighth pin, the second pin, and the third pin each a different "signal assigned to one key."

35. A peripheral device for a game apparatus according to Claim 33, said peripheral device constructed such that, when said two

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

data select signals are supplied to said control pad via said fourth and fifth pins from said game apparatus, the control pad prepares said signals for a plurality of keys pre-classified in four groups as 4-bit data for each group in correspondence with the combination of bits of such two data select signals, and the control pad transmits such prepared 4-bit data back to said game apparatus via said seventh pin, eighth pin, second pin and third pin.

36. A peripheral device for a game apparatus according to Claim 34, said peripheral device constructed such that, when said two data select signals are supplied to said control pad via said fourth and fifth pins from said game apparatus, the control pad prepares said signals for a plurality of keys pre-classified in four groups as 4-bit data for each group in correspondence with the combination of bits of such two data select signals, and the control pad transmits such prepared 4-bit data back to said game apparatus via said seventh pin, eighth pin, second pin and third pin.

37. A connector for connecting a peripheral device to a processing apparatus having a socket connector incorporating nine terminal pins therein, said connector comprising a plug connector being detachably connected to the socket connector and incorporating nine terminal pins disposed in a row in the order of the first to ninth pins each contacting with each of the nine terminal pins of the socket connector, a power source and a ground potential being supplied respectively to the first and ninth pins of the terminal

This Sheet Has Been Replaced



pins from the processing apparatus, control signals being supplied through the fourth and fifth pins of the plug connector from the processing apparatus to the peripheral device, and data signals in accordance with a communication mode of the peripheral device being supplied through at least one of the second, third, seventh and eighth pins from the peripheral device to the processing apparatus.

38. The connector of claim 37, wherein said peripheral device is a peripheral device supplying to the processing apparatus another control signal through the sixth pin of the terminal pins of the plug connector and the data signals in accordance with a three-wire handshake communication mode through the second, third, seventh, and eighth pins of the terminal pins of the plug connector.

39. The connector of claim 37, wherein said sixth pin is short-circuited with said fifth pin in the terminal pins of the plug connector and said peripheral device is a peripheral device supplying to the processing apparatus the data signals in accordance with a clocked parallel communication mode through the second, third, seventh, and eighth pins of the terminal pins of the plug connector.

40. The connector of claim 37, wherein said second pin is short-circuited with said first pin and said sixth to eighth pins are short-circuited with said ninth pin and said peripheral device is a peripheral device supplying to the processing apparatus the data



THIS SHEET HAS BEEN REPLACED

signal in accordance with a clocked serial communication mode through the third pin of the terminal pins of the plug connector.

41. The connector of claim 37, wherein said peripheral device is a peripheral device requiring a data selecting signal of two bits supplied through said fourth and fifth pins of the terminal pins of the plug connector from the processing apparatus.

42. A connector for connecting a peripheral device having a clocked serial communication mode to a processing apparatus, comprising a plug connector detachably connected to a socket connector of the processing apparatus, said plug connector having nine terminal pins disposed in an array in the order of the first to ninth pins each contacting with nine pins of the socket connector, said first and ninth pins receiving a power source and a ground potential respectively, said second pin being short-circuited with said first pin, said sixth to eighth pins being short-circuited with said ninth pin, a single first cable being connected from either one of said first and second pins, a single second cable being connected from one of said sixth to ninth pins, and single third to fifth cables being connected from said third to fifth pins respectively,

wherein control signals are transmitted through said fourth and fifth pins, and data in accordance with the clocked serial communication mode are transmitted from the peripheral device to the processing apparatus.

This Sheet Has Been Replaced



AMENDED CLAIMS

[received by the International Bureau on 9 April 1996 (09.04.96);
original claims 1-42 replaced by amended claims 1-33 (11 pages)]

1. A peripheral device for use with a data processing apparatus, comprising a plug connector detachably connectable to a peripheral port formed on the data processing apparatus, and means for transmitting data signals to the data processing apparatus through the plug connector, characterized in:

that the plug connector comprises a set of terminal pins consisting of first to ninth pins disposed in a row correspondingly to a set of terminal pins disposed at the peripheral port, the first pin for supplying one of a power source and a ground potential, the ninth pin for supplying the other of the power source and the ground potential, the second, third, seventh and eighth pins for conducting data signals, and the fourth to sixth pins for conducting control signals;

that the data signals includes identification data representing a communication mode of the peripheral device and are supplied to the apparatus via at least one of the second, third, seventh and eighth pins by a data request signal supplied from the apparatus; and

that the apparatus determines the communication mode for communicating with the peripheral device based on the data signals received on the second, third, seventh and eighth pins of the peripheral port.

This Sheet Has Been Replaced



2. The peripheral device of claim 1, characterized in that the fourth and fifth pins of the apparatus are for transmitting a signal for activating the peripheral device and for transmitting the data request signal, respectively, and that the peripheral device further comprises means for transmitting an acknowledgement signal to the apparatus via the sixth pin of the plug connector and means for transmitting data signals to the apparatus via the second, third, seventh and eighth pins of the plug connector in synchronism with the clock signal.

3. The peripheral device of claim 1, characterized in that the fourth and fifth pins of the apparatus are for transmitting a signal for activating the peripheral device and for transmitting the clock signal as said data request signal, respectively, and that the peripheral device further comprises means for maintaining the sixth pin at the same potential as on the fifth pin and means for transmitting parallel data signals to the apparatus via the second, third, seventh and eighth pins of the plug connector in synchronism with the clock signals.

4. The peripheral device of claim 1, characterized in that the fourth and fifth pins of the apparatus are for transmitting a signal for activating the peripheral device and for transmitting the clock signal, respectively; and

that the peripheral device further comprises first means for maintaining the second pin at the same potential as on the



first pin, second means for maintaining the sixth, seventh and eighth pins at the same potential as on the ninth pin, and means for transmitting serial data signals to the apparatus via the third pin in synchronism with the clock signals.

5. A peripheral device for use with a data processing apparatus, comprising a plug connector detachably connectable to a socket connector formed at a peripheral port on the apparatus, and means for transmitting data signals to the apparatus via the plug connector, characterized in that the plug connector comprises a set of terminal pins consisting of first to ninth pins disposed in a row correspondingly to a set of terminal pins disposed in the socket connector, the first pin for receiving a power source potential, the ninth pin for receiving a ground potential, the second, third, seventh and eighth pins for conducting data signals, and the fourth to sixth pins for conducting control signals;

that the peripheral device supplies the apparatus with a data signal representing a communication mode of the peripheral device via at least one of the second, third, seventh and eighth pins when a control signal of "1" to the fourth pin and "1" to the fifth pin or a control signal of "0" to the fourth pin and "1" to the fifth pin are supplied from the apparatus wherein "1" and "0" correspond to the power source and ground potentials, respectively; and

that the apparatus determines the communication mode for communicating with the peripheral device based on the data

This Sheet Has Been Replaced



- 66 -



signals received on the second, third, seventh and eighth pins of the peripheral port.

6. The peripheral device according to claim 5, characterized in that the peripheral device supplies a signal of "0" to the seventh pin, "0" to the eighth pin, "0" to the second pin and "1" to the third pin, respectively, when the peripheral device is supplied with the control signals whereby the apparatus determines that the peripheral device connected to the socket connector employs the three-wire hand-shake type communication mode.

7. The peripheral device according to claim 5, characterized in that the peripheral device comprises means for maintaining the sixth pin at the same potential as on the fifth pin and that the peripheral device supplies a signal of "0" to the seventh pin, "0" to the eighth pin, "1" to the second pin and "1" to the third pin, respectively, when the peripheral device is supplied with the control signals whereby the apparatus determines that the peripheral device connected to the socket connector employs the clocked parallel type communication mode.

8. The peripheral device according to claim 5, characterized in that the peripheral device supplies a signal of "0" to the seventh pin, "0" to the eighth pin, "1" to the second pin and "0" to the third pin, respectively, when the peripheral device is supplied with the control signals, whereby the apparatus

This Sheet Has Been Replaced



- 67 -



AMENDED SHEET (ARTICLE 19)

determines that the peripheral device connected to the socket connector employs the clocked serial type communication mode.

9. A peripheral device for use with a data processing apparatus, comprising a plug connector detachably connectable to a socket connector formed at a peripheral port on the apparatus, means for transmitting data signals to the apparatus through the plug connector, characterized in that the plug connector comprises a set of terminal pins consisting of first to ninth pins disposed in a row correspondingly to a set of terminal pins disposed in the socket connect, the first pin for receiving a power source, the ninth pin for receiving a ground potential, the second, third, seventh and eighth pins for conducting data signals, and the fourth to sixth pins for conducting control signals;

that the peripheral device is supplied with control signals from the apparatus alternatively in a first signal combination in which the fourth pin becomes "1" and the fifth pin becomes "1", or in a second signal combination in which the fourth pin becomes "0" and the fifth pin becomes "1", wherein "1" and "0" correspond to the power source and ground potentials, respectively; and

that, when the control signals are in the first or second signal combination, the apparatus determines a peripheral ID based upon the data from the second, third, seventh and eighth pins, and then determines that the peripheral device connected to the socket connector employs a TH/TR communication mode.

This Sheet Has Been Replaced



- 68 -



peripheral device comprises a plurality of switching keys disposed thereon to be manually operated by a player.

11. The peripheral device according to claim 10, characterized in that the apparatus supplies data select signals TH and TR to the peripheral device via the fourth and fifth pins, respectively; and

that the peripheral device transmits various sets of data signals responsive to the data select signals TH and TR via the seventh, eighth, second and third pins, the various sets of data signals including data indicative of status of the switching keys.

12. The peripheral device according to claim 11, characterized in that, when the data select signals TH and TR are "1" and "1", respectively, the peripheral device transmits data back to the apparatus assigning the seventh pin as a signal path to one of the switching keys, the eighth pin "1", the second pin "0", and the third pin "0"; and

that, when the data select signals TH and TR are "0" and "1", or "1" and "0", or "0" and "0", the peripheral device supplying the apparatus with data indicative of status of the switching keys via the seventh, eighth, second and third pins, respectively.

13. The peripheral device according to claim 12, characterized in that the sixth pin is supplied with "1" all the time while the data select signals are supplied.



that the means for maintaining includes means for short-circuiting the sixth pin with the fifth pin.

15. The peripheral device of claim 4, characterized in that the first means for maintaining includes means for short-circuiting the second pin with the first pin and the second means for maintaining includes means for short-circuiting the sixth, seventh and eighth pins with the ninth pin.

16. The peripheral device of any one of claims 1 to 8, characterized in that the peripheral device further comprises means for configuring the set of the terminal pins of the plug connector to be indicative of the communication mode of the peripheral device.

17. The peripheral device of claim 16, characterized in that said configuration means includes means for short-circuiting selected ones of the terminal pins of said plug connector.

18. The peripheral device of any one of the preceding claim, characterized in further comprising a printed circuit board on which means for generating the data signals to be supplied to the apparatus is formed, and a cable including a plurality of wires connecting the terminal pins of the plug connector with the printed circuit board.

This Sheet Has Been Replaced



17, characterized in that the short-circuiting means are formed in the plug connector.

20. The peripheral device of claim 18, characterized in that the wires of the cable are fewer in number than the pins on the peripheral port.

21. The peripheral device of claim 18, characterized in that the plug connector comprises means for short-circuiting selected ones of pins, and the wires of the cable are fewer in number than the pins on the peripheral port.

22. The peripheral device of any one of claims 14, 15 and 17, characterized in that the short-circuiting means are formed on the circuit board.

23. A game apparatus comprising the data processing apparatus and the peripheral device as defined in any one of the preceding claims.

24. A device connector for connecting the peripheral device to the data processing apparatus as defined in any one of the preceding claims, further characterized in that the pins are formed with elongated contacts disposed parallelly in a row.

25. A device connector for connecting a peripheral device to a data processing apparatus having a socket connector with nine terminal pins, characterized in that the device connector comprises a plug connector detachably connectable to the



terminal pins disposed correspondingly to the nine terminal pins of the socket connector, the terminal pins of the plug connector being formed with elongated contacts disposed parallelly in a row;

that the first and ninth terminal pins of the plug connector are respectively for connecting to a power source and ground potential supplied from the apparatus; and

that at least one of the second, third, seventh and eighth terminal pins of the plug connector is for conducting data signals supplied from the peripheral device which represent a communication mode of the peripheral device.

26. The device connector of claim 25, characterized in that the sixth pin is for conducting a control signal supplied from the peripheral device, and the second, third, seventh and eighth terminal pins are for conducting the data signals from the peripheral device in a three-wire handshake communication mode.

27. The device connector of claim 25, characterized in that the fifth and sixth terminal pins of the plug connector are short-circuited together and the second, third, seventh and eighth terminal pins of the plug connector are for conducting the data signals supplied from the peripheral device in a clocked parallel communication mode.

28. The device connector of claim 25, characterized in that the first and second terminal pins of the plug connector are short-circuited together, the sixth through eighth terminal



the third terminal pin of the plug connector is for conducting the data signals supplied from the peripheral device in a clocked serial communication mode.

29. The device connector of claim 25, characterized in that the fourth and fifth terminal pins are for conducting 2 bit data selecting signals supplied to the peripheral device from the processing apparatus.

30. A peripheral device for use with a data processing apparatus, comprising a plug connector detachably connectable to a peripheral port formed on the data processing apparatus, and means for transmitting a data signals to the data processing apparatus through the plug connector, characterized in that the plug connector comprises a set of terminal pins consisting of first to ninth pins disposed in a row correspondingly to a set of terminal pins disposed at the peripheral port;

that the terminal pins of the plug connector are predeterminedly configured in accordance with a communication mode between the processing apparatus and the peripheral device;

that the data signals include identification data representing a communication mode of the peripheral device and are supplied to the apparatus via at least one of the terminal pins in synchronism with clock signals supplied from the data processing apparatus; and

that the data processing apparatus determines the communication mode for communicating with the peripheral



said other terminal pins.

THIS SHEET HAS BEEN
REPLACED

31. A device connector for connecting a peripheral device to a data processing apparatus having a socket connector with nine terminal pins, characterized in:

that the device connector comprises a plug connector detachably connectable to the socket connector, the plug connector has first to ninth terminal pins disposed correspondingly to the nine terminal pins of the socket connector, the terminal pins of the plug connector and socket connector are formed with elongated contacts disposed in parallel, in a row;

that the terminal pins of the plug connector are predeterminedly configured in accordance with a communication mode of the peripheral; and

at least one of terminal pins of the plug connector is for conducting data signals supplied from the peripheral device which represent a communication mode of the peripheral device.

32. The peripheral device of any one of claims 1-8, characterized in that the peripheral device comprises a plurality of switching keys disposed thereon to be manually operated by a player.

33. The device connector of claim 25, characterized in that a control signal is supplied through the fourth and fifth pins of the plug connector from the processing apparatus to the peripheral device.



THIS SHEET HAS BEEN
REPLACED


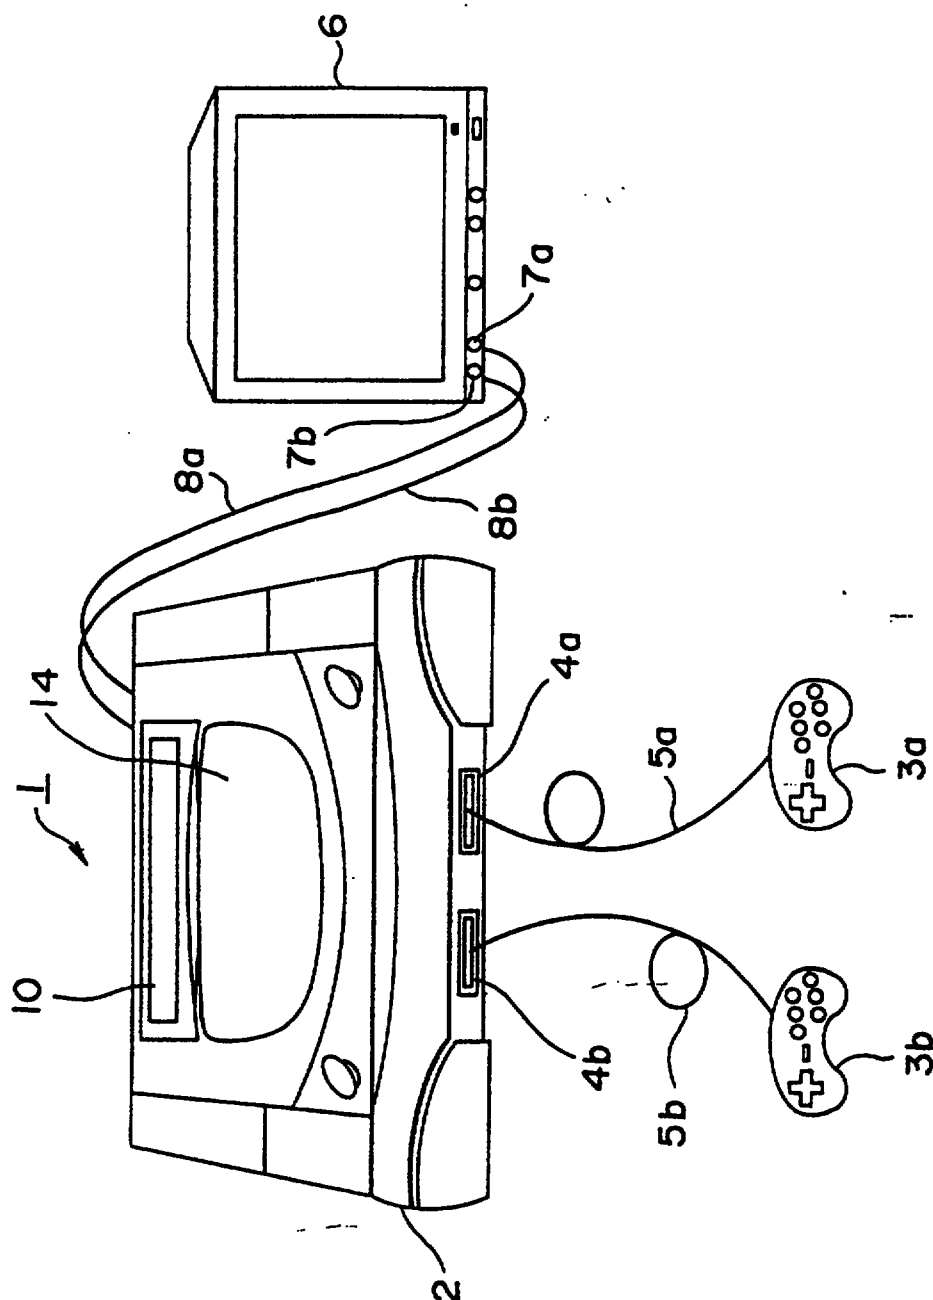


FIG.1

This Sheet Has Been Replaced




THIS SHEET HAS BEEN
REPLACED

FIG.2

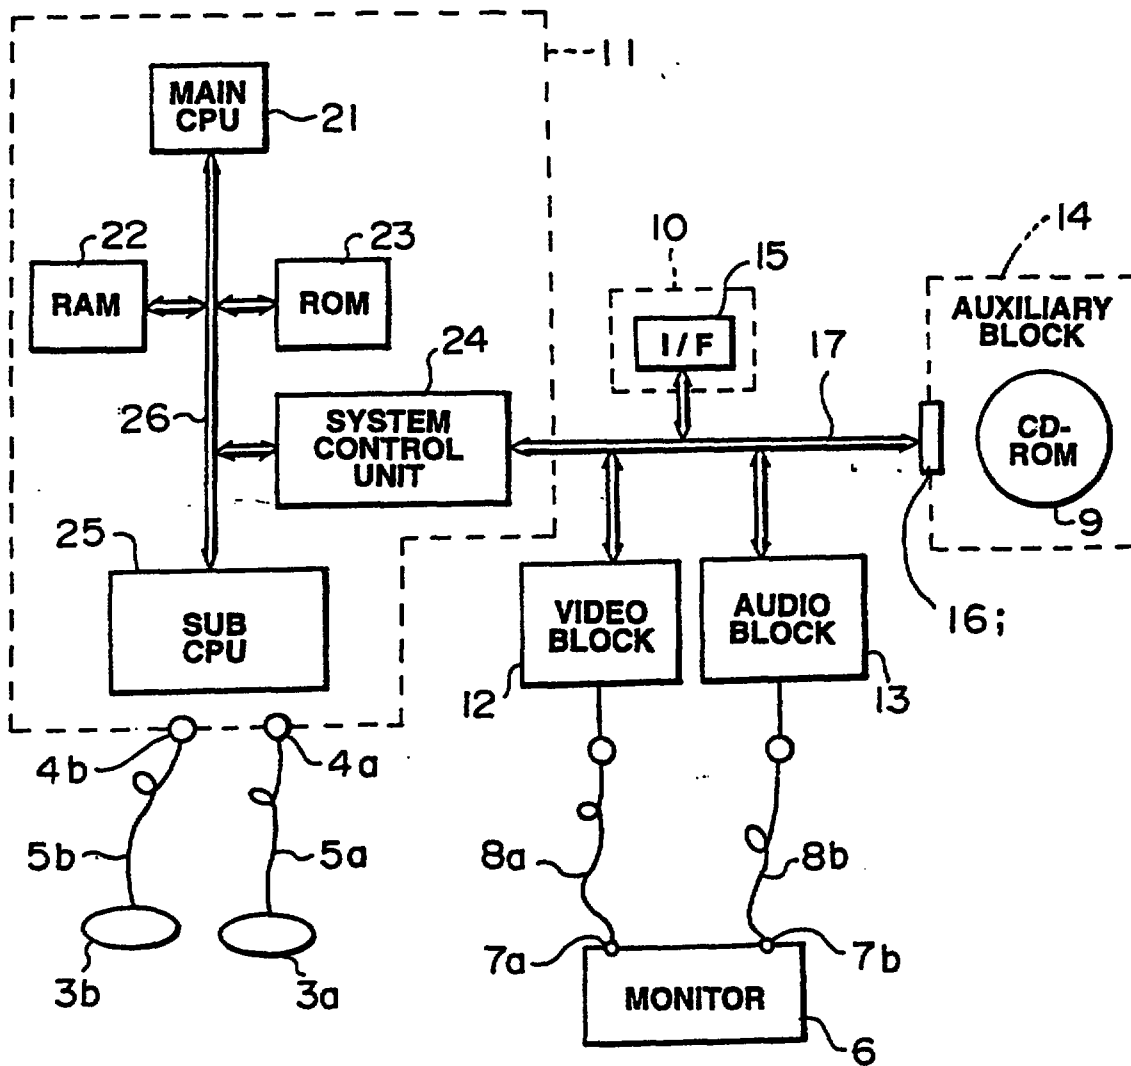This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

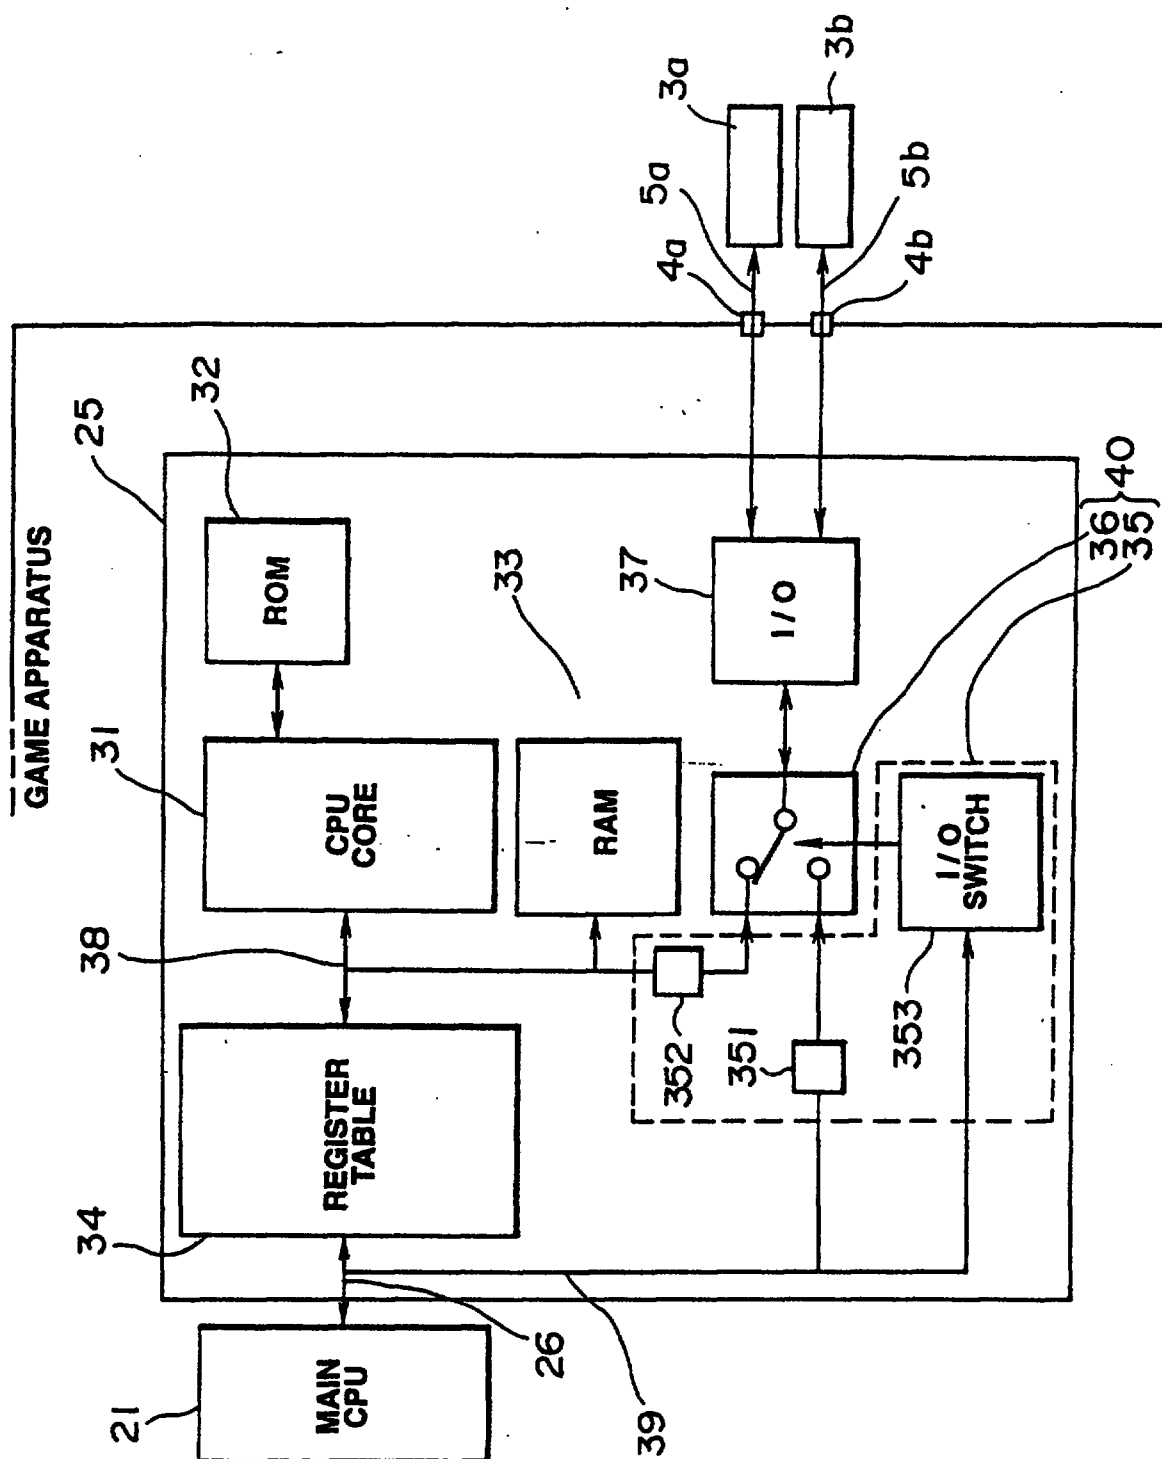


FIG. 3

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

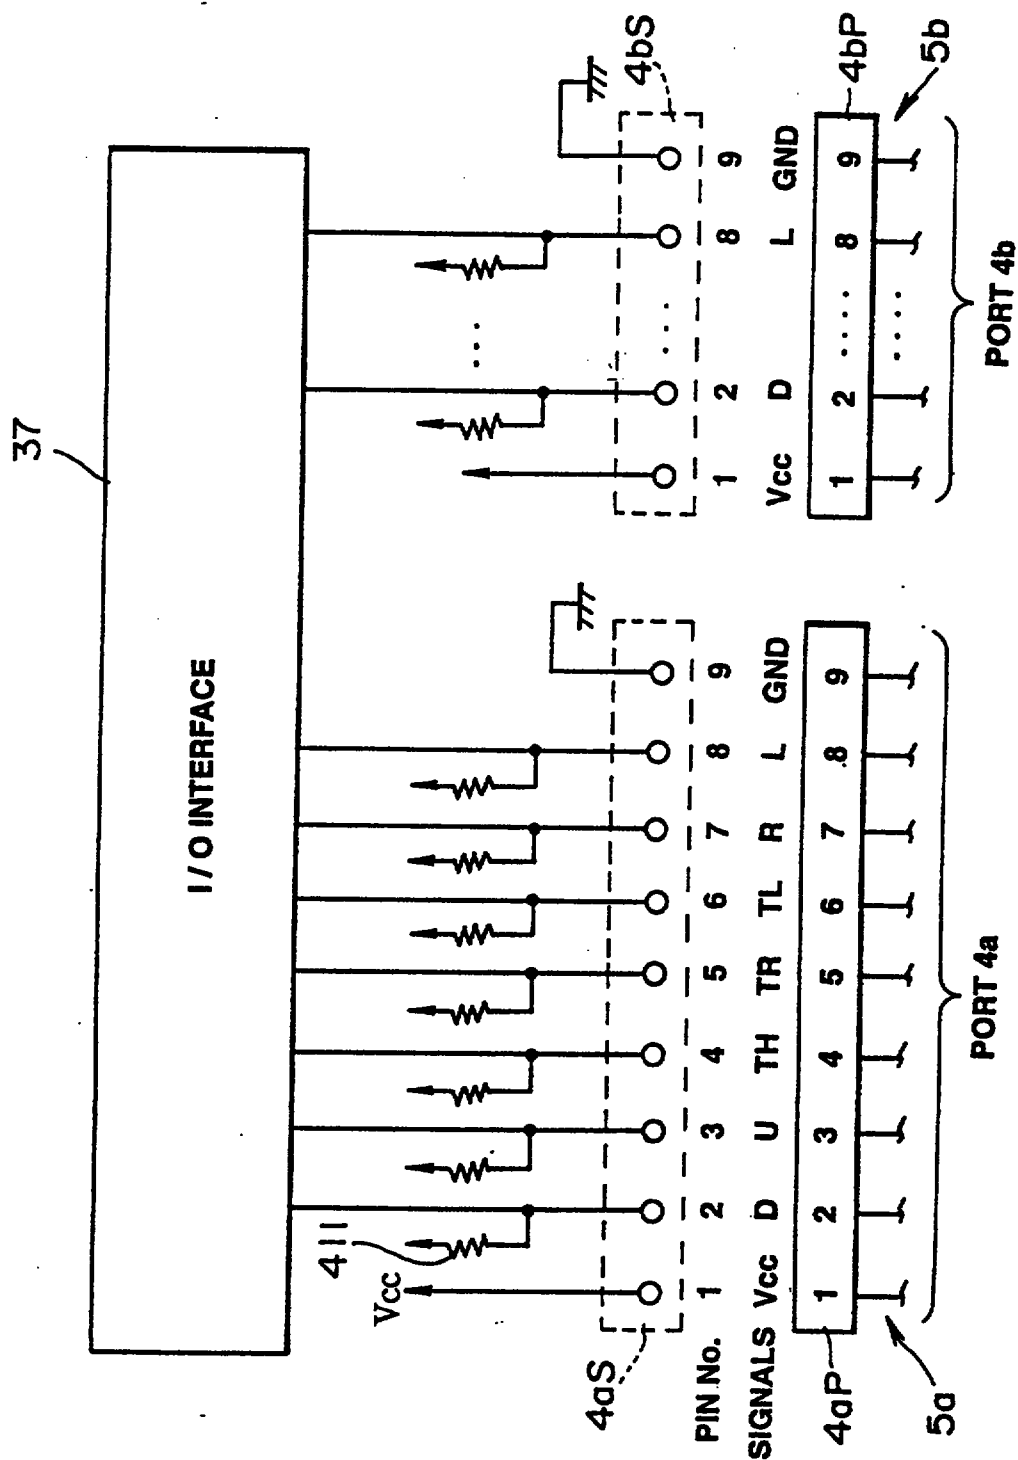


FIG.4

This Sheet Has Been Replaced



This Sheet Has Been Replaced




THIS SHEET HAS BEEN
REPLACED

4aP(4bP)




FIG.5A



4aP(4bP)




FIG.5B



4aP(4bP)



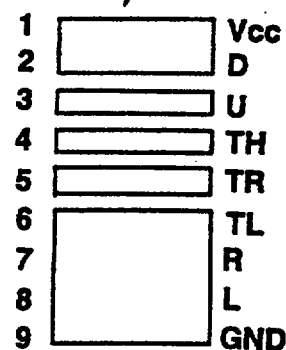FIG.5C



THIS SHEET HAS BEEN
REPLACED

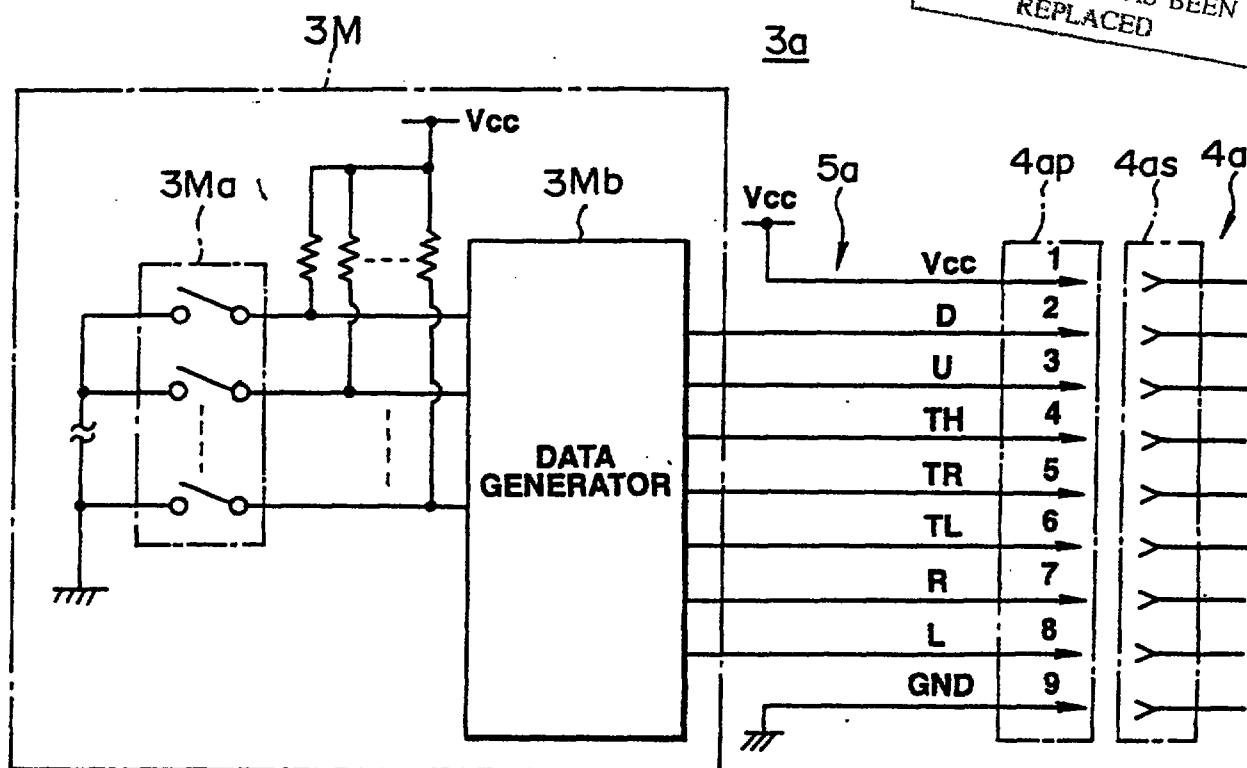


FIG. 6A

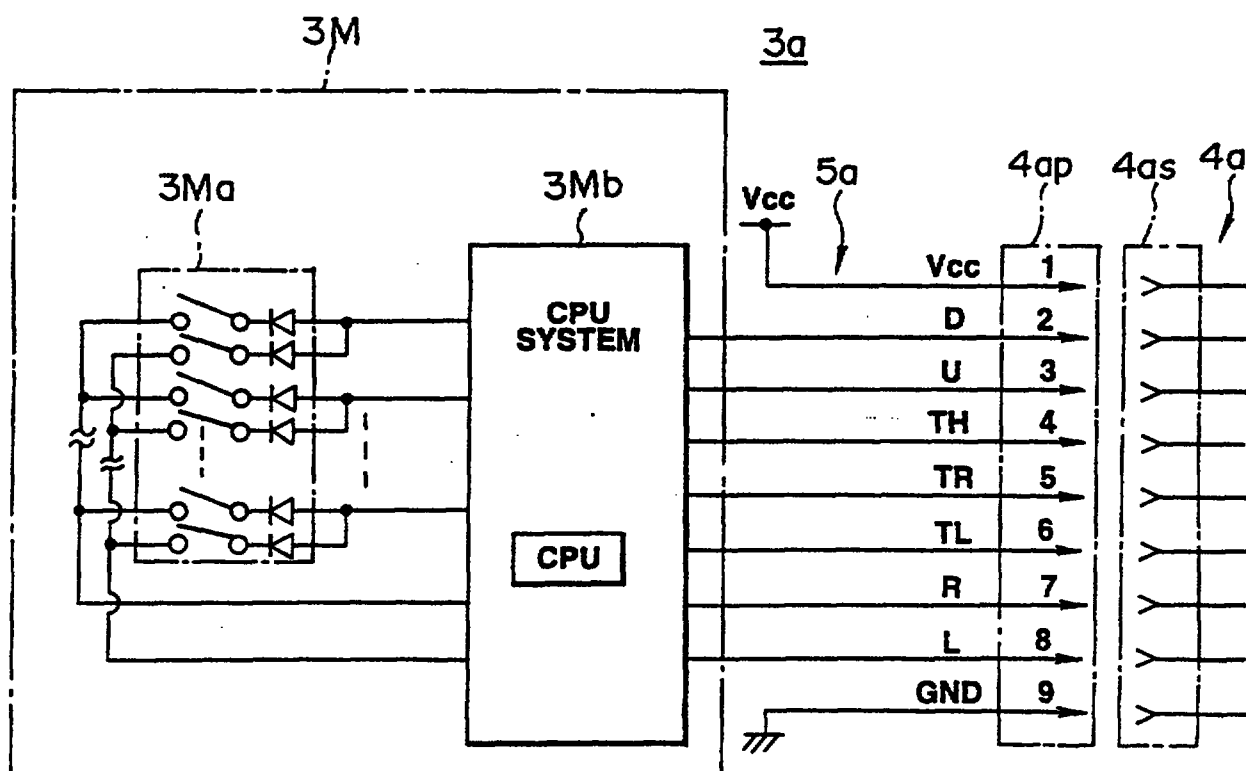


FIG. 6B

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

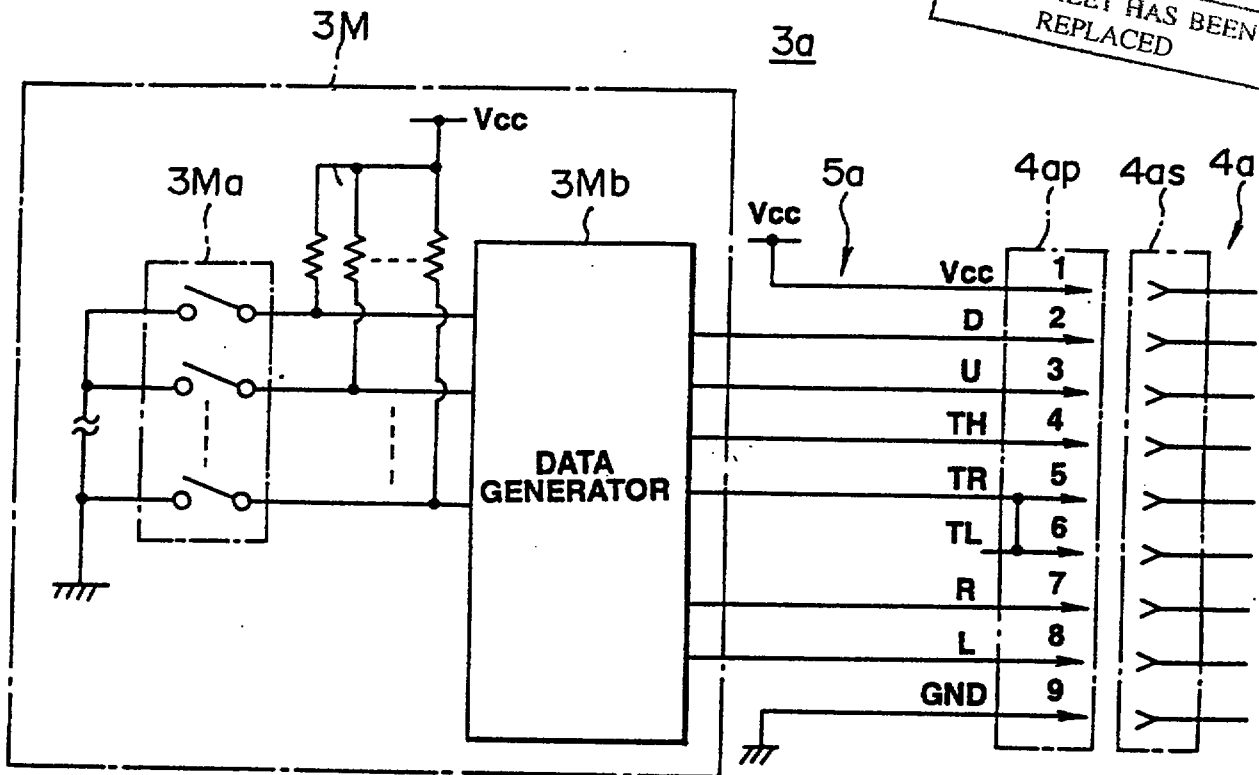


FIG. 6C

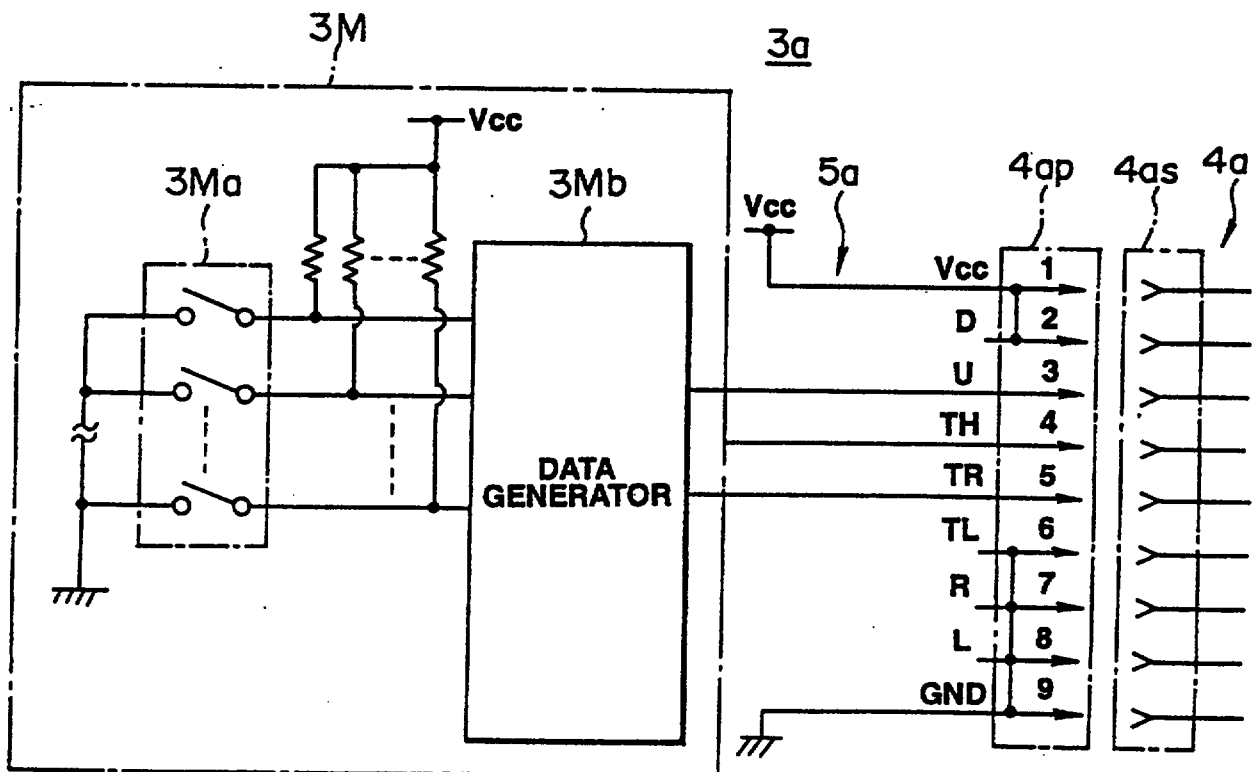


FIG. 6D

This Sheet Has Been Replaced



THIS SHEET HAS BEEN REPLACED


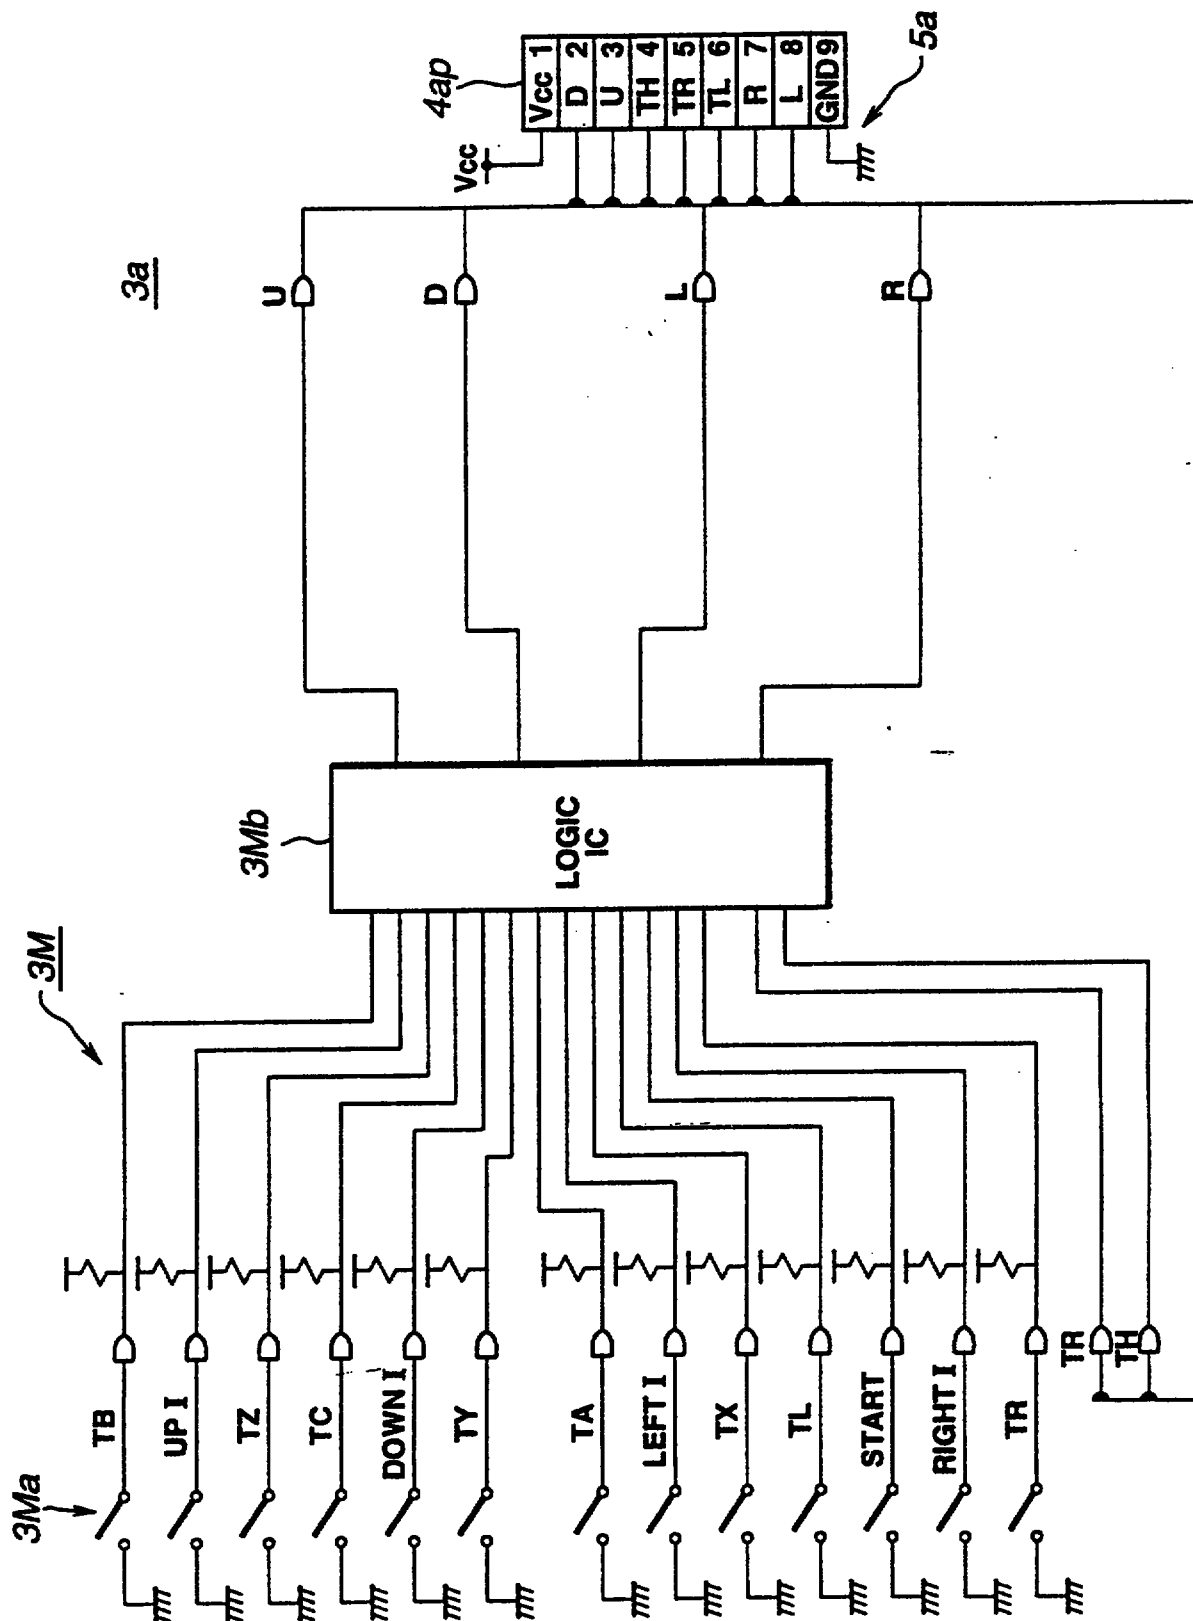


FIG. 7A

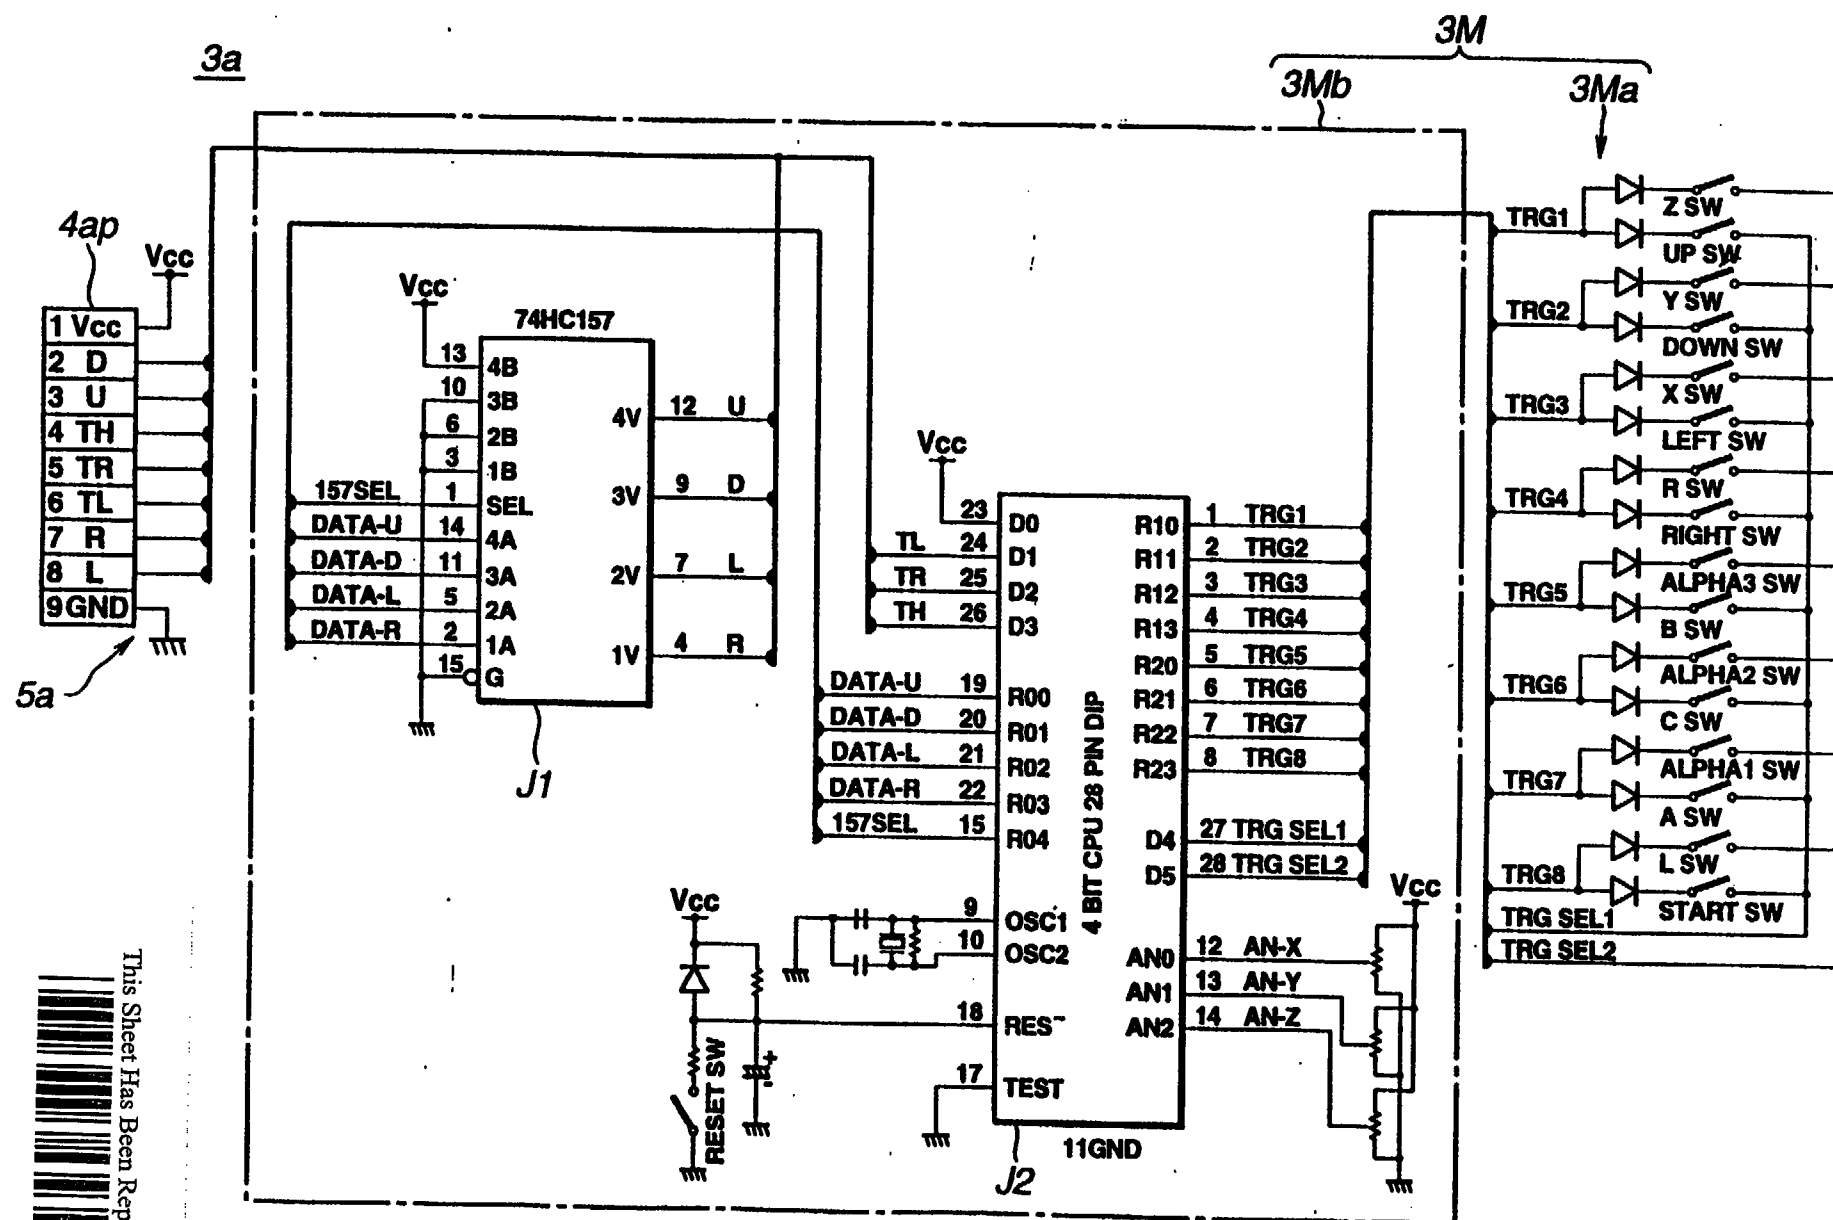

THIS SHEET HAS BEEN
REPLACED

This Sheet Has Been Replaced

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

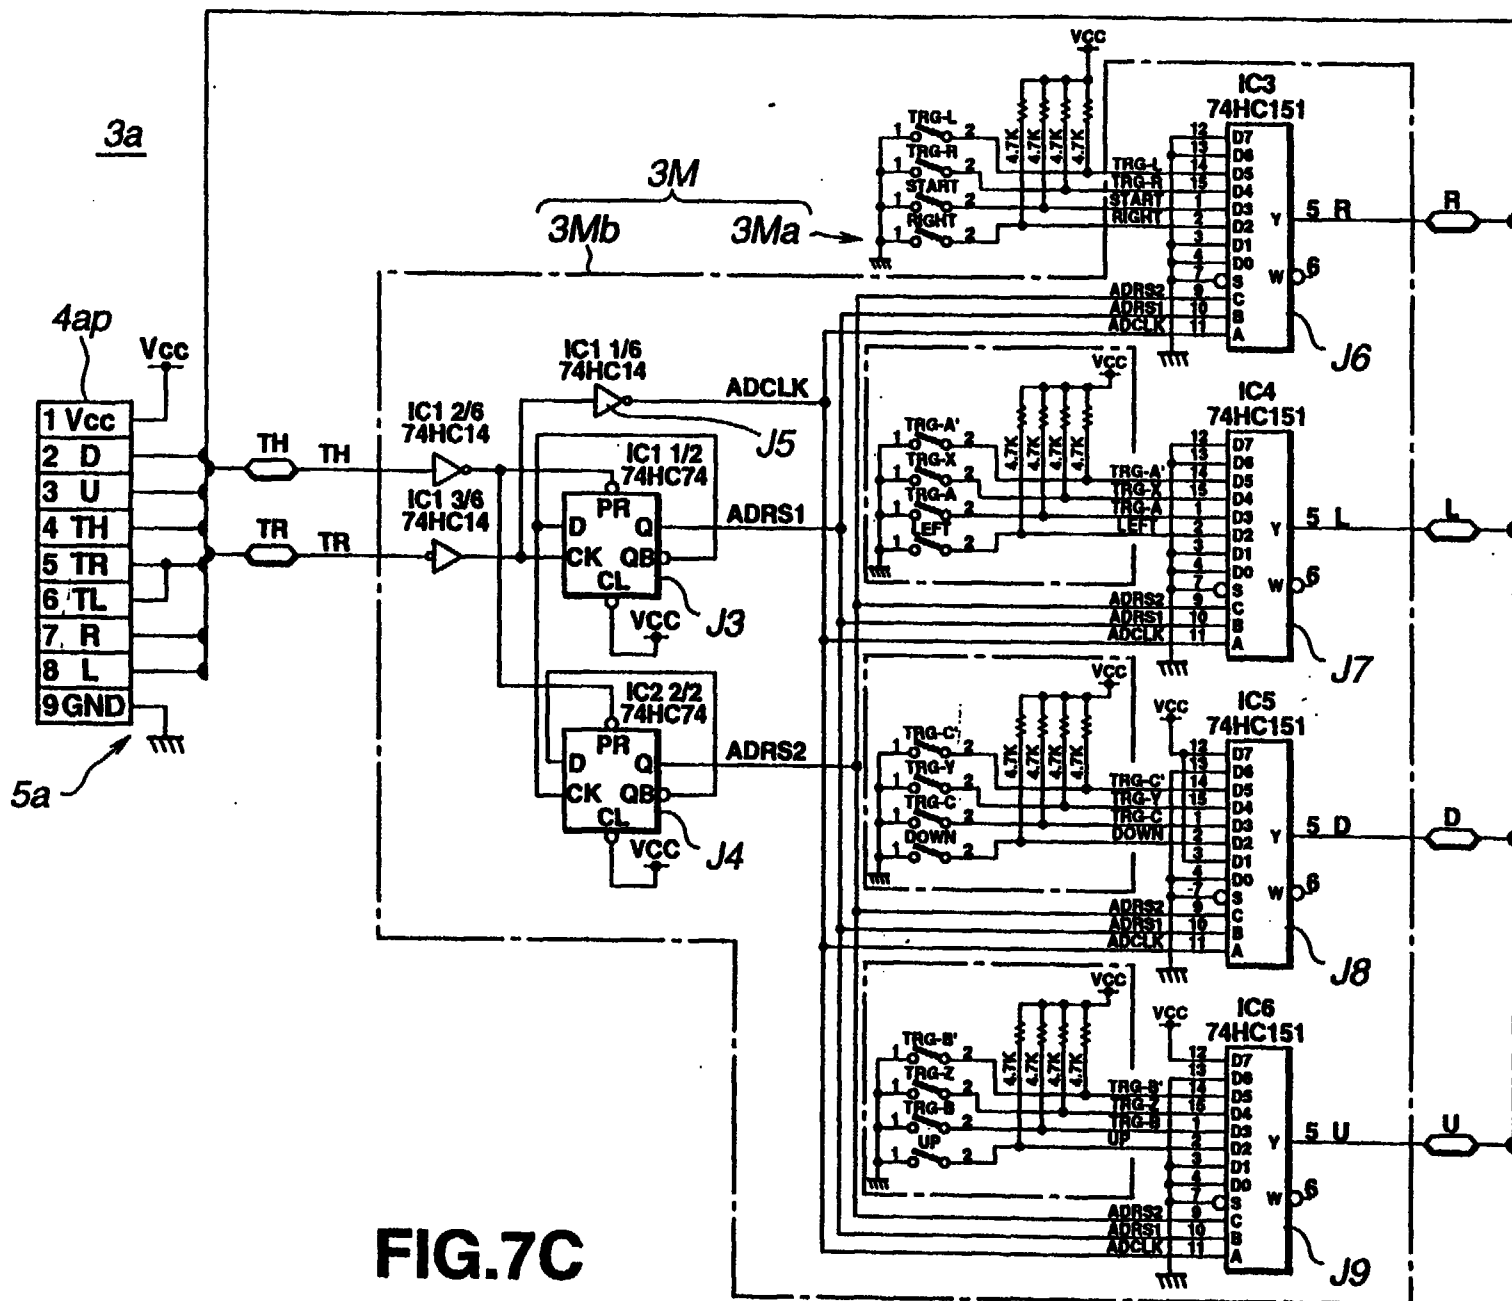


FIG.7C

THIS SHEET HAS BEEN
REPLACED

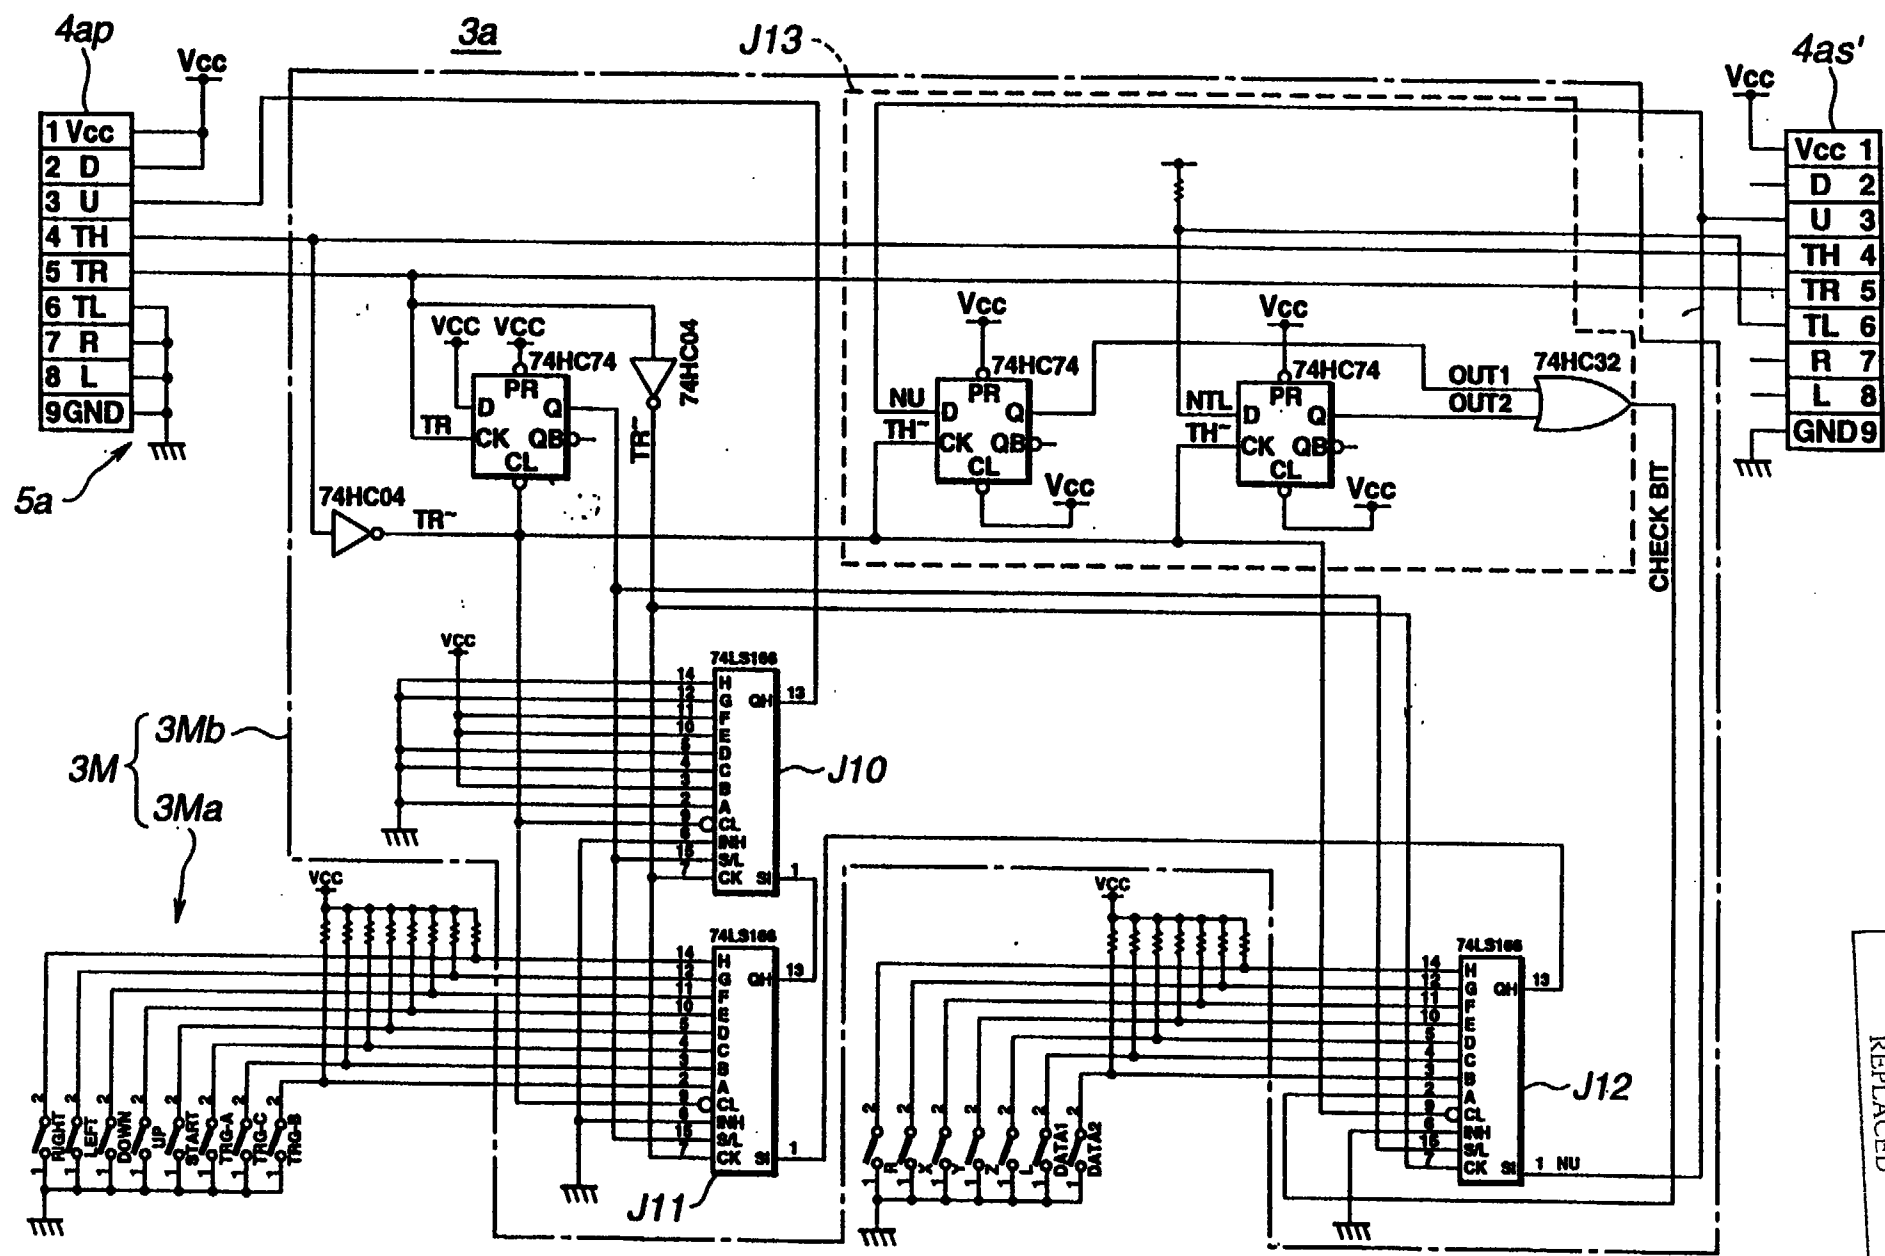


FIG.7D

11/11



THIS SHEET HAS BEEN
REPLACED


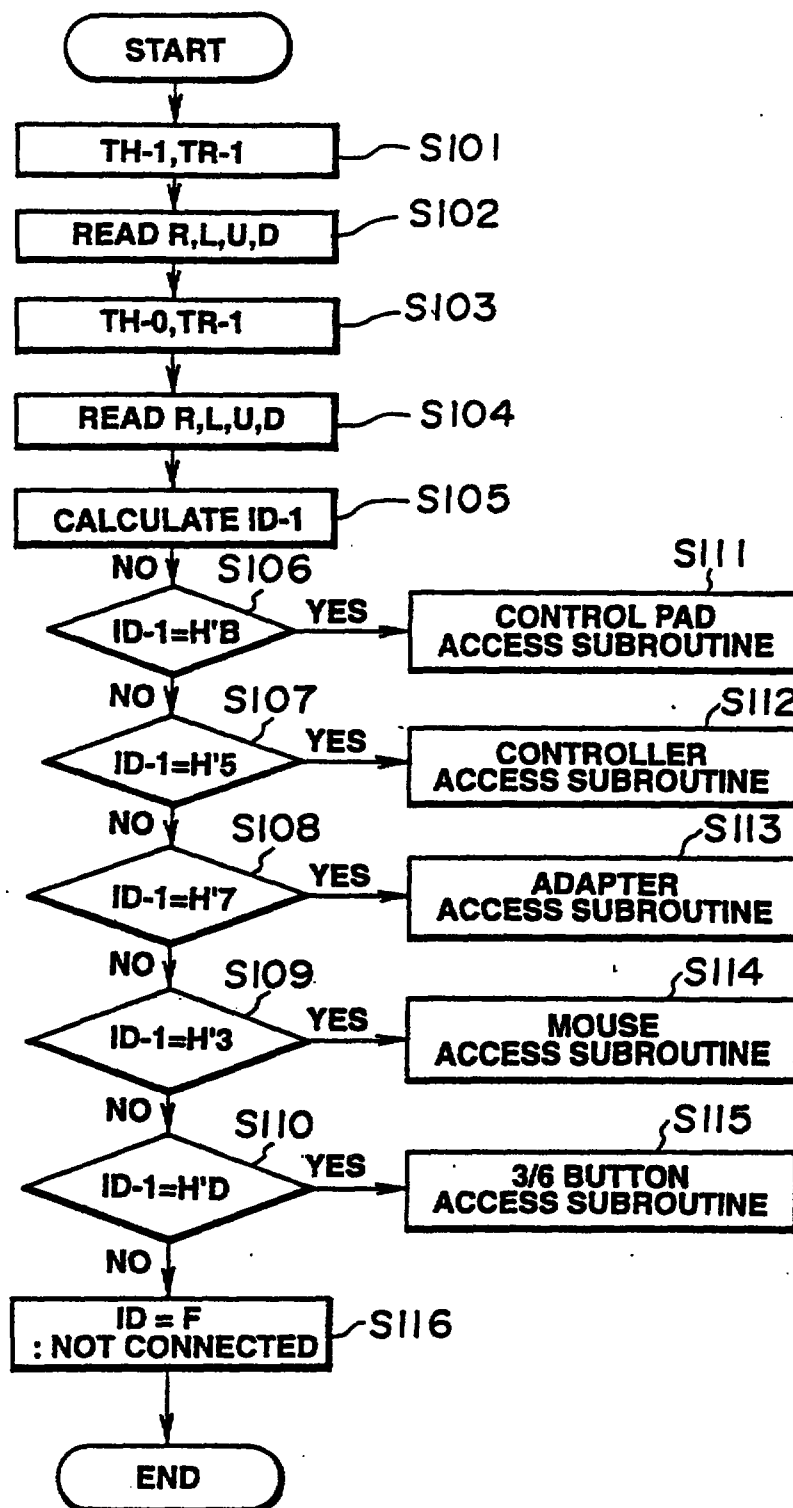


FIG. 8

THIS SHEET HAS BEEN
REPLACED

**FIG.9**

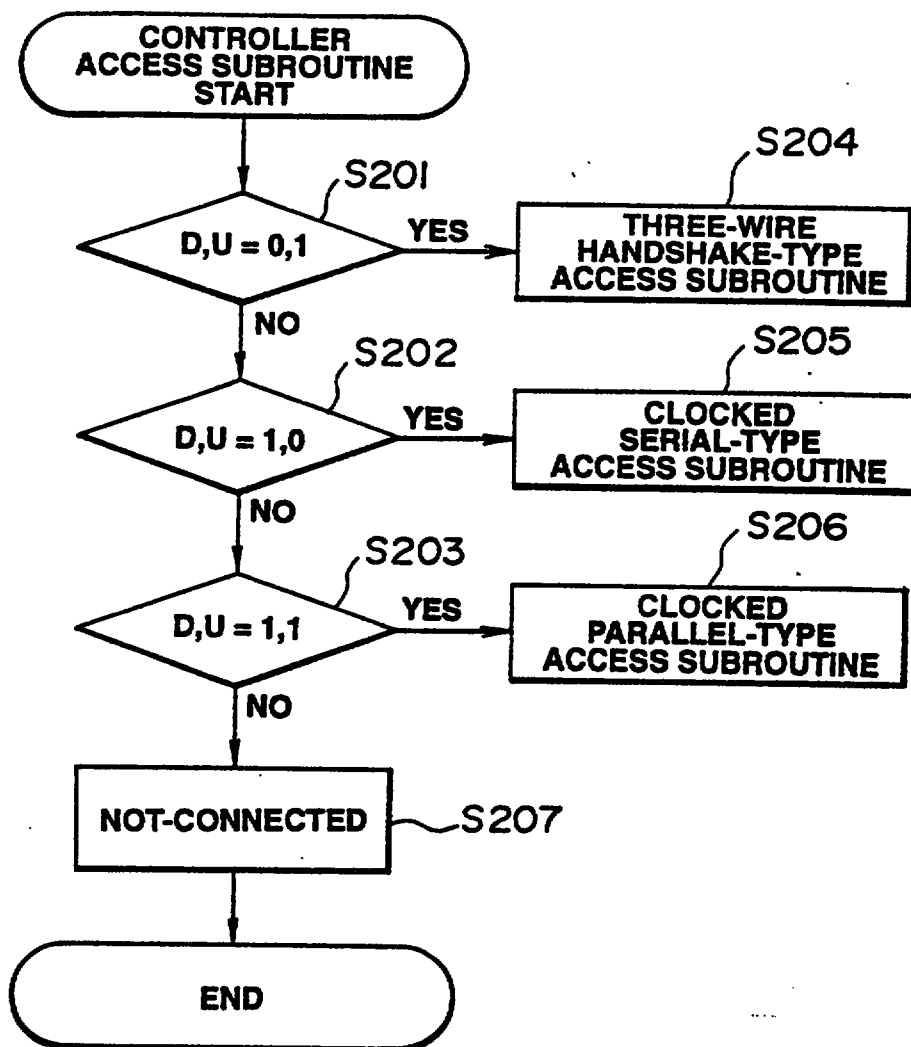This Sheet Has Been Replaced



This Sheet Has Been Replaced

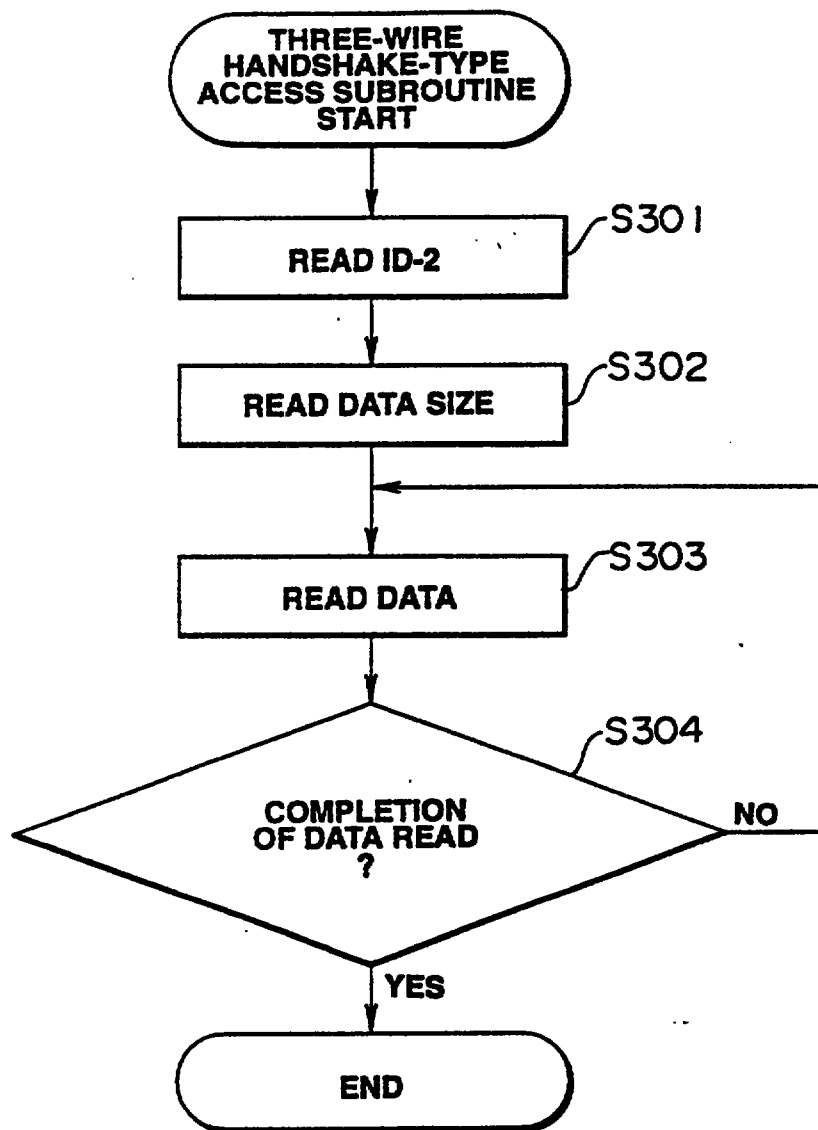
THIS SHEET HAS BEEN
REPLACED

FIG.10

THIS SHEET HAS BEEN
REPLACED

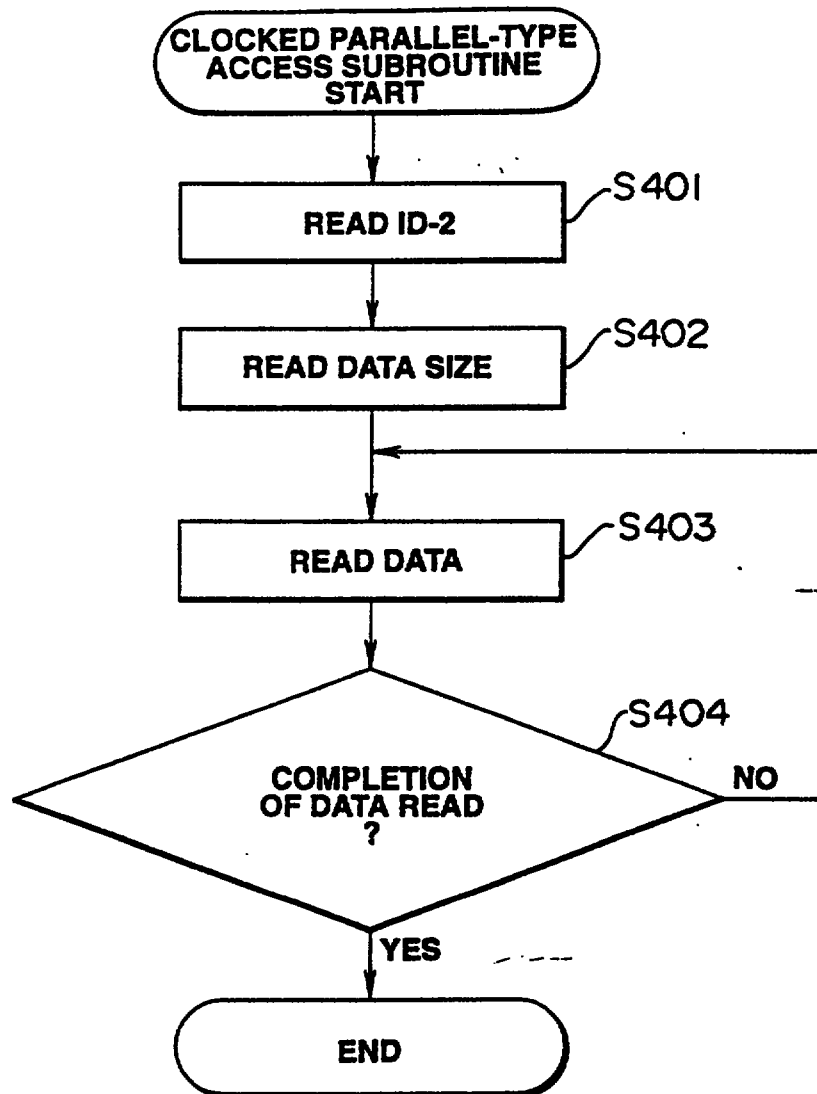


FIG.11

This Sheet Has Been Replaced



This Sheet Has Been Replaced

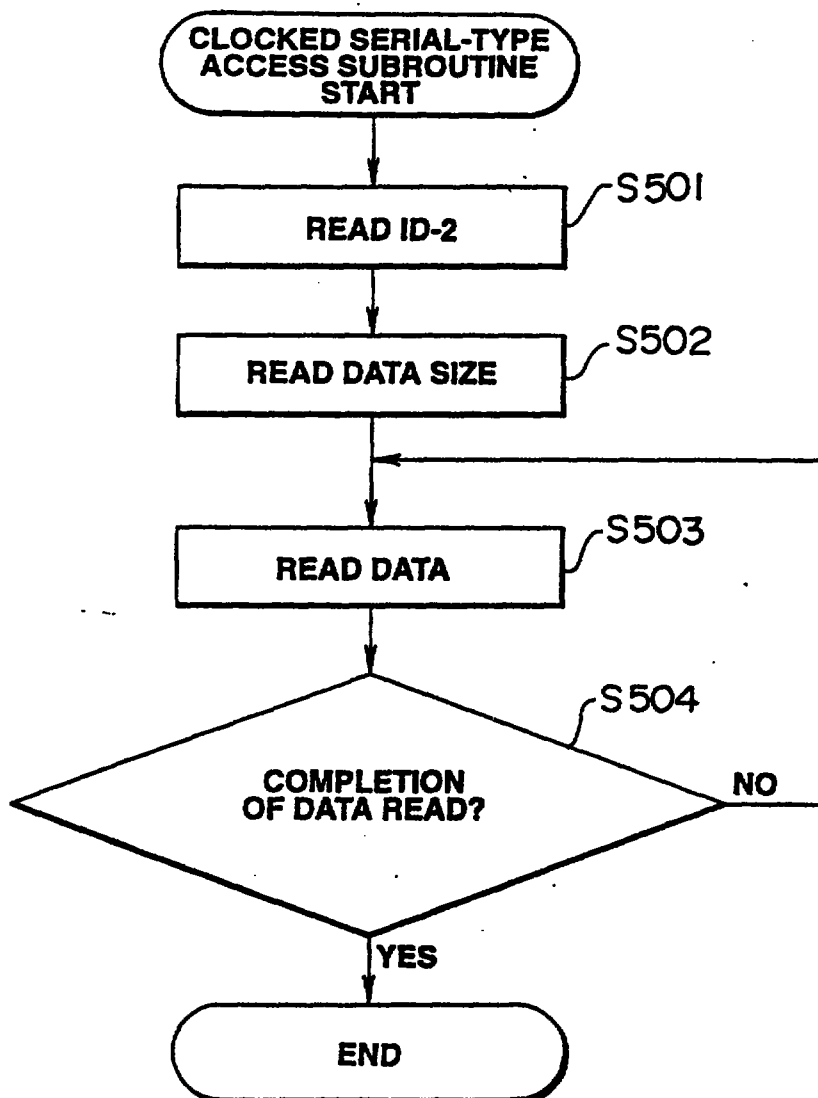
THIS SHEET HAS BEEN
REPLACED

FIG.12

THIS SHEET HAS BEEN
REPLACED

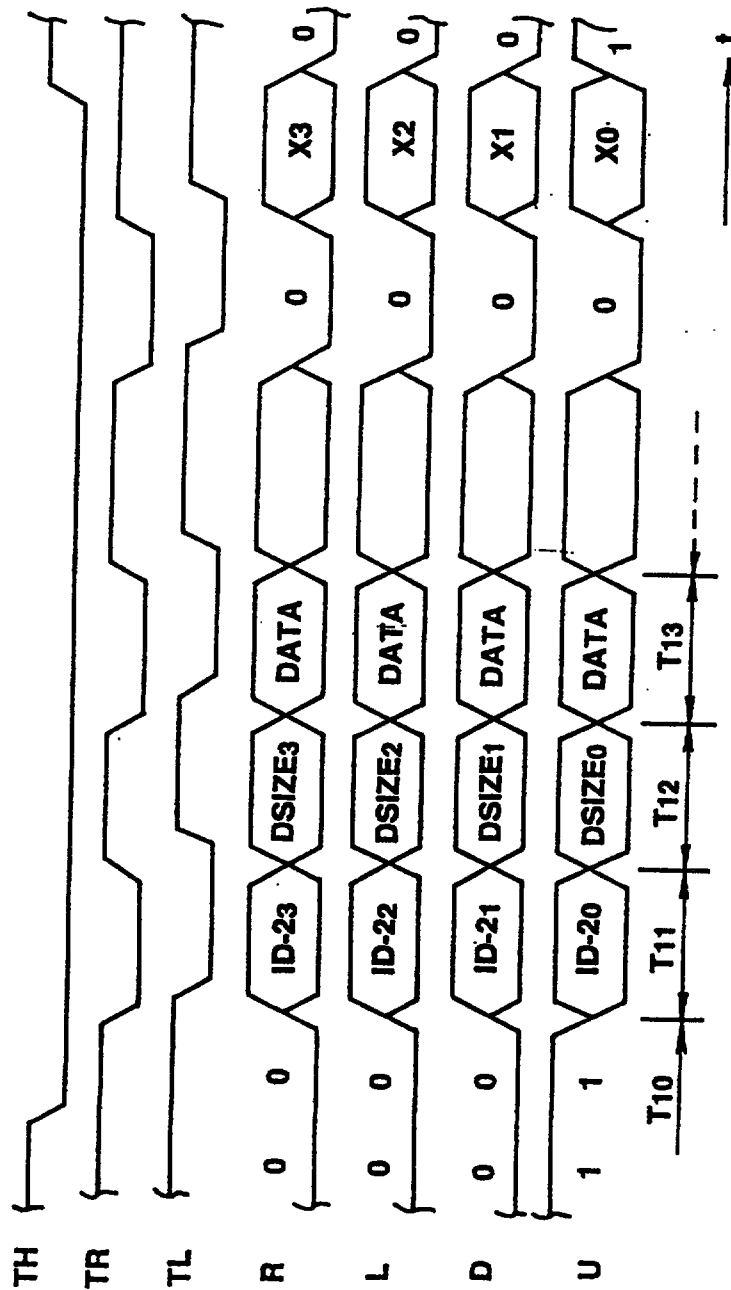


FIG.13

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

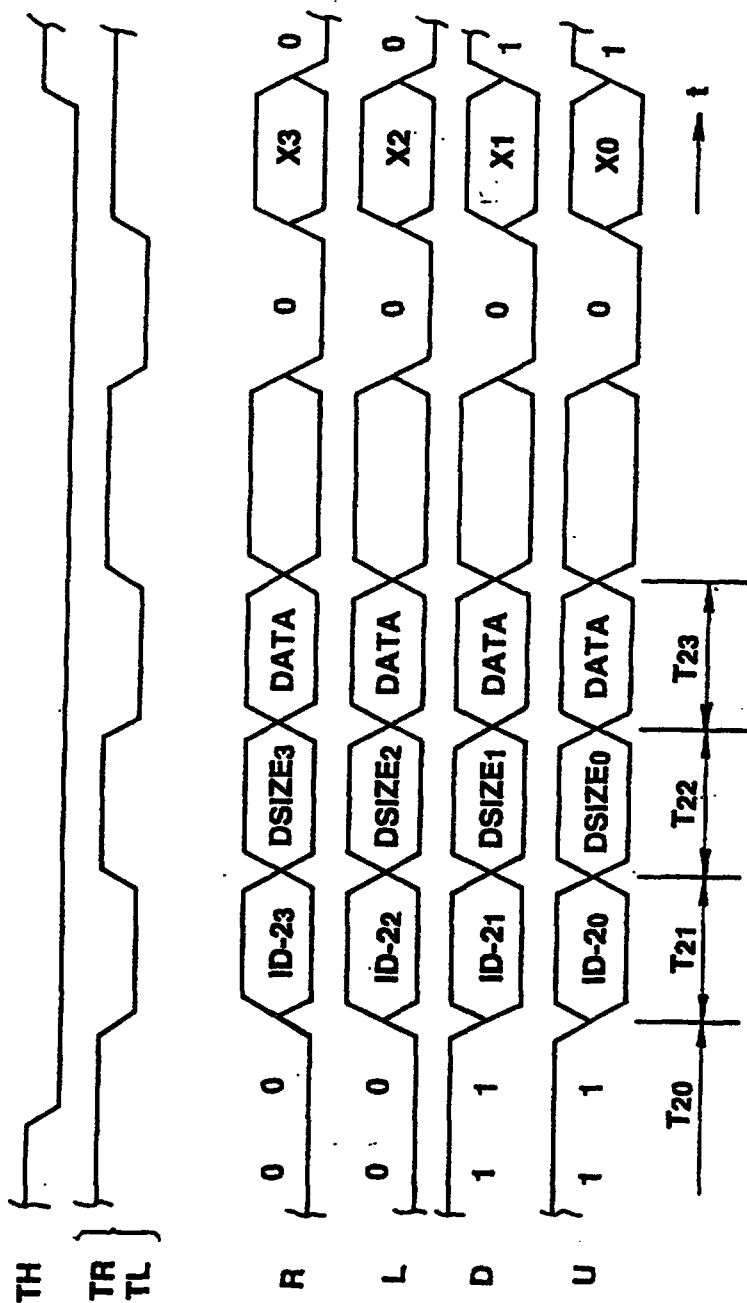


FIG.14

This Sheet Has Been Replaced



This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

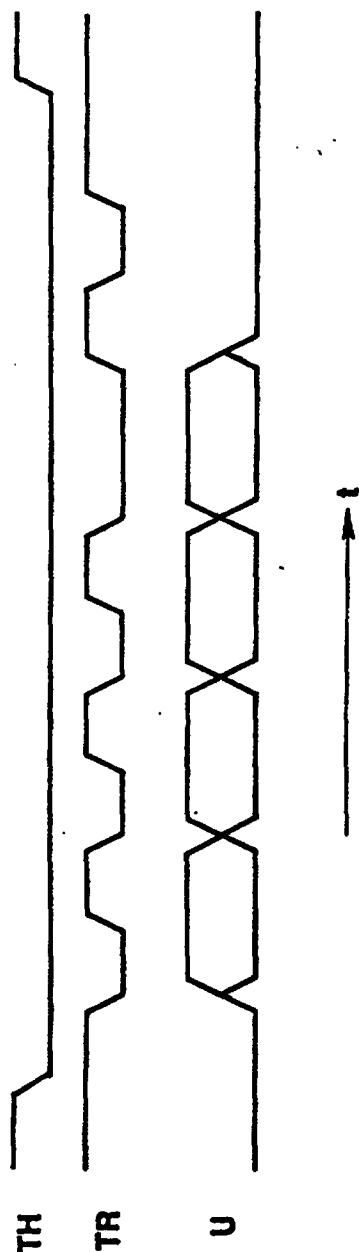


FIG.15

9610917-8

THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

04 JUN 1996

Amended Claims

1. A peripheral device for use with a data processing apparatus, comprising a plug connector detachably connectable to a peripheral port formed on the data processing apparatus, and means for transmitting data signals to the data processing apparatus through the plug connector, characterized in:

that the plug connector comprises a set of terminal pins consisting of first to ninth pins disposed in a row correspondingly to a set of terminal pins disposed at the peripheral port, the first pin for supplying one of a power source and a ground potential, the ninth pin for supplying the other of the power source and the ground potential, the second, third, seventh and eighth pins for conducting data signals, and the fourth to sixth pins for conducting control signals;

that the data signals includes identification data representing a communication mode of the peripheral device and are supplied to the apparatus via at least one of the second, third, seventh and eighth pins by a data request signal supplied from the apparatus; and

that the apparatus determines the communication mode for communicating with the peripheral device based on the data signals received on the second, third, seventh and eighth pins of the peripheral port.



This Sheet Has Been Replaced





THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

04 JUN 1996

2. The peripheral device of claim 1, characterized in that the fourth and fifth pins of the apparatus are for transmitting a signal for activating the peripheral device and for transmitting the data request signal, respectively, and that the peripheral device further comprises means for transmitting an acknowledgement signal to the apparatus via the sixth pin of the plug connector and means for transmitting data signals to the apparatus via the second, third, seventh and eighth pins of the plug connector in synchronism with the clock signal.

3. The peripheral device of claim 1, characterized in that the fourth and fifth pins of the apparatus are for transmitting a signal for activating the peripheral device and for transmitting the clock signal as said data request signal, respectively, and that the peripheral device further comprises means for maintaining the sixth pin at the same potential as on the fifth pin and means for transmitting parallel data signals to the apparatus via the second, third, seventh and eighth pins of the plug connector in synchronism with the clock signals.

4. The peripheral device of claim 1, characterized in that the fourth and fifth pins of the apparatus are for transmitting a signal for activating the peripheral device and for transmitting the clock signal, respectively; and

that the peripheral device further comprises first means for maintaining the second pin at the same potential as on the





THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

04 JUN 1996

first pin, second means for maintaining the sixth, seventh and eighth pins at the same potential as on the ninth pin, and means for transmitting serial data signals to the apparatus via the third pin in synchronism with the clock signals.

5. A peripheral device for use with a data processing apparatus, comprising a plug connector detachably connectable to a socket connector formed at a peripheral port on the apparatus, and means for transmitting data signals to the apparatus via the plug connector, characterized in that the plug connector comprises a set of terminal pins consisting of first to ninth pins disposed in a row correspondingly to a set of terminal pins disposed in the socket connector, the first pin for receiving a power source potential, the ninth pin for receiving a ground potential, the second, third, seventh and eighth pins for conducting data signals, and the fourth to sixth pins for conducting control signals;

that the peripheral device supplies the apparatus with a data signal representing a communication mode of the peripheral device via at least one of the second, third, seventh and eighth pins when a control signal of "1" to the fourth pin and "1" to the fifth pin or a control signal of "0" to the fourth pin and "1" to the fifth pin are supplied from the apparatus wherein "1" and "0" correspond to the power source and ground potentials, respectively; and

that the apparatus determines the communication mode for communicating with the peripheral device based on the data

This Sheet Has Been Replaced





THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

04 JUN 1996

signals received on the second, third, seventh and eighth pins of the peripheral port.

6. The peripheral device according to claim 5, characterized in that the peripheral device supplies a signal of "0" to the seventh pin, "0" to the eighth pin, "0" to the second pin and "1" to the third pin, respectively, when the peripheral device is supplied with the control signals whereby the apparatus determines that the peripheral device connected to the socket connector employs the three-wire hand-shake type communication mode.

7. The peripheral device according to claim 5, characterized in that the peripheral device comprises means for maintaining the sixth pin at the same potential as on the fifth pin and that the peripheral device supplies a signal of "0" to the seventh pin, "0" to the eighth pin, "1" to the second pin and "1" to the third pin, respectively, when the peripheral device is supplied with the control signals whereby the apparatus determines that the peripheral device connected to the socket connector employs the clocked parallel type communication mode.

8. The peripheral device according to claim 5, characterized in that the peripheral device supplies a signal of "0" to the seventh pin, "0" to the eighth pin, "1" to the second pin and "0" to the third pin, respectively, when the peripheral device is supplied with the control signals, whereby the apparatus



THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

04 JUN 1996

determines that the peripheral device connected to the socket connector employs the clocked serial type communication mode.

9. A peripheral device for use with a data processing apparatus, comprising a plug connector detachably connectable to a socket connector formed at a peripheral port on the apparatus, means for transmitting data signals to the apparatus through the plug connector, characterized in that the plug connector comprises a set of terminal pins consisting of first to ninth pins disposed in a row correspondingly to a set of terminal pins disposed in the socket connect, the first pin for receiving a power source, the ninth pin for receiving a ground potential, the second, third, seventh and eighth pins for conducting data signals, and the fourth to sixth pins for conducting control signals;

that the peripheral device is supplied with control signals from the apparatus alternatively in a first signal combination in which the fourth pin becomes "1" and the fifth pin becomes "1", or in a second signal combination in which the fourth pin becomes "0" and the fifth pin becomes "1", wherein "1" and "0" correspond to the power source and ground potentials, respectively; and

that, when the control signals are in the first or second signal combination, the apparatus determines a peripheral ID based upon the data from the second, third, seventh and eighth pins, and then determines that the peripheral device connected to the socket connector employs a TH/TR communication mode.



This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

04 JUN 1996

10. The peripheral device according to claim 9, wherein the peripheral device comprises a plurality of switching keys disposed thereon to be manually operated by a player.

11. The peripheral device according to claim 10, characterized in that the apparatus supplies data select signals TH and TR to the peripheral device via the fourth and fifth pins, respectively; and

that the peripheral device transmits various sets of data signals responsive to the data select signals TH and TR via the seventh, eighth, second and third pins, the various sets of data signals including data indicative of status of the switching keys.

12. The peripheral device according to claim 11, characterized in that, when the data select signals TH and TR are "1" and "1", respectively, the peripheral device transmits data back to the apparatus assigning the seventh pin as a signal path to one of the switching keys, the eighth pin "1", the second pin "0", and the third pin "0"; and

that, when the data select signals TH and TR are "0" and "1", or "1" and "0", or "0" and "0", the peripheral device supplying the apparatus with data indicative of status of the switching keys via the seventh, eighth, second and third pins, respectively.

13. The peripheral device according to claim 12, characterized in that the sixth pin is supplied with "1" all the time while the data select signals are supplied.



THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

04 JUN 1996

14. The peripheral device of claim 3 or 7, characterized in that the means for maintaining includes means for short-circuiting the sixth pin with the fifth pin.

15. The peripheral device of claim 4, characterized in that the first means for maintaining includes means for short-circuiting the second pin with the first pin and the second means for maintaining includes means for short-circuiting the sixth, seventh and eighth pins with the ninth pin.

16. The peripheral device of any one of claims 1 to 8, characterized in that the peripheral device further comprises means for configuring the set of the terminal pins of the plug connector to be indicative of the communication mode of the peripheral device.

17. The peripheral device of claim 16, characterized in that said configuration means includes means for short-circuiting selected ones of the terminal pins of said plug connector.

18. The peripheral device of any one of the preceding claim, characterized in further comprising a printed circuit board on which means for generating the data signals to be supplied to the apparatus is formed, and a cable including a plurality of wires connecting the terminal pins of the plug connector with the printed circuit board.

This Sheet Has Been Replaced





THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

04 JUN 1996

19. The peripheral device of any one of claims 14, 15 and 17, characterized in that the short-circuiting means are formed in the plug connector.
20. The peripheral device of claim 18, characterized in that the wires of the cable are fewer in number than the pins on the peripheral port.
21. The peripheral device of claim 18, characterized in that the plug connector comprises means for short-circuiting selected ones of pins, and the wires of the cable are fewer in number than the pins on the peripheral port.
22. The peripheral device of any one of claims 14, 15 and 17, characterized in that the short-circuiting means are formed on the circuit board.
23. A game apparatus comprising the data processing apparatus and the peripheral device as defined in any one of the preceding claims.
24. A device connector for connecting the peripheral device to the data processing apparatus as defined in any one of the preceding claims, further characterized in that the pins are formed with elongated contacts disposed parallelly in a row.
25. A device connector for connecting a peripheral device to a data processing apparatus having a socket connector with nine terminal pins, characterized in that the device connector comprises a plug connector detachably connectable to the





* C L M S *

THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

4 JUN 1996

socket connector, the plug connector having first to ninth terminal pins disposed correspondingly to the nine terminal pins of the socket connector, the terminal pins of the plug connector being formed with elongated contacts disposed parallelly in a row;

that the first and ninth terminal pins of the plug connector are respectively for connecting to a power source and ground potential supplied from the apparatus; and

that at least one of the second, third, seventh and eighth terminal pins of the plug connector is for conducting data signals supplied from the peripheral device which represent a communication mode of the peripheral device.

26. The device connector of claim 25, characterized in that the sixth pin is for conducting a control signal supplied from the peripheral device, and the second, third, seventh and eighth terminal pins are for conducting the data signals from the peripheral device in a three-wire handshake communication mode.

27. The device connector of claim 25, characterized in that the fifth and sixth terminal pins of the plug connector are short-circuited together and the second, third, seventh and eighth terminal pins of the plug connector are for conducting the data signals supplied from the peripheral device in a clocked parallel communication mode.

28. The device connector of claim 25, characterized in that the first and second terminal pins of the plug connector are short-circuited together, the sixth through eighth terminal

This Sheet Has Been Replaced





THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

04 JUN 1996

pins of the plug connector are short-circuited together, and the third terminal pin of the plug connector is for conducting the data signals supplied from the peripheral device in a clocked serial communication mode.

29. The device connector of claim 25, characterized in that the fourth and fifth terminal pins are for conducting 2 bit data selecting signals supplied to the peripheral device from the processing apparatus.


30. A peripheral device for use with a data processing apparatus, comprising a plug connector detachably connectable to a peripheral port formed on the data processing apparatus, and means for transmitting a data signals to the data processing apparatus through the plug connector, characterized in that the plug connector comprises a set of terminal pins consisting of first to ninth pins disposed in a row correspondingly to a set of terminal pins disposed at the peripheral port;

that the terminal pins of the plug connector are predeterminedly configured in accordance with a communication mode between the processing apparatus and the peripheral device;

that the data signals include identification data representing a communication mode of the peripheral device and are supplied to the apparatus via at least one of the terminal pins in synchronism with clock signals supplied from the data processing apparatus; and

that the data processing apparatus determines the communication mode for communicating with the peripheral

This Sheet Has Been Replaced





THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

04 JUN 1996

device based on the data signals received on at least one of
said other terminal pins.

31. A device connector for connecting a peripheral device to
a data processing apparatus having a socket connector with
nine terminal pins, characterized in:

that the device connector comprises a plug connector
detachably connectable to the socket connector, the plug
connector has first to ninth terminal pins disposed
correspondingly to the nine terminal pins of the socket
connector, the terminal pins of the plug connector and socket
connector are formed with elongated contacts disposed in
parallel, in a row;

that the terminal pins of the plug connector are
predeterminedly configured in accordance with a communication
mode of the peripheral; and

at least one of terminal pins of the plug connector is
for conducting data signals supplied from the peripheral
device which represent a communication mode of the peripheral
device.

32. The peripheral device of any one of claims 1-8,
characterized in that the peripheral device comprises a
plurality of switching keys disposed thereon to be manually
operated by a player.

33. The device connector of claim 25, characterized in that a
control signal is supplied through the fourth and fifth pins
of the plug connector from the processing apparatus to the
peripheral device.



~~THIS SHEET HAS BEEN
REPLACED~~

REPLACEMENT SHEET
PCT/JP95/02073
04 JUN 1996

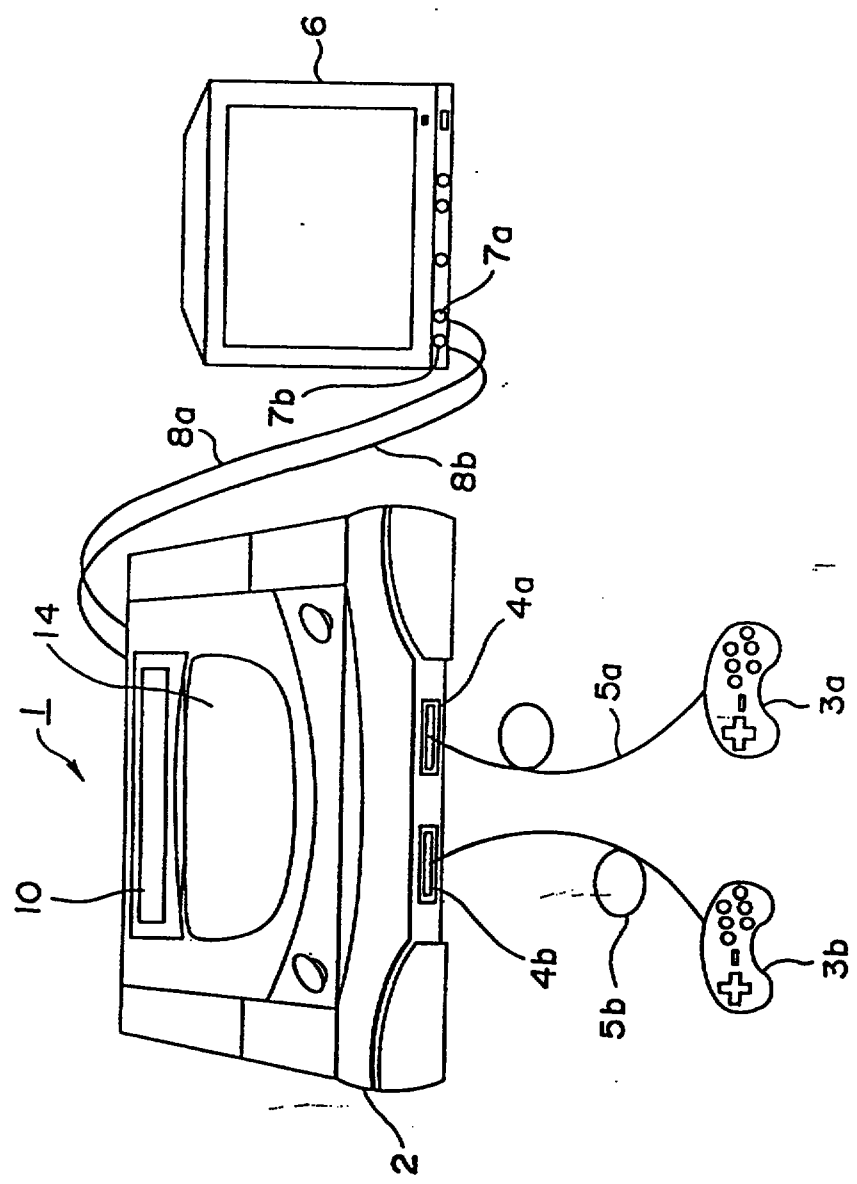


FIG.1

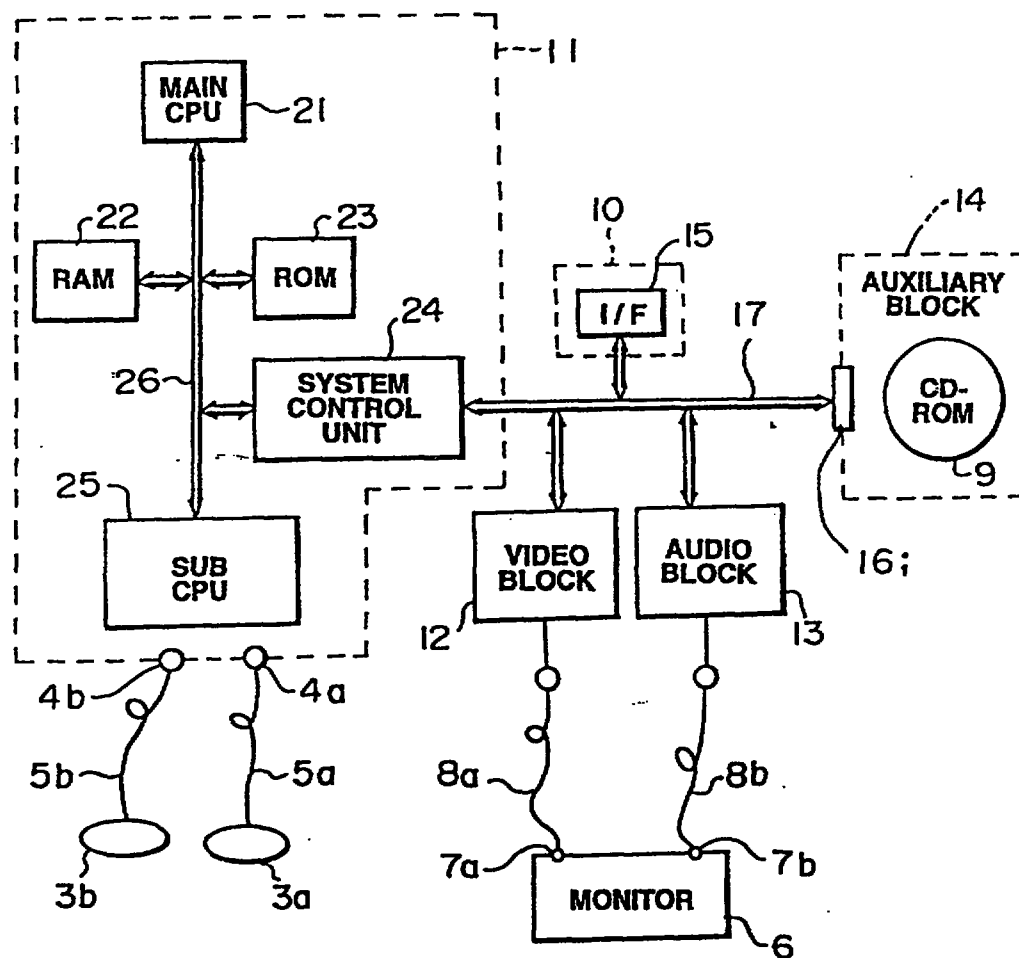


FIG.2

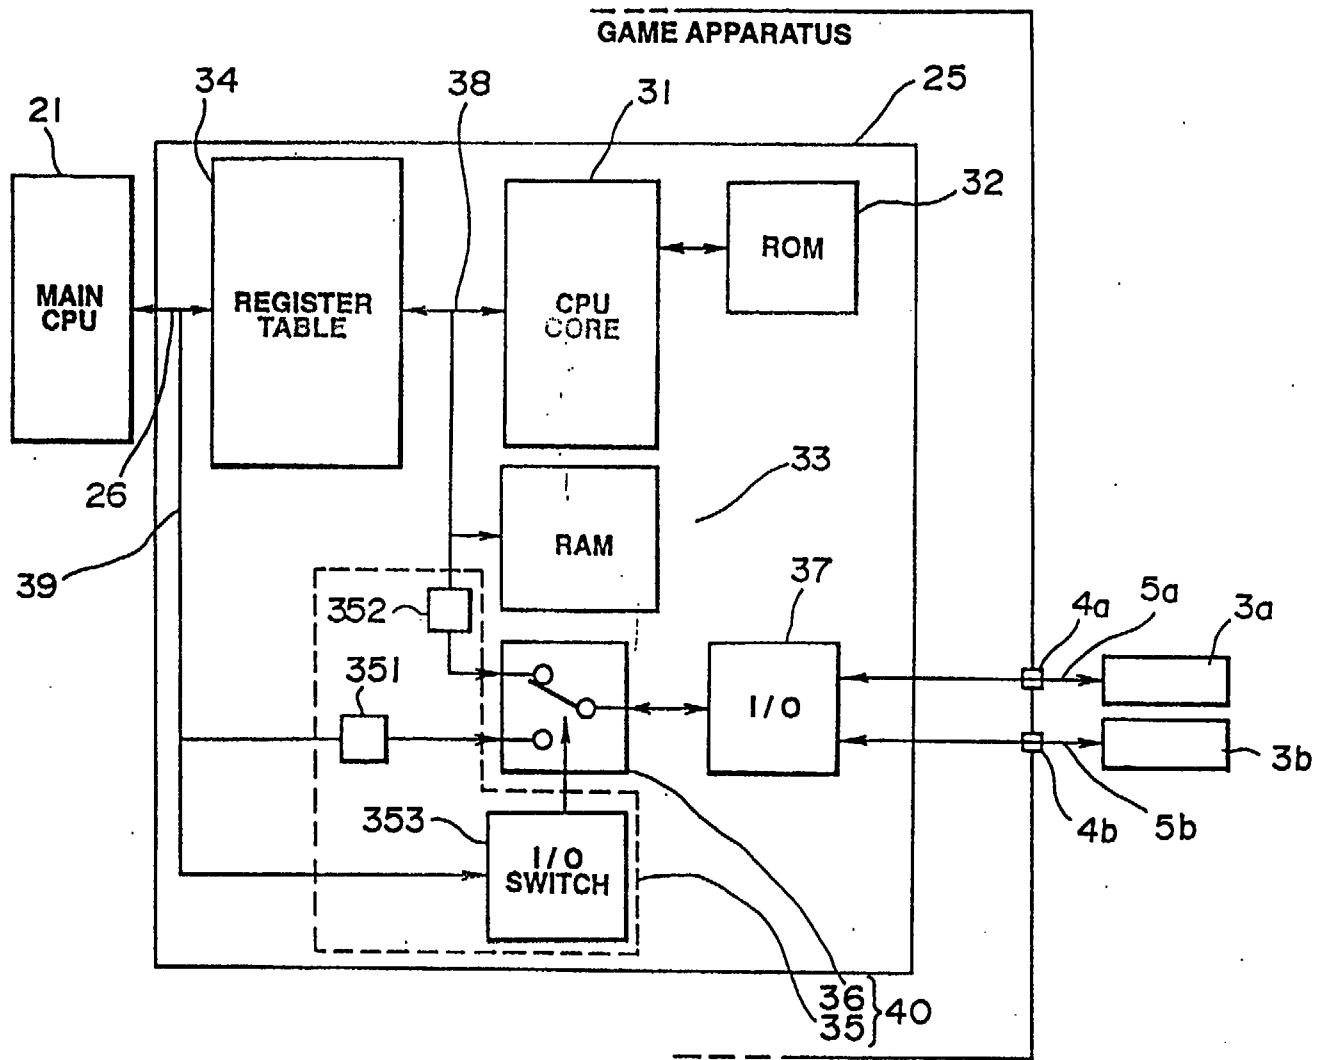


FIG.3

4/9


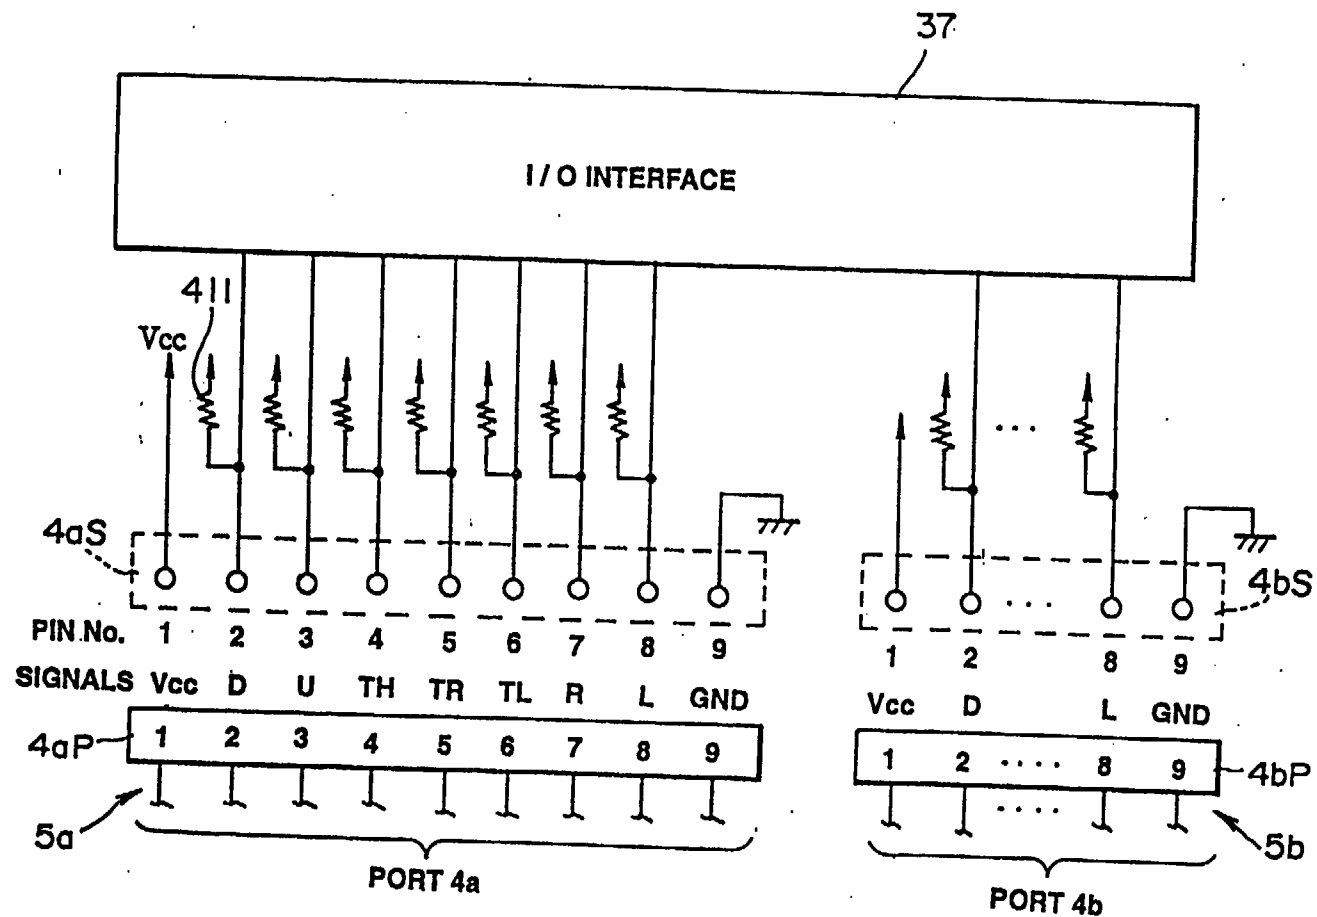


FIG.4

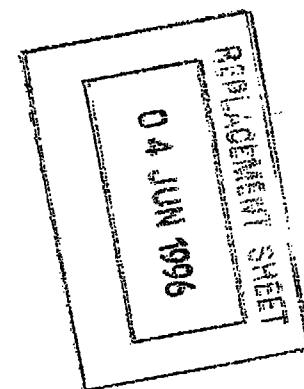

WO 96/12250

PCT/JP95/02073

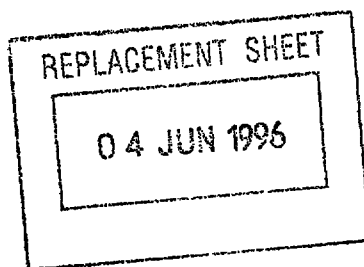


FIG.5A

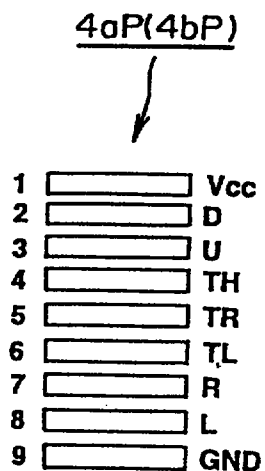


FIG.5B


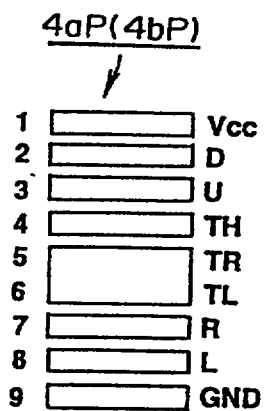


FIG.5C

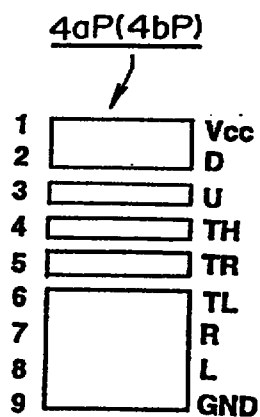

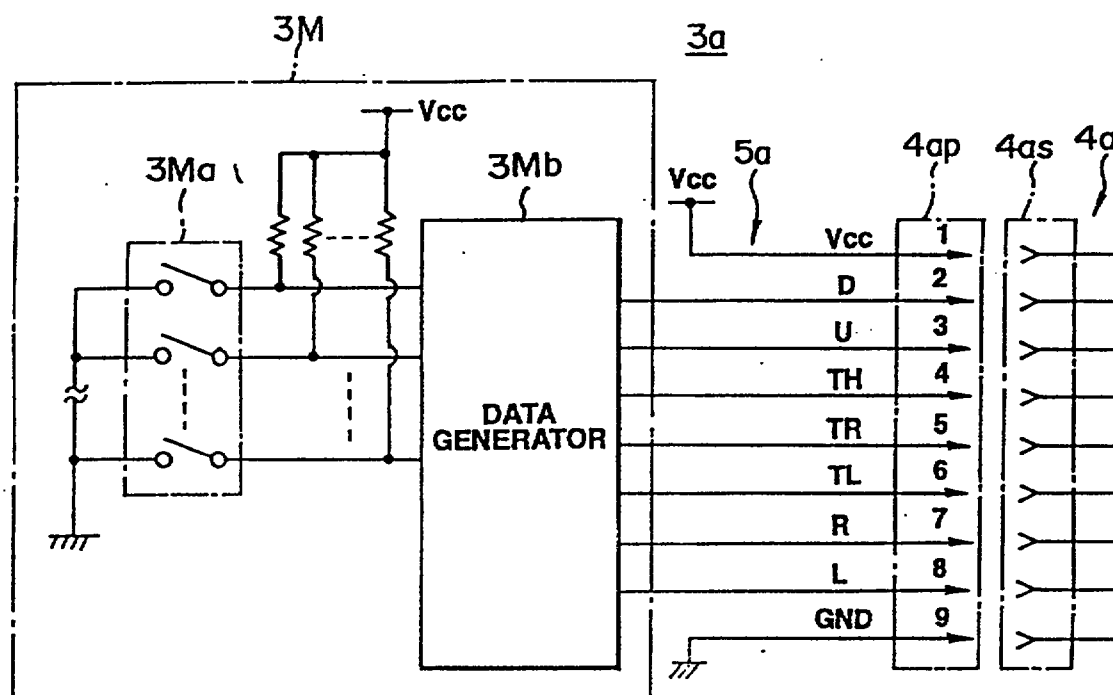


FIG.6A

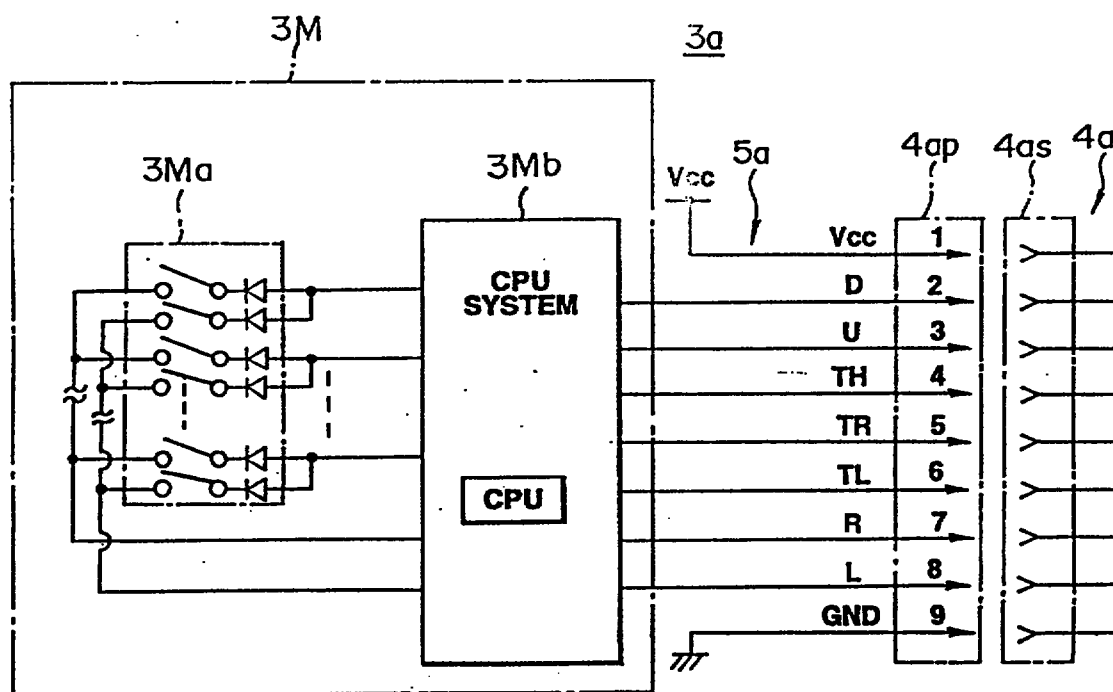


FIG.6B

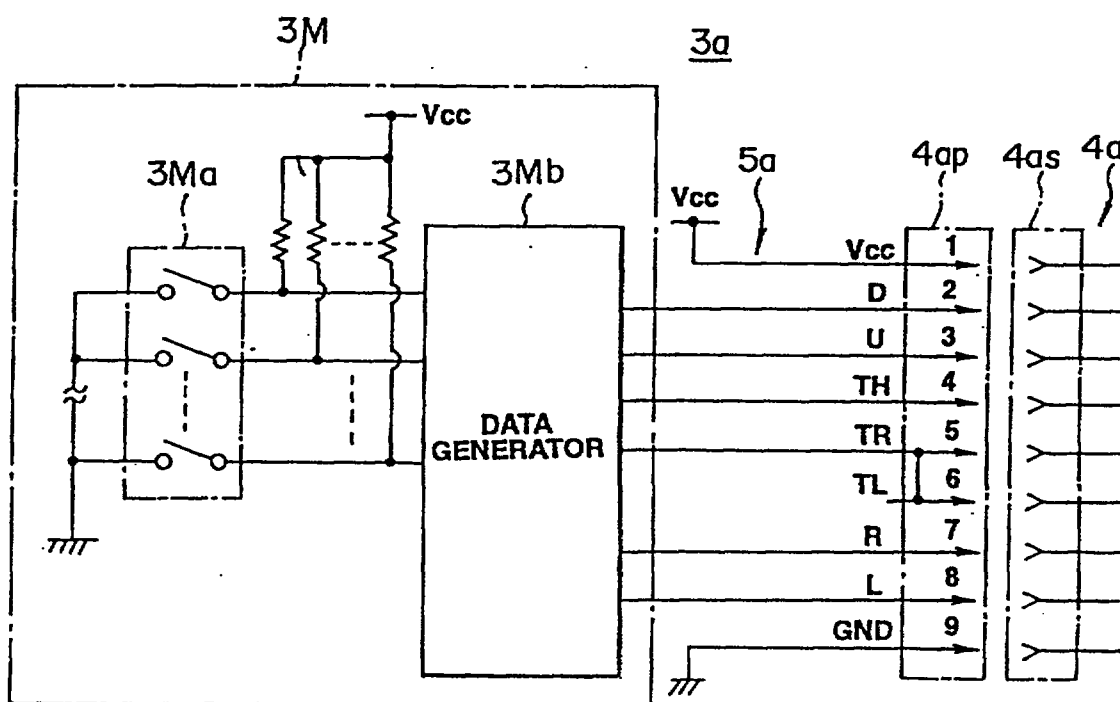


FIG. 6C

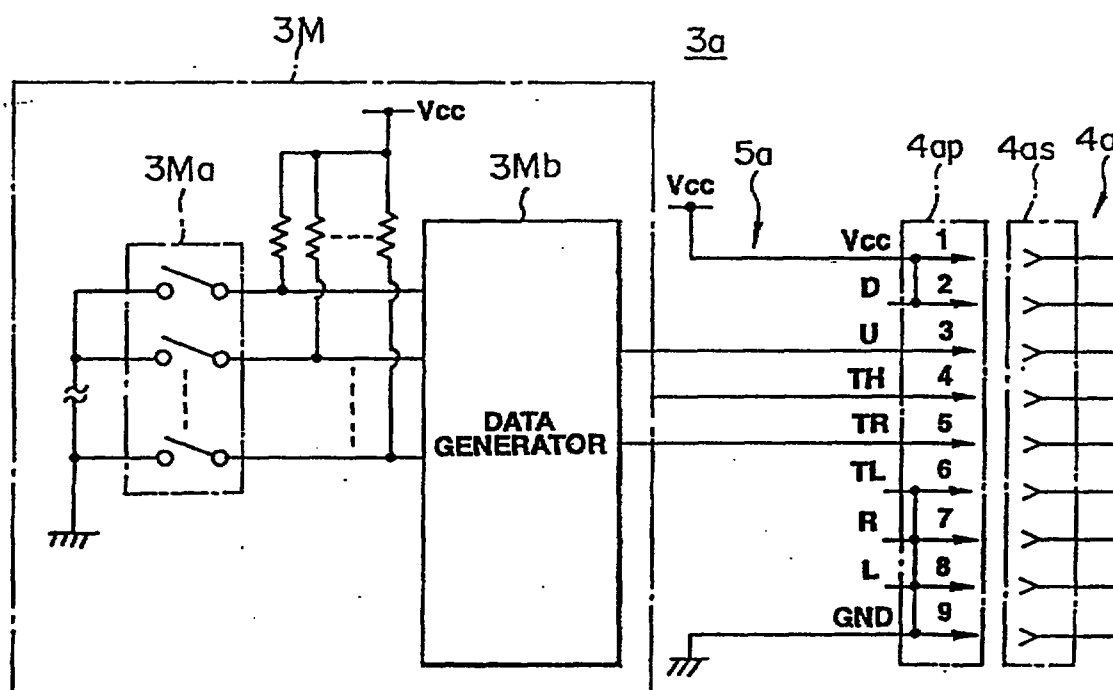


FIG. 6D

b/9

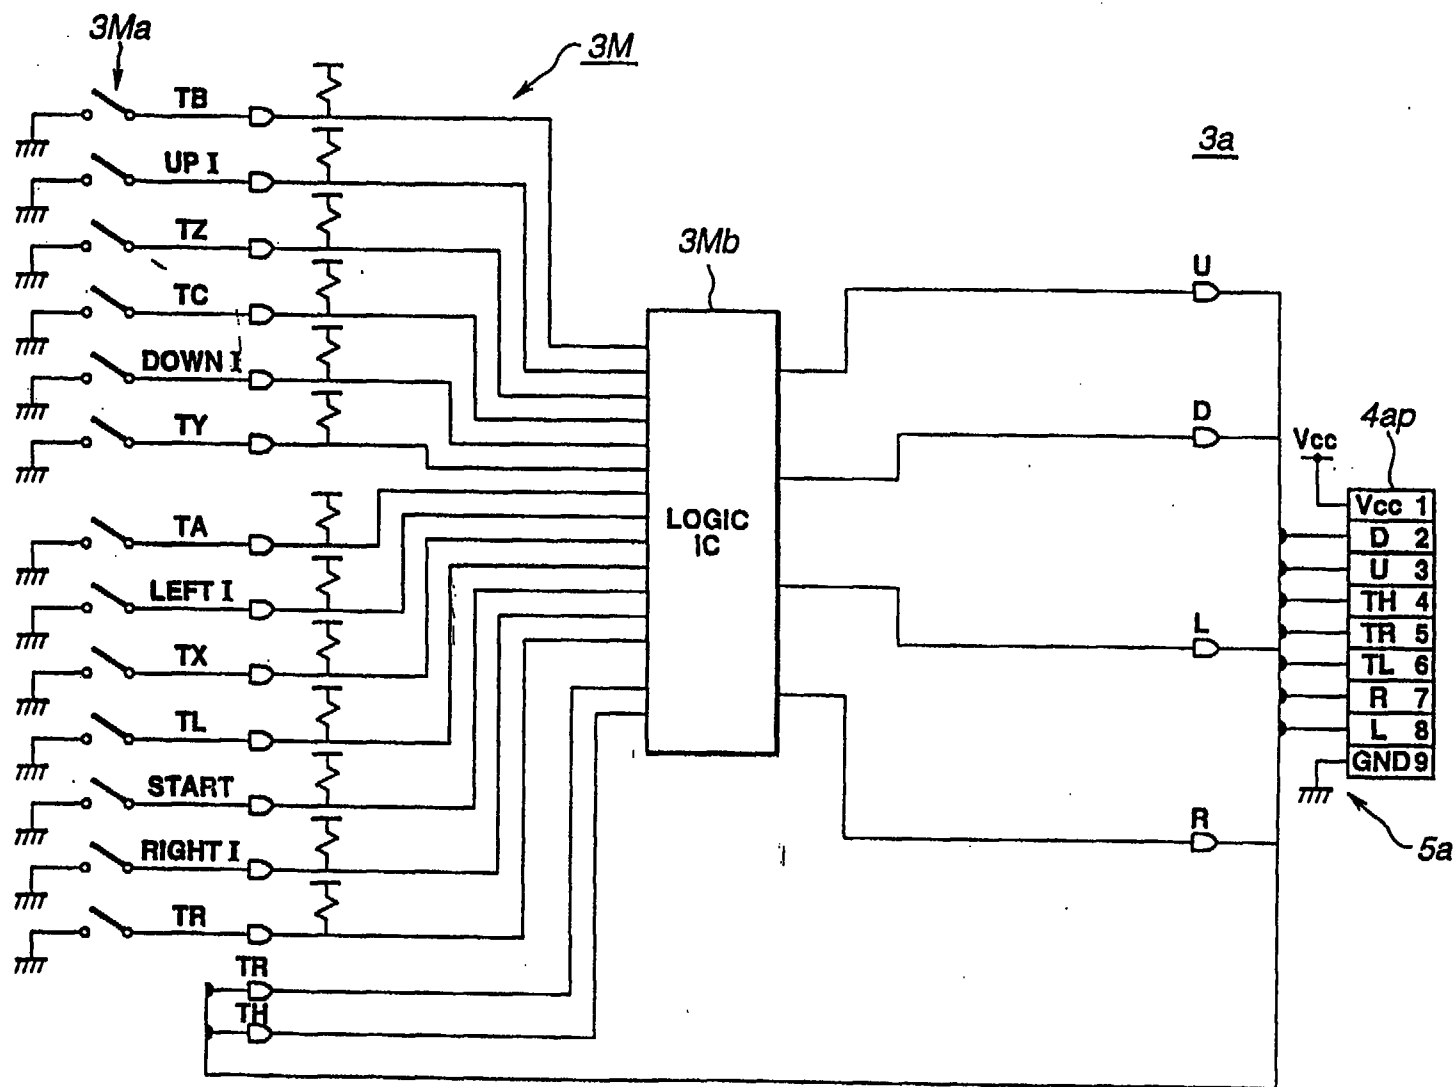


FIG.7A

REPLACEMENT SHEET
04 JUN 1996

WO 96/12250

PCT/JP95/02073



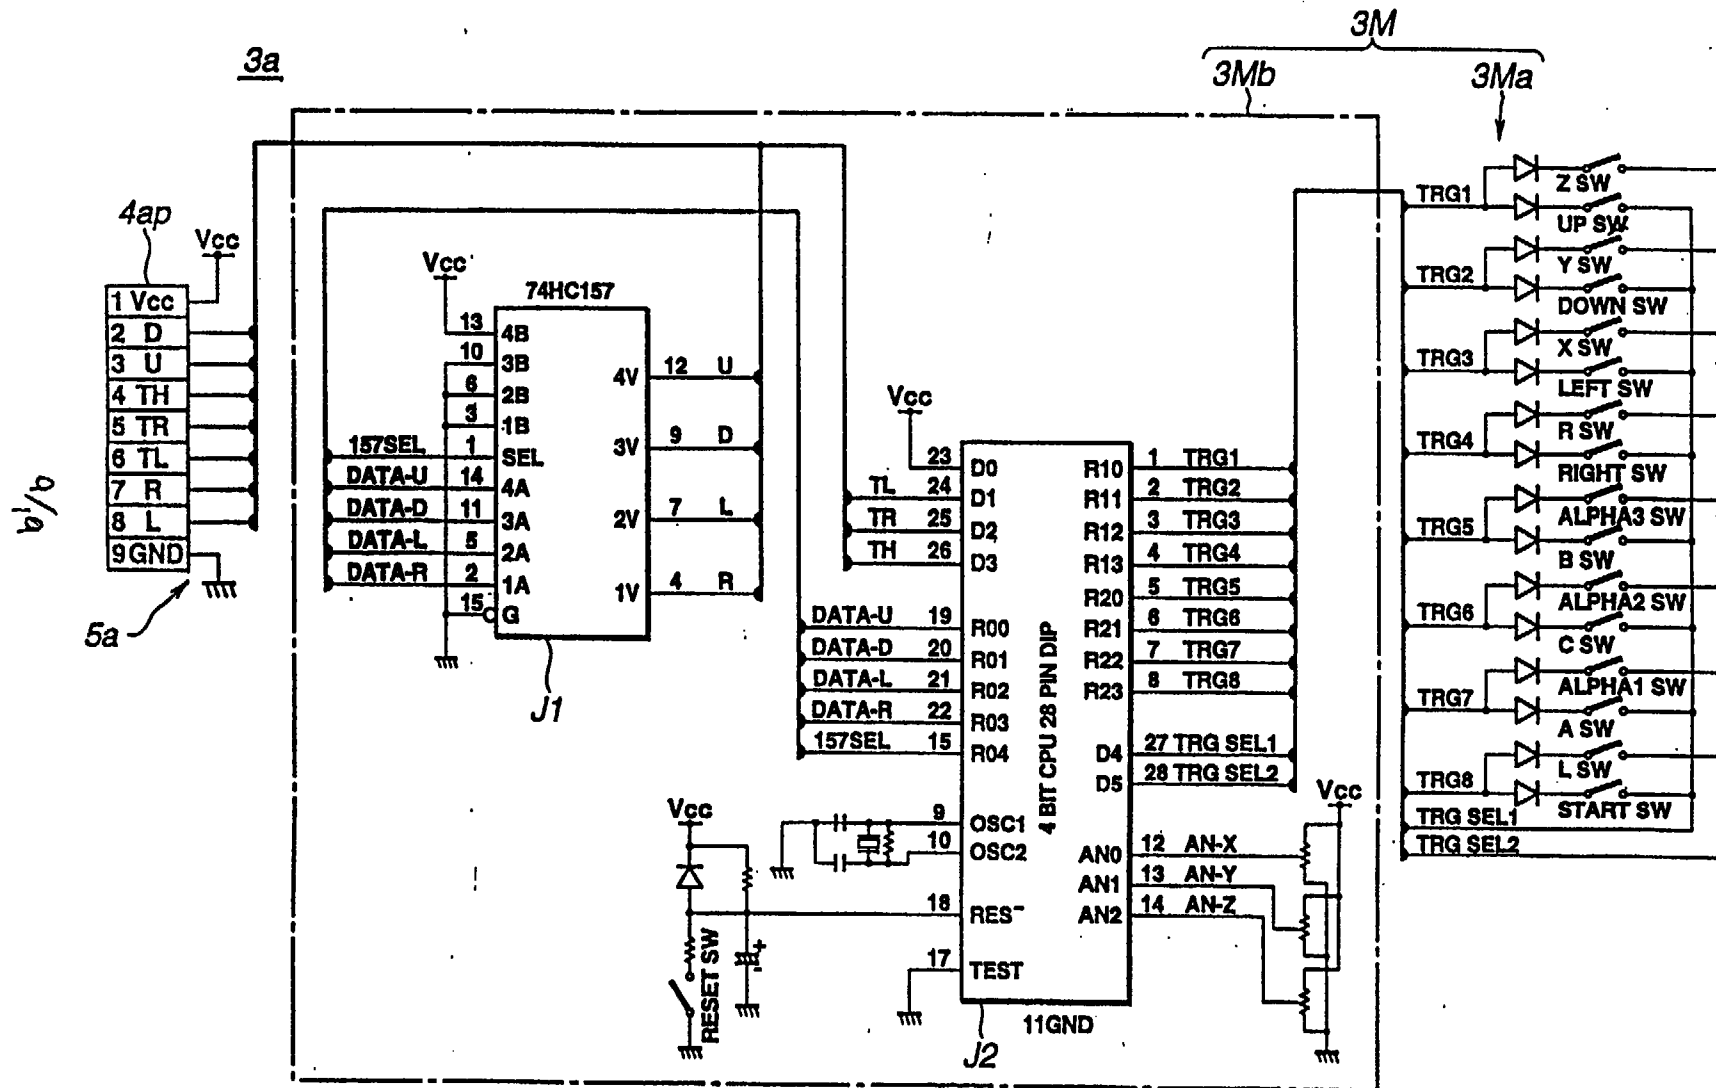


FIG.7B

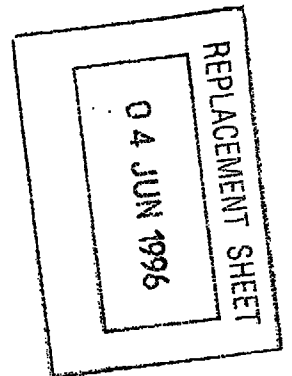WO 96/12250



PCT/JP95/02073

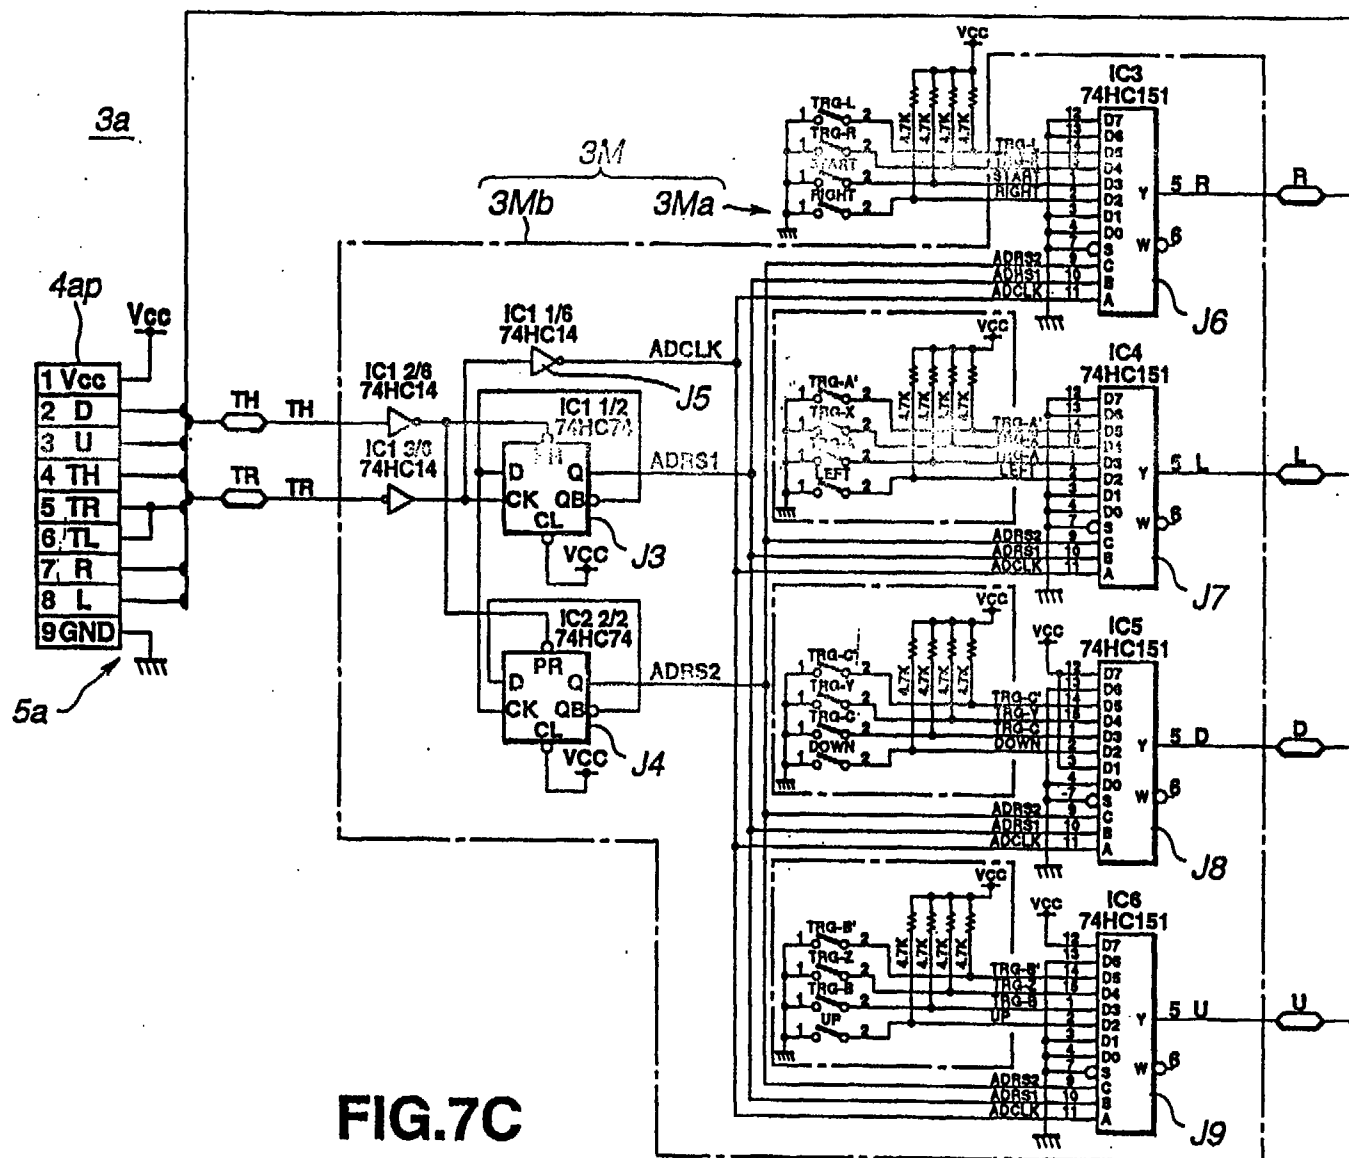

REPLACEMENT SHEET
04 JUN 1996

WO 96/12250

PCT/JP95/02073

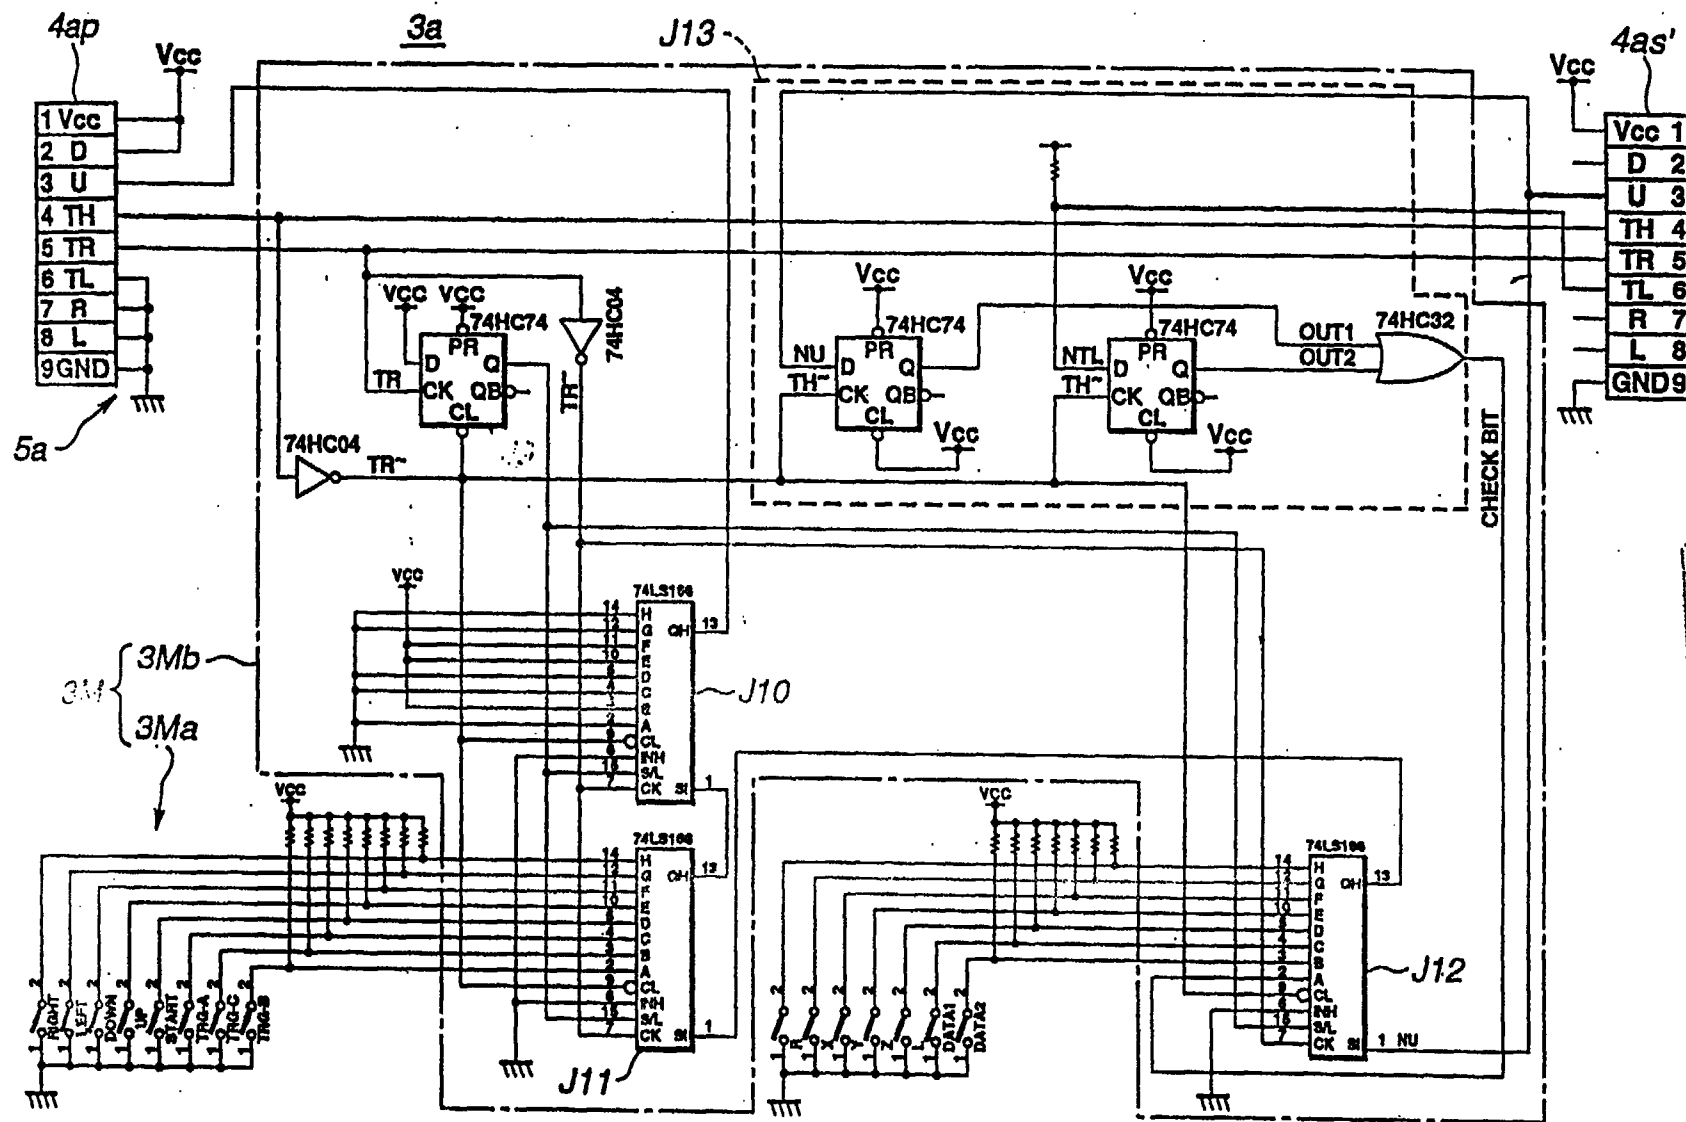


FIG. 7D

WO 96/12250

04 JUN 1996

PCT/JP95/02073

REPLACEMENT SHEET

04 JUN 1996

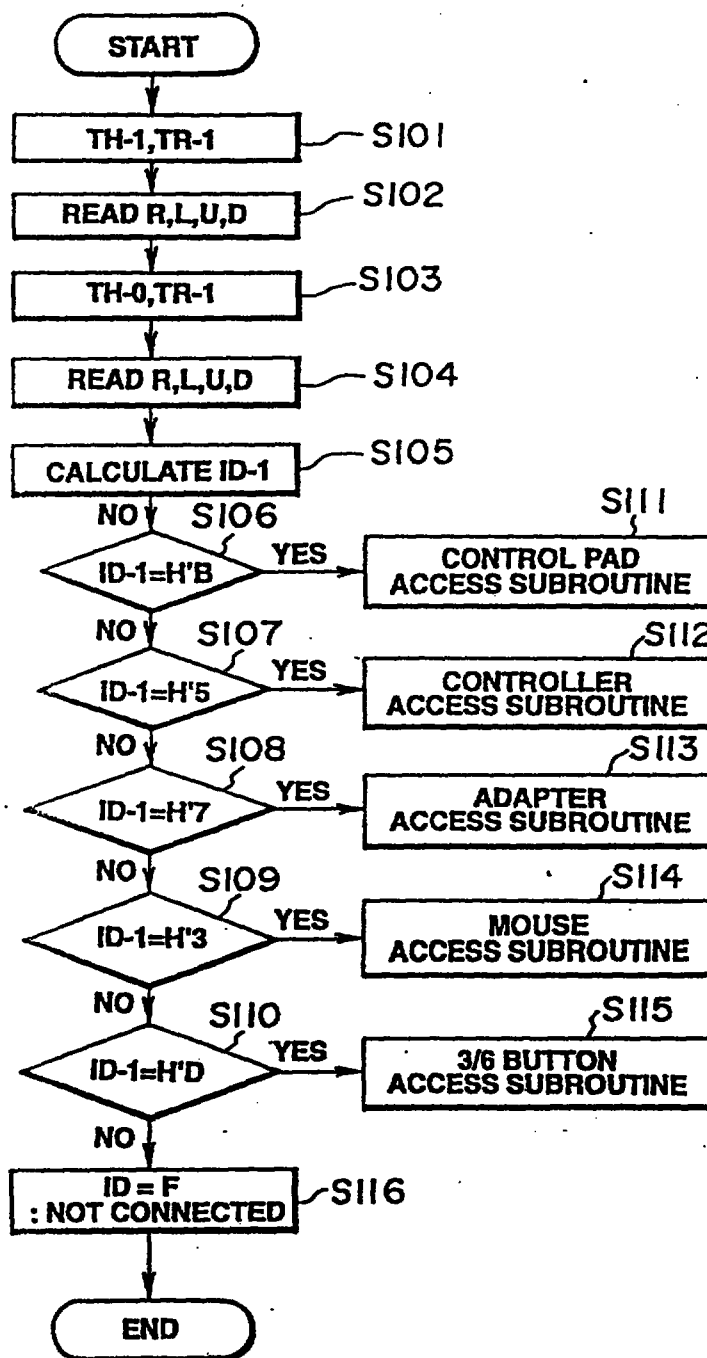


FIG.8

04 JUN 1996

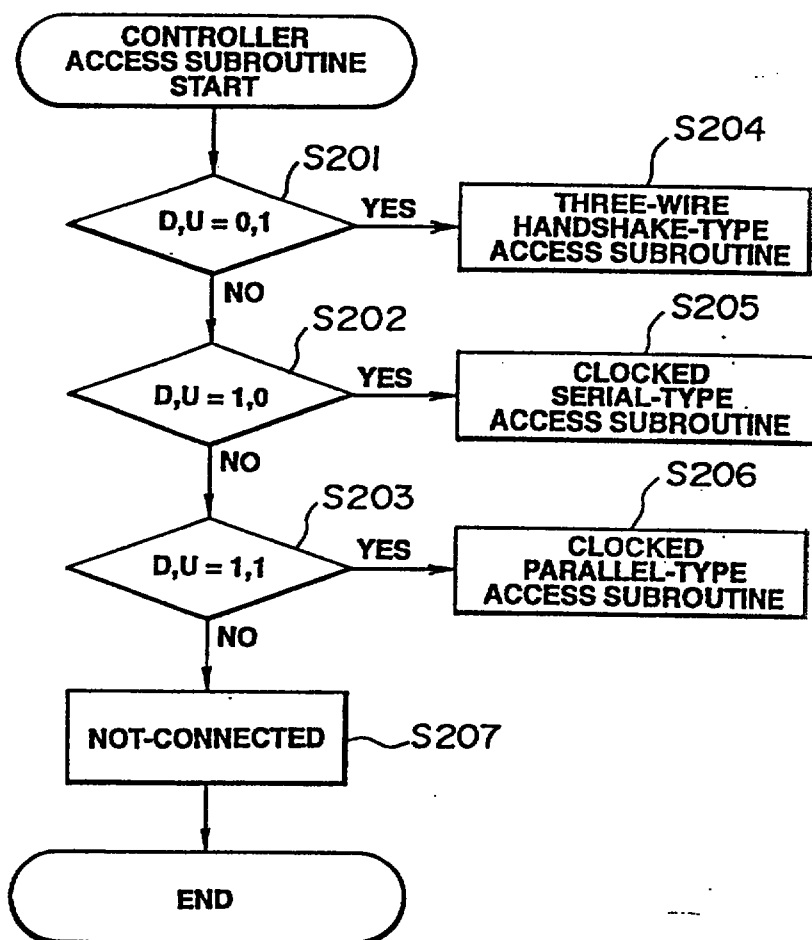


FIG.9

REPLACEMENT SHEET

04 JUN 1996

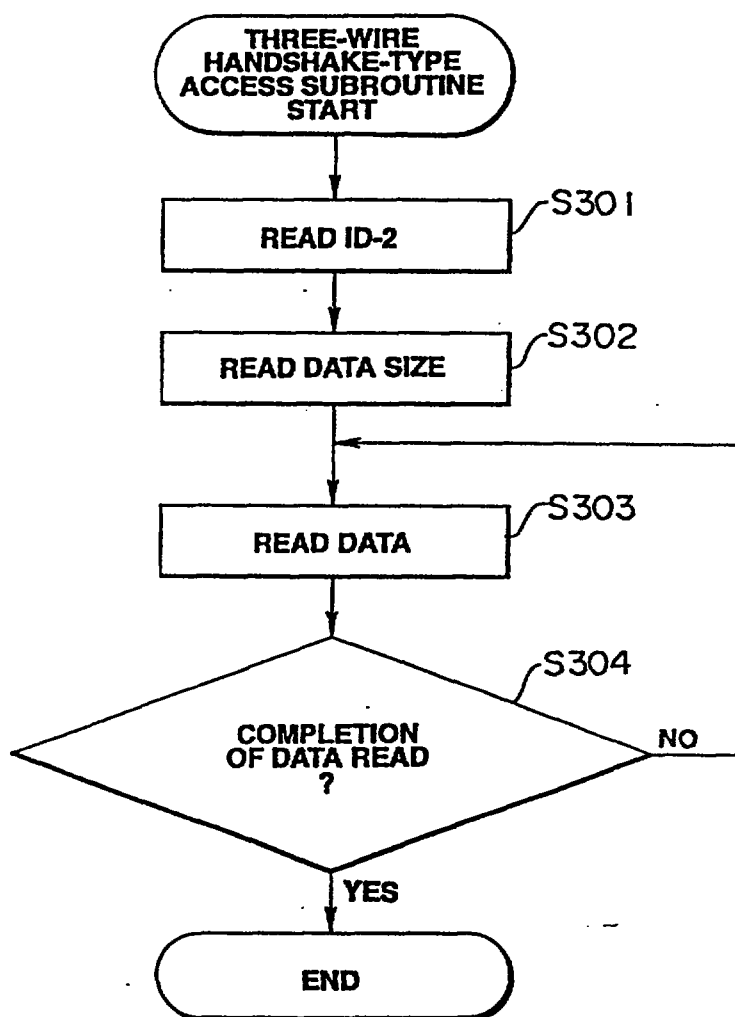


FIG.10

REPLACEMENT SHEET

04 JUN 1996

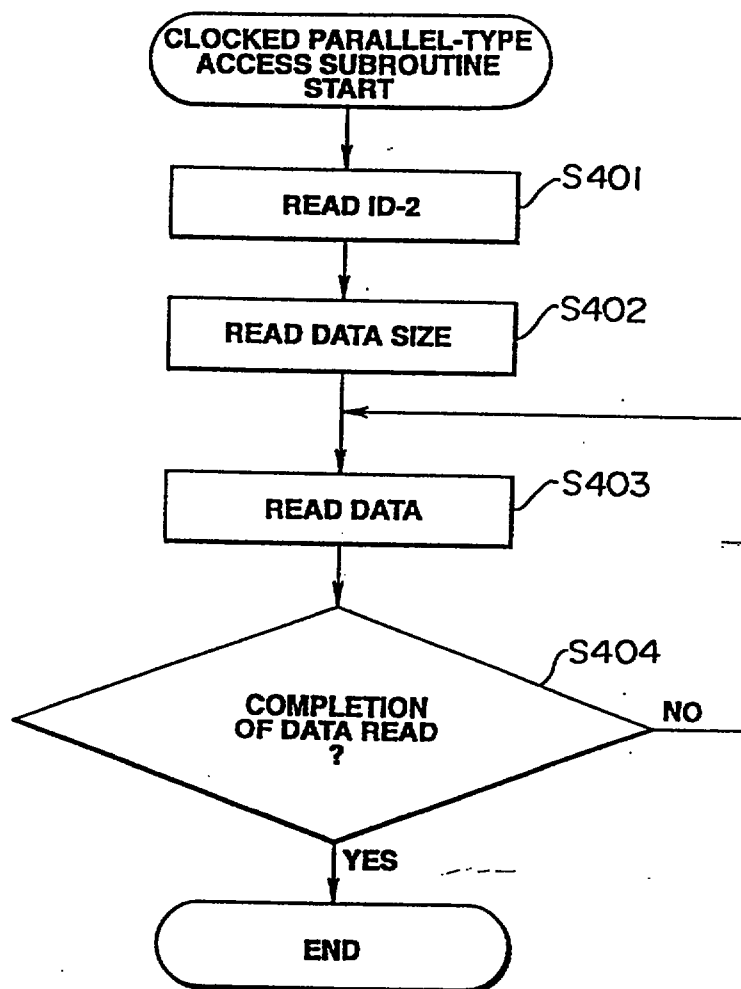


FIG.11

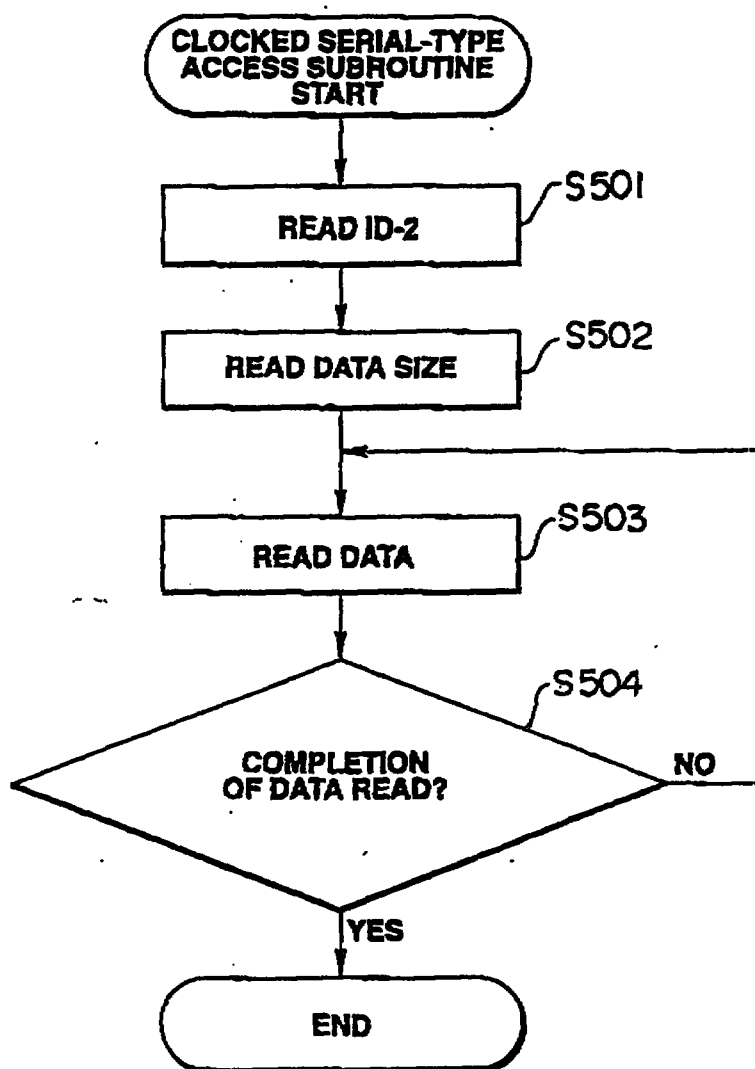
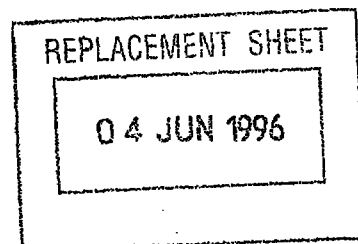


FIG.12

16/19

REPLACEMENT SHEET

04 JUN 1996

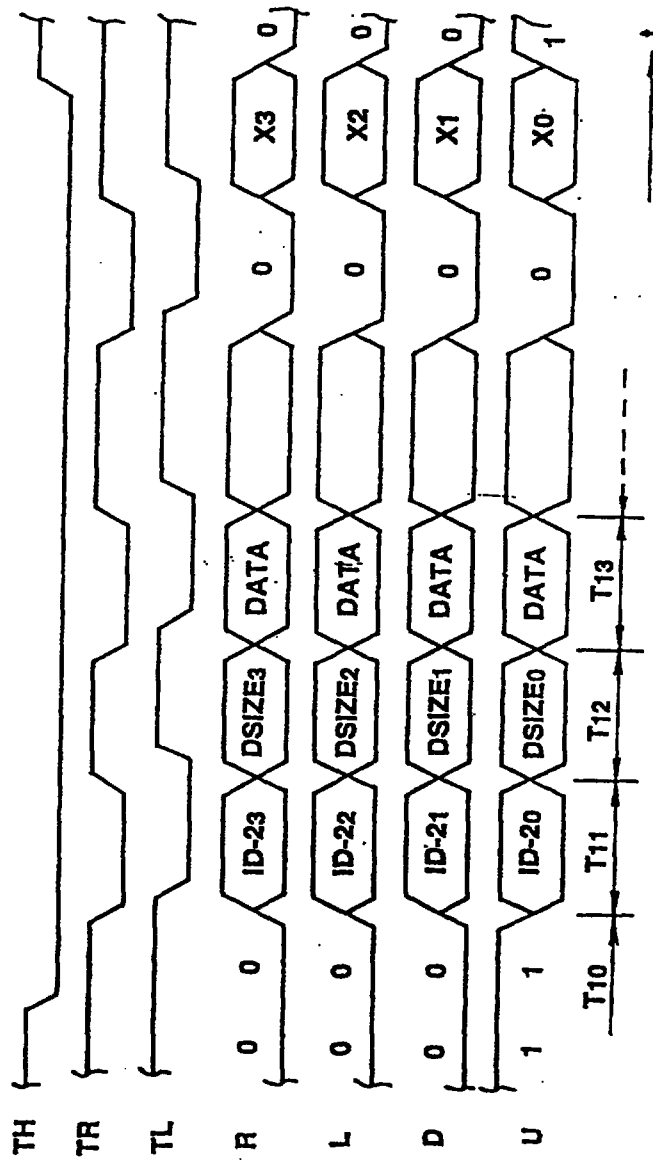


FIG.13

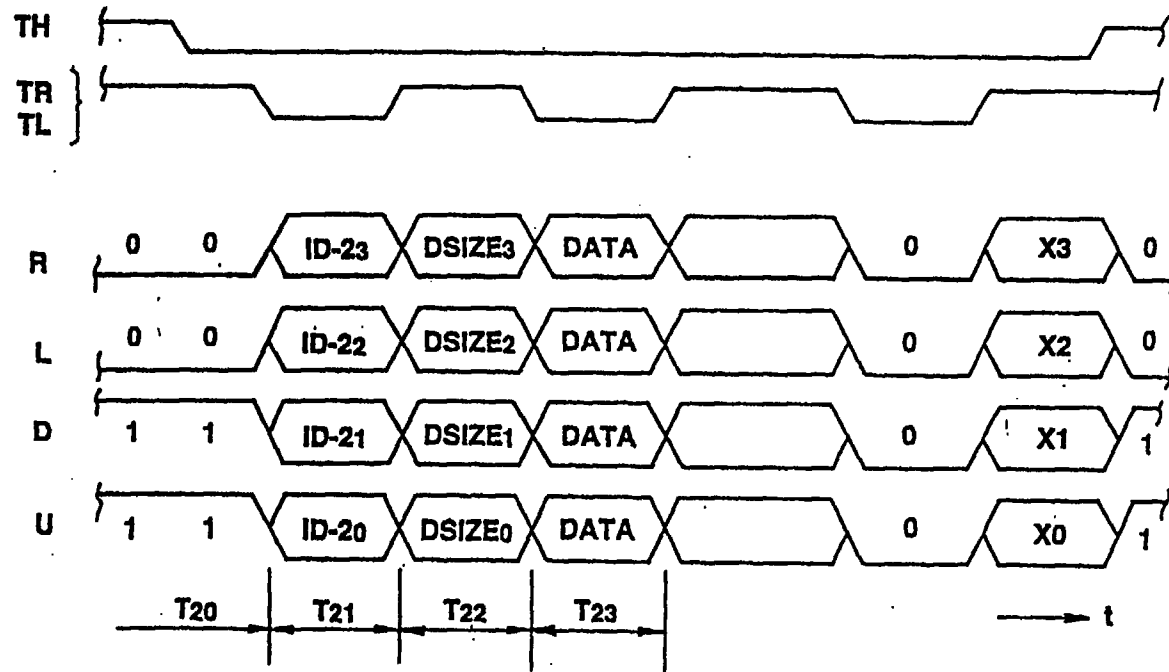


FIG.14

REPLACEMENT SHEET

04 JUN 1996

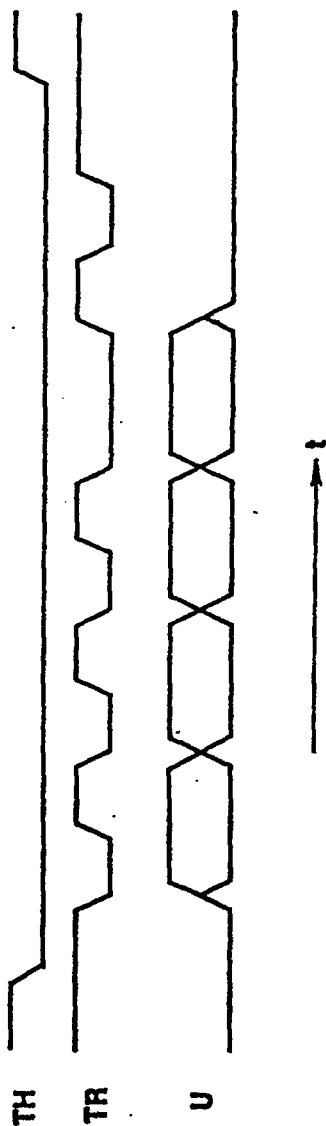



FIG.15

9610917-8

REPLACEMENT SHEET
11 SEP 1996

This Sheet Has Been Replaced

THIS SHEET HAS BEEN
REPLACED



CLAIMS

1. A peripheral, device (3a,3b) for use with data processing apparatus (2), comprising a plug connector (4ap,4bp) detachably connectable to a peripheral port (4a,4b) formed on the data processing apparatus (2), and means (3M) for transmitting data signals to the data processing apparatus (2) through the plug connector (4ap, 4bp), characterized in that:
the plug connector (4ap,4bp) comprises a set of terminal pins consisting of first to ninth pins disposed in a row corresponding to a set of terminal pins disposed at the peripheral port (4a,4b), the first pin for conducting one of a power source and a ground potential, the ninth pin for conducting the other of the power source and the ground potential, at least one of the second, third, seventh and eighth pins for conducting data signals, and the fourth and fifth pins for conducting a control signal; and
the peripheral device (3a,3b) further comprises means for supplying the apparatus (2), in response to the control signal supplied from the apparatus via the fourth and fifth pins, with a data signal representing a communication mode of the peripheral device via the second, third, seventh and eighth pins so that the apparatus determines the communication mode of the peripheral device.
2. A peripheral device as claimed in claim 1, wherein: the control signal includes a peripheral selection signal, and the peripheral device (3a,3b) is arranged to supply an acknowledgment signal to the apparatus (2) via the sixth pin of the plug connector and includes means (3M) for transmitting data signals to the apparatus (2) via the second, third, seventh and eighth pins of the plug

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

11 SEP 1996

connector (4ap, 4bp) while receiving the peripheral selection signal.

3. A peripheral device as claimed in claim 1, wherein: the control signal includes a peripheral selection signal and a clock signal; the peripheral device (3a,3b) further comprises means for maintaining the sixth pin at the same potential as that of the fifth pin; and the transmitting means transmits parallel data signals to the apparatus (2) via the second, third, seventh and eighth pins of the plug connector (4ap,4bp) in synchronism with the clock signal while receiving the peripheral selection signal.
4. A peripheral device as claimed in claim 1, wherein: the control signal includes a peripheral selection signal and a clock signal; the peripheral device (3a,3b) further comprises first means for maintaining the second pin at the same potential as that of the first pin, second means for maintaining the sixth, seventh and eighth pins at the same potential as that of the ninth pin; and said transmitting means (3M) is arranged to transmit serial data signals to the apparatus (2) via the third pin in synchronism with the clock signal while receiving the peripheral selection signal.
5. A peripheral device as claimed in any preceding claim, wherein a socket connector (4as,4bs) is formed at the peripheral port (4a,4b) of the data processing apparatus (2) and the first pin is arranged to receive a power source potential and the ninth pin is arranged to receive a ground potential.
6. A peripheral device as claimed in any preceding claim, wherein the control signal supplied from the apparatus

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

11 SEP 1996

- (2) for collecting the data signal representing the communication mode of the peripheral device (3a,3b) includes a first control signal supplied by the apparatus having a data combination of "1" supplied to the fourth pin and "1" supplied to the fifth pin and a second control signal in a data combination of "0" supplied, to the fourth pin and "1" supplied to the fifth pin, wherein "1" and "0" correspond to the power source and ground potentials, respectively.
7. A peripheral device as claimed in claim 6 when appended to claim 1 or 2, wherein the peripheral device (3a,3b) supplies the data signal having a data combination of "0" to the seventh pin, "0" to the eighth pin, "0" to the second pin and "1" to the third pin, respectively, in response to each of the first and second control signals so that the apparatus (2) determines that the peripheral device connected to the peripheral port (4a,4b) employs the three-wire handshake type communication mode.
8. A peripheral device as claimed in claim 6 when appended to claim 1 or 3, wherein the peripheral device (3a,3b) supplies the data signal having a data combination of "0" to the seventh pin, "0" to the eighth pin, "1" to the second pin and "1" to the third pin, respectively, in response to each of the first and second control signals so that the apparatus determines that the peripheral device (3a,3b) connected to the peripheral port (4a,4b) employs the clocked parallel type communication mode.
9. A peripheral device as claimed in claim 6 when appended to claim 1 or 4, wherein the peripheral device (3a,3b) supplies the data signal having a data combination of

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

11 SEP 1996

- "0" to the seventh pin, "0" to the eighth pin, "1" to the second pin and "0" to the third pin, respectively, in response to each of the first and second control signals so that the apparatus determines that the peripheral device connected to the peripheral port (4a, 4b) employs the clocked serial type communication mode.
10. A peripheral device as claimed in claim 6 when appended to claim 1, wherein the peripheral device (3a, 3b) comprises a plurality of switching keys disposed thereon to be manipulated by an operator; and the peripheral device supplies the data signal including a data combination of "1" to the eighth pin, "0" to the second pin and "0" to the third pin, respectively, in response to the first control signal and a data combination indicative of a selected four of the plurality of switching keys to the second, third, seventh and eighth pins in response to the second control signal so that the apparatus determines that the peripheral device connected to the peripheral port (4a, 4b) employs the TH/TR selection type communication mode.
11. A peripheral device as claimed in claim 10, wherein: the data combination of the data signal supplied by the peripheral device (3a, 3b) in response to the first control signal further includes data to the seventh pin indicative of one of the plurality of switching keys other than the selected four; and the data signal further includes data combinations indicative of the remaining ones of the plurality of switching keys supplied to the second, third, seventh and eighth pins in response to a third control signal having a data combination of "1" supplied to the fourth pin and "0" supplied to the fifth pin and in response to a fourth control signal having a data combination of "0" supplied

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

11 SEP 1996

to the fourth pin and "0" supplied to the fifth pin, respectively, said third and fourth control signals being supplied from the apparatus (2).

12. A peripheral device as claimed in any of claims 6 as appended to claim 1 or claims 10 or 11 wherein the data signal representing the communication mode of the peripheral device (3a,3b) is selected so as to comply with the following formula:

$$\begin{aligned} & \{(\text{data R in TH} = "1") \text{ or } (\text{data L in TH} = "1")\} \times 8h \\ & + \{(\text{data D in TH} = "1") \text{ or } (\text{data U in TH} = "1")\} \times 4h \\ & + \{(\text{data R in TH} = "0") \text{ or } (\text{data L in TH} = "0")\} \times 2h \\ & + \{(\text{data D in TH} = "0") \text{ or } (\text{data U in TH} = "0")\} \times 1h = Bh \end{aligned}$$

wherein data R represents data supplied on the seventh pin, data L on the eighth pin, data D on the second pin, data U on the third pin, and data TH on the fourth pin in the first or the second control signal, and wherein the suffix h represents a hexadecimal number.

13. A peripheral device as claimed in any one of claims 1 to 9, or claim 12 when appended to any one of claims 1 to 6, wherein the peripheral device comprises a plurality of switching keys disposed thereon to be manually operated by a player.
14. A peripheral device as claimed in any one of claims 10, 11 and 13, or claim 12 when appended to claim 10 or 11, wherein the plurality of switching keys comprises "RIGHT", "LEFT", "DOWN", "UP", "TRG-L", "TRG-R", "TRG-A", "TRG-B", "TRG-C", "TRG-X", "TRG-Y", "TRG-Z" and "START".
15. A peripheral device as claimed in claim 10 or 11, or one of claims 12 and 14 when appended to claim 10 or 11,

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

11 SEP 1996

- wherein the selected four of the switching keys are "RIGHT", "LEFT", "DOWN" and "UP".
16. A peripheral device as claimed in any one of claims 12 when appended to claim 10 or 11 or claims 13 to 15 when appended to claim 12, wherein the peripheral device is arranged so that data L becomes "1", data D, "0" and data U, "0" in response to the first control signal and data R represents the switching key "RIGHT", data L switching key "LEFT", data D switching key "DOWN" and data U switching key "UP" in response to the second control signal.
 17. A peripheral device as claimed in any of claims 12 when appended to claim 10 or 11, or claims 13 to 15 when appended to claim 12, or claim 16, wherein: the peripheral device is constructed so that data R represents one of the switching keys other than "RIGHT", "LEFT", "DOWN" and "UP" in response to the first control signal; and the transmitting means supplies data signals indicative of the remaining ones of the plurality of switching keys to the apparatus (2) via the second, third, seventh and eighth pins in response to a third control signal in a data combination of "1" supplied to the fourth pin and "0" supplied to the fifth pin and in response to a fourth control signal in a data combination of "0" supplied to the fourth pin and "0" supplied to the fifth pin, said third and fourth control signals supplied, respectively, from the apparatus (2).
 18. A peripheral device as claimed in any one of claim 1, or claim 5 and 6 when appended to claim 1, or claims 10 to 12 and 15 to 17 wherein the peripheral device (3a,3b) comprises means for maintaining the sixth pin at the signal level of "1" or the power source potential at all



THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

11 SEP 1996

times while the peripheral device (3a,3b) is accessed by the data processing apparatus (2).

19. A peripheral device as claimed in any one of claims 1 and 3, or claims 5 and 6 when appended to claim 1 or 3, or claim 8, or claims 13 and 14 when appended to claim 1, 3 or 8, wherein the peripheral device (3a,3b) further comprises means for maintaining the sixth pin at the same potential as that of the fifth pin.
20. A peripheral device as claimed in any one of claims 1 and 3, or claims 5 and 6 when appended to claim 1 or 3, or claim 8, or claims 13 and 14 when appended to claim 1,3 or 8 wherein the peripheral device (3a, 3b) further includes means for short-circuiting the sixth pin with the fifth pin.
21. A peripheral device as claimed in any of claims 1 and 4, or claims 5 and 6 when appended to claim 1 or 4, or claim 9, or claims 13 and 14 when appended to claim 1, 4 or 9, wherein the peripheral device (3a,3b) further comprises means for maintaining the second pin at the same potential as that of the first pin and means for maintaining the sixth, seventh and eighth pins at the same potential as that of the ninth pin.
22. A peripheral device as claimed in any one of claims 1 and 4, or claims 5 and 6 when appended to claim 1 or 4, or claim 9, or claims 13 and 14 when appended to claim 1, 4 or 9 wherein the peripheral device (3a,3b) further includes means for short-circuiting the second pin with the first pin and means for short-circuiting the sixth, seventh and eighth pins with the ninth pin.





REPLACEMENT SHEET

11 SEP 1996

THIS SHEET HAS BEEN
REPLACED

23. A peripheral device as claimed in any one of claims 1 to 22, wherein the peripheral device (3a,3b) comprises means for configuring the set of plug pins to be indicative of the communication mode of the peripheral device.
24. A peripheral device as claimed in claim 23 when appended to claims 1, 3 to 6, 8, 9, 13, 14 or 19 to 23 wherein said configuring means comprises means for short-circuiting selected ones of the plug pins.
25. A peripheral device as claimed in any one of claims 20, 22 and 24 wherein the short-circuiting means are formed in the plug connector.
26. A peripheral device as claimed in any one of the preceding claims, wherein there is provided a printed circuit board on which means (3M) for generating the data signals to be supplied to the apparatus (2) is provided and a cable (5a) having a plurality of wires connecting the terminal pins of the plug connector with the printed circuit board.
27. A peripheral device as claimed in claim 26, wherein the wires of the cable (5a) are fewer in number than the pins of the peripheral port (4a,4b).
28. A peripheral device as claimed in claim 24, or claim 26 or 27 when appended to claim 24 wherein the short-circuiting means are formed on the circuit board.
29. A game apparatus (1) comprising a data processing apparatus (2) and the peripheral device as claimed in any one of the preceding claims.

This Sheet Has Been Replaced



This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

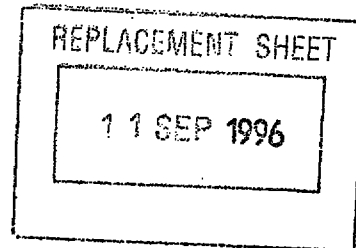
REPLACEMENT SHEET

11 SEP 1996

30. A game apparatus as claimed in claim 29, wherein the data processing apparatus (2) comprises an interface means (25) for communicating with a peripheral device (3a, 3b) with any of the communication modes of a TH/TR selection type, a three-wire handshake type, a clocked parallel type or a clocked serial type, and means (25) for determining a communication mode for communicating with the peripheral device (3a, 3b) connected to the peripheral port (4a,4b) of the data processing apparatus (2) based on the data signal received on the second, third, seventh and eighth pins of the game apparatus.
31. A device connector for connecting the peripheral device (3a,3b) to the data processing apparatus as defined in any one of the preceding claims, wherein the nine pins are formed with elongated contacts disposed in parallel in a single row.
32. A device connector for connecting a peripheral device (3a,3b) to data processing apparatus (2), the data processing apparatus (2) comprising a socket connector (4as,4bs) with nine terminal pins disposed in a single row, an interface means (25) for communicating with a peripheral device (3a,3b) with either of the communication modes of a TH/TR selection type, a three wire handshake type, a clocked parallel. type or a clocked serial type, and means (25) for determining a communication mode for communicating with the peripheral device (3a, 3b)' connected to the socket connector (4as, 4bs) based on the data signal received on the second, third, seventh and eighth pins, and the peripheral device (3a,3b,6) comprising means (3M) for generating data signals including data representing its communication mode selected from one of the said



THIS SHEET HAS BEEN
REPLACED



communication mode; and data indicative of switching keys disposed on the peripheral device; said device connector comprises a plug connector (4ap,4bp) detachably connectable to the socket connector (4as,4ap), the plug connector having first to ninth terminal pine disposed corresponding to the nine terminal pins of the socket connector (4aa,4bs), the nine-terminal pine of the plug connector being formed with elongated contacts disposed in parallel in a single row;

the first and ninth terminal pine of the plug connector (4ap,4bp) are respectively for conducting a power source and ground potential supplied from the apparatus (2) to the peripheral device (3a,3b); and

the second, third, seventh and eighth terminal pins of the plug connector (4ap,4bp) are for conducting data signals supplied from the peripheral device (3a,3b) which represent a communication mode of the peripheral device.

33. A device connector as claimed in claim 32, wherein the sixth pin is for conducting a control signal supplied from the peripheral device (3a, 3b) , and the second, third, seventh and eighth terminal pins are for conducting the data signals from the peripheral device in a three-wire handshake communication mode.
34. A device connector as claimed in claim 32, wherein the fifth and sixth terminal pins of the plug connector (4ap,4bp) are short-circuited together and the second, third, seventh and eighth terminal pins of the plug connector (4ap,4bp) are for conducting the data signals supplied from the peripheral device (3a,3b) in a clocked parallel communication mode.



This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

11 SEP 1996

35. A device connector as claimed in claim 32, wherein the first and second terminal pins of the plug connector (4ap,4bp) are short-circuited together, the sixth through ninth terminal pins of the plug connector (4ap,4bp) are short-circuited together, and the third terminal pin of the plug connector (4ap, 4hp) is for conducting the data signals supplied from the peripheral device (3a, 3b) in a clocked serial communication mode.
36. A device connector as claimed in claim 32, wherein the fourth and fifth terminal pins are for conducting data selecting signals supplied to the peripheral device (3a,3b) from the processing apparatus (2).
37. A peripheral device (3a,3b) for use with a data processing apparatus (2), comprising a plug connector (4ap,4bp) detachably connectable to a peripheral port (4a,4b) formed on the data processing apparatus (2), and means (3M) for transmitting data signals to the data processing apparatus through the plug connector (4ap 4bp), characterized in that:
the plug connector (4ap,4bp) comprises a set of terminal pins consisting of first to ninth pins disposed in a row corresponding to a set of terminal pins disposed at the peripheral port (4a,4b);
the terminal pins of the plug connector (4ap,4bp) are predeterminedly configured in accordance with a communication mode between the processing apparatus (2) and the peripheral device (3a, 3b);
the data signals include identification data representing a communication mode of the peripheral device (3a,3b) and are supplied to the apparatus (2) via four of the terminal pins in response to a data request signal supplied from the data processing apparatus (2)



THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

11 SEP 1996

so that the data processing apparatus (2) determines the communication mode for communicating with the peripheral device (3a,3b) based on the data signals received on said four of the terminal pins; and the data signals indicative of switches disposed on the peripheral device (3a,3b) are supplied to the apparatus via at least one of said four of the terminal pins.

38. A device connector for connecting a peripheral device (3a, 3b) to a data processing apparatus (2) having a socket connector (4as,4bs) with the nine terminal pins, characterized in that:

the device connector comprises a plug connector (4ap, 4bp) detachably connectable to the socket connector (4as, 4bs), the plug connector (4ap,4bp) has first to ninth terminal pins disposed corresponding to the nine terminal pins of the socket connector (4as,4bs), the terminal pins of the plug connector (4ap,4bp) and socket connector (4as,4bs) are formed with elongated contacts disposed in parallel, in a row:

the terminal pins of the plug connector (4ap,4bp) are predeterminedly configured in accordance with a communication mode of the peripheral device (3a,3b); four of the terminal pins of the plug connector (4ap,4bp) are for conducting data signals supplied from the peripheral device (3a,3b) which represent a communication mode of the peripheral device (3a, 3b) so that the data processing apparatus (2) determines the communication mode for communicating with the peripheral device (3a,3b) based on the data signals received on said four of the terminal pins; and

the data signals indicative of switches disposed on the peripheral device are supplied to the apparatus via at least one of the said four of the terminal pins.






THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

11 SEP 1996

39. A device connector of any one of claims 32 to 36 or 38, wherein a control signal is supplied through the fourth and fifth pins of the plug connector (4ap,4bp) from the processing apparatus (2) to the peripheral device (3a,3b).
40. A peripheral device (3a,3b) for use with a game processing apparatus (2), said peripheral device comprising a plurality of key switches to be manipulated by an operator, a plug connector (4ap,4bp) detachably connectable to a peripheral port (4a,4b) formed on the apparatus (2), the plug connector (4ap,4bp) comprising a plurality of terminal contacts corresponding to a plurality of terminal contacts disposed at the peripheral port (4a,4b), and means (3M) for transmitting data signals indicative of the key switches to the apparatus (2) through the plug connector (4ap,4bp), characterized in that:
- the game processing apparatus (2) is formed so as to communicate with various types of peripheral devices (3a,3b) in various types of communication modes and comprises means for supplying a power source potential and a ground potential to the peripheral device (3a,3b) connected to the peripheral port (4a,4b) via a pair of first terminal contacts, means (25) for supplying a control signal to the peripheral device via a pair of second terminal contacts, means (25) for determining a communication mode of the peripheral device based on data signals collected on a plurality of third terminal contacts, and means (25) for receiving from the peripheral device data signals indicative of the key switches via at least one of the plurality of third terminal contacts in accordance with the determined communication mode; and





REPLACEMENT SHEET

11 SEP 1996

THIS SHEET HAS BEEN
REPLACED


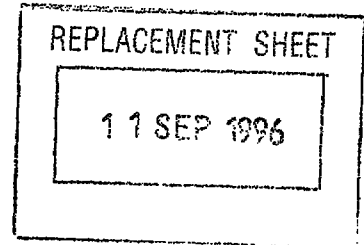
the peripheral device (3a,3b) further comprises means for supplying the apparatus (2), in response to the control signal supplied from the apparatus via the pair of second terminal contacts, with a data signal representing a communication mode of the peripheral device (3a, 3b) via the plurality of third terminal contacts so that the apparatus determines the communication mode for receiving data signals from the peripheral device, and the transmitting means (3M) for supplying data signals indicative of the key switches to the apparatus via at least one of the plurality of third terminal contacts in response to the control signal.

41. A peripheral device as claimed in claim 40, wherein: the control signal comprises a first control signal in a data combination of "1" on one of the pair of second terminal contacts and "1" on the other of the pair of second terminal contacts and a second control signal in a data combination of "0" on the one of the pair of second terminal contacts and "1" on the other of the pair of second terminal contacts wherein "1" and "0" correspond to the power source and ground potentials, respectively; and the communication mode, determining means (25) comprises means for determining peripheral identification data based on the following formula:

$$\begin{aligned} & \{(\text{data R in TH} = "1") \text{ or } (\text{data L in TH} = "1")\} \times 8h \\ & + \{(\text{data D in TH} = "1") \text{ or } (\text{data U in TH} = "1")\} \times 4h \\ & + \{(\text{data R in TH} = "0") \text{ or } (\text{data L in TH} = "0")\} \times 2h \\ & + \{(\text{data D in TH} = "0") \text{ or } (\text{data U in TH} = "0")\} \times 1h \end{aligned}$$

wherein data R, L, D, U represent data collected on four of the third terminal contacts, and data TH represents data supplied to the one of the pair of second terminal contacts in the first or the second control signal, and wherein the suffix h represents a hexadecimal number.





42. A peripheral device as claimed in claim 41, wherein:
the peripheral device supplies a data signal having a data combination of "1" for L, "0" for D and "0" for U, respectively, in response to the first control signal and a data signal having a data combination of R, L, D and U indicative of selected four of the key switches, respectively, in response to the second control signal so that the peripheral identification data becomes Bh.
43. A peripheral device as claimed in claim 42, wherein:
the data combination supplied in response to the first control signal further includes data R indicative of one of the key switches other than the selected four of the key switches; and the selected four of the switching keys are "RIGHT", "LEFT", "DOWN" and "UP".
44. A peripheral device as claimed in claim 43, wherein:
the control signal further comprises a third control signal in a data combination of "1" on the one of the pair of second terminal contacts and "0" on the other of the pair of second terminal contacts and a fourth control signal in a data combination of "0" on one of the pair of second terminal contacts and "0" on the other of the pair of second terminal contacts; and the peripheral device further supplies a data signal having a data combination of R, L, D and U indicative of the remaining ones of the key switches in response to the third and fourth control signals, respectively.
45. A peripheral device as claimed in claim 41, wherein:
the peripheral device (3a,3b) supplies a data signal having a data combination of R, L, D and U so as to cause the peripheral identification data to be other than Rh.



This Sheet Has Been Replaced

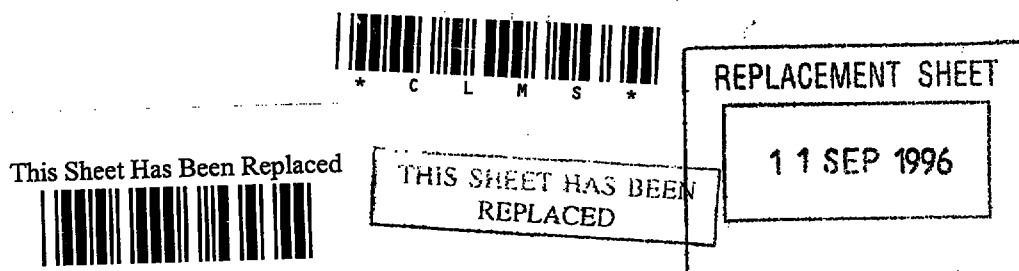


REPLACEMENT SHEET

11 SEP 1996

THIS SHEET HAS BEEN
REPLACED

46. A peripheral device as claimed in claim 45, wherein:
the peripheral device (3a,3b) supplies a data signal having a data combination of "0", "0", "1", and "1" for R, L, D and U, respectively, in response to each of the first and second control signals so as cause the apparatus (2) to determine that the peripheral device (3a,3b) employs a three-wire handshake type communication mode; and
the peripheral device (3a,3b) supplies the apparatus (2) with data signals indicative of the key switches via four third terminal contacts in response to a control signal in the form of a peripheral selection signal supplied from the apparatus (2) via the one of the pair of second terminal contacts.
47. A peripheral device as claimed in claim 45, wherein:
the peripheral device supplies a data signal having a data combination of "0", "0", "1" and "1" for R, L, D and U, respectively, in response to each of the first and second control signals so as to cause the apparatus to determine that the peripheral device employs a clocked parallel type communication mode; and
the peripheral device (3a,3b) supplies the apparatus with data signals indicative of the key switches via four third terminal contacts in response to a control signal comprising a peripheral selection signal and a clock signal supplied from the apparatus (2) via the pair of second terminal contacts.
48. A peripheral device as claimed in claim 45, wherein:
the peripheral device supplies a data signal including a data combination of "0", "0", "1" and "0" for R, L, D and U, respectively, in response to each of the first and second control signals so as to cause the apparatus to



determine that the peripheral device employs a clocked serial type communication mode; and
the peripheral device" supplies the apparatus with data signals indicative of the key switches via one of the third terminal contacts in response to a control signal comprising a peripheral selection signal and a clock signal supplied from the apparatus via the pair of second terminal contacts.

49. A peripheral device (3a,3b) for use with a data processing apparatus (2) having a socket connector (4as,4bs) with nine terminal pins arranged in a row, said peripheral device (3a,3b) comprising:
a plug connector (4ap,4bp) connectable to said socket connector (4as,4bs) of the data processing apparatus (2), said plug connector (4ap,4bp) having nine terminal pins arranged in a row, said nine terminal pins of said plug connector (4ap,4bp) being in contact with corresponding ones of the nine terminal pins of the socket connector (4as,4bs) when the plug connector (4ap, 4bp) is received in said socket connector (4as, 4bs) ; and a processor (3M) for generating data signals to be output to said data processing apparatus and for processing control signals received from said data processing apparatus, wherein said terminal pins of said plug connector (4ap,4bp) comprise:
first and second power supply pins, one of said power supply pins being connectable to a voltage source via a corresponding terminal pin of said socket connector (4as, 4bs) and the other of said power supply pins being connectable to ground;
first, second, third and fourth data pins connected to said processor (3M) , said data pins being arranged so that data generated by said processor (3M) is transmitted by at least one of said. data pins to said data

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

11 SEP 1996

processing apparatus (2) via corresponding terminal pins of the socket connector (4as,4bs); and first and second control pins arranged to receive control signals for controlling said peripheral device (3a,3b) from said data processing apparatus (2), said first and second control pins being connected to said processor (3M), said processor being arranged to generate, in response to a given control signal received from said data processing apparatus (2), data signals indicating the mode of communication of said peripheral device (3a,3b), said data signals being sent to said data processing apparatus via said data pins of said plug connector (4ap, 4bp).

50. A peripheral device as claimed in any one of claims 37, 40, 41 to 49 in combination with a data or game processing apparatus (2) comprising a socket connector (4as,4bs) having nine terminal pins arranged in a row, said plug connector of said peripheral device being received in said socket connector (4as, 4bs), said data or game processing apparatus (2) further comprising means (25) for generating control signals for controlling said peripheral device, said control signals being sent to said peripheral device via said terminal pins of said socket connector.
51. In combination, a peripheral device (3a,3b) and a data processing apparatus (2), said data processing apparatus (2) having a socket connector (4as,4bs) with nine terminal pins arranged in a row and control signal generating means (25) for generating control signals for controlling said peripheral device (3a,3b), said peripheral device comprising a plug connector (4ap,4bp) connectable to said socket connector (4as,4bs) of the data processing apparatus (2), said plug connector (4ap,4bp) having nine terminal pins arranged in a row,



REPLACEMENT SHEET

11 SEP 1996

THIS SHEET HAS BEEN
REPLACED

said nine terminal pins of said plug connector (4ap, 4bp) being in contact with corresponding ones of the nine terminal pins of the socket connector (4as, 4bs) when the plug connector is received in said socket connector, and a processor (3M) for generating data signals to be output to said data processing apparatus (2) and for processing the control signals received from the data processing apparatus (2), the terminal pins of the plug connector (4ap, 4bp) comprising:

first and second power supply pins, one of said power supply pins, in use, being in contact with a corresponding pin of said socket connector which is connectable to a voltage source so that a voltage is applied to said first power supply pin and the other of said power supply pins is connectable to ground;

first, second, third and fourth data pins connected to said processor (3M), said data pins being arranged so that data signals generated by said data processing means are transmitted by at least one of said data pins to the control signal generating means (25) of said data processing apparatus (2) via corresponding pins of the socket connector (4as, 4bs); and

first and second control pins arranged to receive control signals generated by said control signal generating means (25) of said data processing apparatus (2) via corresponding pins of said socket connector (4as, 4bs), said first and second control pins being connected to said processor (3M), said processor being arranged to generate, in response to a given control signal received from said control signal generating means (3), data signals indicating the mode of communication of the peripheral device (3a, 3b), said data signals being transmitted via at least one of said data pins of the plug connector (4ap, 4bp) to said data processing apparatus (2).



THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

11 SEP 1996


Abstract

A peripheral device for use with a data processing apparatus. The apparatus has a peripheral port with a set of terminal pins consisting of first to ninth pins disposed in a row. The first pin is assigned for one of a power source and the ground potential, the ninth pin for the other of the power source and the ground potential, the second, third, seventh and eighth pins for transmitting data signals, and the fourth to sixth pins for transmitting control signals. The apparatus has an element for selecting the communication mode of the peripheral device connected to the peripheral port, based on the data signals transmitted from the second, third, seventh, and eighth pins. The peripheral device comprises a plug connector detachably connected to the peripheral port, the plug connector having a set of terminal pins consisting of first to ninth pins disposed in a row, a cable including a plurality of wires connecting the terminal pins of the plug connector with terminals on an internal printed circuit board, and an element for transmitting data signals including identification data representing the communication mode via at least one of the second, third, seventh and eighth pins in synchronization with a clock signal supplied from the apparatus.


(Figure 4)

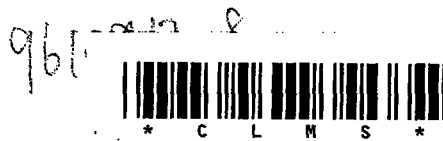This Sheet Has Been Replaced





42

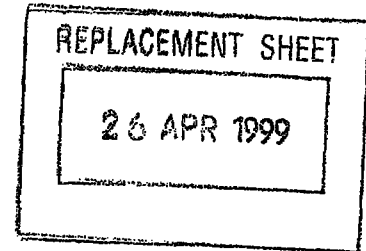

CLAIMS

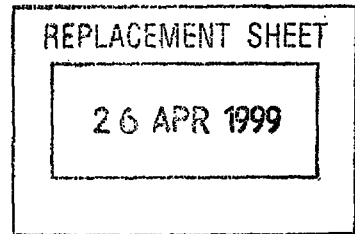
1. A game device (2) for detachable connection with a peripheral device (3a, 3b) comprising:

a peripheral port (4a, 4b) with nine terminal contacts including first and second power supply contacts, a set of four data signal contacts R, L, D and U for receiving data signals from a peripheral device (3a, 3b), and three contacts TH, TR and TL for transmitting signals from/to the peripheral device; and

means for controlling collection of data signals which are transmitted from the peripheral device in response to a control signal transmitted from the game device; and

means for identifying the type of a peripheral device connected to the peripheral port by analysing data signals on the terminal contacts in response to a control signal, characterized in that:

the game device comprises processing means (25) which collects a data combination (R, L, D and U) transmitted via the four data signal contacts R, L, D and U from a peripheral device connected thereto in response to a first control signal of TH="1" and TR="1" and a second control signal of TH="0" and TR="1" transmitted by the game device via the contacts TH and TR and which determines the communication mode of the peripheral device based on the following formula:




$$\begin{aligned} & \{(\text{data R when TH} = "1") \text{ or } (\text{data L when TH} = "1")\} \times 8h \\ & + \{(\text{data D when TH} = "1") \text{ or } (\text{data U when TH} = "1")\} \times 4h \\ & + \{(\text{data R when TH} = "0") \text{ or } (\text{data L when TH} = "0")\} \times 2h \\ & + \{(\text{data D when TH} = "0") \text{ or } (\text{data U when TH} = "0")\} \times 1h \end{aligned}$$

wherein "1" and "0" correspond to the power source and ground potentials and h represents a hexadecimal number; and

the processing means collects data signals indicative of switches to be manipulated by an operator of said peripheral device via at least one of the four data signal contacts R, L, D and U from the peripheral device in accordance with the determined communication mode in response to a third control signal transmitted by the game device via the contacts TH and TR subsequently to the first and second control signals.

2. A game device as claimed in claim 1, characterized in that the interface means (25) is formed so as to communicate with a peripheral device (3a, 3b) with any one of the following communication modes: a TH/TR selection type, a three-wire handshake type, a clocked parallel type, and a clocked serial type.

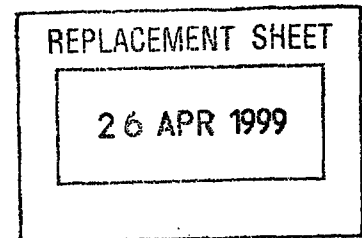3. A game device as claimed in claims 1 or 2, wherein when a predetermined value is obtained using said formula based on the combination value on four of said data signal contacts, said game device is arranged to collect data signals on at least one of said data signal contacts



in accordance with the communication type corresponding to the value determined using said formula.

4. A peripheral device (3a, 3b) for use with a game device, said peripheral device comprising a plurality of switches operable by user, said switches comprising four key switches for "RIGHT", "LEFT", "DOWN" and "UP" and selection switches, a plug connector (4ap, 4bp) which in use is detachably connectable to a peripheral port (4a, 4b) of the game device (2), the plug connection (4ap, 4bp) comprising four data signal contacts "R", "L", "U" and "D" and a plurality of control signal contacts "TH" and "TR", and a data generator (3Mb) disposed between the plurality of switches and the connector, said peripheral device (3a, 3b) having a pair of first and second power supply contacts for providing a power source potential and a ground potential, and means for applying to the contacts logical signals identifying the type of the peripheral device characterised in that::

the data generator (3Mb) is arranged, in use, to supply the game device (2) via the four data signal contacts R, L, D, U, with a data signal representing the type of the peripheral device and a communication mode with which the peripheral device is to transmit signals to the game device in response to a first control signal of "TH=1" and "TR=1" and a second control signal of "TH=0" and "TR=1" transmitted by the game device via the control signal contacts "TH" and "TR", so that the game device is able to



REPLACEMENT SHEET

26 APR 1999

45

determine the communication mode for receiving data signals from the peripheral device based on the following formula:

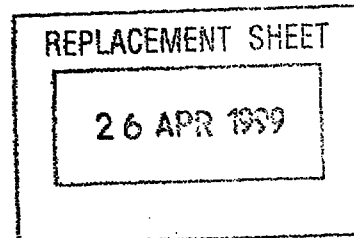
$$\begin{aligned} & \{(\text{data R when TH} = "1") \text{ or } (\text{data L when TH} = "1")\} \times 8h \\ & + \{(\text{data D when TH} = "1") \text{ or } (\text{data U when TH} = "1")\} \times 4h \\ & + \{(\text{data R when TH} = "0") \text{ or } (\text{data L when TH} = "0")\} \times 2h \\ & + \{(\text{data D when TH} = "0") \text{ or } (\text{data U when TH} = "0")\} \times 1h \end{aligned}$$

wherein "1" and "0" correspond to the power source and ground potentials and "h" represents a hexadecimal number; and

the data generator (3Mb) is arranged in use to supply the game device (3) with data signals indicative of the plurality of switches, via at least one of the four data signal contacts R, L, D and U in response to a third control signal transmitted by the game device via the contacts TH and TR subsequently to the first and second control signals.

5. A peripheral device as claimed in claim 4, wherein when a predetermined value is obtained using said formula based on the combination value on four of said data signal contacts, said game device is arranged to collect data signals on at least one of said data signal contacts in accordance with the communication type corresponding to the value determined using said formula.

6. A peripheral device as claimed in claim 4 or 5, wherein said third control signal includes TR="0".




7. A peripheral device in combination with the game device as claimed in claim 1, 2 or 3, comprising a plurality of keys and/or switches to be manipulated by an operator, a plug connector (4ap, 4bp) detachably connectable to the peripheral port (4a, 4b) of the game device (2) and having a plurality of terminal contacts provided corresponding to the terminal contacts of the peripheral port, and means (3M) for transmitting data signals indicative of the key switches.

8. A peripheral device or combination as claimed in claim 4, 5, 6 or 7, wherein:

the peripheral device is arranged to supply a data signal having a data combination of "1" for L, "0" for D and "0" for U, respectively, in response to the first control signal and a data TH/TR signal having a data combination of R, L, D and U indicative of the switches "RIGHT", "LEFT", "UP" and "DOWN", respectively, in response to the second control signal so that the result of the formula is Bh.

9. A peripheral device or combination as claimed in claim 8, wherein:
The data combination supplied by the peripheral device in response to the first control signal further includes data R indicative of one of the switches other than the switches of LEFT, RIGHT, DOWN and UP.

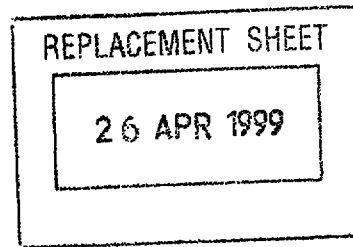10. A peripheral device or combination as claimed in claim 8 or 9, wherein:



the control signal further comprises a third control signal in a data combination of "TH=1" and "TR=0" and a fourth control signal in a data combination of "TH=0" and "TR=0"; and

the peripheral device further supplies a data signal having a data combination of R, L, D and U indicative of switches other than LEFT, RIGHT, DOWN and UP in response to the third and fourth control signals, respectively.

11. A peripheral device or combination as claimed in claims 9 or 10, wherein the switches other than "RIGHT", "LEFT", "DOWN" and "UP" comprise "TRG-L", "TRG-R", "TRG-A", "TRG-B", "TRG-C", "TRG-X", "TRG-Y", "TRG-Z" and "START".

12. A peripheral device or combination as claimed in claim 4, 5, 6 or 7, wherein:

the peripheral device (3a, 3b) supplies a data signal having a data combination of R, L, D and U in response to the first and second control signals so as to cause the result of the formula to be other than Bh.

13. A peripheral device or combination as claimed in claim 4, 5, 6, 7 or 12, wherein;

the peripheral device (3a, 3b) is arranged to supply the game device with a data signal having a data combination of "0", "0", "0" and "1" for R, L, D and U, respectively, in response to each of the first and second control signals so as to cause the game device (2) to determine that the peripheral



REPLACEMENT SHEET

26 APR 1999

48

device (3a, 3b) employs a three-wire handshake type communication mode; and

the peripheral device (3a, 3b) is arranged to supply the game device (2) with data signals indicative of the switches via four data signal contracts in response to a control signal in the form of a peripheral selection signal supplied from the game device (2) via the terminal contact TH.

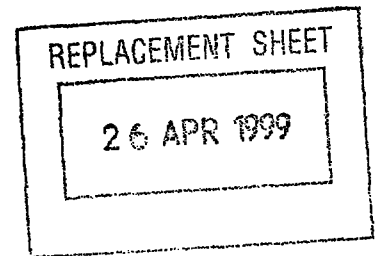
14. A peripheral device or combination as claimed in claim 4, 5, 6, 7, 12 or 13, wherein:

the peripheral device (3a, 3b) is arranged to supply an acknowledgement signal to the game device (2) via terminal contact TL.

15. A peripheral device or combination as claimed in claim 4, 5, 6, 7 or 12, wherein:

the peripheral device is arranged to supply the game device, with a data signal having a data combination of "0", "0", "1" and "1" for R, L, D and U, respectively, in response to each of the first and second control signals so as to cause the game device (2) to determine that the peripheral device employs a clocked parallel type communication mode; and

the peripheral device (3a, 3b) is arranged to supply the game device with data signals indicative of the switches via four third terminal contacts R, L, D, U in response to a control signal including a peripheral selection



signal and a clock signal supplied from the game device (2) via the terminal contacts TH and TR.

16. A peripheral device or combination as claimed in claim 4, 5, 6, 7, 12 or 15, wherein:

the control signal includes a peripheral selection signal and a clock signal;

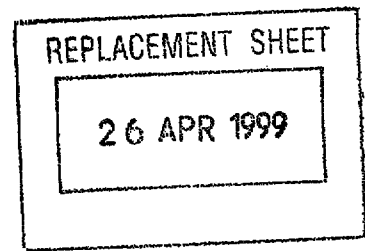
the peripheral device (3a, 3b) further comprises means for maintaining the terminal contact TL at the same potential as that of the terminal contact TR; and

the transmitting means is arranged to transmit a parallel data signal to the game device (2) including data indicative of the switches via the four data signal contacts in synchronism with the clock signal while receiving the peripheral selection signal.

17. A peripheral device or combination as claimed in claim 4, 5, 6, 7 or 12 wherein:

the peripheral device is arranged to supply the game device, a data signal including a data combination of "0", "0", "1" and "0" for R, L, D and U, respectively, in response to each of the first and second control signals so as to cause the apparatus to determine that the peripheral device employs a clocked serial type communication mode; and

the peripheral device is further arranged to supply the game device with data signals indicative of the switches via one of the four data signal



contacts R, L, D, U in response to a control signal comprising a peripheral selection signal and a clock signal supplied from the game device (2) via the terminal contacts TH and TR.

18. A peripheral device or combination as claimed in claim 4, 5, 6, 7, 12 or 17 wherein:

the control signal includes a peripheral selection signal and a clock signal;

the peripheral device (3a, 3b) further comprises means for maintaining three of the four data signal contacts at the power supply potential or the ground potential; and

said transmitting means (3M) is arranged to transmit to the game device serial data signals indicative of the switches via the remaining one of the data signal contacts in synchronism with the clock signal while receiving the peripheral selection signal.

19. A peripheral device or combination as claimed in any of claims 4 to 10, wherein the peripheral device (3a, 3b) comprises means for maintaining the terminal contact TL at the signal level of "1" or the power source potential at all times while the peripheral device (3a, 3b) is accessed by the game device (2).

20. A peripheral device or combination as claimed in claim 4, 5, 6, 7, 12, 15, 16 or 19 wherein the peripheral device (3a, 3b) further comprises



26 APR 1999

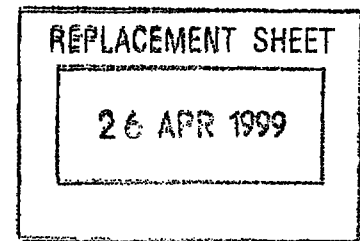
means for maintaining the terminal contact TL pin at the same potential as that of the terminal contact TR.

21. A peripheral device or combination as claimed in claim 4, 5, 6, 7, 12, 15, 16, 19 or 20 wherein the peripheral device (3a, 3b) further includes means for short-circuiting terminal contact TL with the terminal contact TR.


22. A peripheral device or combination as claimed in claim 4, 5, 6, 7, 12, 17 or 18 wherein the peripheral device (3a, 3b) further includes means for short-circuiting three of the four terminal contacts R, L, D, U with the power supply contacts and the transmitting means (3M) supplies the game device (2) with a serial data signal including data indicative of the switches via the remaining one of the terminal contacts R, L, D, U in synchronism with clock signal while receiving a peripheral selection signal.

23. A peripheral device or combination as claimed in claim 4, 5, 6, 7, 12, 17, 18 or 22, wherein the peripheral device (3a, 3b) further comprises means for maintaining three of the four terminal contacts R, L, D, U at the same potential as that of the power supply contacts.

24. A peripheral device or combination as claimed in any of claims 4 to 23, wherein the peripheral device (3a, 3b) comprises means for configuring the set of terminal contacts to be indicative of the communication mode of the peripheral device.



25. A peripheral device or combination as claimed in claim 24, wherein said configuring means comprises means for short-circuiting selected ones of the terminal contacts.
26. A peripheral device or combination as claimed in claim 25, wherein the short-circuiting means are formed in the plug connector.
27. A peripheral device or combination as claimed in any one of claims 4 to 26, wherein there is provided a printed circuit board on which means (3M) for generating the data signals to be supplied to the game device 92) is arranged and a cable (5a) having a plurality of wires connects the terminal contacts of the plug connector with the printed circuit board.
28. A peripheral device or combination as claimed in claim 27, wherein the wires of the cable (5a) are fewer in number than the terminal contacts of the peripheral port (4a, 4b).
29. A peripheral device or combination as claimed in claim 27 or 28 when appended to claim 25, wherein the short-circuiting means are formed on the circuit board.
30. A peripheral device or combination as claimed in any of claims 4 to 29, wherein the nine terminal contacts are disposed in parallel in a single row.

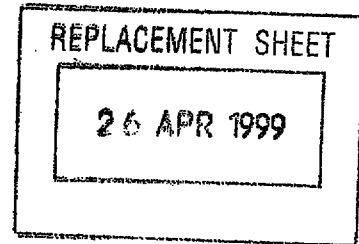

Abstract

A peripheral device for use with a data processing apparatus. The apparatus has a peripheral port with a set of terminal pins consisting of first to ninth pins disposed in a row. The first pin is assigned for one of a power source and the ground potential, the ninth pin for the other of the power source and the ground potential, the second, third, seventh and eighth pins for transmitting data signals, and the fourth to sixth pins for transmitting control signals. The apparatus has an element for selecting the communication mode of the peripheral device connected to the peripheral port, based on the data signals transmitted from the second, third, seventh, and eighth pins. The peripheral device comprises a plug connector detachably connected to the peripheral port, the plug connector having a set of terminals pins consisting of first to ninth pins disposed in a row, a cable including a plurality of wires connecting the terminal pins of the plug connector with terminals on an internal printed circuit board, and an element for transmitting data signals including identification data representing the communication mode via at least one of the second, third, seventh and eight pins in synchronization with a clock signal supplied from the apparatus.

(Figure 4)



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6:

G06K 11/20

A1

(11) International Publication Number:

WO 96/12250

(43) International Publication Date:

25 April 1996 (25.04.96)

(21) International Application Number: PCT/JP95/02073

(22) International Filing Date: 11 October 1995 (11.10.95)

(30) Priority Data:

6/246580	12 October 1994 (12.10.94)	JP
6/246581	12 October 1994 (12.10.94)	JP
08/445,108	19 May 1995 (19.05.95)	US

(60) Parent Application or Grant

(63) Related by Continuation

US	08/445,108 (CIP)
Filed on	19 May 1995 (19.05.95)

(71) Applicant (for all designated States except US): SEGA ENTERPRISES, LTD. [JP/JP]; 2-12, Haneda 1-chome, Ohta-ku, Tokyo 144 (JP).

(72) Inventors; and

(75) Inventors/Applicants (for US only): KOIZUMI, Masahiro [JP/JP]; Sega Enterprises, Ltd., 2-12, Haneda 1-chome, Ohta-ku, Tokyo 144 (JP). NIIZUMA, Naoki [JP/JP]; Sega Enterprises, Ltd., 2-12, Haneda 1-chome, Ohta-ku, Tokyo 144 (JP). KAWASE, Yasuhisa [JP/JP]; Sega Enterprises, Ltd., 2-12, Haneda 1-chome, Ohta-ku, Tokyo 144 (JP).

IKEBE, Hajime [JP/JP]; CSK Research Institute Corporation, 5-1, Suwa 2-chome, Tama-shi, Tokyo 206 (JP).

(74) Agents: INABA, Yoshiyuki et al.; TMI Associates, Suite 803, 37 Mori Building, 5-1, Toranomom 3-chome, Minato-ku, Tokyo 105 (JP).

(81) Designated States: AL, AM, AU, BB, BG, BR, BY, CA, CN, CZ, EE, FI, GE, HU, IS, JP, KE, KG, KR, KZ, LK, LR, LT, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, RO, RU, SD, SG, SI, SK, TJ, TM, TT, UA, UG, US, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, MW, SD, SZ, UG).

Published

With international search report.

With amended claims and statement.

This Sheet Has Been Replaced

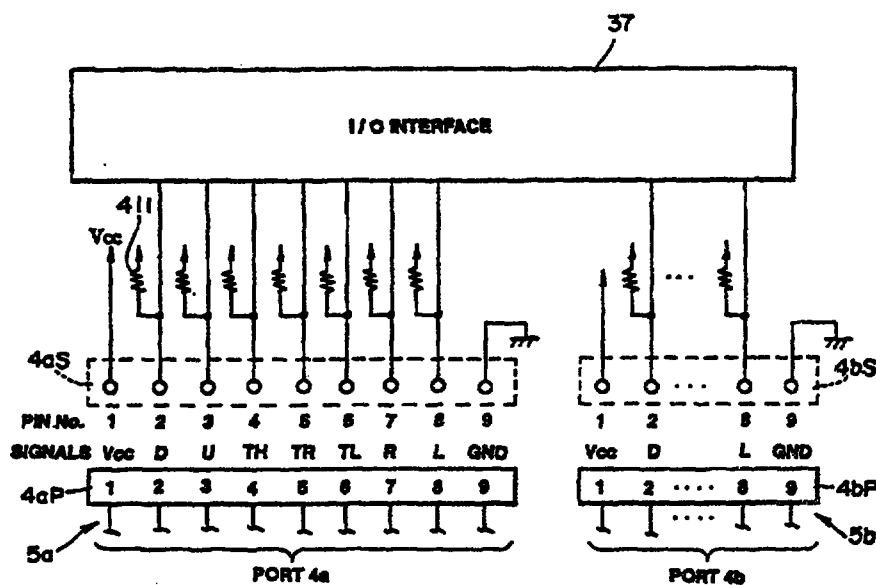


(54) Title: IMPROVEMENT IN COMMUNICATION BETWEEN DATA PROCESSING APPARATUS AND PERIPHERAL DEVICE THEREOF

(57) Abstract

A peripheral device for use with a data processing apparatus. The apparatus has a peripheral port with a set of terminal pins consisting of first to ninth pins disposed in a row. The first pin is assigned for one of a power source and the ground potential, the ninth pin for the other of the power source and the ground potential, the second, third, seventh and eighth pins for transmitting data signals, and the fourth to sixth pins for transmitting control signals. The apparatus has an element for selecting the communication mode of the peripheral device connected to the peripheral port, based on the data signals transmitted from the second, third, seventh and eighth pins. The peripheral device

comprises a plug connector detachably connected to the peripheral port, the plug connector having a set of terminal pins consisting of first to ninth pins disposed in a row, a cable including a plurality of wires connecting the terminal pins of the plug connector with terminals on an internal printed circuit board, and an element for transmitting data signals including identification data representing the communication mode via at least one of the second, third, seventh and eighth pins in synchronization with a clock signal supplied from the apparatus.

THIS SHEET HAS BEEN
REPLACED

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				