



- (51) **International Patent Classification:**
H04W 76/19 (2018.01) *H04W 8/26* (2009.01)
- (21) **International Application Number:**
PCT/US2020/030272
- (22) **International Filing Date:**
28 April 2020 (28.04.2020)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
20190100265 18 June 2019 (18.06.2019) GR
16/859,450 27 April 2020 (27.04.2020) US
- (71) **Applicant: QUALCOMM INCORPORATED** [US/US];
ATTN: International IP Administration, 5775 Morehouse
Drive, San Diego, California 92121-1714 (US).
- (72) **Inventors: GRIOT, Miguel;** 5775 Morehouse Drive, San
Diego, California 92121-1714 (US). **SPEICHER, Se-**
bastian; 5775 Morehouse Drive, San Diego, California
92121-1714 (US). **ZISIMOPOULOS, Haris;** 5775 More-
house Drive, San Diego, California 92121-1714 (US).
CHAPONNIERE, Lenaig Genevieve; 5775 Morehouse
Drive, San Diego, California 92121-1714 (US). **DHANDA,**
Mungal Singh; 5775 Morehouse Drive, San Diego, Cali-
fornia 92121-1714 (US). **KADIRI, Prasad Reddy;** 5775
Morehouse Drive, San Diego, California 92121-1714 (US).
- (74) **Agent: MUTTER, Nathan;** Holland & Hart LLP, P.O. Box
11583, Salt Lake City, Utah 84147 (US).
- (81) **Designated States** (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP,
KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.
- (84) **Designated States** (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

(54) **Title:** TRUNCATED IDENTIFICATION INDICATORS

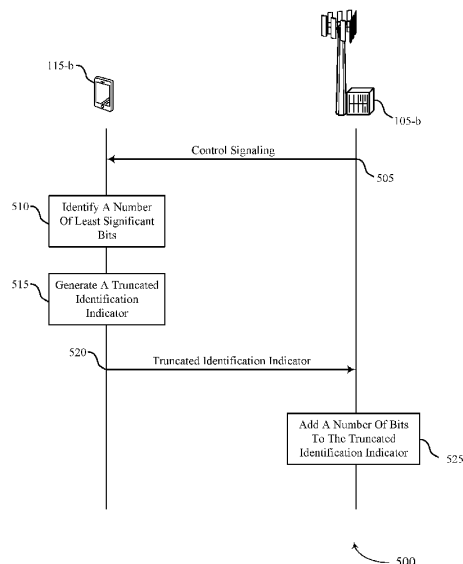


FIG. 5

(57) **Abstract:** Methods, systems, and devices for wireless communica-
tions are described that provide for truncated identification indicators. A
user equipment (UE) may receive control signaling indicating a truncat-
ing configuration for an identification indicator. The truncating configura-
tion may indicate a set of bits within an initial identification indicator to
remove to generate a truncated identification indicator. The UE may re-
move the indicated set of bits and transmit the truncated identification in-
dicator to a base station. The base station may receive the truncated iden-
tification indicator and reconstruct the initial identification indicator ac-
cording to the truncating configuration. The base station may reconstruct
the initial identification indicator by adding the set of bits (e.g., removed
by the UE to generate the truncated identification indicator) to the trun-
cated identification indicator.

Published:

— with international search report (Art. 21(3))