

THIS SHEET HAS BEEN
REPLACED

FLOATING-POINT DIGITAL-TO-ANALOG CONVERTER

BACKGROUND OF THE INVENTIONField of the Invention

The invention relates generally to a floating-point digital-to-analog converter (called DAC hereafter), and more specifically to a floating-point DAC preferably applied to digital audio apparatuses such as compact disk players.

Prior Art

A floating-point DAC that converts digital data represented by 2's complement of 22-bits into an analog signal is constructed as shown in Fig. 1 (though Fig. 1 is a block diagram of an embodiment of the invention, it is also used here to illustrate the conventional apparatus). In Fig. 1, 1a designates a shift processor comprising input buffers all designated as 2, 2, ..., a shift-number-detection circuit 3a, a digital-shift circuit 4, and an inverter 5. Digital input data of 22-bits I_0 to I_{21} is applied to the digital-shift circuit 4 through the input buffers 2, 2, The upper 7-bits I_{15} to I_{21} of the 22-bits, forming the exponent thereof, are supplied to the shift-number-detection circuit 3a which produces shift numbers S_0 to S_6 according to the exponent. The digital-shift circuit 4 produces 15-bit digital mantissa M_0 to M_{14} by shifting the input data I_0 to I_{20} by bit positions

This Sheet Has Been Replaced



specified by one of the shift numbers S_0 to S_6 . The inverter 5 inverts the most significant bit I_{21} of the input data and produces the reversed bit as the most significant bit M_{15} of the digital mantissa.

Numeral 6 designates a mantissa DAC 6 that converts the digital mantissa M_0 to M_{15} to an analog mantissa. It comprises a buffer circuit 7 and R-2R ladder network 8. The buffer circuit 7 is provided with a pair of serially connected inverters for each bit which produces high or low voltage according to logic-1 or logic-0 of each bit of the digital mantissa M_0 to M_{15} . The R-2R ladder network 8 receives each bit of the digital mantissa, multiplies each bit by a specific weight, and sums the resulting products, thus producing an analog mantissa.

Numeral 9 designates an exponent DAC which produces analog output V_{OUT} that corresponds to the input data I_0 to I_{21} , using the analog mantissa applied from the mantissa DAC 6 and the shift numbers S_0 to S_6 supplied from the shift-number-detection circuit 3a. It comprises a R-2R ladder network 10 and a switch circuit 11. The R-2R ladder network 10 multiplies the analog mantissa by weight specified by one of the shift numbers S_0 to S_6 and the reference voltage V_{MP} . The switch circuit 11 consists of 7 switch elements, one of which turns on according to one of shift numbers S_0 to S_6 of logic-1.

In the construction mentioned above, the shift-number-detection circuit 3a determines the shift numbers S_0 to S_6 , as shown in Fig. 2 (a) and (b). Analog levels represented by digital notation as

from +2097151 to -2097152 in Fig. 2 (a), are divided into $2^4 (= 16)$ levels by every 6 dB interval, and the shift numbers S_0 to S_6 are determined as shown in Fig. 2 (b). Specifically, when the absolute value of the analog level ranges from the maximum to $1/2$ thereof, the shift number S_0 is assigned; from $1/2$ to $1/4$, the shift number S_1 is assigned; from $1/4$ to $1/8$, the shift number S_2 is assigned, and so on. Each digital mantissa M_0 to M_{14} is selected from the input data I_0 to I_{20} according to the shift numbers S_0 to S_6 as shown in Fig. 2 (a): solid arrows ($\leftrightarrow$) in the input data table shown in Fig. 2 (a) designate the range to be selected as a digital mantissa M_0 to M_{14} . Inspection of Fig. 2 (a) shows that every time the analog level is halved, shift numbers S_0 to S_6 are changed, as well as the input data I_0 to I_{20} to be selected as a mantissa is shifted. Furthermore, mantissa M_{15} is obtained as a reversed value of the input data I_{21} .

Figure 3 (a) depicts the relationships between analog levels and the shift numbers S_0 to S_6 . Each time the amplitude of the analog signal is halved (i.e., every 6 dB interval), one of the shift numbers S_0 to S_6 is selected in turn and assigned to each level, beginning with the maximum level to $1/2$ thereof, shift number S_0 is assigned, from $1/2$ to $1/4$, shift number S_1 , and so on. If two levels corresponding to the shift numbers S_0 and S_1 are compared, although the output of mantissa DAC 6 has the same range in both cases, the output of the exponent DAC 9 is half the level corresponding to the shift number S_1 as in the shift number S_0 .



If both the mantissa DAC 6 and exponent DAC 9 had 16-bit accuracy (i.e., $(100 * 2^{-16})\%$), the relationship between the analog output level of the sinusoidal wave and the total harmonic distortion (called "distortion" for brevity hereafter) of the analog output level measured by a distortion meter, would be shown by solid line A in Fig. 4. First, line A shows saw-tooth variation, because every time the shift number is incremented by 1 the amplitude of the mantissa increases by 6 dB over that just immediately prior to the shift, and thus distortion decreases by 6 dB each time the shift number is changed. Second, the average level of the line A is kept constant. This is because error E applied from the mantissa DAC 6 to the input terminal of the R-2R ladder network 10 of the exponent DAC 9 is halved each time the shift number changes from S_0 to S_6 , such as $2^{-1} \cdot E$, $2^{-2} \cdot E$, ..., $2^{-6} \cdot E$, and hence error E and the level of analog output are simultaneously halved. Thus, average distortion of the analog signal is kept constant as long as the shift number is changed. Consequently, distortion of the analog signal varies between two levels (between 0.00125% and 0.0025%, for example) in the range from 0 to 36 dB in which the shift number is altered, whereas distortion in the smaller range is inversely proportional to the level of analog output V_{OUT} because the shift number is not changed.

As described above, if both mantissa DAC 6 and exponent DAC 9 have 16-bit accuracy, a low level distortion is obtained as shown by solid line A in Fig. 4. In practice, however, a low level



distortion cannot be achieved because 16-bit accuracy of exponent DAC 9 cannot be obtained. More specifically, though 14-bit to 16-bit accuracy can be achieved for the mantissa DAC 6 by trimming or other means to compensate for errors of each resistor in the R-2R ladder network 8, it is very difficult to obtain similar accuracy for exponent DAC 9. This is because the resistor of ladder network 10 in exponent DAC 9 are connected to form an integral part, and so each resistance there of cannot be measured separately and hence the trimming thereof is difficult. In particular, it is very difficult to achieve high accuracy in a range where the level of analog output is small. Consequently, sufficient adjustment of resistors in the exponent DAC 9 is practically impossible, so the actual accuracy obtained is about 10- to 12-bits.

For this reason, even if mantissa DAC 6 of 16-bit accuracy is employed, the accuracy of the resulting output from exponent DAC 9 is only about 10- to 12-bits, as shown by broken line B in Fig.

4. First, the distortion in this case shows saw-tooth variation, because every time the shift number is incremented by one, the weight of exponent DAC 9 is decreased by 6 dB while the amplitude of the mantissa increases by 6 dB over that just immediately prior to the shift, and thus distortion decreases significantly from 10- to 12-bit accuracy. Second, the distortion is improved to 0.00125% abruptly at -36 dB because the shift number S_6 which is used thereunder is free from the low accuracy of exponent DAC 9.

The fact that distortion increases near the maximum output (0

dB), causes a critical problem in digital audio apparatus such as compact disk players, because performance of these apparatus is specified by distortion at 0 dB output.

SUMMARY OF THE INVENTION

It is therefore an object of the invention to provide a floating-point digital-to-analog converter which has improved distortion characteristic of maximum output level, by using the exponent DAC that has a similar accuracy to that of a conventional one, thus achieving a higher dynamic range.

According to one aspect of the present invention, there is provided a floating-point digital-to-analog converter comprising:
shifting means for detecting shift numbers according to exponent data of floating point digital input data, and for shifting the input data according to the shift numbers to produce digital mantissa data of the input data;

mantissa converting means for converting the digital mantissa data to an analog mantissa; and

exponent converting means for converting the shift numbers to weights represented by the exponent data and a certain base, and for multiplying the analog mantissa by one of the weights;

whereby the shifting means shifts the input data when the absolute value of the analog mantissa is less than the value at which the accuracy of the mantissa converting means becomes lower



than that of the exponent converting means; and the exponent converting means multiplies the analog mantissa by the weight other than 1 only so long as the accuracy of the mantissa converting means is lower than that of the exponent converting means.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram of a floating-point DAC according to an embodiment of the present invention;

Fig. 2 is a table showing the relationship between digital input data I_0 to I_{21} and shift number S_0 to S_6 of the embodiment, in comparison with a conventional apparatus;

Fig. 3 is a graph showing the relationship between the analog output level and the shift number of the embodiment, in comparison with a conventional apparatus; and

Fig. 4 is a graph showing the relationship between the analog output level and the total distortion thereof, in comparison to a conventional apparatus.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

The invention will now be described with reference to the accompanying drawings.

[A] FIRST EMBODIMENT

This Sheet Has Been Replaced




Fig. 1 is a block diagram of a floating-point DAC according to a first embodiment of the present invention.

This embodiment differs from the conventional apparatus in the construction of shift-number-detection circuit 3. The shift-number-detection circuit 3 that constitutes a shift processor 1 does not initiate its shift operation of the input data I_0 to I_{20} as long as the accuracy of mantissa DAC 6 is higher than that of exponent DAC 9.

Specifically, consider the output distortion of 16-bit mantissa DAC 6. For example, when the analog output signal thereof is maximum, i.e., 0 dB, its distortion is 0.00125%. The distortion increases inversely proportional to the analog output level and reaches 0.02% at the -24 dB level as shown in Fig. 4 by alternate-long-short-dash line C. This value of distortion is comparable to that of the exponent DAC 9 of about 12-bit accuracy. For this reason, the shift processor 1 does not change the shift number S_0 as long as the accuracy of the mantissa DAC 6 is greater than that of exponent DAC 9, i.e., as long as the level of the analog mantissa is in the range of 0 to -24 dB, so that mantissa DAC 6 can make its accuracy to its full extent.

Figure 2 (c) and Fig. 3 (b) show changing points of shift numbers S_0 to S_6 according to the embodiment. As long as the analog level is larger than -24 dB, the shift number is kept S_0 , i.e., the shift in exponent DAC 9 is not performed. In contrast, when the analog level is reduced to -24 dB, or to -30 dB, or to -36 dB, ... in 6 dB increments, the shift numbers are changed to



$S_1, S_2, S_3, \dots$, respectively. Bits M_0 to M_{14} of the digital mantissas selected from the input data I_0 to I_{20} and produced from the digital-shift circuit 4 for each of shift numbers are designated by broken arrows ($\leftarrow - - \rightarrow$) in Fig. 2 (a).

According to the construction described above, distortion near the maximum output level (0 dB) is lessened as shown in Fig. 4 by alternate-long-short-dash line C, when using exponent DAC 9 of the conventional accuracy, thus achieving a wide dynamic range.

[B] SECOND EMBODIMENT

The second embodiment of the present invention is designed so that distortion characteristic thereof will be as shown in Fig. 4 by alternate-long-and-two-short-dashes line D. In other words, the shift processor 1 of the second embodiment increments shift numbers by one each time the input data decreases by 6 dB, as far as the shifting quantity decreases to -36 dB, i.e., $-6 \text{ dB} * S_6$, after the shift processor 1 initiates the shifting of the input data at -24 dB. Simultaneously, it selects bits M_0 to M_{14} of mantissas as shown in Fig. 2 (a) by solid arrows in the range below -36 dB. Consequently, the distortion level of the second embodiment will be a combination of the lowest levels of distortion in Fig. 4 shown by the alternate-long-short-dash line C of the first embodiment, and by the broken line B showing the conventional distortion level.

Although specific embodiments of a floating-point digital-to-



THIS SHEET HAS BEEN
REPLACED

analog converter constructed in accordance with the present invention have been disclosed, it is not intended that the invention be restricted to either these specific configurations or to the uses disclosed herein. Modifications may be made in a manner obvious to those skilled in the art. For example, the invention also applies to a floating-point DAC designed such that analog output of the exponent DAC is inputted to the analog input terminal of mantissa DAC which produces analog output corresponding to digital input data. Accordingly, it is intended that the invention be limited only by the scope of the appended claims.

This Sheet Has Been Replaced





THIS SHEET HAS BEEN
REPLACED

What is claimed is:

1. A floating-point digital-to-analog converter comprising:

shifting means (1) for detecting shift numbers according to exponent data of floating point digital input data, and for shifting said input data according to said shift numbers to produce digital mantissa data of said input data;

mantissa converting means (6) for converting said digital mantissa data to an analog mantissa; and

exponent converting means (9) for converting said shift numbers to weights represented by said exponent data and a certain base, and for multiplying said analog mantissa by one of said weights;

whereby said shifting means shifts said input data when the absolute value of said analog mantissa will be less than the value where an accuracy of said mantissa converting means becomes lower than that of said exponent converting means, and said exponent converting means multiplies said analog mantissa by said weight other than 1 only as long as the accuracy of said mantissa converting means is lower than that of said exponent converting means.

2. A floating-point digital-to-analog converter as defined in claim 1 wherein said shifting means increments said shift numbers by 1 each time the level of said input data decreases 6 dB, after said shifting means initiates said shifting of said input data.

3. A floating-point digital-to-analog converter as defined in



THIS SHEET HAS BEEN
REPLACED

claim 1 wherein said shifting means, after initiating said shifting of said input data, increments said shift numbers by 1 each time the level of said input data is decremented 6 dB, until said shifting quantity decreases to the point specified by the maximum shift number multiplied by 6 dB, and said exponent converting means multiplies said analog mantissa by the minimum weight when the level of said input data is lower than said point.



This Sheet Has Been Replaced



ABSTRACT OF THE DISCLOSURE

The invention relates to a floating-point digital-to-analog converter (DAC) having mantissa converting means and exponent converting means. The mantissa converting means generally has higher accuracy than the exponent converting means because of differences in their constructions. Hence, as long as the accuracy of the mantissa converting means is greater than that of the exponent converting means, analog output of the mantissa converting means is used as output of the DAC. Once the accuracy of the mantissa converting means goes below that of the exponent converting means, the input data is shifted to form digital mantissa applied to the mantissa converting means, and the exponent converting means multiplies the output of the mantissa converting means (i.e., analog mantissa) by weight specified by the exponent. Thus a higher accuracy can be achieved than in a conventional apparatus.

This Sheet Has Been Replaced

THIS SHEET HAS BEEN :
REPLACED

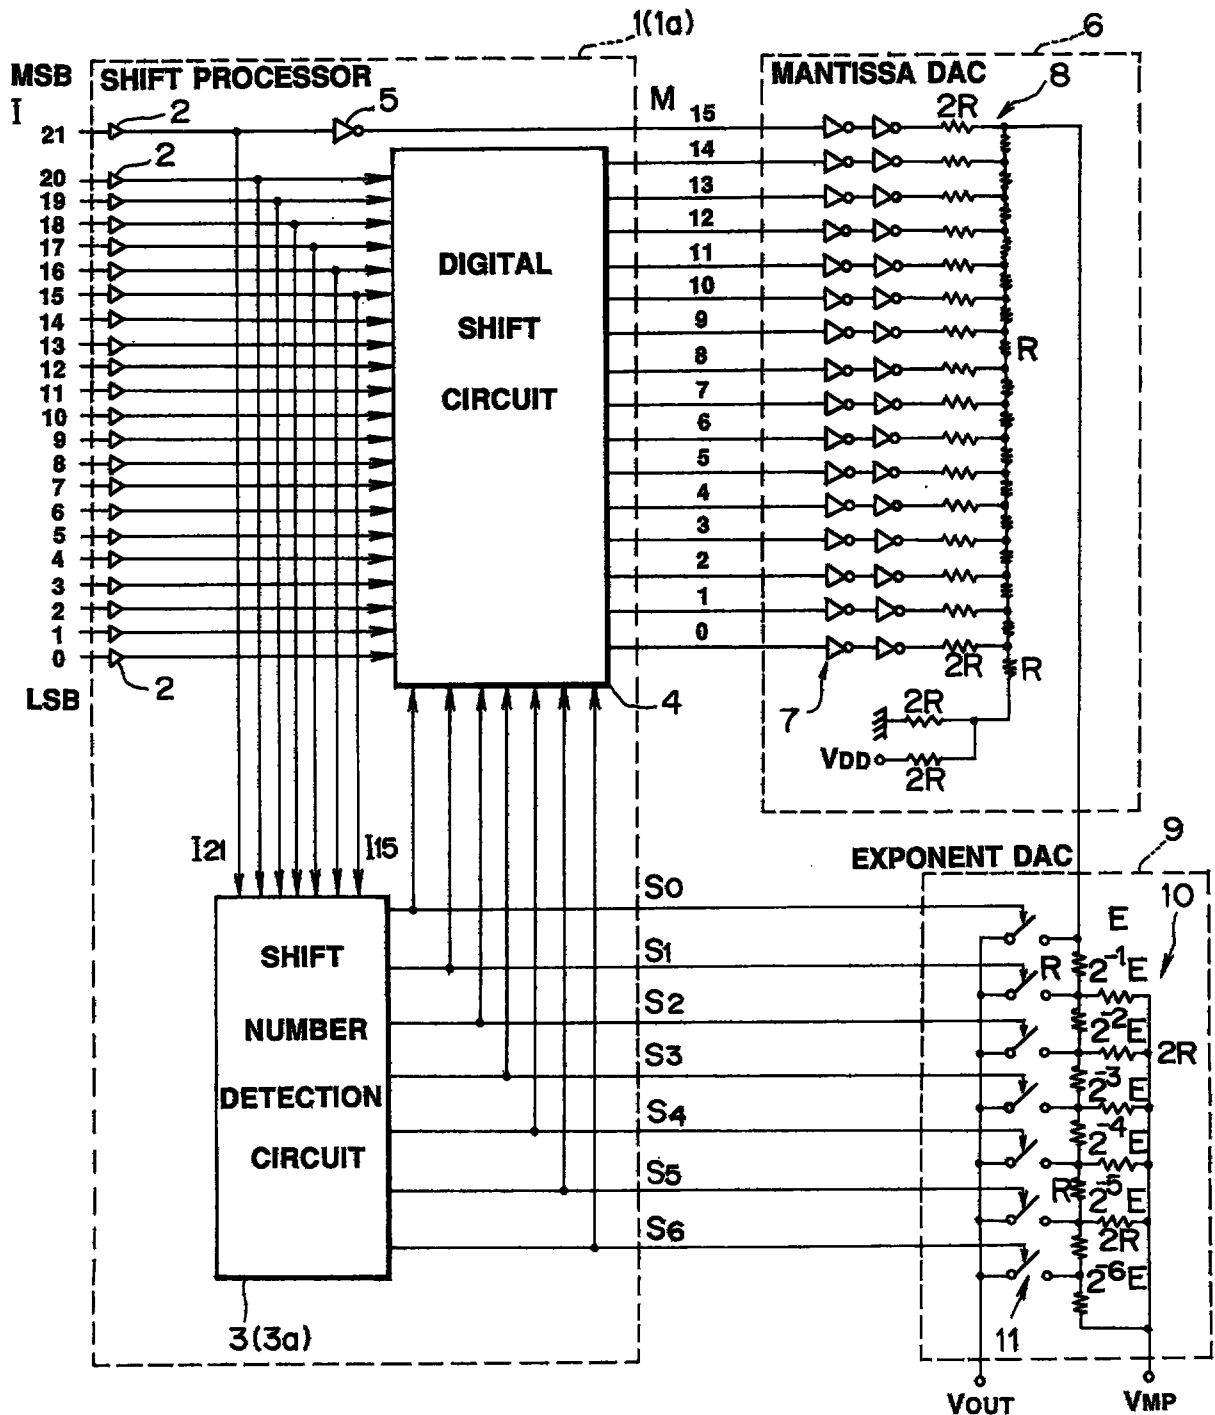


FIG. 1

This Sheet Has Been Replaced



1. The first step in the process is to identify the problem. This involves gathering information about the situation and understanding the needs of the stakeholders involved.

2. Once the problem is identified, the next step is to develop a plan. This involves setting goals, identifying resources, and determining the steps that need to be taken to address the problem.

3. The third step is to implement the plan. This involves putting the plan into action and monitoring progress. It is important to stay flexible and adjust the plan as needed.


4. Finally, the fourth step is to evaluate the results. This involves assessing the effectiveness of the plan and determining whether the problem has been solved. If not, the process may need to be repeated.

N-G-L

(a)

[illegible]

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

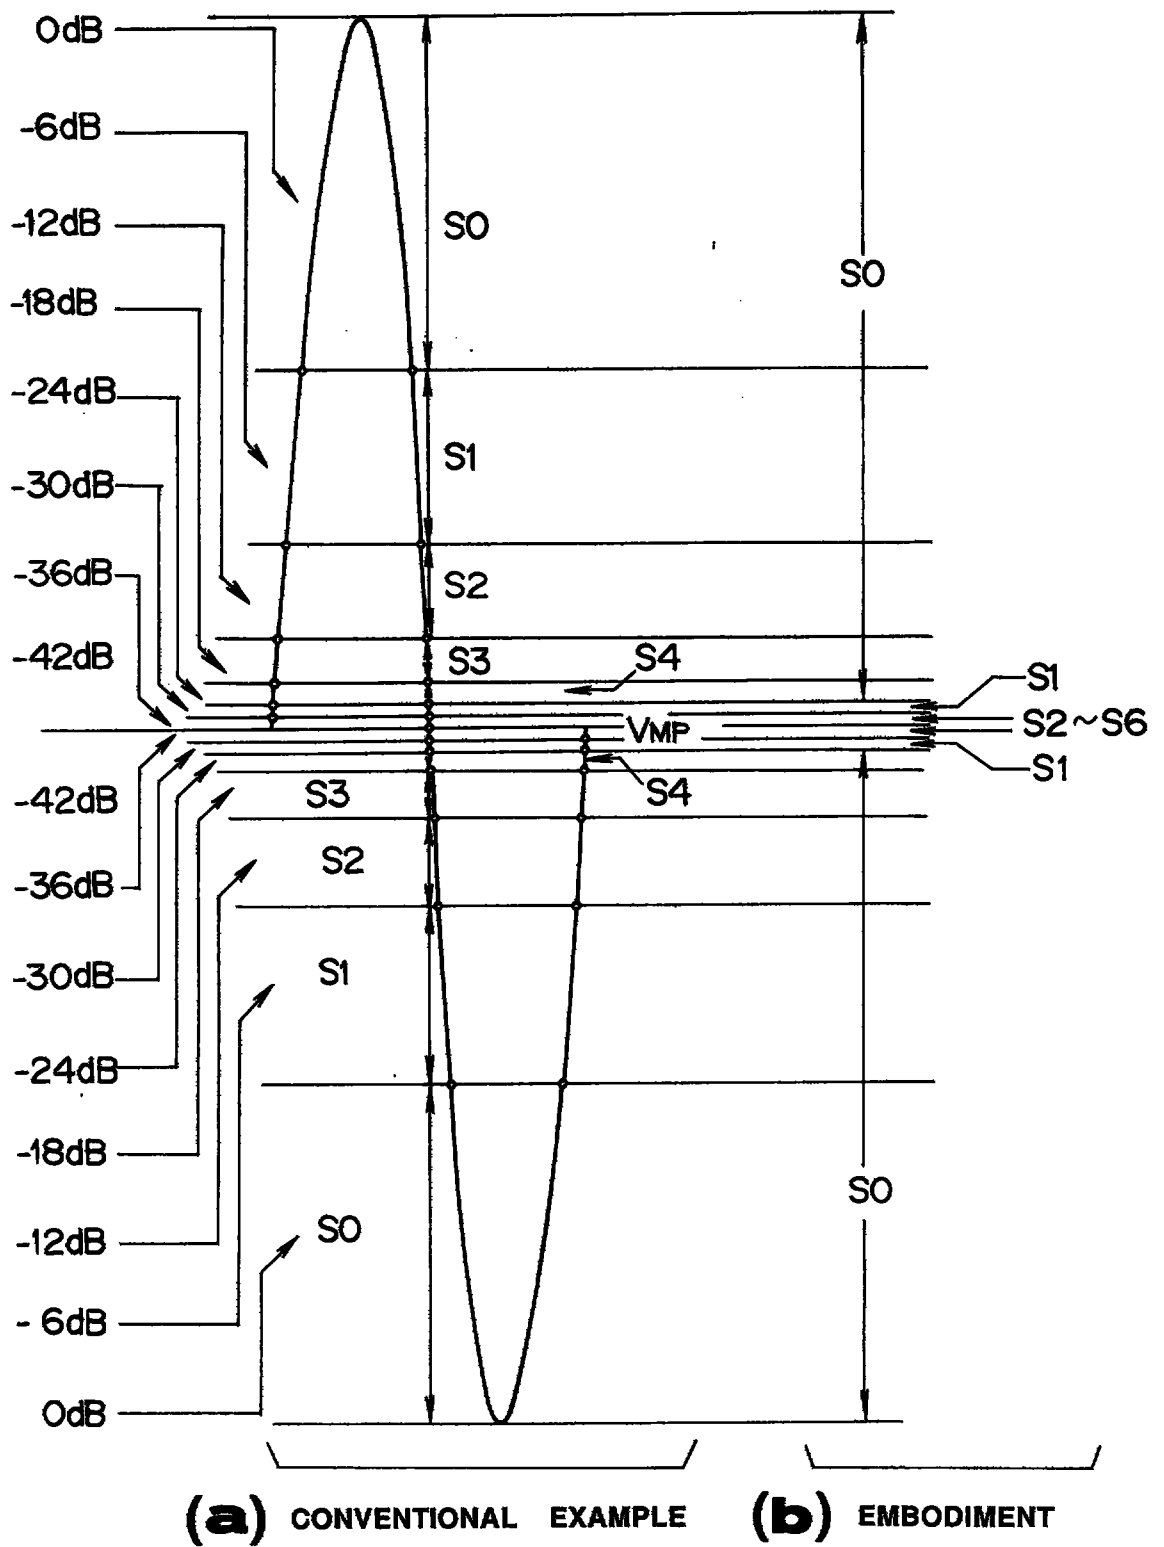


FIG. 3

THIS SHEET HAS BEEN
REPLACED

This Sheet Has Been Replaced

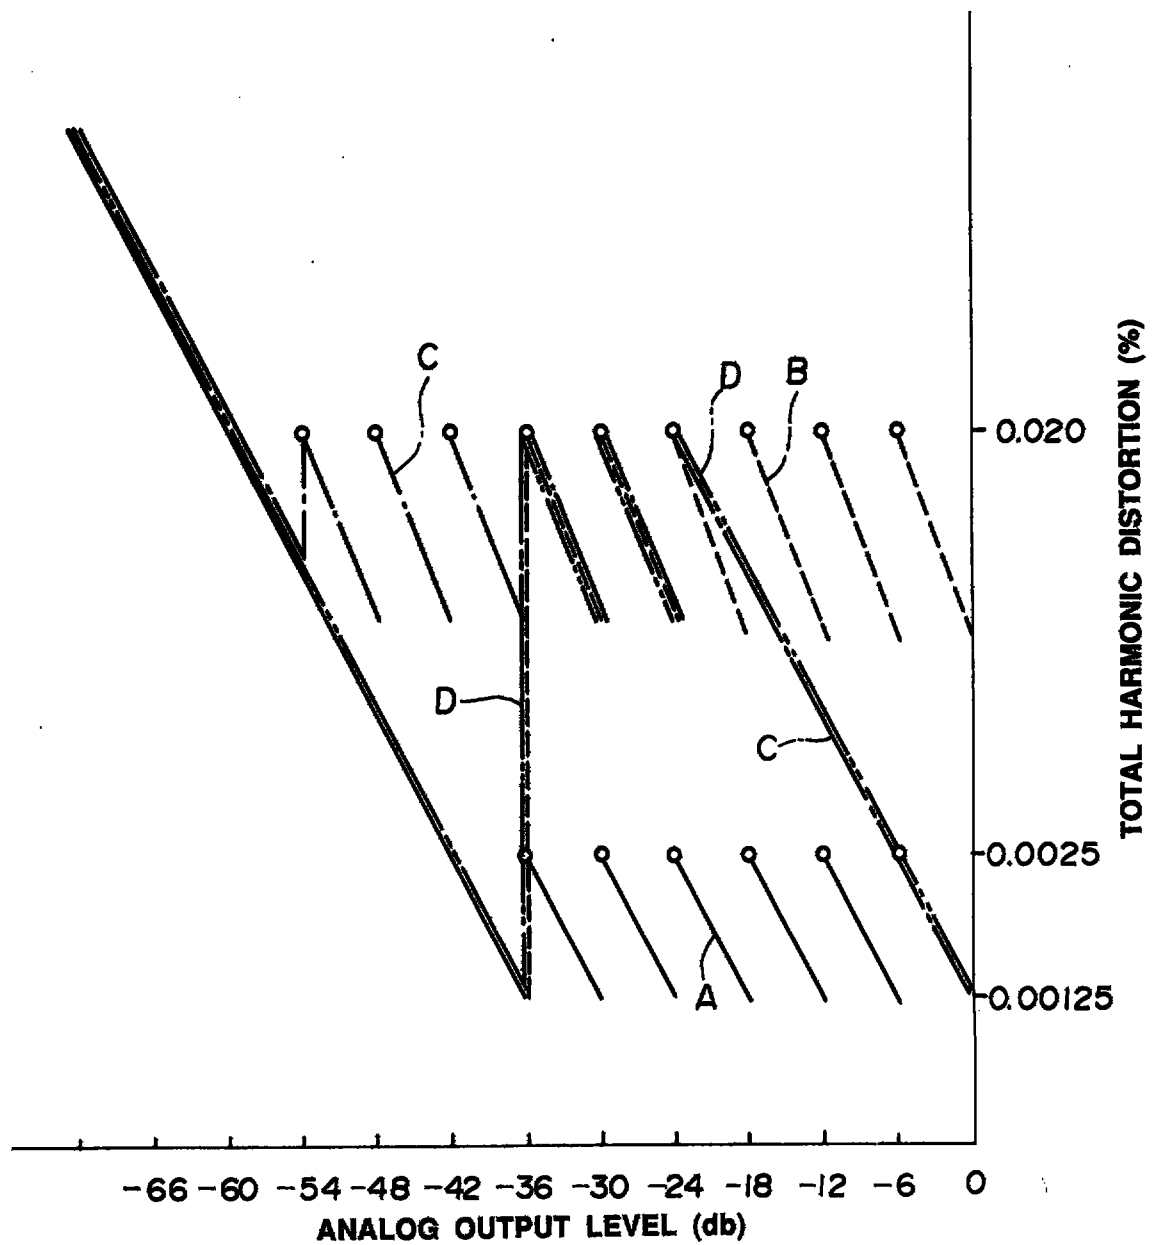


FIG. 4

9603129-9

EXTRA

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

1

REPLACEMENT SHEET
05 SEP 1996

FLOATING-POINT DIGITAL-TO-ANALOG CONVERTER

BACKGROUND OF THE INVENTION

Field of the Invention

The invention relates generally to a floating-point digital-to-analog converter (called DAC hereafter), and more specifically to a floating-point DAC preferably applied to digital audio apparatuses such as compact disk players.

Prior Art

A floating-point DAC that converts digital data represented by 2's complement of 22-bits into an analog signal is constructed as shown in Fig. 1 (though Fig. 1 is a block diagram of an embodiment of the invention, it is also used here to illustrate the conventional apparatus). In Fig. 1, 1a designates a shift processor comprising input buffers all designated as 2, 2, ..., a shift-number-detection circuit 3a, a digital-shift circuit 4, and an inverter 5. Digital input data of 22-bits I_0 to I_{21} is applied to the digital-shift circuit 4 through the input buffers 2, 2, The upper 7-bits I_{15} to I_{21} of the 22-bits, forming the exponent thereof, are supplied to the shift-number-detection circuit 3a which produces shift numbers S_0 to S_6 according to the exponent. The digital-shift circuit 4 produces 15-bit digital mantissa M_0 to M_{14} by shifting the input data I_0 to I_{20} by bit positions

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

2

REPLACEMENT SHEET

05 SEP 1976

specified by one of the shift numbers S_0 to S_6 . The inverter 5 inverts the most significant bit I_{21} of the input data and produces the reversed bit as the most significant bit M_{15} of the digital mantissa.

Numeral 6 designates a mantissa DAC 6 that converts the digital mantissa M_0 to M_{15} to an analog mantissa. It comprises a buffer circuit 7 and R-2R ladder network 8. The buffer circuit 7 is provided with a pair of serially connected inverters for each bit which produces high or low voltage according to logic-1 or logic-0 of each bit of the digital mantissa M_0 to M_{15} . The R-2R ladder network 8 receives each bit of the digital mantissa, multiplies each bit by a specific weight, and sums the resulting products, thus producing an analog mantissa.

Numeral 9 designates an exponent DAC which produces analog output V_{OUT} that corresponds to the input data I_0 to I_{21} , using the analog mantissa applied from the mantissa DAC 6 and the shift numbers S_0 to S_6 supplied from the shift-number-detection circuit 3a. It comprises a R-2R ladder network 10 and a switch circuit 11. The R-2R ladder network 10 multiplies the analog mantissa by weight specified by one of the shift numbers S_0 to S_6 and the reference voltage V_{MP} . The switch circuit 11 consists of 7 switch elements, one of which turns on according to one of shift numbers S_0 to S_6 of logic-1.

In the construction mentioned above, the shift-number-detection circuit 3a determines the shift numbers S_0 to S_6 , as shown in Fig. 2 (a) and (b). Analog levels represented by digital notation as

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

3

REPLACEMENT SHEET

05 SEP 1996

from +2097151 to -2097152 in Fig. 2 (a), are divided into 2^4 (= 16) levels by every 6 dB interval, and the shift numbers S_0 to S_6 are determined as shown in Fig. 2 (b). Specifically, when the absolute value of the analog level ranges from the maximum to $1/2$ thereof, the shift number S_0 is assigned; from $1/2$ to $1/4$, the shift number S_1 is assigned; from $1/4$ to $1/8$, the shift number S_2 is assigned, and so on. Each digital mantissa M_0 to M_{14} is selected from the input data I_0 to I_{20} according to the shift numbers S_0 to S_6 as shown in Fig. 2 (a): solid arrows ($\leftrightarrow$) in the input data table shown in Fig. 2 (a) designate the range to be selected as a digital mantissa M_0 to M_{14} . Inspection of Fig. 2 (a) shows that every time the analog level is halved, shift numbers S_0 to S_6 are changed, as well as the input data I_0 to I_{20} to be selected as a mantissa is shifted. Furthermore, mantissa M_{15} is obtained as a reversed value of the input data I_{21} .

Figure 3 (a) depicts the relationships between analog levels and the shift numbers S_0 to S_6 . Each time the amplitude of the analog signal is halved (i.e., every 6 dB interval), one of the shift numbers S_0 to S_6 is selected in turn and assigned to each level, beginning with the maximum level to $1/2$ thereof, shift number S_0 is assigned, from $1/2$ to $1/4$, shift number S_1 , and so on. If two levels corresponding to the shift numbers S_0 and S_1 are compared, although the output of mantissa DAC 6 has the same range in both cases, the output of the exponent DAC 9 is half the level corresponding to the shift number S_1 as in the shift number S_0 .

This Sheet Has Been Replaced



4

THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

05 SEP 1996

If both the mantissa DAC 6 and exponent DAC 9 had 16-bit accuracy (i.e., $(100 * 2^{-16})\%$), the relationship between the analog output level of the sinusoidal wave and the total harmonic distortion (called "distortion" for brevity hereafter) of the analog output level measured by a distortion meter, would be shown by solid line A in Fig. 4. First, line A shows saw-tooth variation, because every time the shift number is incremented by 1 the amplitude of the mantissa increases by 6 dB over that just immediately prior to the shift, and thus distortion decreases by 6 dB each time the shift number is changed. Second, the average level of the line A is kept constant. This is because error E applied from the mantissa DAC 6 to the input terminal of the R-2R ladder network 10 of the exponent DAC 9 is halved each time the shift number changes from S_0 to S_6 , such as $2^{-1} \cdot E$, $2^{-2} \cdot E$, ..., $2^{-6} \cdot E$, and hence error E and the level of analog output are simultaneously halved. Thus, average distortion of the analog signal is kept constant as long as the shift number is changed. Consequently, distortion of the analog signal varies between two levels (between 0.00125% and 0.0025%, for example) in the range from 0 to 36 dB in which the shift number is altered, whereas distortion in the smaller range is inversely proportional to the level of analog output V_{OUT} because the shift number is not changed.

As described above, if both mantissa DAC 6 and exponent DAC 9 have 16-bit accuracy, a low level distortion is obtained as shown by solid line A in Fig. 4. In practice, however, a low level

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

5

REPLACEMENT SHEET

05 SEP 1996

dB), causes a critical problem in digital audio apparatus such as compact disk players, because performance of these apparatus is specified by distortion at 0 dB output.

SUMMARY OF THE INVENTION

It is therefore an object of the invention to provide a floating-point digital-to-analog converter which has improved distortion characteristic of maximum output level, by using the exponent DAC that has a similar accuracy to that of a conventional one, thus achieving a higher dynamic range.

According to one aspect of the present invention, there is provided a floating-point digital-to-analog converter comprising:

shifting means for detecting shift numbers according to exponent data of floating point digital input data, and for shifting the input data according to the shift numbers to produce digital mantissa data of the input data;

mantissa converting means for converting the digital mantissa data to an analog mantissa; and

exponent converting means for converting the shift numbers to weights represented by the exponent data and a certain base, and for multiplying the analog mantissa by one of the weights;

whereby the shifting means shifts the input data when the absolute value of the analog mantissa is less than the value at which the accuracy of the mantissa converting means becomes lower

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

6

REPLACEMENT SHEET

05 SEP 1996

than that of the exponent converting means; and the exponent converting means multiplies the analog mantissa by the weight other than 1 only so long as the accuracy of the mantissa converting means is lower than that of the exponent converting means.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram of a floating-point DAC according to an embodiment of the present invention;

Fig. 2 is a table showing the relationship between digital input data I_0 to I_{21} and shift number S_0 to S_6 of the embodiment, in comparison with a conventional apparatus;

Fig. 3 is a graph showing the relationship between the analog output level and the shift number of the embodiment, in comparison with a conventional apparatus; and


Fig. 4 is a graph showing the relationship between the analog output level and the total distortion thereof, in comparison to a conventional apparatus.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

The invention will now be described with reference to the accompanying drawings.

[A] FIRST EMBODIMENT

This Sheet Has Been Replaced



7

THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

05 SEP 1996

Fig. 1 is a block diagram of a floating-point DAC according to a first embodiment of the present invention.

This embodiment differs from the conventional apparatus in the construction of shift-number-detection circuit 3. The shift-number-detection circuit 3 that constitutes a shift processor 1 does not initiate its shift operation of the input data I_0 to I_{20} as long as the accuracy of mantissa DAC 6 is higher than that of exponent DAC 9.

Specifically, consider the output distortion of 16-bit mantissa DAC 6. For example, when the analog output signal thereof is maximum, i.e., 0 dB, its distortion is 0.00125%. The distortion increases inversely proportional to the analog output level and reaches 0.02% at the -24 dB level as shown in Fig. 4 by alternate-long-short-dash line C. This value of distortion is comparable to that of the exponent DAC 9 of about 12-bit accuracy. For this reason, the shift processor 1 does not change the shift number S_0 as long as the accuracy of the mantissa DAC 6 is greater than that of exponent DAC 9, i.e., as long as the level of the analog mantissa is in the range of 0 to -24 dB, so that mantissa DAC 6 can make its accuracy to its full extent.

Figure 2 (c) and Fig. 3 (b) show changing points of shift numbers S_0 to S_6 according to the embodiment. As long as the analog level is larger than -24 dB, the shift number is kept S_0 , i.e., the shift in exponent DAC 9 is not performed. In contrast, when the analog level is reduced to -24 dB, or to -30 dB, or to -36 dB, ... in 6 dB increments, the shift numbers are changed to

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

8

REPLACEMENT SHEET

05 SEP 1976

$S_1, S_2, S_3, \dots$, respectively. Bits M_0 to M_{14} of the digital mantissas selected from the input data I_0 to I_{20} and produced from the digital-shift circuit 4 for each of shift numbers are designated by broken arrows ($\leftarrow - - \rightarrow$) in Fig. 2 (a).

According to the construction described above, distortion near the maximum output level (0 dB) is lessened as shown in Fig. 4 by alternate-long-short-dash line C, when using exponent DAC 9 of the conventional accuracy, thus achieving a wide dynamic range.

[B] SECOND EMBODIMENT

The second embodiment of the present invention is designed so that distortion characteristic thereof will be as shown in Fig. 4 by alternate-long-and-two-short-dashes line D. In other words, the shift processor 1 of the second embodiment increments shift numbers by one each time the input data decreases by 6 dB, as far as the shifting quantity decreases to -36 dB, i.e., $-6 \text{ dB} * S_6$, after the shift processor 1 initiates the shifting of the input data at -24 dB. Simultaneously, it selects bits M_0 to M_{14} of mantissas as shown in Fig. 2 (a) by solid arrows in the range below -36 dB. Consequently, the distortion level of the second embodiment will be a combination of the lowest levels of distortion in Fig. 4 shown by the alternate-long-short-dash line C of the first embodiment, and by the broken line B showing the conventional distortion level.

Although specific embodiments of a floating-point digital-to-

This Sheet Has Been Replaced



9

THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

05 SEP 1996

analog converter constructed in accordance with the present invention have been disclosed, it is not intended that the invention be restricted to either these specific configurations or to the uses disclosed herein. Modifications may be made in a manner obvious to those skilled in the art. For example, the invention also applies to a floating-point DAC designed such that analog output of the exponent DAC is inputted to the analog input terminal of mantissa DAC which produces analog output corresponding to digital input data. Accordingly, it is intended that the invention be limited only by the scope of the appended claims.

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

10



REPLACEMENT SHEET

05 SEP 1996

What is claimed is:

1. A floating-point digital-to-analog converter comprising:

shifting means (1) for detecting shift numbers according to exponent data of floating point digital input data, and for shifting said input data according to said shift numbers to produce digital mantissa data of said input data;

mantissa converting means (6) for converting said digital mantissa data to an analog mantissa; and

exponent converting means (9) for converting said shift numbers to weights represented by said exponent data and a certain base, and for multiplying said analog mantissa by one of said weights;

whereby said shifting means shifts said input data when the absolute value of said analog mantissa will be less than the value where an accuracy of said mantissa converting means becomes lower than that of said exponent converting means, and said exponent converting means multiplies said analog mantissa by said weight other than 1 only as long as the accuracy of said mantissa converting means is lower than that of said exponent converting means.

2. A floating-point digital-to-analog converter as defined in claim 1 wherein said shifting means increments said shift numbers by 1 each time the level of said input data decreases 6 dB, after said shifting means initiates said shifting of said input data.

3. A floating-point digital-to-analog converter as defined in

This Sheet Has Been Replaced



11

THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

05 SEP 1996

claim 1 wherein said shifting means, after initiating said shifting of said input data, increments said shift numbers by 1 each time the level of said input data is decremented 6 dB, until said shifting quantity decreases to the point specified by the maximum shift number multiplied by 6 dB, and said exponent converting means multiplies said analog mantissa by the minimum weight when the level of said input data is lower than said point.



This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

12

REPLACEMENT SHEET

05 SEP 1996

FLOATING-POINT DIGITAL-TO-ANALOG CONVERTER

ABSTRACT OF THE DISCLOSURE

The invention relates to a floating-point digital-to-analog converter (DAC) having mantissa converting means and exponent converting means. The mantissa converting means generally has higher accuracy than the exponent converting means because of differences in their constructions. Hence, as long as the accuracy of the mantissa converting means is greater than that of the exponent converting means, analog output of the mantissa converting means is used as output of the DAC. Once the accuracy of the mantissa converting means goes below that of the exponent converting means, the input data is shifted to form digital mantissa applied to the mantissa converting means, and the exponent converting means multiplies the output of the mantissa converting means (i.e., analog mantissa) by weight specified by the exponent. Thus a higher accuracy can be achieved than in a conventional apparatus.

FIGURE 1

THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

05 SEP 1976

05 SEP 1976

This Sheet Has Been Replaced

- 1 -

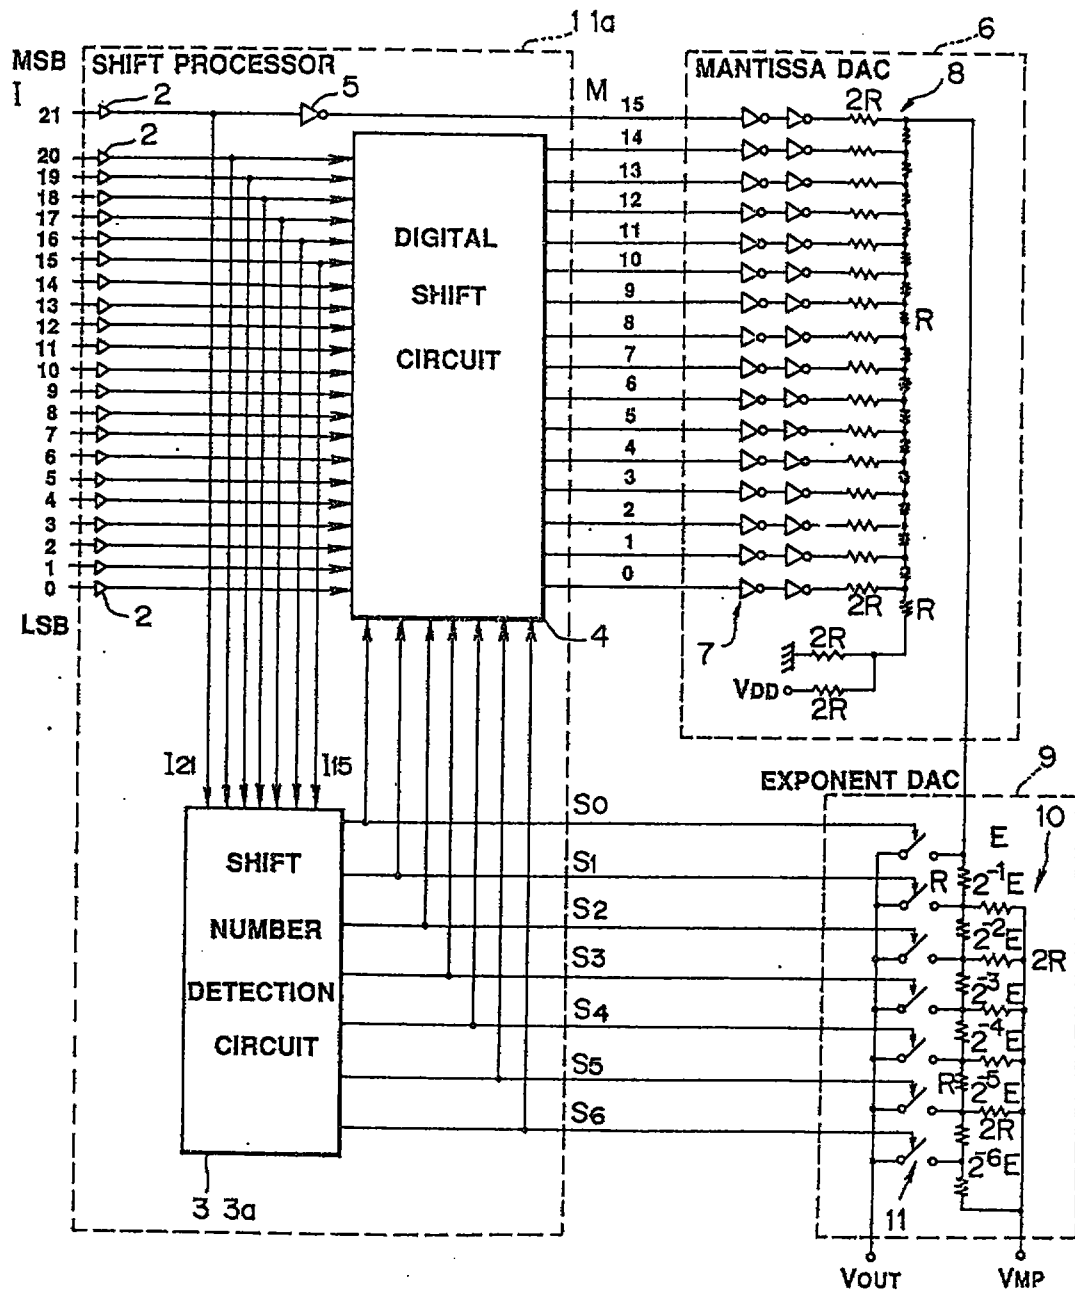


FIG. 1

is Sheet has been

- 2 -

05 SEP 1976

0-24dB

NOVEL

LEVEL 1

[illegible]**b CONVENTIONAL EXAMPLE** **c FIRST EMBODIMENT**

13



05 SEP 1996

- 3 -

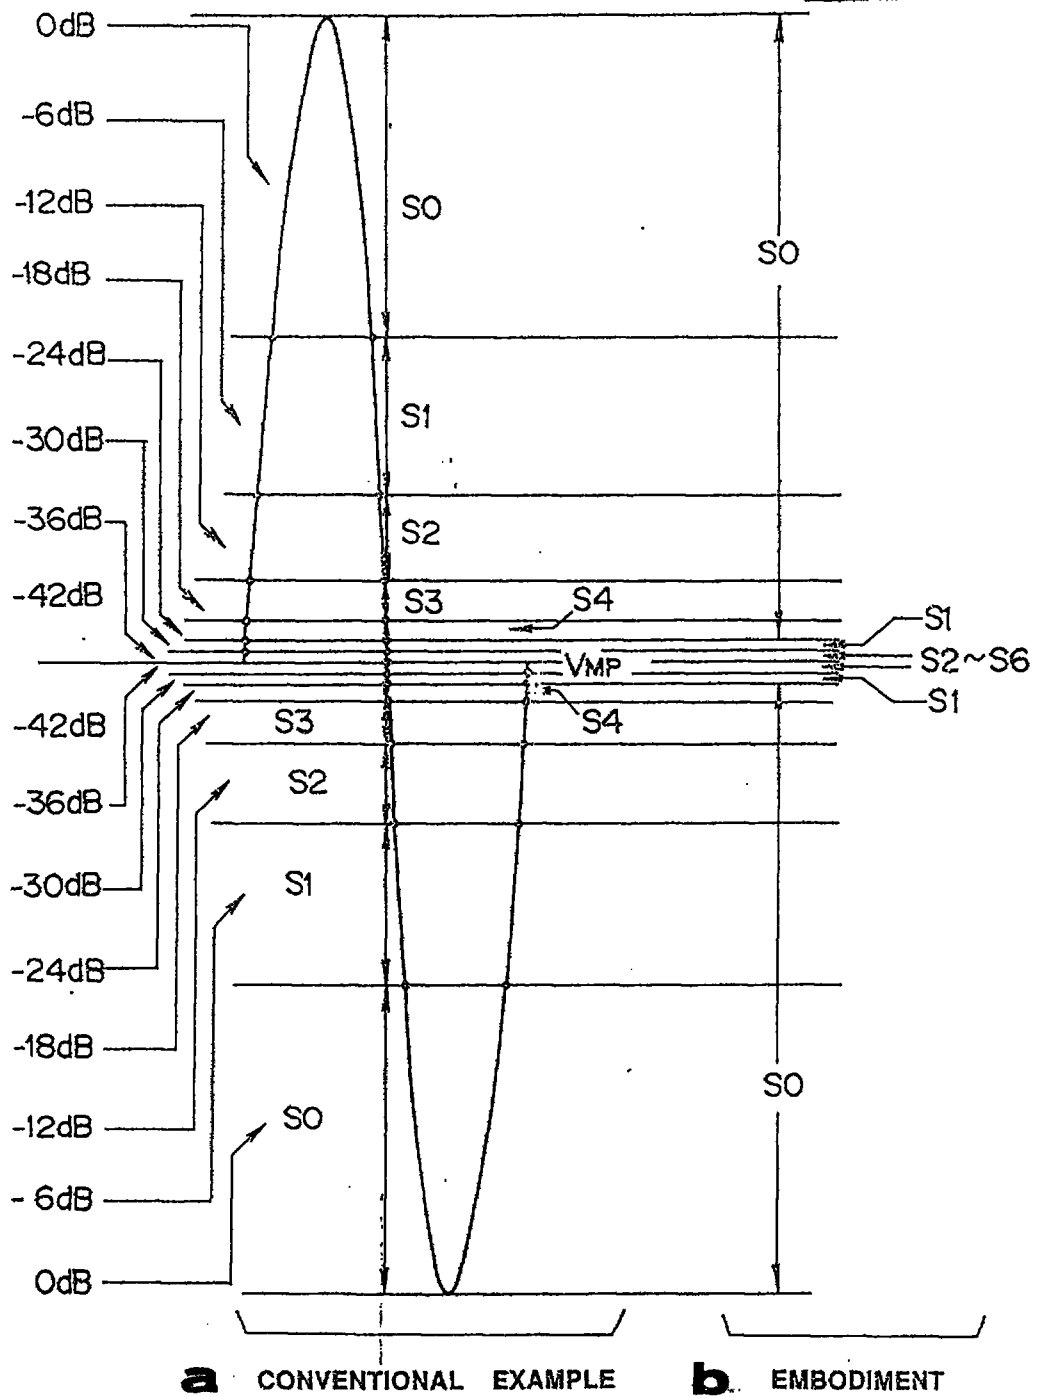


FIG. 3

THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

05 SEP 1976

- 4 -

This Sheet Has Been Replaced

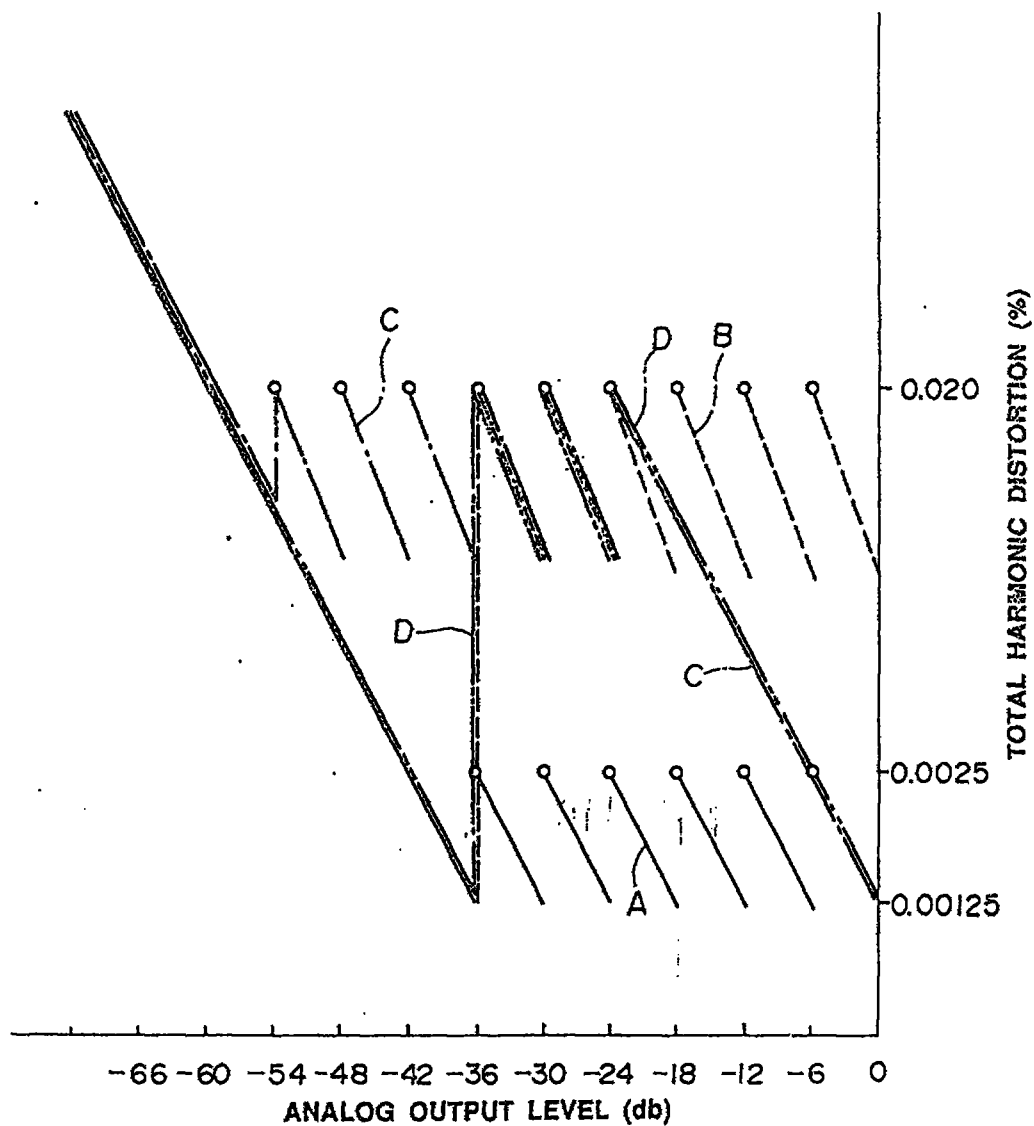



FIG. 4

9603129-9

EXTRA

1 THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

23 JUL 1997

FLOATING-POINT DIGITAL-TO-ANALOG CONVERTER

BACKGROUND OF THE INVENTIONField of the Invention

The invention relates generally to a floating-point digital-to-analog converter (called DAC hereafter), and more specifically to a floating-point DAC preferably applied to digital audio apparatuses such as compact disk players.

Prior Art

EP-A-0 200 970 discloses a floating-point DAC that converts digital data represented by 2's complement of 22-bits into an analog signal is constructed as shown in Fig. 1 (though Fig. 1 is a block diagram of an embodiment of the invention, it is also used here to illustrate the conventional apparatus). In Fig. 1, 1a designates a shift processor comprising input buffers all designated as 2, 2, ..., a shift-number-detection circuit 3a, a digital-shift circuit 4, and an inverter 5. Digital input data of 22-bits I_0 to I_{21} is applied to the digital-shift circuit 4 through the input buffers 2, 2, The upper 7-bits I_{15} to I_{21} of the 22-bits, forming the exponent thereof, are supplied to the shift-number-detection circuit 3a which produces shift numbers S_0 to S_6 according to the exponent. The digital-shift circuit 4 produces 15-bit digital mantissa M_0 to M_{14} by shifting the input data I_0 to I_{20} by bit positions

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

23 JUL 1997

db), causes a critical problem in digital audio apparatus such as compact disk players, because performance of these apparatuses is specified by distortion at 0 dB output.

SUMMARY OF THE INVENTION

It is therefore an object of the invention to provide a floating-point digital-to-analog converter which has improved distortion characteristic of maximum output level, by using the exponent DAC that has a similar accuracy to that of a conventional one, thus achieving a higher dynamic range.

According to the present invention, there is provided a floating-point digital-to-analog converter comprising:

shifting means for detecting shift numbers according to exponent data of floating point digital input data, and for shifting said digital input data in the direction of the most significant bit thereof by bits equal in number to said detected shift numbers to produce digital mantissa data of said input data, said shift numbers being integers $\leq m$, where m is the maximum shift number

mantissa converting means for converting said digital mantissa data to an analog mantissa; and

exponent converting means for converting said shift numbers to weights represented by said exponent data and a certain base, and for multiplying said analog mantissa by one of said weights, characterized in that

said shifting means shifts said input data when the absolute value of said analog mantissa will be less than the value where an accuracy of said mantissa converting means becomes lower

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

23 JUL 1997

11

CLAIMS:

This Sheet Has Been Replaced



1. A floating-point digital-to-analog converter comprising:
shifting means (1) for detecting shift numbers according to exponent data of floating point digital input data, and for shifting said digital input data in the direction of the most significant bit thereof by bits equal in number to said detected shift numbers to produce digital mantissa data of said input data, said shift numbers being integers $\leq m$, where m is the maximum shift number,
mantissa converting means (6) for converting said digital mantissa data to an analog mantissa; and
exponent converting means (9) for converting said shift numbers to weights represented by said exponent data and a certain base, and for multiplying said analog mantissa by one of said weights, characterized in that
said shifting means shifts said input data when the absolute value of said analog mantissa will be less than the value where an accuracy of said mantissa converting means becomes lower than that of said exponent converting means, and said exponent converting means multiplies said analog mantissa by said weight other than 1 only as long as the accuracy of said mantissa converting means is lower than that of said exponent converting means.
2. A floating-point digital-to-analog converter as defined in claim 1 wherein said shifting means increments said shift numbers by 1 each time the analog level represented by said digital input data decreases by 6 dB, after said shifting means initiates said shifting of said input data.
3. A floating-point digital-to-analog converter as defined in claim 1 wherein said shifting means, after initiating said shifting of said input data, increments said shift numbers by 1 each time the analog level represented by said digital input data is



THIS SHEET HAS BEEN
REPLACED

12

REPLACEMENT SHEET

23 JUL 1997

decremented by 6 dB, until said shifting quantity decreases to the point specified by the maximum shift number multiplied by 6 dB, and said exponent converting means multiplies said analog mantissa by the weight, corresponding to the maximum shift number when the level of said input data is lower than said point.

REPLACEMENT SHEET

10 SEP 1998

-1-


FLOATING-POINT DIGITAL-TO-ANALOG CONVERTER

Description**BACKGROUND OF THE INVENTION****Field of the Invention**

The invention relates generally to a floating-point digital-to-analog converter (called DAC hereafter), and more specifically to a floating-point DAC preferably applied to digital audio apparatuses such as compact disk players.

Prior Art

EP-A-0 200 970 discloses a floating-point DAC that converts digital data represented by 2's complement of 22-bits into an analog signal is constructed as shown in Fig. 1 (though Fig. 1 is a block diagram of an embodiment of the invention, it is also used here to illustrate the conventional apparatus). In Fig. 1, 1a designates a shift processor comprising input buffers all designated as 2, 2 a shift-number-detection circuit 3a, a digital-shift circuit 4, and an inverter 5. Digital input data of 22-bits I_0 to I_{21} is applied to the digital-shift circuit 4 through the input buffers 2, 2, ... The upper 7-bits I_{15} to I_{21} of the 22-bits, forming the exponent thereof, are supplied to the shift-number-detection circuit 3a which produces shift numbers S_0 to S_6 according to the exponent. The digital-shift circuit 4 produces 15-bit digital mantissa M_0 to M_{14} by shifting the input data I_0 to I_{20} by bit positions specified by one of the shift numbers S_0 to S_6 . The inverter 5 inverts the most significant bit I_{21} of the input data and produces the reversed bit as the most significant bit M_{15} of the digital mantissa.

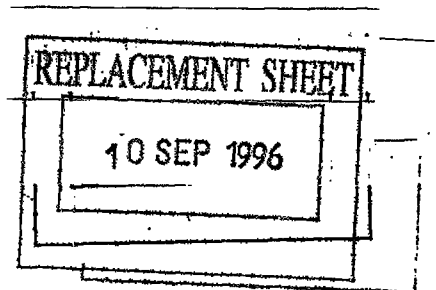

Numeral 6 designates a mantissa DAC 6 that converts the digital mantissa M_0 to M_{15} to an analog mantissa. It comprises a buffer circuit 7 and R-2R ladder network 8. The buffer circuit 7 is provided with a pair of serially connected inverters for each bit which produces high or low voltage according to logic-1 or logic-0 of each bit of the digital mantissa M_0 to M_{15} . The R-2R ladder network 8 receives each bit of the digital mantissa, multiplies each bit by a specific weight, and sums the resulting products, thus producing an analog mantissa.

Numeral 9 designates an exponent DAC which produces analog output V_{OUT} that corresponds to the input data I_0 to I_{21} , using the analog mantissa applied from the mantissa DAC 6 and the shift numbers S_0 to S_6 supplied from the shift-number-detection circuit 3a. It comprises a R-2R ladder network 10 and a switch circuit 11. The R-2R ladder network 10 multiplies the analog mantissa by weight specified by one of the shift numbers S_0 to S_6 and the reference voltage V_{MP} . The switch circuit 11 consists of 7 switch elements, one of which turns on according to one of shift numbers S_0 to S_6 of logic-1.

In the construction mentioned above, the shift-number-detection circuit 3a determines the shift numbers S_0 to S_6 , as shown in Fig. 2 (a) and (b). Analog levels represented by digital notation as from +2097151 to -2097152 in Fig. 2 (a), are divided into 2^4 (= 16) levels by every 6 dB interval, and the shift numbers S_0 to S_6 are determined as shown in Fig. 2 (b). Specifically, when the absolute value of the analog level ranges from the maximum to 1/2 thereof, the shift number S_0 is assigned; from 1/2 to 1/4, the shift number S_1 is assigned; from 1/4 to 1/8, the shift number S_2 is assigned, and so on. Each digital mantissa M_0 to M_{14} is selected from the input data I_0 to I_{20} according to the shift numbers S_0 to

10 SEP 1998

- 3 -

S_6 as shown in Fig. 2 (a): solid arrows ($\leftrightarrow$) in the input data table shown in Fig. 2 (a) designate the range to be selected as a digital mantissa M_0 to M_{14} . Inspection of Fig. 2 (a) shows that every time the analog level is halved, shift numbers S_0 to S_6 are changed, as well as the input data I_0 to I_{20} to be selected as a mantissa is shifted. Furthermore, mantissa M_{15} is obtained as a reversed value of the input data I_{21} .

Figure 3 (a) depicts the relationships between analog levels and the shift numbers S_0 to S_6 . Each time the amplitude of the analog signal is halved (i.e., every 6 dB interval), one of the shift numbers S_0 to S_6 is selected in turn and assigned to each level, beginning with the maximum level to 1/2 thereof, shift number S_0 is assigned, from 1/2 to 1/4, shift number S_1 , and so on. If two levels corresponding to the shift numbers S_0 and S_1 are compared, although the output of mantissa DAC 6 has the same range in both cases, the output of the exponent DAC 9 is half the level corresponding to the shift number S_1 as in the shift number S_0 .

If both the mantissa DAC 6 and exponent DAC 9 had 16-bit accuracy (i.e., $(100 \cdot 2^{-16})\%$), the relationship between the analog output level of the sinusoidal wave and the total harmonic distortion (called "distortion" for brevity hereafter) of the analog output level measured by a distortion meter, would be shown by solid line A in Fig. 4. First, line A shows saw-tooth variation, because every time the shift number is incremented by 1 the amplitude of the mantissa increases by 6 dB over that just immediately prior to the shift, and thus distortion decreases by 6 dB each time the shift number is changed. Second, the average level of the line A is kept constant. This is because error E applied from the mantissa DAC 6 to the input terminal of the R-2R ladder network 10 of the exponent DAC 9 is halved each time the shift number changes from S_0 to S_6 , such as $2^{-1} \cdot E$, $2^{-2} \cdot E$, ..., $2^{-6} \cdot E$, and hence error E and the level of analog output are simultaneously halved. Thus, average distortion of the analog signal is kept constant as long as the shift number is changed. Consequently, distortion of the analog signal varies between two levels (between 0.00125% and 0.0025%, for example) in the range from


10 SEP 1998

- 4 -

0 to 36 dB in which the shift number is altered, whereas distortion in the smaller range is inversely proportional to the level of analog output V_{OUT} because the shift number is not changed.

As described above, if both mantissa DAC 6 and exponent DAC 9 have 16-bit accuracy, a low level distortion is obtained as shown by solid line A in Fig. 4. In practice, however, a low level distortion cannot be achieved because 16-bit accuracy of exponent DAC 9 cannot be obtained. More specifically, though 14-bit to 16-bit accuracy can be achieved for the mantissa DAC 6 by trimming or other means to compensate for errors of each resistor in the R-2R ladder network 8, it is very difficult to obtain similar accuracy for exponent DAC 9. This is because the resistor of ladder network 10 in exponent DAC 9 are connected to form an integral part, and so each resistance there of cannot be measured separately and hence the trimming thereof is difficult. In particular, it is very difficult to achieve high accuracy in a range where the level of analog output is small. Consequently, sufficient adjustment of resistors in the exponent DAC 9 is practically impossible, so the actual accuracy obtained is about 10- to 12-bits.

For this reason, even if mantissa DAC 6 of 16-bit accuracy is employed, the accuracy of the resulting output from exponent DAC 9 is only about 10- to 12-bits, as shown by broken line B in Fig. 4. First, the distortion in this case shows saw-tooth variation, because every time the shift number is incremented by one, the weight of exponent DAC 9 is decreased by 6 dB while the amplitude of the mantissa increases by 6 dB over that just immediately prior to the shift, and thus distortion decreases significantly from 10 - to 12-bit accuracy. Second, the distortion is improved to 0.00125% abruptly at -36 dB because the shift number S_6 which is used thereunder is free from the low accuracy of exponent DAC 9.

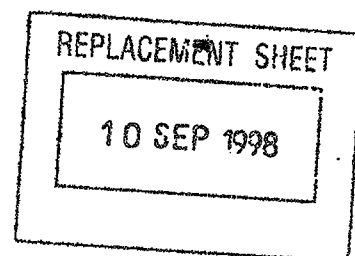

The fact that distortion increases near the maximum output (0 db), causes a critical problem in digital audio apparatus such as compact disk players, because performance of these apparatuses is specified by distortion at 0 dB output.

SUMMARY OF THE INVENTION

It is therefore an object of the invention to provide a floating-point digital-to-analog converter which has improved distortion characteristic of maximum output level, by using the exponent DAC that has a similar accuracy to that of a conventional one, thus achieving a higher dynamic range.

According to the present invention, there is provided a floating-point digital-to-analog converter comprising:

shifting means for detecting shift numbers according to exponent data of floating point digital input data, and for shifting said digital input data in the direction of the most significant bit thereof by bits equal in number to said detected shift numbers to produce digital mantissa data of said input data, said shift numbers being integers $\leq m$, where m is the maximum shift number

mantissa converting means for converting said digital mantissa data to an analog mantissa; and
exponent converting means for converting said shift numbers to weights represented by said exponent data and a certain base, and for multiplying said analog mantissa by one of said weights, characterized in that

said shifting means shifts said input data when the absolute value of said analog mantissa will be less than the value where an accuracy of said mantissa converting means becomes lower than that of the exponent converting means; and the exponent converting means multiplies the analog mantissa by the weight other than 1 only so long as the accuracy of the mantissa converting means is lower than that of the exponent converting means.

BRIEF DESCRIPTION OF THE DRAWINGS


Fig. 1 is a block diagram of a floating-point DAC according to an embodiment of the present invention; Fig. 2 is a table showing the relationship between digital input data I_0 to I_{21} and shift number S_0 to S_6 of the embodiment, in comparison with a conventional apparatus;

Fig. 3 is a graph showing the relationship between the analog output level and the shift number of the embodiment, in comparison with a conventional apparatus; and

Fig. 4 is a graph showing the relationship between the analog output level and the total distortion thereof, in comparison to a conventional apparatus.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

The invention will now be described with reference to the accompanying drawings.

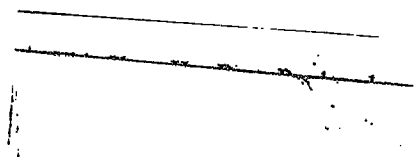

10 SEP 1998

[A] FIRST EMBODIMENT

Fig. 1 is a block diagram of a floating-point DAC according to a first embodiment of the present invention.

This embodiment differs from the conventional apparatus in the construction of shift-number-detection circuit 3. The shift-number-detection circuit 3 that constitutes a shift processor 1 does not initiate its shift operation of the input data I_0 to I_{20} as long as the accuracy of mantissa DAC 6 is higher than that of exponent DAC 9.

Specifically, consider the output distortion of 16-bit mantissa DAC 6. For example, when the analog output signal thereof is maximum, i.e., 0 dB, its distortion is 0.00125%. The distortion increases inversely proportional to the analog output level and reaches 0.02% at the -24 dB level as shown in Fig. 4 by alternate-long-short-dash line C. This value of distortion is comparable to that of the exponent DAC 9 of about 12-bit accuracy. For this reason, the shift processor 1 does not change the shift number S_0 as long as the accuracy of the mantissa DAC 6 is greater than that of exponent DAC 9, i.e., as long as the level of the analog mantissa is in the range of 0 to -24 dB, so that mantissa DAC 6 can make its accuracy to its full extent.

Figure 2 (c) and Fig. 3 (b) show changing points of shift numbers S_0 to S_6 according to the embodiment. As long as the analog level is larger than -24 dB, the shift number is kept S_0 , i.e., the shift in exponent DAC 9 is not performed. In contrast, when the analog level is reduced to -24 dB, or to -30 dB, or to -36 dB, ... in 6 dB increments, the shift numbers are changed to S_1 , S_2 , S_3 , ..., respectively. Bits M_0 to M_{14} of the digital mantissas selected from the input data I_0 to I_{20} and produced from the digital-shift circuit 4 for each of shift numbers are designated by broken arrows ($\leftarrow\rightarrow$) in Fig. 2 (a).

10 SEP 1998

- 8 -

According to the construction described above, distortion near the maximum output level (0 dB) is lessened as shown in Fig. 4 by alternate-long-short-dash line C, when using exponent DAC 9 of the conventional accuracy, thus achieving a wide dynamic range.

[B] SECOND EMBODIMENT

The second embodiment of the present invention is designed so that distortion characteristic thereof will be as shown in Fig. 4 by alternate-long-and-two-short-dashes line D. In other words, the shift processor 1 of the second embodiment increments shift numbers by one each time the input data decreases by 6 dB, as far as the shifting quantity decreases to -36 dB, i.e., $-6 \text{ dB} * S_6$, after the shift processor 1 initiates the shifting of the input data at -24 dB. Simultaneously, it selects bits M_0 to M_{14} of mantissas as shown in Fig. 2 (a) by solid arrows in the range below -36 dB. Consequently, the distortion level of the second embodiment will be a combination of the lowest levels of distortion in Fig. 4 shown by the alternate-long-short-dash line C of the first embodiment, and by the broken line B showing the conventional distortion level.

Although specific embodiments of a floating-point digital-to-analog converter constructed in accordance with the present invention have been disclosed, it is not intended that the invention be restricted to either these specific configurations or to the uses disclosed herein. Modifications may be made in a manner obvious to those skilled in the art. For example, the invention also applies to a floating-point DAC designed such that analog output of the exponent DAC is inputted to the analog input terminal of mantissa DAC which produces analog output corresponding to digital input data.

REPLACE

12 SEP 1988

- 9 -



Claims

1. A floating-point digital-to-analog converter comprising:

shifting means (1) for detecting shift numbers according to exponent data of floating point digital input data, and for shifting said digital input data in the direction of the most significant bit thereof by bits equal in number to said detected shift numbers to produce digital mantissa data of said input data, said shift numbers being integers $\leq m$, where m is the maximum shift number,


mantissa converting means (6) for converting said digital mantissa data to an analog mantissa; and

exponent converting means (9) for converting said shift numbers to weights represented by said exponent data and a certain base, and for multiplying said analog mantissa by one of said weights, characterized in that

said shifting means shifts said input data when the absolute value of said analog mantissa will be less than the value where an accuracy of said mantissa converting means becomes lower than that of said exponent converting means, and said exponent converting means multiplies said analog mantissa by said weight other than 1 only as long as the accuracy of said mantissa converting means is lower than that of said exponent converting means.

10 SEP 1998

- 10 -

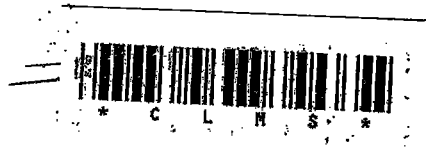

2. A floating-point digital-to-analog converter as defined in claim 1 wherein said shifting means increments said shift numbers by 1 each time the analog level represented by said digital input data decreases by 6 dB, after said shifting means initiates said shifting of said input data.
3. A floating-point digital-to-analog converter as defined in claim 1 wherein said shifting means, after initiating said shifting of said input data, increments said shift numbers by 1 each time the analog level represented by said digital input data is decremented by 6 dB, until said shifting quantity decreases to the point specified by the maximum shift number multiplied by 6 dB, and said exponent converting means multiplies said analog mantissa by the weight, corresponding to the maximum shift number when the level of said input data is lower than said point.

10 SEP 1998

- 11 -

FLOATING-POINT DIGITAL-TO-ANALOG CONVERTER

ABSTRACT OF THE DISCLOSURE

The invention relates to a floating-point digital-to-analog converter (DAC) having mantissa converting means and exponent converting means. The mantissa converting means generally has higher accuracy than the exponent converting means because of differences in their constructions. Hence, as long as the accuracy of the mantissa converting means is greater than that of the exponent converting means, analog output of the mantissa converting means is used as output of the DAC. Once the accuracy of the mantissa converting means goes below that of the exponent converting means, the input data is shifted to form digital mantissa applied to the mantissa converting means, and the exponent converting means multiplies the output of the mantissa converting means (i.e., analog mantissa) by weight specified by the exponent. Thus a higher accuracy can be achieved than in a conventional apparatus.

Figure 1.

FIG. 1


(b) CONVENTIONAL EXAMPLE (c) FIRST EMBODIMENT

ANALOG 22bit 2'S Complement

[illegible]


10 SEP 1998

- 3 -

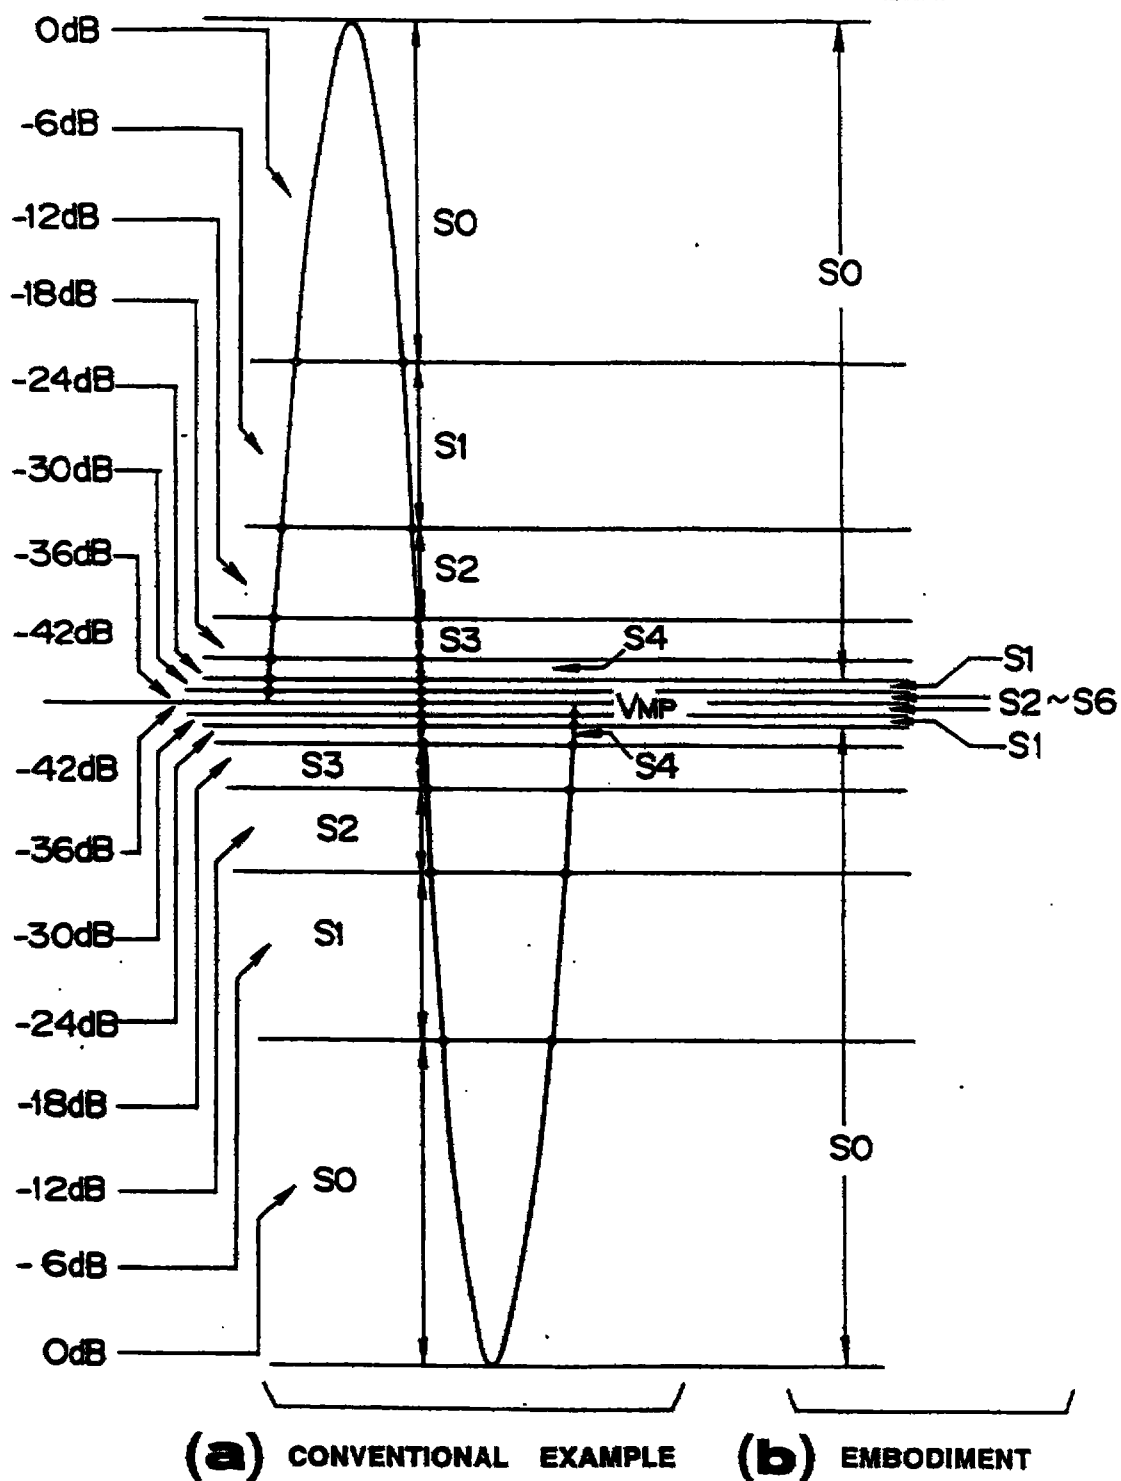**FIG. 3**

10 SEP 1998

- 4 -

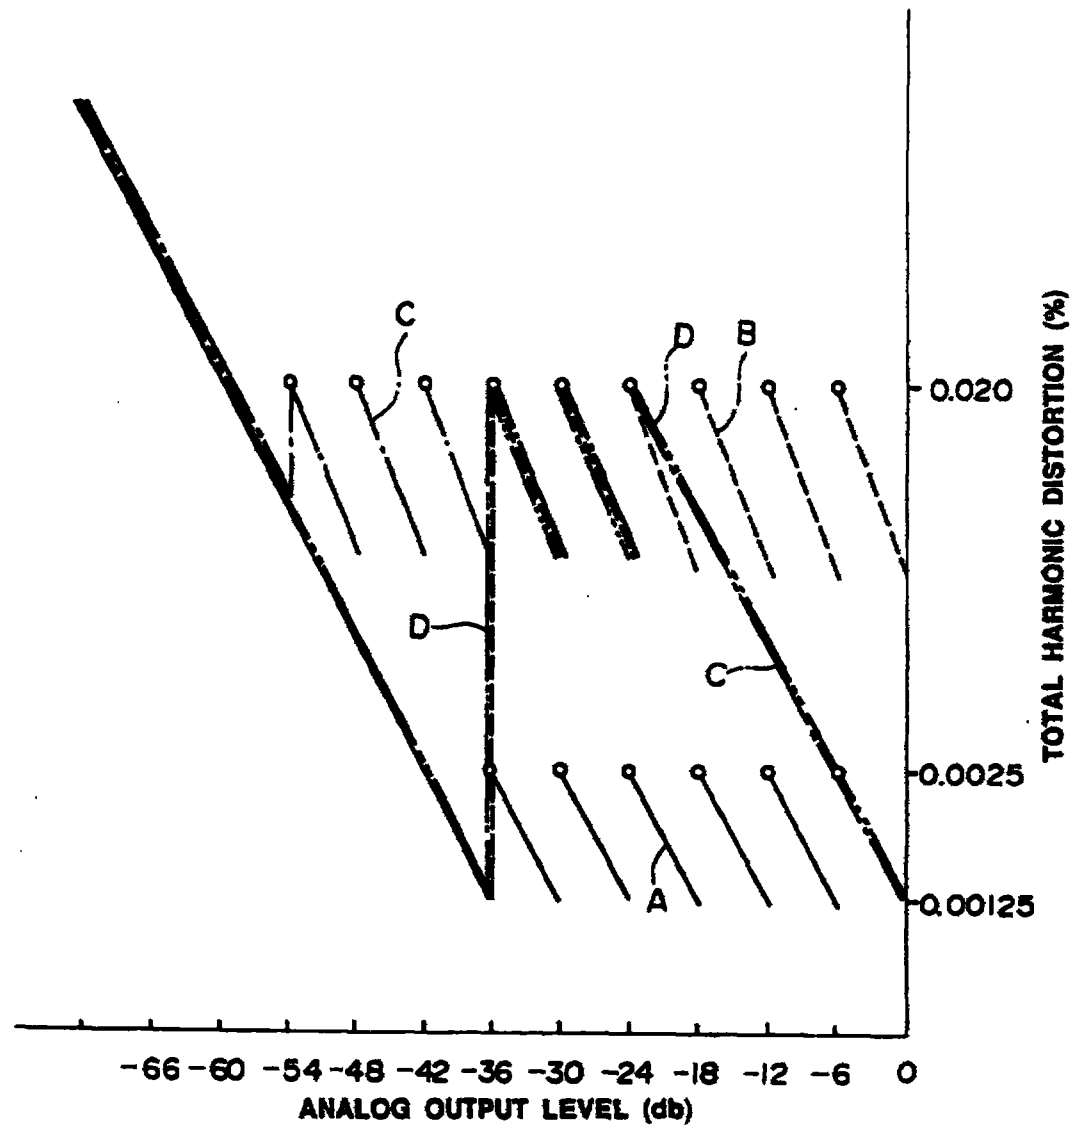**FIG. 4**