



(51) International Patent Classification:

C25B 1/26 (2006.01) C25B 1/00 (2006.01)
C25B 1/04 (2006.01) C25B 7/00 (2006.01)
C25B 9/06 (2006.01)

(21) International Application Number:

PCT/EP2013/060179

(22) International Filing Date:

16 May 2013 (16.05.2013)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

MI2012A001048 18 June 2012 (18.06.2012) IT

(71) Applicant: **INDUSTRIE DE NORA S.P.A.** [IT/IT]; Via
Bistolfi 35, I-20134 Milano (IT).

(72) Inventor: **BENEDETTO, Mariachiara**; Via Budrio 38A,
I-20153 Milan (IT).

(74) Agent: **REITSTÖTTER KINZEBACH**; Sternwartstraße
4, 81679 München (DE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: ELECTROLYTIC CELL EQUIPPED WITH CONCENTRIC ELECTRODE PAIRS

(57) Abstract: The invention relates to an electrochemical cell, particularly useful in electrochemical processes carried out with periodic reversal of polarity. The cell is equipped with concentric pairs of electrodes arranged in such a way that, in each stage of the process, the cathodic area is equal to the anodic area.

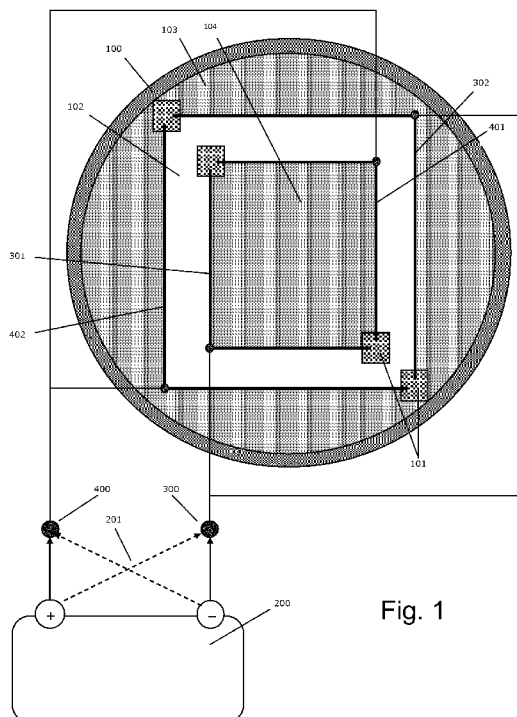


Fig. 1