



- (51) **International Patent Classification:**
E05B 35/00 (2006.01)
- (21) **International Application Number:**
PCT/US2009/054835
- (22) **International Filing Date:**
25 August 2009 (25.08.2009)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
193931 7 September 2008 (07.09.2008) IL
- (71) **Applicant (for all designated States except US):** MUL-T-LOCK TECHNOLOGIES LTD. [IL/IL]; PO Box 637, 81104 Yavne (IL).
- (71) **Applicant (for VC only):** KLEIN, David [US/IL]; 2 Ha-Hagana Street, 76210 Rehovot (IL).
- (72) **Inventors; and**
- (75) **Inventors/Applicants (for US only):** BEN-AHARON, Effi [IL/IL]; 10 Yitzhak Ben-Zvi Street, 45373 Hod HaSharon (IL). MARKBREIT, Dani [IL/IL]; 180 Jerusalem Street, 58001 Azur (IL).
- (74) **Agent:** KLEIN, David; Beit HaRofim, 18 Menuha Venahala Street, Room 27, 76209 Rehovot (IL).
- (81) **Designated States (unless otherwise indicated, for every kind of national protection available):** AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States (unless otherwise indicated, for every kind of regional protection available):** ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) **Title:** KEY DEVICE WITH MOVABLE KEY COMBINATION ELEMENT AND LOCK ASSEMBLY

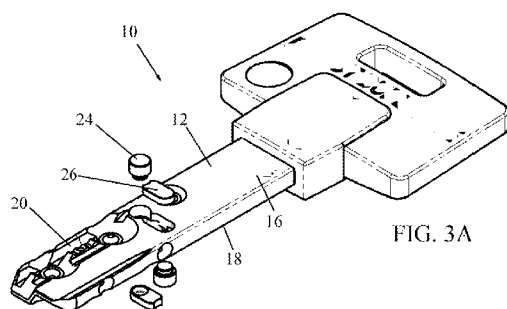


FIG. 3A

(57) **Abstract:** A key device for use with more than one lock, the key device including a shaft portion, and at least one movable key combination element retained within the shaft portion and including first and second portions adjacent one another, the first portion of the at least one movable key combination element being located along on the shaft portion and the second portion of the at least one movable key combination element being located offset to the first portion.

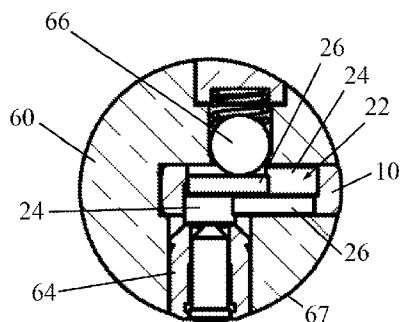


FIG. 8A



Published:

— with international search report (Art. 21(3))

— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))