

CLOCK RECOVERY CIRCUIT EMPLOYING DELAY-AND-DIFFERENCE CIRCUIT AND TRAJECTORY CLASSIFICATION

BACKGROUND OF THE INVENTION

The present invention relates to a clock recovery circuit for use in a demodulator such as a $\pi/4$ -shift quaternary phase-shift-keying differential demodulator.

$\pi/4$ -shift quaternary phase-shift keying (QPSK) is used to modulate carrier signals in, for example, digital mobile communication systems. The data to be transmitted consist of two-bit symbols. The phase of the carrier signal is shifted by $-3\pi/4$, $-\pi/4$, $\pi/4$, or $3\pi/4$ radians in each symbol interval to encode the value of the symbol. A differential demodulator recovers the transmitted data by detecting these phase shifts. That is, it detects the value of a differential phase signal, indicating the difference between the current instantaneous carrier phase and the phase one symbol duration before.

Operation of a differential demodulator is synchronized to a clock signal that indicates where the center of each symbol interval occurs. The clock signal is recovered from the transmitted signal itself. To facilitate clock recovery, a transmission begins with a preamble having a fixed, repetitive data pattern. Typically the symbols "10" and "01" are sent alternately during the preamble, causing

the carrier phase to shift alternately by $3\pi/4$ and $-\pi/4$.

One conventional clock recovery circuit operates by detecting zero crossings of the differential phase signal. Ideally, these zero crossings occur at the boundaries between symbol intervals. Unfortunately, in the preamble described above, symbol boundaries are crossed at the midpoint ($\pi/4$) between $3\pi/4$ and $-\pi/4$, and zero crossings occur somewhat before and after the symbol boundaries. This creates a problem known as jitter, which can lead to loss of clock synchronization, or cause the clock signal to become deadlocked in a state exactly opposite to the correct phase.

Jitter can also arise from carrier frequency offset between the transmitter and receiver. This type of jitter affects clock recovery in the entire data transmission, not just the preamble.

One proposed solution to the problem of jitter employs a double differential phase signal, obtained by taking the difference between the current value of the differential phase signal and the value one symbol interval before. During the preamble, if the differential phase signal alternates between $3\pi/4$ and $-\pi/4$, the double differential phase signal will alternate between π and $-\pi$. The midpoint between π and $-\pi$ is zero, so zero crossings will occur at symbol boundaries, without jitter. Jitter due to frequency offset is also eliminated.

This proposed solution engenders a further problem, however, in that after the preamble ends and transmission of arbitrary data begins, zero crossings by the double differential phase signal occur at many points far removed from the symbol boundaries, hindering the maintenance of correct clock synchronization.

SUMMARY OF THE INVENTION

It is accordingly an object of the present invention to provide reliable clock recovery both during and after the preamble.

The invented clock recovery circuit receives an input signal that follows an arbitrary trajectory among levels which represent symbol values. A delay-and-difference circuit delays the input signal to obtain a delayed signal, and takes the difference between the input signal and delayed signal to obtain a differential signal. A plurality of comparators compare the differential signal with a plurality of levels, and generate respective pulse signals when the differential signal matches these levels.

A classifying circuit detects certain sequences of these pulse signals and activates a gate signal for a certain interval when these sequences occur. A delay circuit delays one of the pulse signals to obtain delayed pulses. A gate circuit outputs the delayed pulses as timing

pulses when the gate signal is active. A phase-locked loop generates a clock signal and locks the clock signal in phase to the timing pulses.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 shows the general format of a $\pi/4$ -shift QPSK transmission.

FIG. 2 is a general block diagram of a differential demodulator.

FIG. 3 is a block diagram of the invented clock recovery circuit.

FIG. 4 shows an eye pattern of a differential phase signal without frequency offset.

FIG. 5 shows an eye pattern of a differential phase signal with frequency offset.

FIG. 6 shows an eye pattern of a double differential phase signal without frequency offset.

FIG. 7 shows an eye pattern of a double differential phase signal with frequency offset.

FIG. 8 shows eye patterns of differential and double differential phase signals, and illustrates the operation of the invention during the preamble.

FIG. 9 illustrates phase shifts on the I-Q plane.

FIG. 10 illustrates transitions among these phase shifts.

FIG. 11 illustrates several trajectories of the differential phase signal.

FIG. 12 illustrates several more trajectories of the differential phase signal.

FIG. 13 illustrates several more trajectories of the differential phase signal.

FIG. 14 illustrates several more trajectories of the differential phase signal.

FIG. 15 illustrates several more trajectories of the differential phase signal.

FIG. 16 illustrates several more trajectories of the differential phase signal.

FIG. 17 is a block diagram of a second embodiment of the invention.

DETAILED DESCRIPTION OF THE INVENTION

Two embodiments of the invention will now be described with reference to the attached illustrative drawings. The first two drawings illustrate the format of a typical transmission from which a clock signal is to be recovered, and the general configuration of a differential demodulator in which the invention can be employed.

Referring to FIG. 1, in certain mobile communication systems, each transmission starts with a preamble 2 in which the data pattern is "10011001...1001." The preamble is

followed by a data header 4 (labeled UW in the drawing), then the body of the data 6.

Referring to FIG. 2, a differential demodulator has an input terminal 8 at which it receives a modulated carrier signal. A local oscillator 10 generates an unmodulated carrier signal with a frequency substantially equal to the frequency of the modulated carrier signal. An instantaneous phase detection circuit 12 compares the phase of the modulated carrier with the phase of the unmodulated carrier and converts the difference between them to a digital value, which it outputs as an instantaneous phase signal P. A differential phase calculation circuit 14 takes the difference between the instantaneous phase signal P and the instantaneous phase signal P delayed by one symbol interval, to obtain a differential phase signal ΔP .

The differential phase signal ΔP is supplied to a clock recovery circuit 16 and data recovery circuit 18. The clock recovery circuit 16 recovers a clock signal CK, which it outputs at an output terminal 20 and also sends to the data recovery circuit 18. The data recovery circuit 18 samples the differential phase signal ΔP at timings designated by the clock signal CK, decodes the sampled values to recover the transmitted data, and outputs these data at an output terminal 22. The clock signal CK output at terminal 20 is used in subsequent processing of the data

output at terminal 22.

FIG. 3 shows the configuration of a first embodiment of the invention, which can be employed as the clock recovery circuit 16 in FIG. 2. The invented clock recovery circuit comprises a timing pulse generating circuit 24 and a digital phase-locked loop 26. The timing pulse generating circuit 24 comprises a delay-and-difference circuit 28, a first magnitude comparator 30 and first register 31, a second magnitude comparator 32 and second register 33, a third magnitude comparator 34 and third register 35, a delay circuit 36, a gate circuit 38, and a classifying circuit 40. The classifying circuit 40 comprises a timer 42 and decision circuit 44.

The digital phase-locked loop (DPLL) 26 is a well-known circuit that outputs a clock signal CK, certain transitions (e.g. rising transitions) of which are synchronized to coincide, on the average, with pulses occurring in a timing signal X_T (these pulses will be referred to as timing pulses X_T). The frequency of the clock signal CK has a fixed value equal to the (known) symbol rate. The digital phase-locked loop 26 operates by advancing the phase of the clock signal CK when transitions of the clock signal CK are found to lag timing pulses X_T , and retarding the phase of the clock signal CK when transitions of the clock signal CK are found to lead timing pulses X_T . The clock signal CK is used as

the clock signal CK in FIG. 2.

In the timing pulse generating circuit 24, the delay-and-difference circuit 28 receives the differential phase signal ΔP , stores each received value of the differential phase signal ΔP for a time T equal to the known length of one symbol interval, and takes the difference between the current value of the differential phase signal ΔP and the value received one symbol interval before to obtain a double differential phase signal $\Delta \Delta P$.

The symbol interval length T is the period of the clock signal CK. In dealing with phase, it is convenient to speak in terms of angular measure, so that T is equivalent to 360° , or 2π radians. The values of the differential and double differential phase signals ΔP and $\Delta \Delta P$ can also be measured in terms of angle. In the following explanation degrees will be used to describe T and other time values, while radians will be used to describe ΔP and $\Delta \Delta P$.

The double differential phase signal $\Delta \Delta P$ is supplied to the three magnitude comparators 30, 32, and 34. The first magnitude comparator 30 compares the value of $\Delta \Delta P$ with a first level L_1 , which is stored in the first register 31, and outputs a first pulse X_1 when the value of $\Delta \Delta P$ matches L_1 . Similarly, the second magnitude comparator 32 compares $\Delta \Delta P$ with a second level L_2 , stored in the second register 32, and outputs a second pulse X_2 when $\Delta \Delta P$

matches L_2 . Likewise, the third magnitude comparator 34 compares $\Delta \Delta P$ with a third level L_3 , stored in the third register 35, and outputs a third pulse X_3 when $\Delta \Delta P$ matches L_3 .

In this first embodiment L_1 is $3\pi/4$, L_2 is $-3\pi/4$, and L_3 is zero. The third pulses X_3 are accordingly zero-matching pulses.

The delay circuit 36 delays each third pulse X_3 by a time equivalent to half a symbol interval ($T/2$, or 180°). The delay circuit 36 can be, for example, a digital timer that is triggered by input of a third pulse X_3 , counts for a time equal to $T/2$, then outputs a delayed pulse X_D .

The first and second pulses X_1 and X_2 are supplied to the timer 42 in the classifying circuit 40. The timer 42 is a counter that is driven at a constant rate, so that its count value represents elapsed time. When the timer 42 receives either pulse X_1 or X_2 , it outputs to the decision circuit 44 a pulse discriminating signal D_X indicating which pulse (X_1 or X_2) was received, and data D_C indicating the current count value. Then the timer 42 is reset to an initial value such as zero and starts counting again. If the count reaches a certain value T_d without input of another pulse (X_1 or X_2), the timer 42 is automatically reset to its initial value and stops counting. T_d is equivalent to, for example, 160° .

The decision circuit 44 outputs a gate signal GS according to the most recent count value D_C and two most recent pulse discriminating signals D_X . The gate signal GS is normally inactive. When the decision circuit 44 receives a pulse discriminating signal D_X , if the accompanying count data D_C is not the initial count value, indicating that the two most recent pulses were received within time T_d of each other, and if the current and preceding pulse discriminating signals D_X are different (indicating that pulse X_1 was preceded by X_2 , or X_2 by X_1), then the decision circuit 44 activates the gate signal GS for a certain time T_g . This time T_g can be equivalent to 120° , or $T/3$. The decision circuit 44 comprises, for example, a pair of latches for storing the two most recent pulse discriminating signals D_X , an exclusive-OR gate for comparing these signals, and a comparator for comparing the count data D_C with the above-mentioned initial value. Table 1 summarizes the operation of the classifying circuit 40.

Table 1 Operation of Classifying Circuit

Input	Gate Signal GS
X_2 pulse followed within time T_d by X_1 pulse	Active for time T_g starting from X_1 pulse
X_1 pulse followed within time T_d by X_2 pulse	Active for time T_g starting from X_2 pulse
Other input	Inactive

The gate circuit 38 receives the delayed pulse signal X_D and gate signal GS. While GS is active, the gate circuit 38 passes X_D through to the digital phase-locked loop 26 as the above-mentioned timing signal X_T . When GS is inactive, the gate circuit 38 blocks the delayed pulse signal X_D . The gate circuit 38 can be a simple logic gate such as an AND gate.

The operation of the first embodiment will now be described with reference to FIGs. 2 to 16.

FIG. 4 shows a simulated eye pattern of the differential phase signal ΔP when there is no frequency offset between the transmitter and receiver; that is, when the frequency of the modulated carrier signal received at input terminal 8 in FIG. 2 is exactly equal to the frequency of the unmodulated carrier signal output by the oscillator 10. The horizontal axis indicates time. The vertical line 46 represents a symbol boundary. The vertical axis indicates the value of the differential phase signal ΔP in

multiples of $\pi/2$, so that 1 corresponds to $\pi/2$, and -0.5 to $-\pi/4$. FIG. 4 is obtained by plotting all possible trajectories of the differential phase signal ΔP , both during and after the preamble. Zero crossings are concentrated in the vicinity of the symbol boundary 46.

FIG. 5 shows a simulated eye pattern of the differential phase signal ΔP when frequency offset is present (the frequencies of the modulated and unmodulated carrier signals are not equal). The horizontal and vertical axes have the same meaning as in FIG. 4. The offset is equivalent to $\pi/8$. The entire eye pattern is shifted upward, and zero crossings tend to occur at considerable distances from the symbol boundary 46. In a conventional clock recovery circuit employing the differential phase signal ΔP , severe jitter would occur.

FIG. 6 shows a simulated eye pattern of the double differential phase signal $\Delta \Delta P$ when frequency offset is absent. The horizontal and vertical axes have the same meaning as in FIG. 4. Although the eye pattern is centered around the zero point on the vertical axis, zero crossings occur at some points that are closer to the centers of the symbol intervals than to the symbol boundary 46. A clock recovery circuit that employed the double differential phase signal $\Delta \Delta P$ but detected only zero crossings would be unstable.

FIG. 7 shows a simulated eye pattern of the double differential phase signal $\Delta \Delta P$ when the same frequency offset ($\pi/8$) is present as in FIG. 5. The horizontal and vertical axes have the same meaning as in FIG. 4. The eye pattern is still centered around the zero point on the vertical axis; it does not shift upward as in FIG. 5. The problem of jitter is aggravated, however. Zero crossings occur at nearly random locations on the horizontal axis, with many unwanted zero-matching pulses created by trajectories that weave around the zero level.

FIG. 8 shows the eye patterns of the differential phase signal ΔP and double differential phase signal $\Delta \Delta P$ schematically, illustrating for simplicity the case in which there is no frequency offset. The waveform of the clock signal CK is shown below the eye pattern of the differential phase signal ΔP , and waveforms of the gate signal GS, delayed pulse signal X_D , and timing signal X_T are shown below the eye pattern of the double differential phase signal $\Delta \Delta P$. The graduations on the vertical axis indicate the values of ΔP and $\Delta \Delta P$ in radians. Levels L_1 , L_2 , and L_3 are also indicated.

During the preamble, the double differential phase signal $\Delta \Delta P$ alternates between π and $-\pi$, following trajectory 48, for example. This trajectory 48 crosses the first, third, and second levels L_1 , L_3 , and L_2 in this

sequence at points a, b, and c. The separation between points a and c is less than T_d on the horizontal axis, so the classifying circuit 40 activates the gate signal GS for time T_g , starting at point c. During this time T_g the delay circuit 36 outputs a delayed pulse signal X_D delayed by time $T/2$ from the zero crossing at point b. Since GS is active, the gate circuit 38 sends this delayed pulse signal X_D as a timing pulse X_T to the digital phase-locked loop 26.

After passing point c, trajectory 48 reaches $-\pi$, then begins to rise toward π again, now crossing the second, third, and first levels L_2 , L_3 , and L_1 in sequence at points d, e, and f. The separation between points d and f is less than T_d on the horizontal axis, so the classifying circuit 40 activates the gate signal GS again for time T_g , starting at point f. During this time the delay circuit 36 outputs a delayed pulse signal X_D delayed by $T/2$ from the zero crossing at point e, and the gate circuit 38 passes this pulse on as another timing pulse X_T to the digital phase-locked loop 26. Both timing pulses X_T occur at the centers of symbol intervals, indicated by vertical dashed lines 50. The timing pulses X_T are accordingly free of jitter.

During the preamble, the double differential phase signal $\Delta \Delta P$ continues to repeat the pattern of trajectory 48, so the digital phase-locked loop 26 continues to receive a timing pulse X_T at the center of each symbol interval.

Input of these jitter-free pulses enables the digital phase-locked loop 26 to synchronize the clock signal CK rapidly and reliably, so that rising transitions of CK coincide with timing pulses X_T , at the centers of the symbol intervals. By sampling the differential phase signal ΔP at rising transitions of the clock signal CK, the data recovery circuit 18 in FIG. 2 can obtain values of the differential phase signal ΔP at the optimal points, where the eye pattern of the differential phase signal ΔP is most open.

After the preamble ends and transmission of the data header and body begins, the double differential phase signal $\Delta \Delta P$ starts following an unpredictable trajectory, and the conditions for activating the gate signal GS are not satisfied in every symbol interval. The digital phase-locked loop 26 accordingly does not receive a timing pulse X_T in every symbol interval as it did during the preamble, but if timing pulses X_T are generated in a sufficient number of symbol intervals, the digital phase-locked loop 26 can still maintain synchronization of the clock signal CK. Operation after the preamble ends will be analyzed in detail next.

The double differential phase signal $\Delta \Delta P$ in two successive symbol intervals is derived from the differential phase signal ΔP in three successive symbol intervals, with four possible values in each interval, so there are sixty-

four possible trajectories in all. These trajectories were illustrated in FIGs. 6 and 7, but the large number of superimposed trajectories makes those drawings difficult to interpret. The trajectories will accordingly be described in a more schematic form in FIGs. 9 to 16.

The carrier signal used in QPSK communications can be split into a pair of carrier signals, comprising an in-phase carrier I and quadrature carrier Q, and the received signal can be represented on an I-Q plane as shown in FIG. 9. If point (a) represents the received signal in a certain symbol interval, then the transitions that can occur in the next symbol interval are indicated by the four dashed arrows. Transmitted data (0, 0) will cause a transition to point (b), corresponding to a phase rotation of $\pi/4$; data (0, 1) will cause a transition to point (c), corresponding to a phase rotation of $3\pi/4$; data (1, 1) will cause a transition to point (d), corresponding to a phase rotation of $-3\pi/4$; and data (1, 0) will cause a transition to point (e), corresponding to a phase rotation of $-\pi/4$. Each dashed arrow corresponds to one possible value of the differential phase signal ΔP .

FIG. 10 represents the sixteen possible combinations of values of the differential phase signal ΔP in two successive symbol intervals, using arrows labeled from A to P to indicate transitions from one value to the next. These

sixteen transition arrows generate corresponding values of the double differential phase signal $\Delta \Delta P$. For example, transition A indicates two successive phase shifts of $\pi/4$, corresponding to bit data (0, 0, 0, 0). The value of the differential phase signal ΔP is $\pi/4$ in two successive intervals, so the value of the double differential phase signal $\Delta \Delta P$ is zero. Transition K indicates successive phase shifts of $-\pi/4$ and $3\pi/4$, corresponding to bit data (1, 0, 0, 1) and producing a double differential phase signal value of $-\pi$.

FIG. 11 indicates four of the sixty-four possible trajectories of the differential phase signal ΔP over three successive symbol intervals, showing the trajectories in which the differential phase signal ΔP has the value $\pi/4$ in the second and third symbol intervals. The value of the differential phase signal ΔP is indicated in radians on the vertical axis. Time is indicated on the horizontal axis, with vertical lines 46 indicating symbol boundaries as before. The letters E, A, L, and J indicate the transitions between the first and second symbol intervals, using the same notation as in FIG. 10.

Similarly, FIG. 12 indicates the four trajectories in which the differential phase signal ΔP takes on values of $\pi/4$ and $-\pi/4$ in the second and third symbol intervals. FIG. 13 indicates the four trajectories with values of $\pi/4$

and $3\pi/4$, respectively, in the second and third symbol intervals. FIG. 14 indicates the four trajectories with values of $\pi/4$ and $-3\pi/4$ in the second and third symbol intervals. FIG. 15 indicates the four trajectories with values of $3\pi/4$ and $\pi/4$ in the second and third symbol intervals. FIG. 16 indicates the four trajectories with values of $3\pi/4$ and $-\pi/4$ in the second and third symbol intervals. Together, FIGs. 11 to 16 illustrate twenty-four of the sixty-four possible trajectories.

Table 2 lists all sixty-four trajectories, using the same letters A to P to denote transitions of the differential phase signal ΔP between the first and second symbol intervals and between the second and third symbol intervals, indicating the corresponding values of the double differential phase signal $\Delta \Delta P$, and noting the locations of zero crossing points (denoted 0-Crss) of the double differential phase signal $\Delta \Delta P$. For example, the first entry in Table 2, corresponding to bit data (0, 0, 0, 0, 0, 0), is for three successive phase shifts of $\pi/4$, causing two successive occurrences of transition A, with corresponding values of zero for the double differential phase signal $\Delta \Delta P$. Two successive occurrences of zero in the double differential phase signal $\Delta \Delta P$ constitute a zero matching but not a zero crossing, so no zero crossing point is listed.

T1335

The zero-crossing-point locations in Table 2 are approximate; the exact values depend on the precise shapes of the trajectories.

Table 2 Zero Crossings (0-Crss) of Double Differential
Phase Signal $\Delta \Delta P$

2nd Shift = $\pi/4$ (b)			2nd Shift = $3\pi/4$ (c)		
ΔP	$\Delta \Delta P$	0-Crss	ΔP	$\Delta \Delta P$	0-Crss
A-A	0 $\rightarrow$ 0	--	G-G	0 $\rightarrow$ 0	--
A-C	0 $\rightarrow$ $\pi/2$	--	G-H	0 $\rightarrow$ $-3\pi/2$	--
A-D	0 $\rightarrow$ $-\pi$	--	G-F	0 $\rightarrow$ $-\pi$	--
A-B	0 $\rightarrow$ $-\pi/2$	--	G-E	0 $\rightarrow$ $-\pi/2$	--
E-A	$-\pi/2 \rightarrow$ 0	--	C-G	$\pi/2 \rightarrow$ 0	--
E-C	$-\pi/2 \rightarrow \pi/2$	0°	C-H	$\pi/2 \rightarrow -3\pi/2$	-90°
E-D	$-\pi/2 \rightarrow -\pi$	--	C-F	$\pi/2 \rightarrow -\pi$	-60°
E-B	$-\pi/2 \rightarrow -\pi/2$	--	C-E	$\pi/2 \rightarrow -\pi/2$	0°
J-A	$\pi \rightarrow$ 0	--	K-G	$\pi \rightarrow$ 0	--
J-C	$\pi \rightarrow \pi/2$	--	K-H	$\pi \rightarrow -3\pi/2$	-45°
J-D	$\pi \rightarrow -\pi$	0°	K-F	$\pi \rightarrow -\pi$	0°
J-B	$\pi \rightarrow -\pi/2$	$+60^\circ$	K-E	$\pi \rightarrow -\pi/2$	$+60^\circ$
L-A	$\pi/2 \rightarrow$ 0	--	I-G	$3\pi/2 \rightarrow$ 0	--
L-C	$\pi/2 \rightarrow \pi/2$	--	I-H	$3\pi/2 \rightarrow -3\pi/2$	0°
L-D	$\pi/2 \rightarrow -\pi$	-60°	I-F	$3\pi/2 \rightarrow -\pi$	$+45^\circ$
L-B	$\pi/2 \rightarrow -\pi/2$	0°	I-E	$3\pi/2 \rightarrow -\pi/2$	$+90^\circ$

Table 2 Zero Crossings (0-Crss) of Double Differential
Phase Signal $\Delta \Delta P$ (cont)

2nd Shift = $-\pi/4$ (e)			2nd Shift = $-3\pi/4$ (d)		
ΔP	$\Delta \Delta P$	0-Crss	ΔP	$\Delta \Delta P$	0-Crss
O-O	$0 \rightarrow 0$	--	P-P	$0 \rightarrow 0$	--
O-M	$0 \rightarrow -\pi/2$	--	P-I	$0 \rightarrow 3\pi/2$	--
O-K	$0 \rightarrow \pi$	--	P-J	$0 \rightarrow \pi$	--
O-L	$0 \rightarrow \pi/2$	--	P-N	$0 \rightarrow \pi/2$	--
N-O	$-\pi/2 \rightarrow 0$	--	M-P	$-\pi/2 \rightarrow 0$	--
N-M	$-\pi/2 \rightarrow -\pi/2$	0°	M-I	$-\pi/2 \rightarrow 3\pi/2$	-90°
N-K	$-\pi/2 \rightarrow \pi$	--	M-J	$-\pi/2 \rightarrow \pi$	-60°
N-L	$-\pi/2 \rightarrow -\pi/2$	--	M-N	$-\pi/2 \rightarrow \pi/2$	0°
F-O	$\pi \rightarrow 0$	--	D-P	$\pi \rightarrow 0$	--
F-M	$\pi \rightarrow \pi/2$	--	D-I	$\pi \rightarrow -3\pi/2$	-45°
F-K	$\pi \rightarrow -\pi$	0°	D-J	$\pi \rightarrow -\pi$	0°
F-L	$\pi \rightarrow -\pi/2$	$+60^\circ$	D-N	$\pi \rightarrow -\pi/2$	$+60^\circ$
B-O	$-\pi/2 \rightarrow 0$	--	H-P	$-3\pi/2 \rightarrow 0$	--
B-M	$-\pi/2 \rightarrow -\pi/2$	--	H-I	$-3\pi/2 \rightarrow 3\pi/2$	0°
B-K	$-\pi/2 \rightarrow \pi$	-60°	H-J	$-3\pi/2 \rightarrow \pi$	$+45^\circ$
B-L	$-\pi/2 \rightarrow \pi/2$	0°	H-N	$-3\pi/2 \rightarrow \pi/2$	$+90^\circ$

In the first embodiment, the classifying circuit 40 classifies trajectories of the double differential phase signal $\Delta \Delta P$ into two groups: those that cross the zero level while going from π or $3\pi/2$ to $-\pi$ or $-3\pi/2$, or from

$-\pi$ or $-3\pi/2$ to π or $3\pi/2$; and other trajectories, which may or may not cross the zero level. Timing pulses X_T are generated only for trajectories in the first group, because only these trajectories cross levels L_1 , L_2 , and L_3 in the necessary sequence. Specifically, timing pulses are generated for ten of the sixty-four trajectories listed in Table 2: J-D, K-F, I-H, F-K, D-J, and H-I, which have zero crossings at 0° ; and K-H, I-F, D-I, and H-J, which have zero crossings at $\pm 45^\circ$. Of these, K-F and F-K occur both in the preamble and during data header and body transmission; the other trajectories occur only during data header and body transmission.

During data header and body transmission, the digital phase-locked loop 26 will receive, on the average, jitter-free timing pulses X_T about 6/64 of the time, and timing pulses X_T with $\pm 45^\circ$ jitter about 4/64 of the time. Jitter values of $+45^\circ$ and -45° will moreover tend to average out to zero. The digital phase-locked loop 26 will therefore be able to maintain clock synchronization even after the preamble ends, unless an unusual data pattern produces an extended interval without input of any timing pulses X_T , or with input mostly of pulses having $+45^\circ$ jitter, or mostly of pulses having -45° jitter.

If frequency offset is present as illustrated in FIG. 7, many unwanted delayed pulses X_D will be produced due to

zero crossings at random locations, but very few of these will be preceded and followed by crossings of the $3\pi/4$ and $-3\pi/4$ levels (L_1 and L_2), so most of them will be blocked at the gate circuit 38. By classifying trajectories as described above, the first embodiment is able to eliminate most unwanted timing pulses.

Next a second embodiment of the invention will be described. The second embodiment reduces the risk of loss of synchronization after the preamble ends by producing a greater number of timing pulses X_T .

FIG. 17 shows the structure of the second embodiment, using the same reference numerals as in FIG. 3 to denote identical or equivalent elements. Descriptions of these elements will be omitted.

The digital phase-locked loop 52 in the second embodiment is similar to the digital phase-locked loop 26 in the first embodiment, but operates in two control modes, a fast mode and a slow mode. In the fast control mode, the digital phase-locked loop 52 responds to every timing pulse X_T , advancing the phase of the clock signal CK if a rising transition of CK lags the timing pulse X_T , and retarding the phase of the clock signal CK if a rising CK transition leads the timing pulse X_T . In the slow control mode, the digital phase-locked loop 52 responds not to these individual leads or lags but to the average lead or lag over a period of

T1335

time, typically including a number of timing pulses X_T .

The digital phase-locked loop 52 is switched between its fast and slow control modes by a mode switching signal MS output from the timing pulse generating circuit 54, more specifically from a mode control circuit 56 in the timing pulse generating circuit 54. The mode control circuit 56 receives the timing signal X_T and clock signal CK, compares their phase, and activates the mode switching signal MS when the phase difference is less than a certain threshold phase angle value, such as 45° , over a certain period of time. When the phase difference exceeds this threshold phase angle value, the mode control circuit 56 deactivates the mode switching signal MS.

The mode switching signal MS is also sent to the first and second registers 58 and 60, which supply comparison levels to the first and second magnitude comparators 30 and 32. When the mode switching signal MS is inactive, the first register 58 supplies the first magnitude comparator 30 with the same first level L_1 of $3\pi/4$ as in the first embodiment. After the mode switching signal MS becomes active, the first register 58 supplies the first magnitude comparator 30 with a reduced first level L_1' of, for example, $\pi/4$, which is closer to zero. Similarly, the second register 60 supplies the second magnitude comparator 32 with a second level L_2 of $-3\pi/4$ while the mode switching

signal MS is inactive, and a second level L_2' of $-\pi/4$, closer to zero, when the mode switching signal MS is active.

Next the operation of the second embodiment will be described.

During the preamble, the phase difference between the timing signal X_T and clock signal CK will usually start out at a value greater than 45° , making the mode switching signal MS inactive. The second embodiment will accordingly operate at first like the first embodiment, supplying the digital phase-locked loop 52 with jitter-free timing pulses X_T in all symbol intervals.

When the phase of the clock signal CK is brought to within 45° of the phase of these timing signal X_T , the mode control circuit 56 activates the mode switching signal MS, causing the first and second levels L_1 and L_2 to switch from $\pm 3\pi/4$ to $\pm \pi/4$. This has the effect of moving points a and c in FIG. 8 closer to point b, and points d and f closer to point e, so the gate signal GS is shifted slightly to the left, but the delayed zero-matching pulses X_D continue to fall within the active gate intervals. As long as the preamble continues, the gate circuit 38 continues to pass jitter-free timing pulses X_T to the digital phase-locked loop 52 in every symbol interval. Although the digital phase-locked loop 52 is now operating in its slow control mode, since the timing pulses X_T are jitter-free, the phase

of the clock signal CK continues to be adjusted at substantially the same rate as before, until the clock signal CK is locked in phase to the timing pulses X_T .

When the preamble ends and transmission of the data header and body starts, the digital phase-locked loop 52 receives timing pulses X_T for all twenty-eight of the zero-crossing points noted in Table 2, including twelve with zero jitter, four with jitter of $\pm 45^\circ$, eight with jitter of $\pm 60^\circ$, and four with jitter of $\pm 90^\circ$. Since the digital phase-locked loop 52 is operating in its slow control mode, positive and negative jitter will tend to cancel out, so the risk of loss of synchronization due to jitter is small. On the average, the digital phase-locked loop 52 will receive timing pulses X_T in 28/64 of the symbol periods, instead of 10/64 as in the first embodiment, and will receive jitter-free timing pulses X_T in 12/64 of the symbol periods, instead of 6/64 as in the first embodiment, so the risk of loss of synchronization due to an inadequate number of timing pulses X_T is also small.

Although the reduction of the first and second levels L_1 and L_2 from $\pm 3\pi/4$ to $\pm \pi/4$ in the second embodiment causes the digital phase-locked loop 52 to receive timing pulses X_T with jitter of up to about $\pm 90^\circ$, these levels of $\pm \pi/4$ are still adequate to block timing pulses X_T from trajectories that cross the zero level near the center of

T1335

the symbol interval. In particular, the unwanted timing pulses that would be generated by trajectories that weave around the zero axis in FIG. 7 are blocked in this way, because these trajectories do not cross the $\pi/4$ and $-\pi/4$ levels within the time T_d .

The second embodiment accordingly provides adequate timing pulses X_T for clock recovery with a high degree of reliability both during and after the preamble.

The present invention is not restricted to the embodiments described above, but includes various modifications. For example, the preamble signal need not be "10011001...1001;" other repetitive data patterns can be used instead. If necessary, one or more of the first, second, and third levels L_1 , L_2 , and L_3 can be altered to accommodate a different preamble pattern, or the number of levels can be increased to four or more.

It is also possible to practice the invention with only two levels. For example, successive matches of $\Delta \Delta P$ with the zero level and a certain positive level (in either order) within a certain time could be detected, timing pulses being generated at a delay of $T/2$ from the zero-level match point.

The values of 120° and 160° for T_g and T_d were shown only as examples. The invention can be practiced with other values for these times. The delay time in the delay circuit

36 and the phase difference at which the mode control circuit 56 activates the mode switching signal MS can also be modified as necessary.

Although the mode control circuit 56 was shown as an element of the timing pulse generating circuit 54 in FIG. 17, it can be an element of the digital phase-locked loop 52 instead. For example, since the digital phase-locked loop 52 has a circuit that detects average phase lead or lag over a certain interval of time for use in the slow control mode, this circuit can serve the function of the mode control circuit 56.

Applications of the invention are of course not limited to mobile digital communications; the invention can be practiced in any system employing $\pi/4$ -shift QPSK. More generally, it can be practiced in any system that must recover data and a clock signal from an input signal having an eye pattern like the ones shown in FIGs. 4 and 5, in which each eye corresponds to one symbol interval, and values of the input signal at the centers of the symbol intervals correspond in one-to-one fashion to the data symbols to be recovered.

Those skilled in the art will recognize that further variations are possible without departing from the scope claimed below.

WHAT IS CLAIMED IS:



1. A clock recovery circuit (16) for recovering a clock signal from an input signal that follows trajectories which, when superimposed, form an eye pattern, comprising:

a delay-and-difference circuit (28) for receiving said input signal, delaying said input signal by a certain first time to obtain a delayed signal, and taking a difference between said input signal and said delayed signal to obtain a differential signal;

a plurality of comparators (30, 32, 34) coupled to said delay-and-difference circuit (28), for comparing said differential signal with a corresponding plurality of different levels, and generating respective pulse signals when said differential signal matches said levels;

a classifying circuit (40) coupled to said comparators (30, 32, 34), for using said pulse signals to classify said trajectories, and activating a gate signal for a certain second time responsive to certain sequences of said pulse signals;

a delay circuit (36) coupled to one of said comparators (34), for delaying the pulses generated by said one of said comparators (34) by a certain third time to obtain delayed pulses;

a gate circuit (38) coupled to said delay circuit (36),



for outputting said delayed pulses as timing pulses when said gate signal is active; and

a phase-locked loop (26) coupled to said gate circuit (38), for generating said clock signal and locking said clock signal in phase to said timing pulses.

2. The clock recovery circuit of claim 1, wherein said first time is equal to one period of said clock signal.

3. The clock recovery circuit of claim 1, wherein said third time is equal to one-half of one period of said clock signal.

4. The clock recovery circuit of claim 1, wherein:

said phase-locked loop (52) has a fast control mode and a slow control mode; and

said clock recovery circuit (16) has a mode control circuit (56) coupled to said phase-locked loop (52), for receiving said timing pulses and said clock signal, generating a mode selection signal, setting said mode selection signal to a first state selecting said fast control mode when said clock signal differs in phase from said timing pulses by more than a certain threshold quantity, and setting said mode selection signal to a second state selecting said slow control mode when said clock



signal differs in phase from said timing pulses by less than said threshold quantity.

5. The clock recovery circuit of claim 4, wherein said mode selection signal also selects values of at least of one of said levels.

6. A clock recovery circuit (16) for recovering a clock signal from a differential phase signal, comprising:

a delay-and-difference circuit (28) for receiving said differential phase signal, delaying said differential phase signal by a certain first time to obtain a delayed signal, and taking a difference between said differential phase signal and said delayed signal to obtain a double differential phase signal;

a first comparator (30) coupled to said delay-and-difference circuit (28), for generating a first pulse when said double differential phase signal matches a certain positive level;

a second comparator (32) coupled to said delay-and-difference circuit (28), for generating a second pulse when said double differential phase signal matches a certain negative level;

a third comparator (34) coupled to said delay-and-difference circuit (28), for generating a third pulse when



said double differential phase signal matches a zero level;

a classifying circuit (40) coupled to said first comparator (30) and said second comparator (32), for activating a gate signal for a certain second time when said first pulse is followed by said second pulse within a certain third time, and for activating said gate signal for said second time when said second pulse is followed by said first pulse within said third time;

a delay circuit (36) coupled to said third comparator (34), for delaying said third pulse by a certain fourth time to obtain a delayed pulse;


a gate circuit (38) coupled to said delay circuit (36), for outputting said delayed pulse as a timing pulse if said gate signal is active; and

a digital phase-locked loop (26, 52) coupled to said gate circuit (38), for generating said clock signal and adjusting said clock signal in phase so as to synchronize a certain transition of said clock signal with said timing pulse.

7. The clock recovery circuit of claim 6, wherein said first time is equal to one period of said clock signal.

8. The clock recovery circuit of claim 6, wherein said fourth time is equal to one-half of one period of said clock

T1335

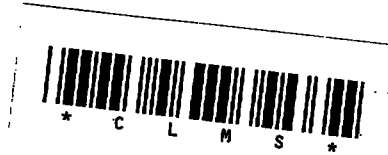

signal.

9. The clock recovery circuit of claim 6, wherein said classifying circuit (40) comprises:

a timer (42) for receiving said first pulse and said second pulse and measuring elapsed time from each pulse thus received; and

a decision circuit (44) for activating said gate signal responsive to two pulses most recently received by said timer (42), and to the elapsed time between said two pulses.

10. The clock recovery circuit of claim 6, wherein said digital phase-locked loop (52) adjusts said clock signal at a first rate when said clock signal differs in phase from said timing signal by more than a certain phase angle, and at a second rate when said clock signal differs in phase from said timing signal by less than said phase angle, said first rate being faster than said second rate.

11. The clock recovery circuit of claim 10, comprising a mode control circuit (56) for detecting a phase difference between said clock signal and said timing pulse, and generating a mode selection signal that switches said digital phase-locked loop (52) between said first rate and said second rate.



12. The clock recovery circuit of claim 11, wherein said mode selection signal also switches said positive level and said negative level between a first pair of levels when said clock signal differs in phase from said timing signal by more than said phase angle, and a second pair of levels when said clock signal differs in phase from said timing signal by less than said phase angle.

13. The clock recovery circuit of claim 11, wherein said second pair of levels is closer to said zero level than is said first pair of levels.

14. A method of recovering a clock signal from a differential phase signal, comprising the steps of:

 delaying said differential phase signal by a certain first time to obtain a delayed differential phase signal;

 taking a difference between said differential phase signal and said delayed differential phase signal to obtain a double differential phase signal;

 comparing said double differential phase signal with a plurality of levels, and generating respective pulse signals when said double differential phase signal matches said levels;

 detecting certain sequences of said pulse signals;



activating a gate signal for a certain second time when said certain sequences are detected;

delaying one of said pulse signals by a certain third time to obtain a delayed pulse signal;

outputting said delayed pulse signal as a timing signal when said gate signal is active; and


generating said clock signal and locking said clock signal in phase to said timing signal.

15. The method of claim 14, wherein said first time is equal to one period of said clock signal.

16. The method of claim 14 wherein, in said step of generating said clock signal, locking of said clock signal in phase to said timing signal is performed in a fast control mode when said clock signal differs in phase from said timing signal by more than a certain quantity, and in a slow control mode when said clock signal differs in phase from said timing signal by less than said certain quantity.

17. The method of claim 14, wherein said plurality of levels comprises a positive level, a negative level, and a zero level.

18. The method of claim 17, wherein said certain sequences

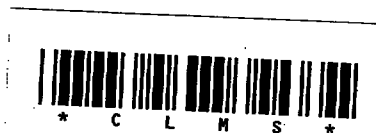

include:

a pulse signal generated when said double differential phase signal matches said positive level followed, within a certain fourth time, by a pulse signal generated when said double differential phase signal matches said negative level; and

a pulse signal generated when said double differential phase signal matches said negative level followed, within said fourth time, by a pulse signal generated when said double differential phase signal matches said positive level.

19. The method of claim 17, wherein said delayed pulse signal is obtained by delaying a pulse signal generated when said double differential phase signal matches said zero level.

20. The method of claim 19, wherein said third time is equal to one-half of one period of said clock signal.

21. The method of claim 17, comprising the further step of switching said positive level and said negative level between a first pair of levels when said clock signal differs in phase from said timing signal by more than said certain quantity, and a second pair of levels when said



T1335

clock signal differs in phase from said timing signal by less than said certain quantity.

22. The method of claim 21, wherein said second pair of levels is closer to said zero level than is said first pair of levels.

ABSTRACT

A clock recovery circuit receives an input signal having an eye pattern and takes differences at certain intervals to generate a differential signal. A set of comparators detect timings at which the differential signal matches different levels, and generate pulse signals at these timings. A classifying circuit classifies trajectories of the differential signal by detecting certain sequences of these pulse signals, and activates a gate signal when these sequences are detected. A delay circuit delays one of the pulse signals to create a delayed signal. A gate circuit outputs the delayed signal as a timing signal when the gate signal is active. A phase-locked loop generates a clock signal synchronized to the timing signal.

FIG. 1

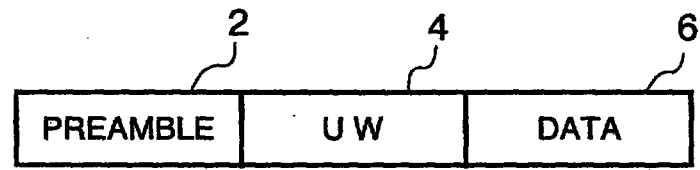


FIG. 2

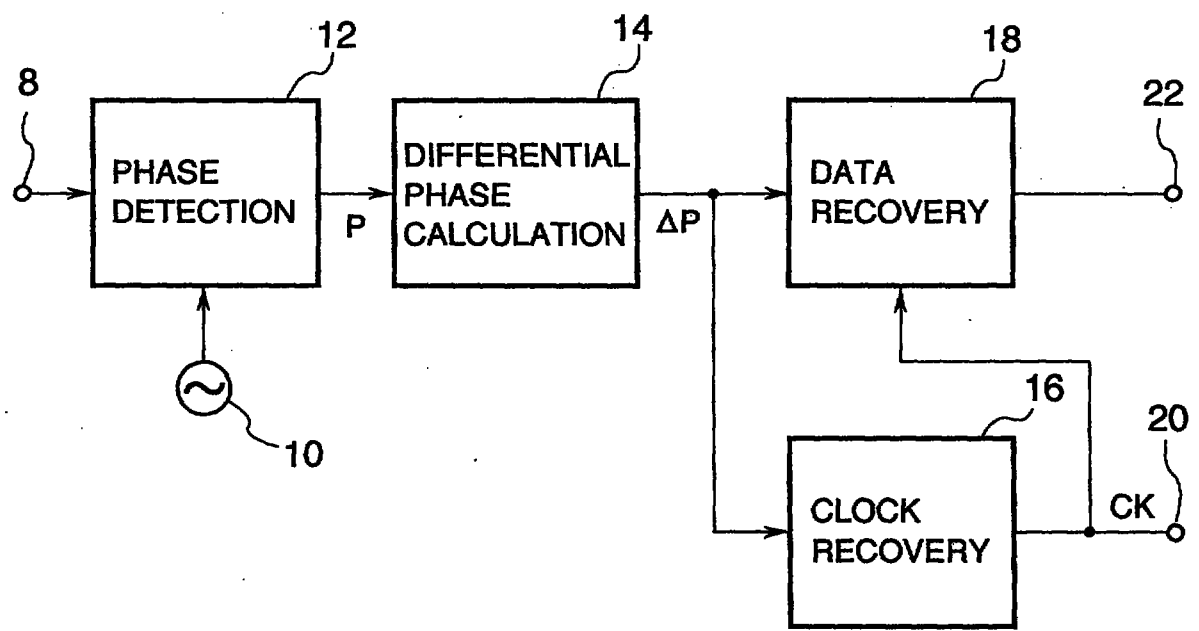


FIG. 3

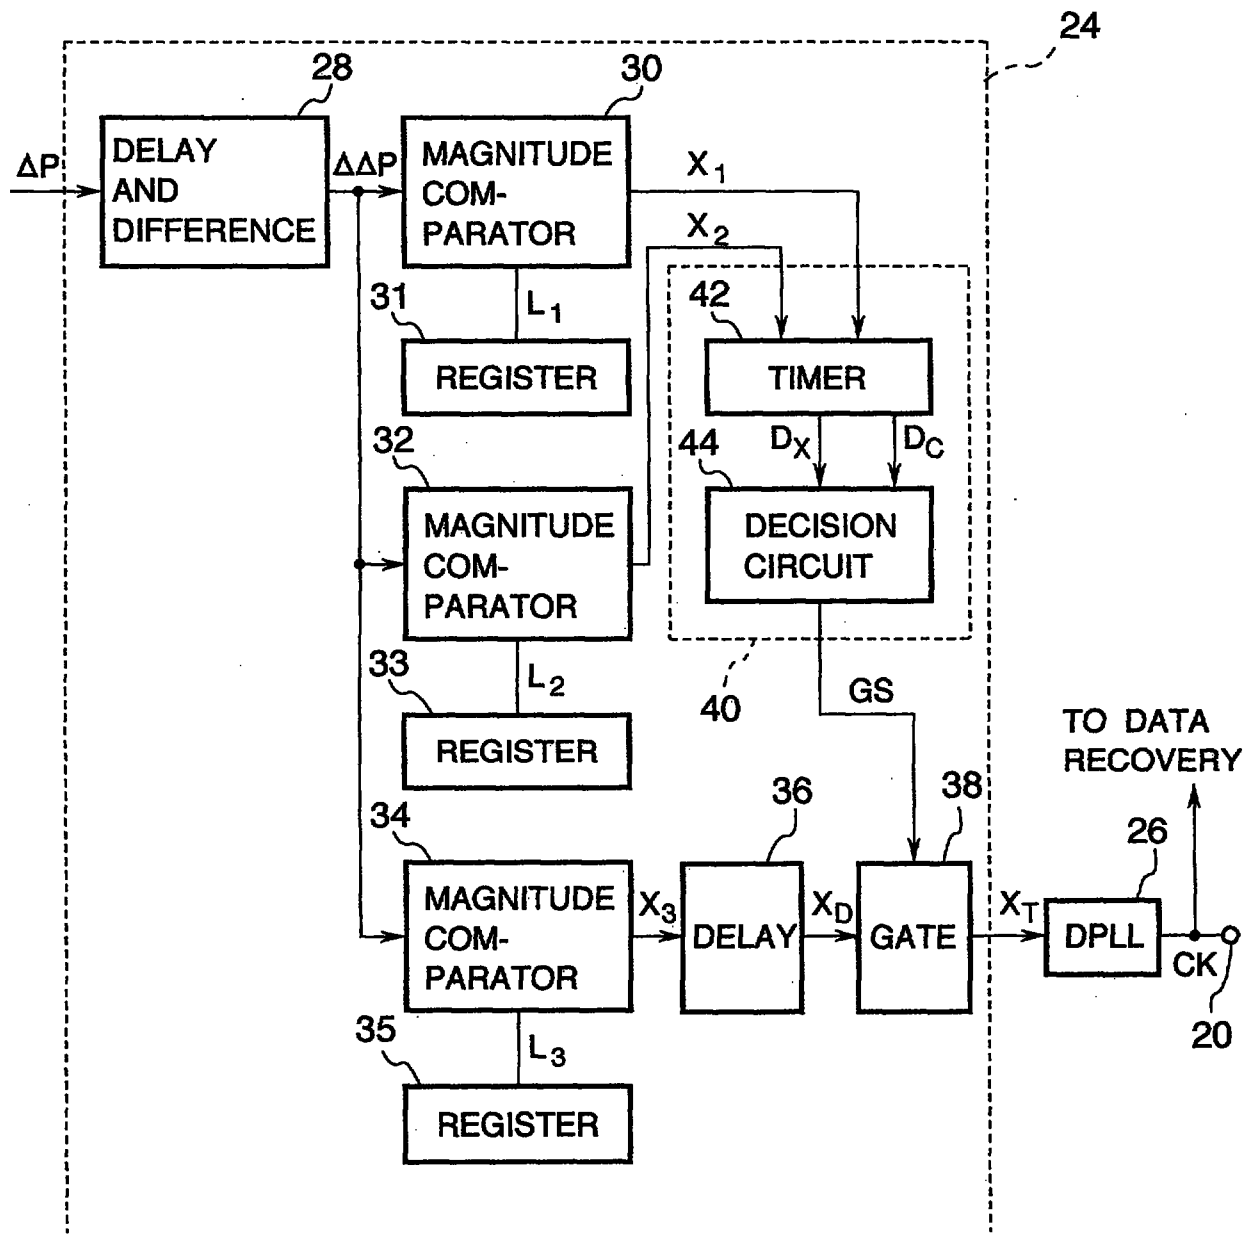


FIG. 4

46

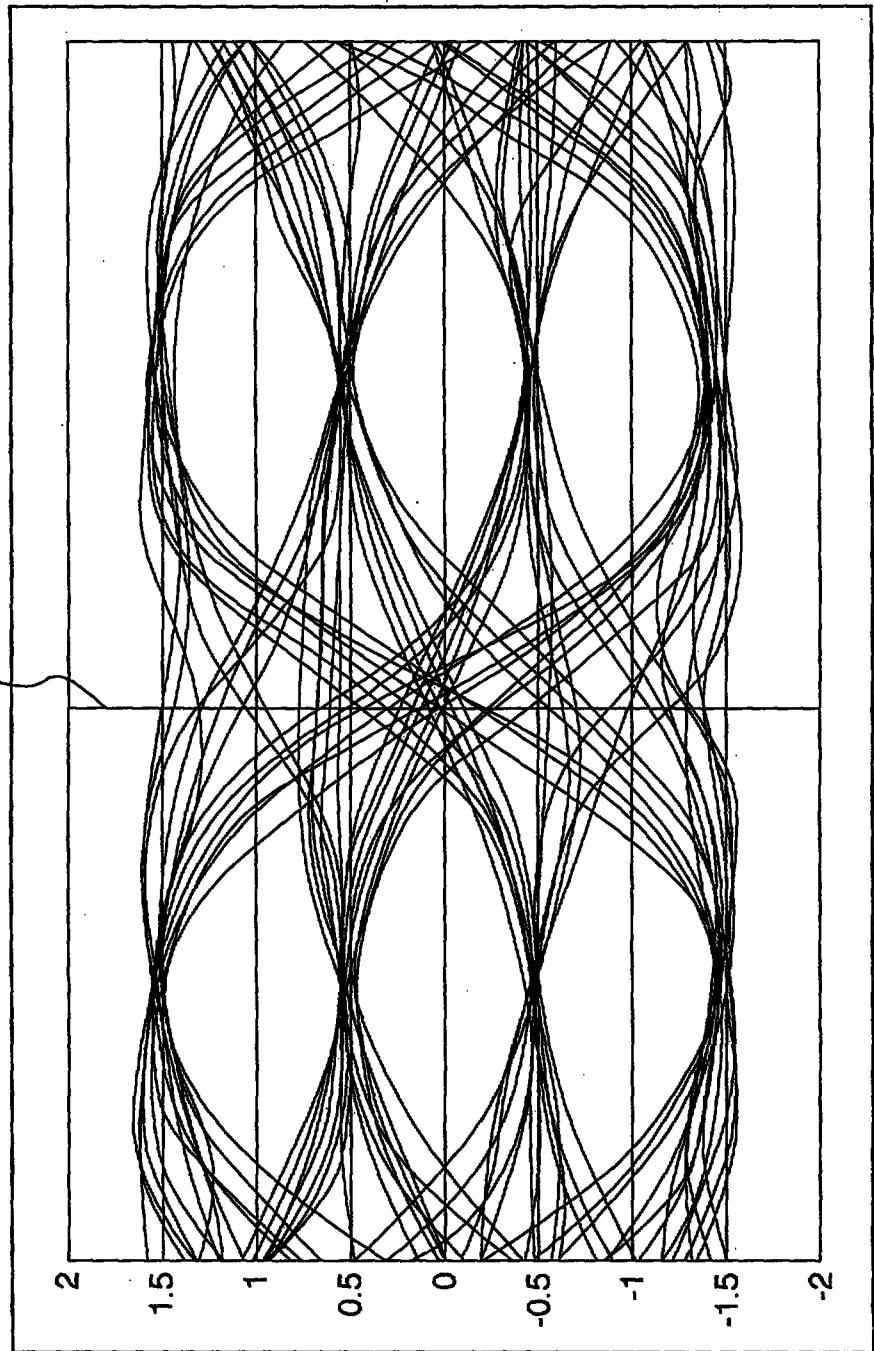


FIG. 5

46

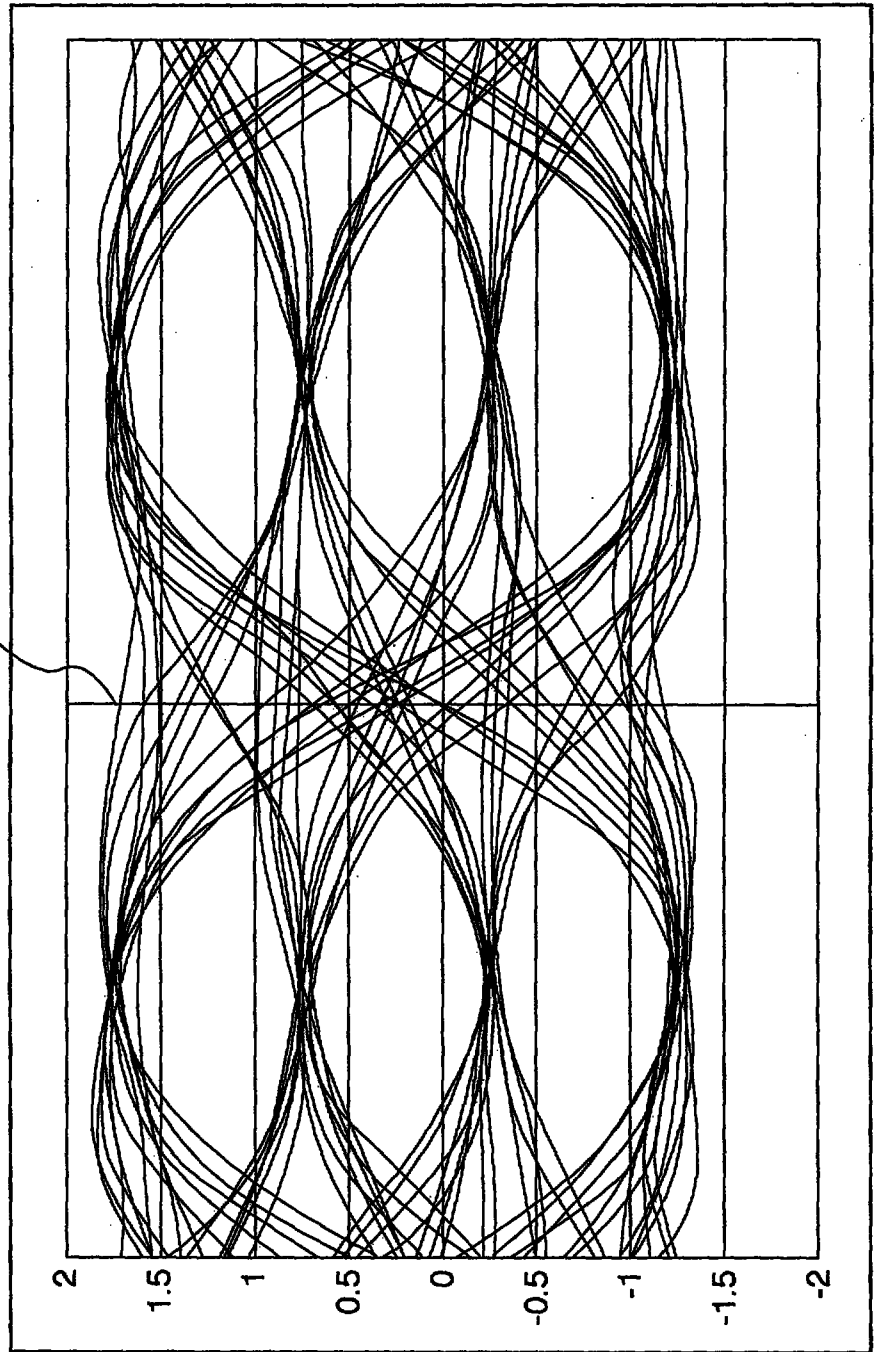


FIG. 6

46

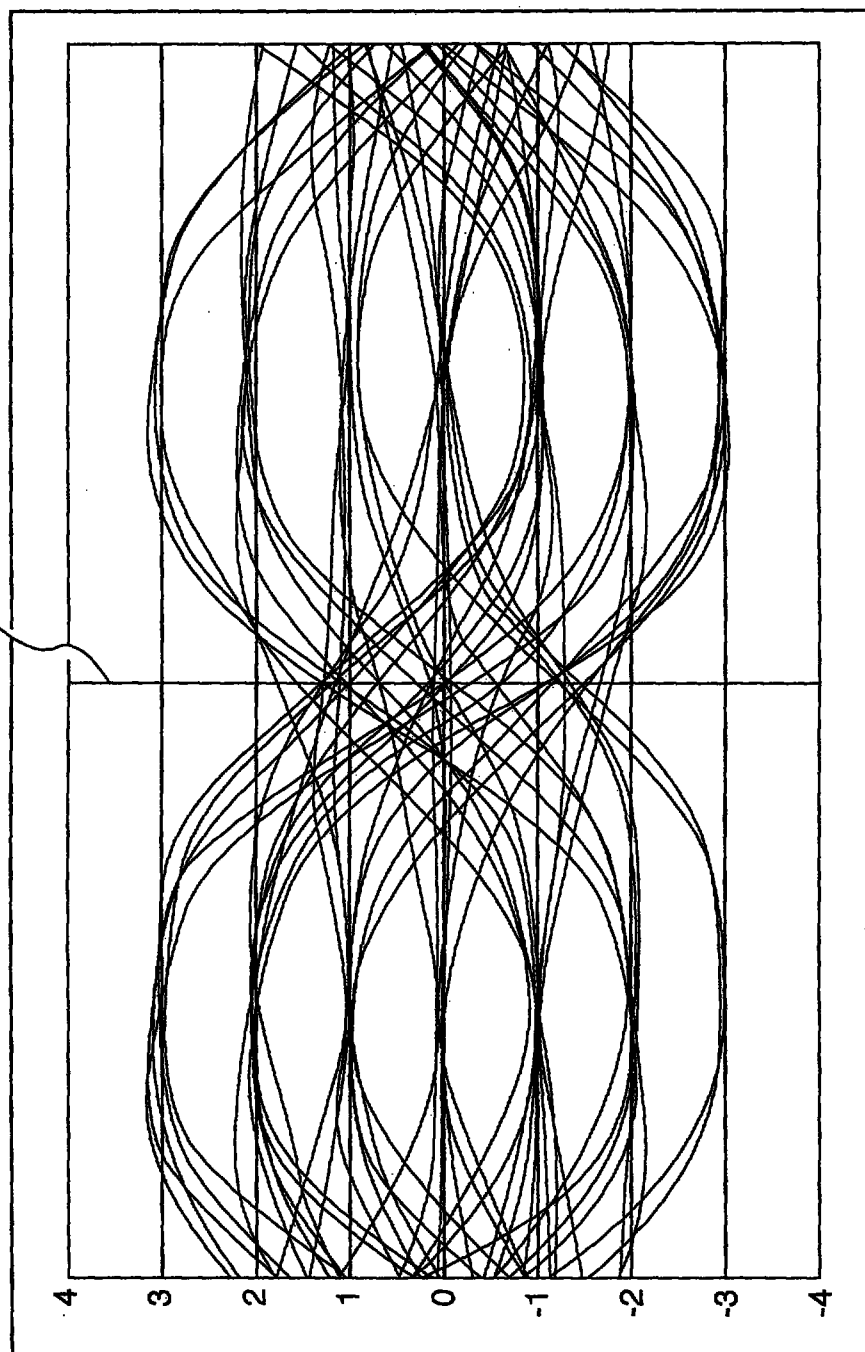


FIG. 7

46

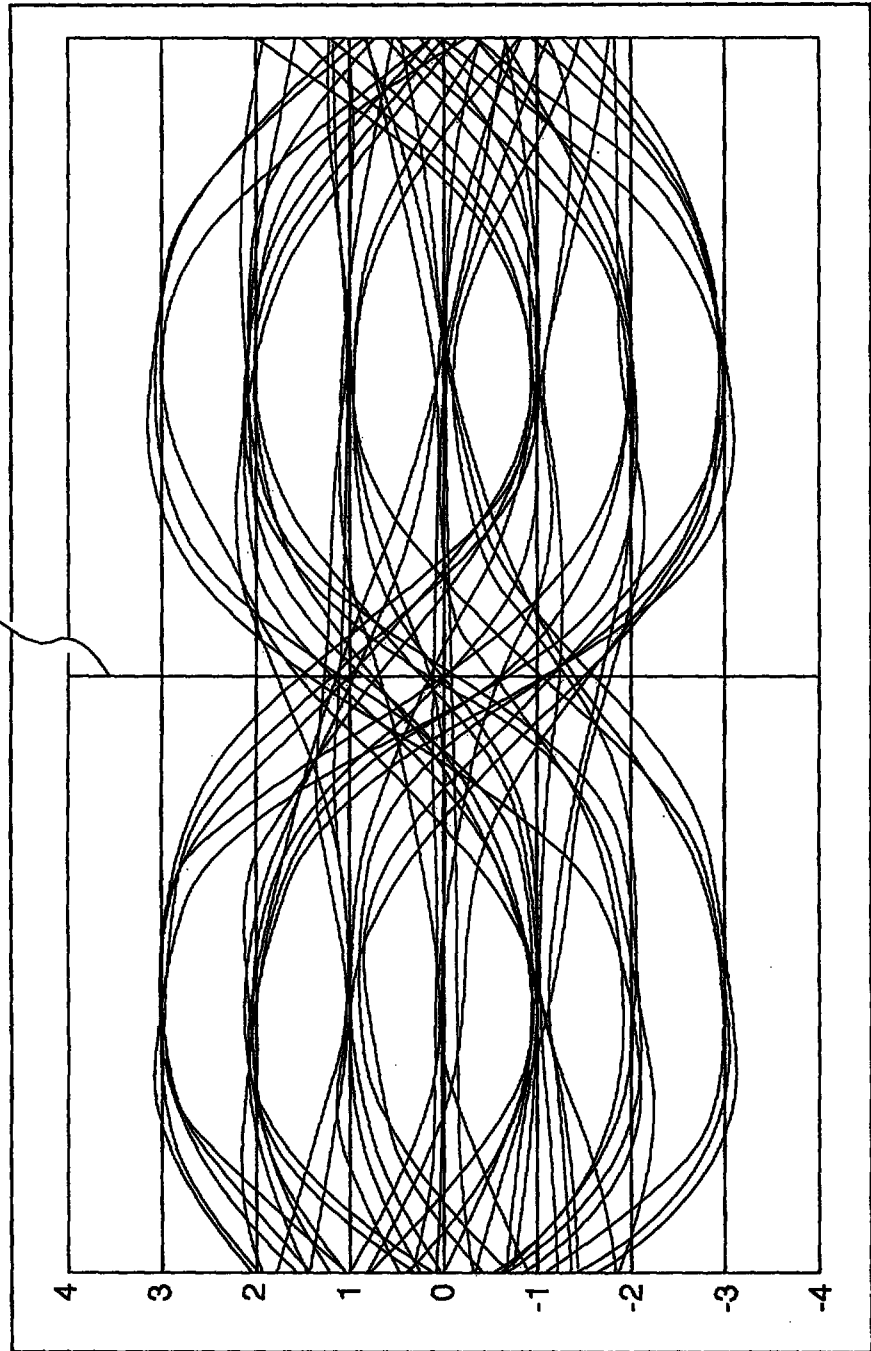


FIG. 8

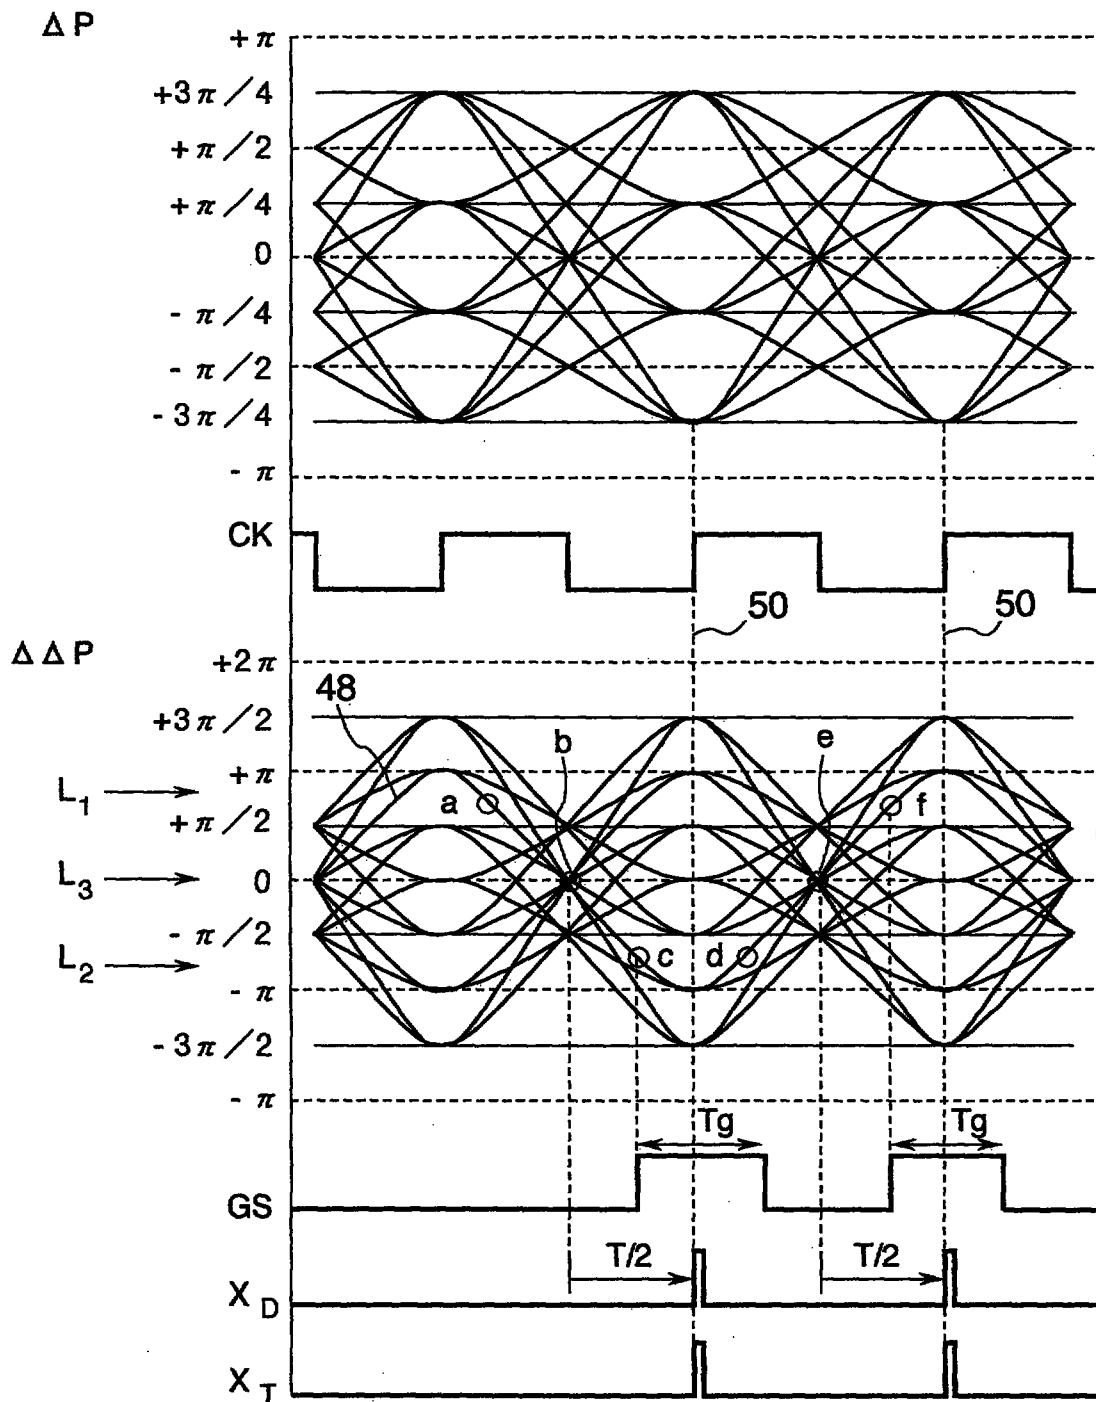


FIG. 9

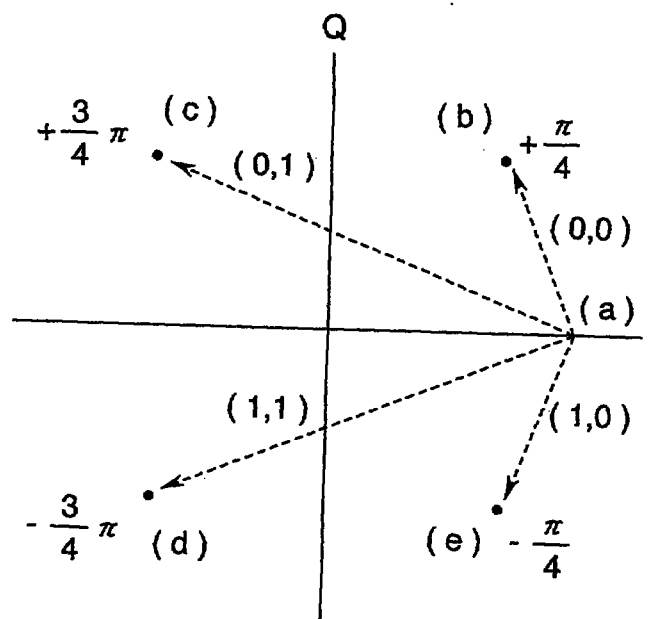


FIG. 10

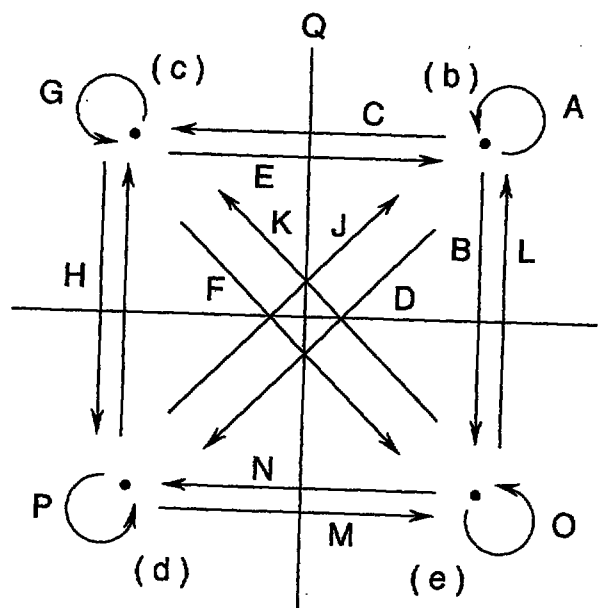


FIG. 11

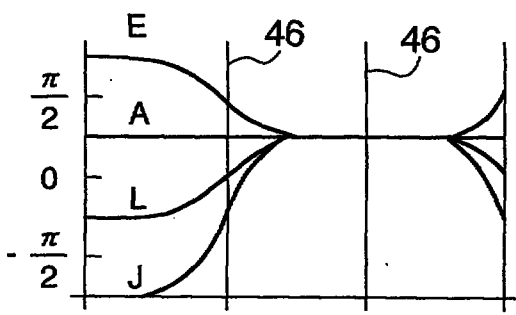


FIG. 14

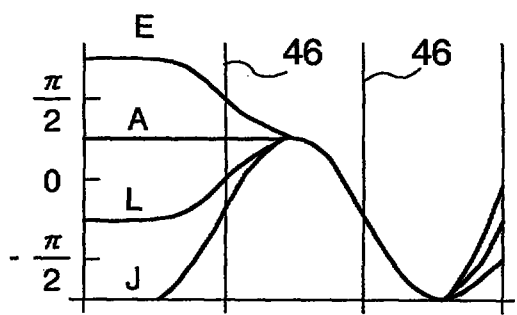


FIG. 12

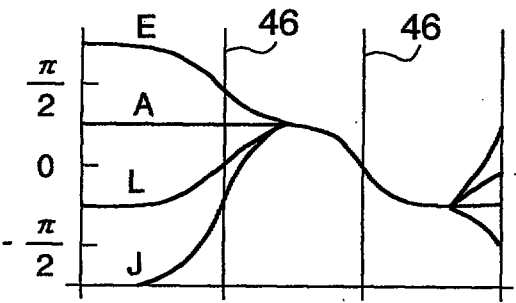


FIG. 15

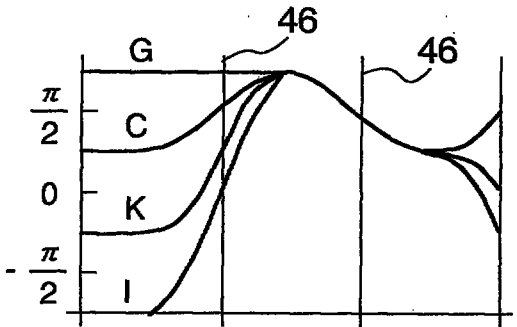


FIG. 13

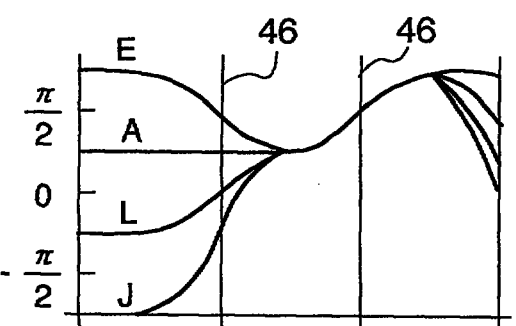


FIG. 16


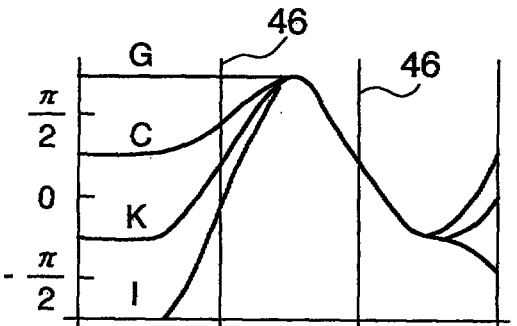


FIG. 17

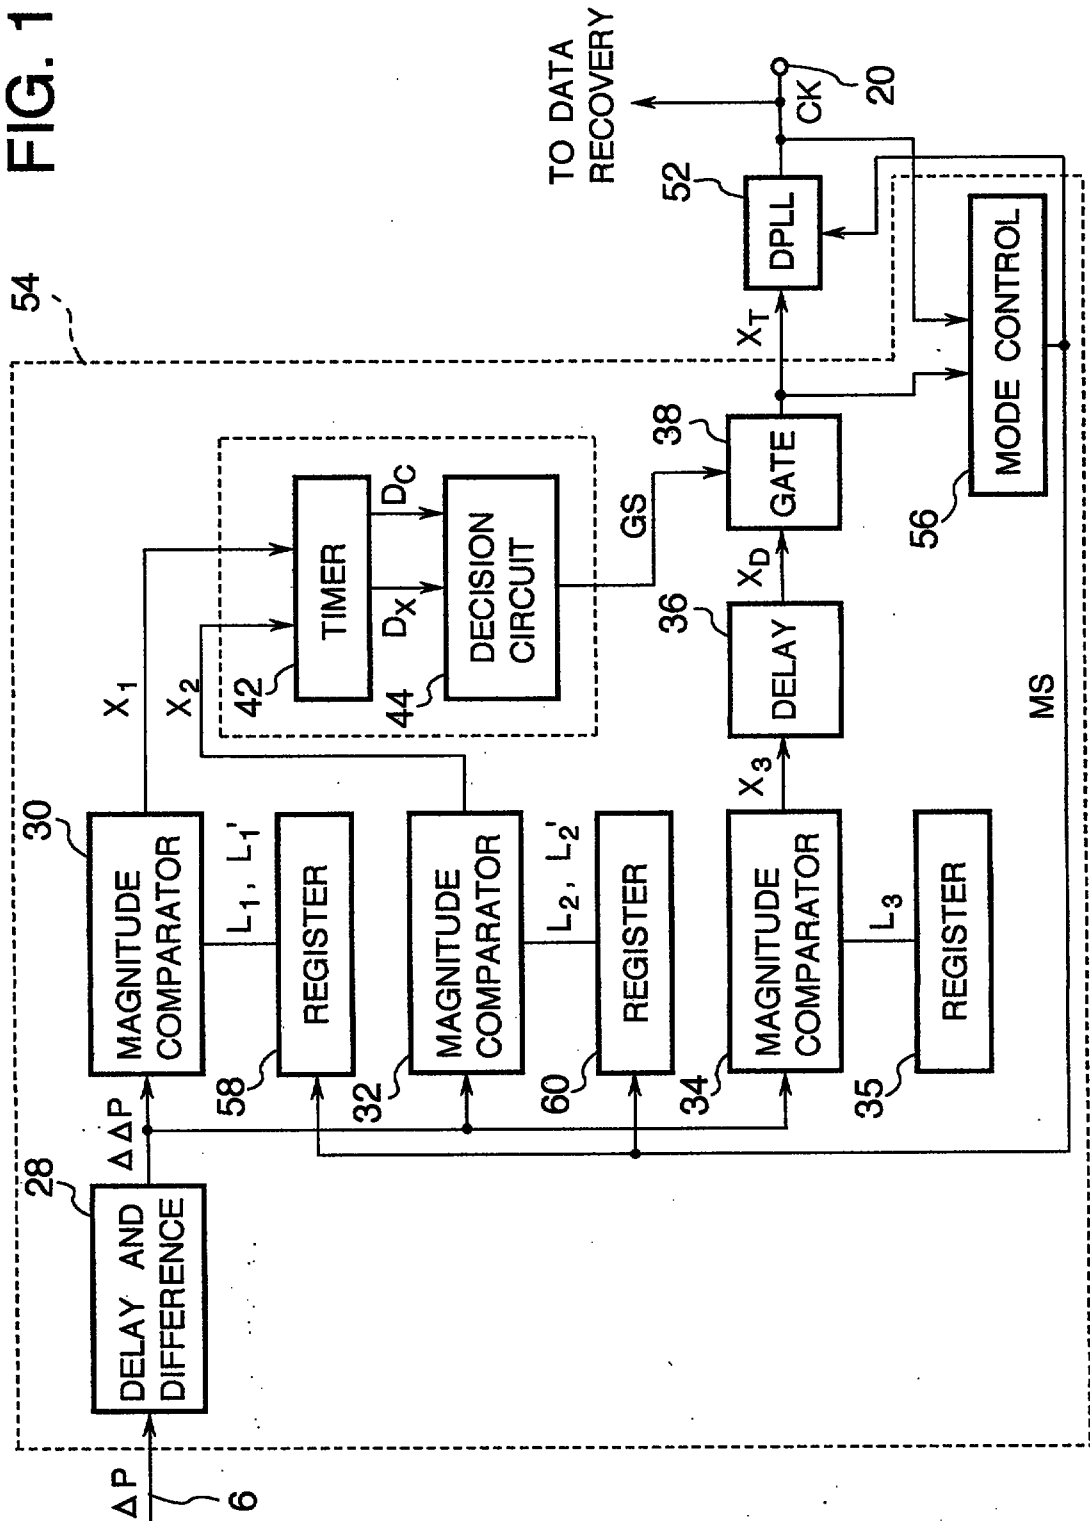

28 JUL 1995

CLOCK RECOVERY CIRCUIT EMPLOYING DELAY-AND-DIFFERENCE
CIRCUIT AND TRAJECTORY CLASSIFICATION

BACKGROUND OF THE INVENTION

The present invention relates to a clock recovery circuit for use in a demodulator such as a $\pi/4$ -shift quaternary phase-shift-keying differential demodulator.

$\pi/4$ -shift quaternary phase-shift keying (QPSK) is used to modulate carrier signals in, for example, digital mobile communication systems. The data to be transmitted consist of two-bit symbols. The phase of the carrier signal is shifted by $-3\pi/4$, $-\pi/4$, $\pi/4$, or $3\pi/4$ radians in each symbol interval to encode the value of the symbol. A differential demodulator recovers the transmitted data by detecting these phase shifts. That is, it detects the value of a differential phase signal, indicating the difference between the current instantaneous carrier phase and the phase one symbol duration before.

Operation of a differential demodulator is synchronized to a clock signal that indicates where the center of each symbol interval occurs. The clock signal is recovered from the transmitted signal itself. To facilitate clock recovery, a transmission begins with a preamble having a fixed, repetitive data pattern. Typically the symbols "10" and "01" are sent alternately during the preamble, causing

2

the carrier phase to shift alternately by $3\pi/4$ and $-\pi/4$.

One conventional clock recovery circuit operates by detecting zero crossings of the differential phase signal. Ideally, these zero crossings occur at the boundaries between symbol intervals. Unfortunately, in the preamble described above, symbol boundaries are crossed at the midpoint ($\pi/4$) between $3\pi/4$ and $-\pi/4$, and zero crossings occur somewhat before and after the symbol boundaries. This creates a problem known as jitter, which can lead to loss of clock synchronization, or cause the clock signal to become deadlocked in a state exactly opposite to the correct phase.

Jitter can also arise from carrier frequency offset between the transmitter and receiver. This type of jitter affects clock recovery in the entire data transmission, not just the preamble.

One proposed solution to the problem of jitter employs a double differential phase signal, obtained by taking the difference between the current value of the differential phase signal and the value one symbol interval before. During the preamble, if the differential phase signal alternates between $3\pi/4$ and $-\pi/4$, the double differential phase signal will alternate between π and $-\pi$. The midpoint between π and $-\pi$ is zero, so zero crossings will occur at symbol boundaries, without jitter. Jitter due to frequency offset is also eliminated.

3

This proposed solution engenders a further problem, however, in that after the preamble ends and transmission of arbitrary data begins, zero crossings by the double differential phase signal occur at many points far removed from the symbol boundaries, hindering the maintenance of correct clock synchronization.

SUMMARY OF THE INVENTION

It is accordingly an object of the present invention to provide reliable clock recovery both during and after the preamble.

The invented clock recovery circuit receives an input signal that follows an arbitrary trajectory among levels which represent symbol values. A delay-and-difference circuit delays the input signal to obtain a delayed signal, and takes the difference between the input signal and delayed signal to obtain a differential signal. A plurality of comparators compare the differential signal with a plurality of levels, and generate respective pulse signals when the differential signal matches these levels.

A classifying circuit detects certain sequences of these pulse signals and activates a gate signal for a certain interval when these sequences occur. A delay circuit delays one of the pulse signals to obtain delayed pulses. A gate circuit outputs the delayed pulses as timing

4

pulses when the gate signal is active. A phase-locked loop generates a clock signal and locks the clock signal in phase to the timing pulses.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 shows the general format of a $\pi/4$ -shift QPSK transmission.

FIG. 2 is a general block diagram of a differential demodulator.

FIG. 3 is a block diagram of the invented clock recovery circuit.

FIG. 4 shows an eye pattern of a differential phase signal without frequency offset.

FIG. 5 shows an eye pattern of a differential phase signal with frequency offset.

FIG. 6 shows an eye pattern of a double differential phase signal without frequency offset.

FIG. 7 shows an eye pattern of a double differential phase signal with frequency offset.

FIG. 8 shows eye patterns of differential and double differential phase signals, and illustrates the operation of the invention during the preamble.

FIG. 9 illustrates phase shifts on the I-Q plane.

FIG. 10 illustrates transitions among these phase shifts.

5

FIG. 11 illustrates several trajectories of the differential phase signal.

FIG. 12 illustrates several more trajectories of the differential phase signal.

FIG. 13 illustrates several more trajectories of the differential phase signal.

FIG. 14 illustrates several more trajectories of the differential phase signal.

FIG. 15 illustrates several more trajectories of the differential phase signal.

FIG. 16 illustrates several more trajectories of the differential phase signal.

FIG. 17 is a block diagram of a second embodiment of the invention.

DETAILED DESCRIPTION OF THE INVENTION

Two embodiments of the invention will now be described with reference to the attached illustrative drawings. The first two drawings illustrate the format of a typical transmission from which a clock signal is to be recovered, and the general configuration of a differential demodulator in which the invention can be employed.

Referring to FIG. 1, in certain mobile communication systems, each transmission starts with a preamble 2 in which the data pattern is "10011001...1001." The preamble is

followed by a data header 4 (⁶labeled UW in the drawing), then the body of the data 6.

Referring to FIG. 2, a differential demodulator has an input terminal 8 at which it receives a modulated carrier signal. A local oscillator 10 generates an unmodulated carrier signal with a frequency substantially equal to the frequency of the modulated carrier signal. An instantaneous phase detection circuit 12 compares the phase of the modulated carrier with the phase of the unmodulated carrier and converts the difference between them to a digital value, which it outputs as an instantaneous phase signal P. A differential phase calculation circuit 14 takes the difference between the instantaneous phase signal P and the instantaneous phase signal P delayed by one symbol interval, to obtain a differential phase signal ΔP .

The differential phase signal ΔP is supplied to a clock recovery circuit 16 and data recovery circuit 18. The clock recovery circuit 16 recovers a clock signal CK, which it outputs at an output terminal 20 and also sends to the data recovery circuit 18. The data recovery circuit 18 samples the differential phase signal ΔP at timings designated by the clock signal CK, decodes the sampled values to recover the transmitted data, and outputs these data at an output terminal 22. The clock signal CK output at terminal 20 is used in subsequent processing of the data

output at terminal 22.

FIG. 3 shows the configuration of a first embodiment of the invention, which can be employed as the clock recovery circuit 16 in FIG. 2. The invented clock recovery circuit comprises a timing pulse generating circuit 24 and a digital phase-locked loop 26. The timing pulse generating circuit 24 comprises a delay-and-difference circuit 28, a first magnitude comparator 30 and first register 31, a second magnitude comparator 32 and second register 33, a third magnitude comparator 34 and third register 35, a delay circuit 36, a gate circuit 38, and a classifying circuit 40. The classifying circuit 40 comprises a timer 42 and decision circuit 44.

The digital phase-locked loop (DPLL) 26 is a well-known circuit that outputs a clock signal CK, certain transitions (e.g. rising transitions) of which are synchronized to coincide, on the average, with pulses occurring in a timing signal X_T (these pulses will be referred to as timing pulses X_T). The frequency of the clock signal CK has a fixed value equal to the (known) symbol rate. The digital phase-locked loop 26 operates by advancing the phase of the clock signal CK when transitions of the clock signal CK are found to lag timing pulses X_T , and retarding the phase of the clock signal CK when transitions of the clock signal CK are found to lead timing pulses X_T . The clock signal CK is used as

8

the clock signal CK in FIG. 2.

In the timing pulse generating circuit 24, the delay-and-difference circuit 28 receives the differential phase signal ΔP , stores each received value of the differential phase signal ΔP for a time T equal to the known length of one symbol interval, and takes the difference between the current value of the differential phase signal ΔP and the value received one symbol interval before to obtain a double differential phase signal $\Delta \Delta P$.

The symbol interval length T is the period of the clock signal CK. In dealing with phase, it is convenient to speak in terms of angular measure, so that T is equivalent to 360° , or 2π radians. The values of the differential and double differential phase signals ΔP and $\Delta \Delta P$ can also be measured in terms of angle. In the following explanation degrees will be used to describe T and other time values, while radians will be used to describe ΔP and $\Delta \Delta P$.

The double differential phase signal $\Delta \Delta P$ is supplied to the three magnitude comparators 30, 32, and 34. The first magnitude comparator 30 compares the value of $\Delta \Delta P$ with a first level L_1 , which is stored in the first register 31, and outputs a first pulse X_1 when the value of $\Delta \Delta P$ matches L_1 . Similarly, the second magnitude comparator 32 compares $\Delta \Delta P$ with a second level L_2 , stored in the second register 32, and outputs a second pulse X_2 when $\Delta \Delta P$

9

matches L_2 . Likewise, the third magnitude comparator 34 compares $\Delta \Delta P$ with a third level L_3 , stored in the third register 35, and outputs a third pulse X_3 when $\Delta \Delta P$ matches L_3 .

In this first embodiment L_1 is $3\pi/4$, L_2 is $-3\pi/4$, and L_3 is zero. The third pulses X_3 are accordingly zero-matching pulses.

The delay circuit 36 delays each third pulse X_3 by a time equivalent to half a symbol interval ($T/2$, or 180°). The delay circuit 36 can be, for example, a digital timer that is triggered by input of a third pulse X_3 , counts for a time equal to $T/2$, then outputs a delayed pulse X_D .

The first and second pulses X_1 and X_2 are supplied to the timer 42 in the classifying circuit 40. The timer 42 is a counter that is driven at a constant rate, so that its count value represents elapsed time. When the timer 42 receives either pulse X_1 or X_2 , it outputs to the decision circuit 44 a pulse discriminating signal D_X indicating which pulse (X_1 or X_2) was received, and data D_C indicating the current count value. Then the timer 42 is reset to an initial value such as zero and starts counting again. If the count reaches a certain value T_d without input of another pulse (X_1 or X_2), the timer 42 is automatically reset to its initial value and stops counting. T_d is equivalent to, for example, 160° .

10

The decision circuit 44 outputs a gate signal GS according to the most recent count value D_C and two most recent pulse discriminating signals D_X . The gate signal GS is normally inactive. When the decision circuit 44 receives a pulse discriminating signal D_X , if the accompanying count data D_C is not the initial count value, indicating that the two most recent pulses were received within time T_d of each other, and if the current and preceding pulse discriminating signals D_X are different (indicating that pulse X_1 was preceded by X_2 , or X_2 by X_1), then the decision circuit 44 activates the gate signal GS for a certain time T_g . This time T_g can be equivalent to 120° , or $T/3$. The decision circuit 44 comprises, for example, a pair of latches for storing the two most recent pulse discriminating signals D_X , an exclusive-OR gate for comparing these signals, and a comparator for comparing the count data D_C with the above-mentioned initial value. Table 1 summarizes the operation of the classifying circuit 40.

Table 1 Operation of Classifying Circuit

Input	Gate Signal GS
X_2 pulse followed within time T_d by X_1 pulse	Active for time T_g starting from X_1 pulse
X_1 pulse followed within time T_d by X_2 pulse	Active for time T_g starting from X_2 pulse
Other input	Inactive

The gate circuit 38 receives the delayed pulse signal X_D and gate signal GS. While GS is active, the gate circuit 38 passes X_D through to the digital phase-locked loop 26 as the above-mentioned timing signal X_T . When GS is inactive, the gate circuit 38 blocks the delayed pulse signal X_D . The gate circuit 38 can be a simple logic gate such as an AND gate.

The operation of the first embodiment will now be described with reference to FIGs. 2 to 16.

FIG. 4 shows a simulated eye pattern of the differential phase signal ΔP when there is no frequency offset between the transmitter and receiver; that is, when the frequency of the modulated carrier signal received at input terminal 8 in FIG. 2 is exactly equal to the frequency of the unmodulated carrier signal output by the oscillator 10. The horizontal axis indicates time. The vertical line 46 represents a symbol boundary. The vertical axis indicates the value of the differential phase signal ΔP in

12

multiples of $\pi/2$, so that 1 corresponds to $\pi/2$, and -0.5 to $-\pi/4$. FIG. 4 is obtained by plotting all possible trajectories of the differential phase signal ΔP , both during and after the preamble. Zero crossings are concentrated in the vicinity of the symbol boundary 46.

FIG. 5 shows a simulated eye pattern of the differential phase signal ΔP when frequency offset is present (the frequencies of the modulated and unmodulated carrier signals are not equal). The horizontal and vertical axes have the same meaning as in FIG. 4. The offset is equivalent to $\pi/8$. The entire eye pattern is shifted upward, and zero crossings tend to occur at considerable distances from the symbol boundary 46. In a conventional clock recovery circuit employing the differential phase signal ΔP , severe jitter would occur.

FIG. 6 shows a simulated eye pattern of the double differential phase signal $\Delta \Delta P$ when frequency offset is absent. The horizontal and vertical axes have the same meaning as in FIG. 4. Although the eye pattern is centered around the zero point on the vertical axis, zero crossings occur at some points that are closer to the centers of the symbol intervals than to the symbol boundary 46. A clock recovery circuit that employed the double differential phase signal $\Delta \Delta P$ but detected only zero crossings would be unstable.

FIG. 7 shows a simulated eye pattern of the double differential phase signal $\Delta \Delta P$ when the same frequency offset ($\pi/8$) is present as in FIG. 5. The horizontal and vertical axes have the same meaning as in FIG. 4. The eye pattern is still centered around the zero point on the vertical axis; it does not shift upward as in FIG. 5. The problem of jitter is aggravated, however. Zero crossings occur at nearly random locations on the horizontal axis, with many unwanted zero-matching pulses created by trajectories that weave around the zero level.

FIG. 8 shows the eye patterns of the differential phase signal ΔP and double differential phase signal $\Delta \Delta P$ schematically, illustrating for simplicity the case in which there is no frequency offset. The waveform of the clock signal CK is shown below the eye pattern of the differential phase signal ΔP , and waveforms of the gate signal GS, delayed pulse signal X_D , and timing signal X_T are shown below the eye pattern of the double differential phase signal $\Delta \Delta P$. The graduations on the vertical axis indicate the values of ΔP and $\Delta \Delta P$ in radians. Levels L_1 , L_2 , and L_3 are also indicated.

During the preamble, the double differential phase signal $\Delta \Delta P$ alternates between π and $-\pi$, following trajectory 48, for example. This trajectory 48 crosses the first, third, and second levels L_1 , L_3 , and L_2 in this

14

sequence at points a, b, and c. The separation between points a and c is less than T_d on the horizontal axis, so the classifying circuit 40 activates the gate signal GS for time T_g , starting at point c. During this time T_g the delay circuit 36 outputs a delayed pulse signal X_D delayed by time $T/2$ from the zero crossing at point b. Since GS is active, the gate circuit 38 sends this delayed pulse signal X_D as a timing pulse X_T to the digital phase-locked loop 26.

After passing point c, trajectory 48 reaches $-\pi$, then begins to rise toward π again, now crossing the second, third, and first levels L_2 , L_3 , and L_1 in sequence at points d, e, and f. The separation between points d and f is less than T_d on the horizontal axis, so the classifying circuit 40 activates the gate signal GS again for time T_g , starting at point f. During this time the delay circuit 36 outputs a delayed pulse signal X_D delayed by $T/2$ from the zero crossing at point e, and the gate circuit 38 passes this pulse on as another timing pulse X_T to the digital phase-locked loop 26. Both timing pulses X_T occur at the centers of symbol intervals, indicated by vertical dashed lines 50. The timing pulses X_T are accordingly free of jitter.

During the preamble, the double differential phase signal $\Delta \Delta P$ continues to repeat the pattern of trajectory 48, so the digital phase-locked loop 26 continues to receive a timing pulse X_T at the center of each symbol interval.

15

Input of these jitter-free pulses enables the digital phase-locked loop 26 to synchronize the clock signal CK rapidly and reliably, so that rising transitions of CK coincide with timing pulses X_T , at the centers of the symbol intervals. By sampling the differential phase signal ΔP at rising transitions of the clock signal CK, the data recovery circuit 18 in FIG. 2 can obtain values of the differential phase signal ΔP at the optimal points, where the eye pattern of the differential phase signal ΔP is most open.

After the preamble ends and transmission of the data header and body begins, the double differential phase signal $\Delta \Delta P$ starts following an unpredictable trajectory, and the conditions for activating the gate signal GS are not satisfied in every symbol interval. The digital phase-locked loop 26 accordingly does not receive a timing pulse X_T in every symbol interval as it did during the preamble, but if timing pulses X_T are generated in a sufficient number of symbol intervals, the digital phase-locked loop 26 can still maintain synchronization of the clock signal CK. Operation after the preamble ends will be analyzed in detail next.

The double differential phase signal $\Delta \Delta P$ in two successive symbol intervals is derived from the differential phase signal ΔP in three successive symbol intervals, with four possible values in each interval, so there are sixty-

16

four possible trajectories in all. These trajectories were illustrated in FIGs. 6 and 7, but the large number of superimposed trajectories makes those drawings difficult to interpret. The trajectories will accordingly be described in a more schematic form in FIGs. 9 to 16.

The carrier signal used in QPSK communications can be split into a pair of carrier signals, comprising an in-phase carrier I and quadrature carrier Q, and the received signal can be represented on an I-Q plane as shown in FIG. 9. If point (a) represents the received signal in a certain symbol interval, then the transitions that can occur in the next symbol interval are indicated by the four dashed arrows. Transmitted data (0, 0) will cause a transition to point (b), corresponding to a phase rotation of $\pi/4$; data (0, 1) will cause a transition to point (c), corresponding to a phase rotation of $3\pi/4$; data (1, 1) will cause a transition to point (d), corresponding to a phase rotation of $-3\pi/4$; and data (1, 0) will cause a transition to point (e), corresponding to a phase rotation of $-\pi/4$. Each dashed arrow corresponds to one possible value of the differential phase signal ΔP .

FIG. 10 represents the sixteen possible combinations of values of the differential phase signal ΔP in two successive symbol intervals, using arrows labeled from A to P to indicate transitions from one value to the next. These

17

sixteen transition arrows generate corresponding values of the double differential phase signal $\Delta \Delta P$. For example, transition A indicates two successive phase shifts of $\pi/4$, corresponding to bit data (0, 0, 0, 0). The value of the differential phase signal ΔP is $\pi/4$ in two successive intervals, so the value of the double differential phase signal $\Delta \Delta P$ is zero. Transition K indicates successive phase shifts of $-\pi/4$ and $3\pi/4$, corresponding to bit data (1, 0, 0, 1) and producing a double differential phase signal value of $-\pi$.

FIG. 11 indicates four of the sixty-four possible trajectories of the differential phase signal ΔP over three successive symbol intervals, showing the trajectories in which the differential phase signal ΔP has the value $\pi/4$ in the second and third symbol intervals. The value of the differential phase signal ΔP is indicated in radians on the vertical axis. Time is indicated on the horizontal axis, with vertical lines 46 indicating symbol boundaries as before. The letters E, A, L, and J indicate the transitions between the first and second symbol intervals, using the same notation as in FIG. 10.

Similarly, FIG. 12 indicates the four trajectories in which the differential phase signal ΔP takes on values of $\pi/4$ and $-\pi/4$ in the second and third symbol intervals. FIG. 13 indicates the four trajectories with values of $\pi/4$

and $3\pi/4$, respectively, in the second and third symbol intervals. FIG. 14 indicates the four trajectories with values of $\pi/4$ and $-3\pi/4$ in the second and third symbol intervals. FIG. 15 indicates the four trajectories with values of $3\pi/4$ and $\pi/4$ in the second and third symbol intervals. FIG. 16 indicates the four trajectories with values of $3\pi/4$ and $-\pi/4$ in the second and third symbol intervals. Together, FIGs. 11 to 16 illustrate twenty-four of the sixty-four possible trajectories.

Table 2 lists all sixty-four trajectories, using the same letters A to P to denote transitions of the differential phase signal ΔP between the first and second symbol intervals and between the second and third symbol intervals, indicating the corresponding values of the double differential phase signal $\Delta \Delta P$, and noting the locations of zero crossing points (denoted 0-Crss) of the double differential phase signal $\Delta \Delta P$. For example, the first entry in Table 2, corresponding to bit data (0, 0, 0, 0, 0, 0), is for three successive phase shifts of $\pi/4$, causing two successive occurrences of transition A, with corresponding values of zero for the double differential phase signal $\Delta \Delta P$. Two successive occurrences of zero in the double differential phase signal $\Delta \Delta P$ constitute a zero matching but not a zero crossing, so no zero crossing point is listed.

The zero-crossing-point locations in Table 2 are approximate; the exact values depend on the precise shapes of the trajectories.

Table 2 Zero Crossings (0-Crss) of Double Differential Phase Signal $\Delta \Delta P$

2nd Shift = $\pi/4$ (b)			2nd Shift = $3\pi/4$ (c)		
ΔP	$\Delta \Delta P$	0-Crss	ΔP	$\Delta \Delta P$	0-Crss
A-A	0 $\rightarrow$ 0	--	G-G	0 $\rightarrow$ 0	--
A-C	0 $\rightarrow$ $\pi/2$	--	G-H	0 $\rightarrow$ $-3\pi/2$	--
A-D	0 $\rightarrow$ $-\pi$	--	G-F	0 $\rightarrow$ $-\pi$	--
A-B	0 $\rightarrow$ $-\pi/2$	--	G-E	0 $\rightarrow$ $-\pi/2$	--
E-A	$-\pi/2 \rightarrow$ 0	--	C-G	$\pi/2 \rightarrow$ 0	--
E-C	$-\pi/2 \rightarrow \pi/2$	0°	C-H	$\pi/2 \rightarrow -3\pi/2$	-90°
E-D	$-\pi/2 \rightarrow -\pi$	--	C-F	$\pi/2 \rightarrow -\pi$	-60°
E-B	$-\pi/2 \rightarrow -\pi/2$	--	C-E	$\pi/2 \rightarrow -\pi/2$	0°
J-A	$\pi \rightarrow$ 0	--	K-G	$\pi \rightarrow$ 0	--
J-C	$\pi \rightarrow \pi/2$	--	K-H	$\pi \rightarrow -3\pi/2$	-45°
J-D	$\pi \rightarrow -\pi$	0°	K-F	$\pi \rightarrow -\pi$	0°
J-B	$\pi \rightarrow -\pi/2$	$+60^\circ$	K-E	$\pi \rightarrow -\pi/2$	$+60^\circ$
L-A	$\pi/2 \rightarrow$ 0	--	I-G	$3\pi/2 \rightarrow$ 0	--
L-C	$\pi/2 \rightarrow \pi/2$	--	I-H	$3\pi/2 \rightarrow -3\pi/2$	0°
L-D	$\pi/2 \rightarrow -\pi$	-60°	I-F	$3\pi/2 \rightarrow -\pi$	$+45^\circ$
L-B	$\pi/2 \rightarrow -\pi/2$	0°	I-E	$3\pi/2 \rightarrow -\pi/2$	$+90^\circ$

20

Table 2 Zero Crossings (0-Crss) of Double Differential
Phase Signal $\Delta \Delta P$ (cont)

2nd Shift = $-\pi/4$ (e)			2nd Shift = $-3\pi/4$ (d)		
ΔP	$\Delta \Delta P$	0-Crss	ΔP	$\Delta \Delta P$	0-Crss
O-O	0 $\rightarrow$ 0	--	P-P	0 $\rightarrow$ 0	--
O-M	0 $\rightarrow$ $-\pi/2$	--	P-I	0 $\rightarrow$ $3\pi/2$	--
O-K	0 $\rightarrow$ π	--	P-J	0 $\rightarrow$ π	--
O-L	0 $\rightarrow$ $\pi/2$	--	P-N	0 $\rightarrow$ $\pi/2$	--
N-O	$-\pi/2 \rightarrow$ 0	--	M-P	$-\pi/2 \rightarrow$ 0	--
N-M	$-\pi/2 \rightarrow -\pi/2$	0°	M-I	$-\pi/2 \rightarrow 3\pi/2$	-90°
N-K	$-\pi/2 \rightarrow \pi$	--	M-J	$-\pi/2 \rightarrow \pi$	-60°
N-L	$-\pi/2 \rightarrow -\pi/2$	--	M-N	$-\pi/2 \rightarrow \pi/2$	0°
F-O	$\pi \rightarrow$ 0	--	D-P	$\pi \rightarrow$ 0	--
F-M	$\pi \rightarrow \pi/2$	--	D-I	$\pi \rightarrow -3\pi/2$	-45°
F-K	$\pi \rightarrow -\pi$	0°	D-J	$\pi \rightarrow -\pi$	0°
F-L	$\pi \rightarrow -\pi/2$	$+60^\circ$	D-N	$\pi \rightarrow -\pi/2$	$+60^\circ$
B-O	$-\pi/2 \rightarrow$ 0	--	H-P	$-3\pi/2 \rightarrow$ 0	--
B-M	$-\pi/2 \rightarrow -\pi/2$	--	H-I	$-3\pi/2 \rightarrow 3\pi/2$	0°
B-K	$-\pi/2 \rightarrow \pi$	-60°	H-J	$-3\pi/2 \rightarrow \pi$	$+45^\circ$
B-L	$-\pi/2 \rightarrow \pi/2$	0°	H-N	$-3\pi/2 \rightarrow \pi/2$	$+90^\circ$

In the first embodiment, the classifying circuit 40 classifies trajectories of the double differential phase signal $\Delta \Delta P$ into two groups: those that cross the zero level while going from π or $3\pi/2$ to $-\pi$ or $-3\pi/2$, or from

21

$-\pi$ or $-3\pi/2$ to π or $3\pi/2$; and other trajectories, which may or may not cross the zero level. Timing pulses X_T are generated only for trajectories in the first group, because only these trajectories cross levels L_1 , L_2 , and L_3 in the necessary sequence. Specifically, timing pulses are generated for ten of the sixty-four trajectories listed in Table 2: J-D, K-F, I-H, F-K, D-J, and H-I, which have zero crossings at 0° ; and K-H, I-F, D-I, and H-J, which have zero crossings at $\pm 45^\circ$. Of these, K-F and F-K occur both in the preamble and during data header and body transmission; the other trajectories occur only during data header and body transmission.

During data header and body transmission, the digital phase-locked loop 26 will receive, on the average, jitter-free timing pulses X_T about 6/64 of the time, and timing pulses X_T with $\pm 45^\circ$ jitter about 4/64 of the time. Jitter values of $+45^\circ$ and -45° will moreover tend to average out to zero. The digital phase-locked loop 26 will therefore be able to maintain clock synchronization even after the preamble ends, unless an unusual data pattern produces an extended interval without input of any timing pulses X_T , or with input mostly of pulses having $+45^\circ$ jitter, or mostly of pulses having -45° jitter.

If frequency offset is present as illustrated in FIG. 7, many unwanted delayed pulses X_D will be produced due to

zero crossings at random locations, but very few of these will be preceded and followed by crossings of the $3\pi/4$ and $-3\pi/4$ levels (L_1 and L_2), so most of them will be blocked at the gate circuit 38. By classifying trajectories as described above, the first embodiment is able to eliminate most unwanted timing pulses.

Next a second embodiment of the invention will be described. The second embodiment reduces the risk of loss of synchronization after the preamble ends by producing a greater number of timing pulses X_T .

FIG. 17 shows the structure of the second embodiment, using the same reference numerals as in FIG. 3 to denote identical or equivalent elements. Descriptions of these elements will be omitted.

The digital phase-locked loop 52 in the second embodiment is similar to the digital phase-locked loop 26 in the first embodiment, but operates in two control modes, a fast mode and a slow mode. In the fast control mode, the digital phase-locked loop 52 responds to every timing pulse X_T , advancing the phase of the clock signal CK if a rising transition of CK lags the timing pulse X_T , and retarding the phase of the clock signal CK if a rising CK transition leads the timing pulse X_T . In the slow control mode, the digital phase-locked loop 52 responds not to these individual leads or lags but to the average lead or lag over a period of

23

time, typically including a number of timing pulses X_T .

The digital phase-locked loop 52 is switched between its fast and slow control modes by a mode switching signal MS output from the timing pulse generating circuit 54, more specifically from a mode control circuit 56 in the timing pulse generating circuit 54. The mode control circuit 56 receives the timing signal X_T and clock signal CK, compares their phase, and activates the mode switching signal MS when the phase difference is less than a certain threshold phase angle value, such as 45° , over a certain period of time. When the phase difference exceeds this threshold phase angle value, the mode control circuit 56 deactivates the mode switching signal MS.

The mode switching signal MS is also sent to the first and second registers 58 and 60, which supply comparison levels to the first and second magnitude comparators 30 and 32. When the mode switching signal MS is inactive, the first register 58 supplies the first magnitude comparator 30 with the same first level L_1 of $3\pi/4$ as in the first embodiment. After the mode switching signal MS becomes active, the first register 58 supplies the first magnitude comparator 30 with a reduced first level L_1' of, for example, $\pi/4$, which is closer to zero. Similarly, the second register 60 supplies the second magnitude comparator 32 with a second level L_2 of $-3\pi/4$ while the mode switching

24

signal MS is inactive, and a second level L_2' of $-\pi/4$, closer to zero, when the mode switching signal MS is active.

Next the operation of the second embodiment will be described.

During the preamble, the phase difference between the timing signal X_T and clock signal CK will usually start out at a value greater than 45° , making the mode switching signal MS inactive. The second embodiment will accordingly operate at first like the first embodiment, supplying the digital phase-locked loop 52 with jitter-free timing pulses X_T in all symbol intervals.

When the phase of the clock signal CK is brought to within 45° of the phase of these timing signal X_T , the mode control circuit 56 activates the mode switching signal MS, causing the first and second levels L_1 and L_2 to switch from $\pm 3\pi/4$ to $\pm \pi/4$. This has the effect of moving points a and c in FIG. 8 closer to point b, and points d and f closer to point e, so the gate signal GS is shifted slightly to the left, but the delayed zero-matching pulses X_D continue to fall within the active gate intervals. As long as the preamble continues, the gate circuit 38 continues to pass jitter-free timing pulses X_T to the digital phase-locked loop 52 in every symbol interval. Although the digital phase-locked loop 52 is now operating in its slow control mode, since the timing pulses X_T are jitter-free, the phase

of the clock signal CK continues to be adjusted at substantially the same rate as before, until the clock signal CK is locked in phase to the timing pulses X_T .

When the preamble ends and transmission of the data header and body starts, the digital phase-locked loop 52 receives timing pulses X_T for all twenty-eight of the zero-crossing points noted in Table 2, including twelve with zero jitter, four with jitter of $\pm 45^\circ$, eight with jitter of $\pm 60^\circ$, and four with jitter of $\pm 90^\circ$. Since the digital phase-locked loop 52 is operating in its slow control mode, positive and negative jitter will tend to cancel out, so the risk of loss of synchronization due to jitter is small. On the average, the digital phase-locked loop 52 will receive timing pulses X_T in 28/64 of the symbol periods, instead of 10/64 as in the first embodiment, and will receive jitter-free timing pulses X_T in 12/64 of the symbol periods, instead of 6/64 as in the first embodiment, so the risk of loss of synchronization due to an inadequate number of timing pulses X_T is also small.

Although the reduction of the first and second levels L_1 and L_2 from $\pm 3\pi/4$ to $\pm \pi/4$ in the second embodiment causes the digital phase-locked loop 52 to receive timing pulses X_T with jitter of up to about $\pm 90^\circ$, these levels of $\pm \pi/4$ are still adequate to block timing pulses X_T from trajectories that cross the zero level near the center of

the symbol interval. In particular, the unwanted timing pulses that would be generated by trajectories that weave around the zero axis in FIG. 7 are blocked in this way, because these trajectories do not cross the $\pi/4$ and $-\pi/4$ levels within the time T_d .

The second embodiment accordingly provides adequate timing pulses X_T for clock recovery with a high degree of reliability both during and after the preamble.

The present invention is not restricted to the embodiments described above, but includes various modifications. For example, the preamble signal need not be "10011001...1001;" other repetitive data patterns can be used instead. If necessary, one or more of the first, second, and third levels L_1 , L_2 , and L_3 can be altered to accommodate a different preamble pattern, or the number of levels can be increased to four or more.

It is also possible to practice the invention with only two levels. For example, successive matches of $\Delta \Delta P$ with the zero level and a certain positive level (in either order) within a certain time could be detected, timing pulses being generated at a delay of $T/2$ from the zero-level match point.

The values of 120° and 160° for T_g and T_d were shown only as examples. The invention can be practiced with other values for these times. The delay time in the delay circuit

27

36 and the phase difference at which the mode control circuit 56 activates the mode switching signal MS can also be modified as necessary.

Although the mode control circuit 56 was shown as an element of the timing pulse generating circuit 54 in FIG. 17, it can be an element of the digital phase-locked loop 52 instead. For example, since the digital phase-locked loop 52 has a circuit that detects average phase lead or lag over a certain interval of time for use in the slow control mode, this circuit can serve the function of the mode control circuit 56.

Applications of the invention are of course not limited to mobile digital communications; the invention can be practiced in any system employing $\pi/4$ -shift QPSK. More generally, it can be practiced in any system that must recover data and a clock signal from an input signal having an eye pattern like the ones shown in FIGs. 4 and 5, in which each eye corresponds to one symbol interval, and values of the input signal at the centers of the symbol intervals correspond in one-to-one fashion to the data symbols to be recovered.

Those skilled in the art will recognize that further variations are possible without departing from the scope claimed below.

WHAT IS CLAIMED IS:



1. A clock recovery circuit (16) for recovering a clock signal from an input signal that follows trajectories which, when superimposed, form an eye pattern, comprising:

a delay-and-difference circuit (28) for receiving said input signal, delaying said input signal by a certain first time to obtain a delayed signal, and taking a difference between said input signal and said delayed signal to obtain a differential signal;

a plurality of comparators (30, 32, 34) coupled to said delay-and-difference circuit (28), for comparing said differential signal with a corresponding plurality of different levels, and generating respective pulse signals when said differential signal matches said levels;

a classifying circuit (40) coupled to said comparators (30, 32, 34), for using said pulse signals to classify said trajectories, and activating a gate signal for a certain second time responsive to certain sequences of said pulse signals;

a delay circuit (36) coupled to one of said comparators (34), for delaying the pulses generated by said one of said comparators (34) by a certain third time to obtain delayed pulses;

a gate circuit (38) coupled to said delay circuit (36),

29

for outputting said delayed pulses as timing pulses when said gate signal is active; and

a phase-locked loop (26) coupled to said gate circuit (38), for generating said clock signal and locking said clock signal in phase to said timing pulses.

2. The clock recovery circuit of claim 1, wherein said first time is equal to one period of said clock signal.

3. The clock recovery circuit of claim 1, wherein said third time is equal to one-half of one period of said clock signal.

4. The clock recovery circuit of claim 1, wherein:

said phase-locked loop (52) has a fast control mode and a slow control mode; and

said clock recovery circuit (16) has a mode control circuit (56) coupled to said phase-locked loop (52), for receiving said timing pulses and said clock signal, generating a mode selection signal, setting said mode selection signal to a first state selecting said fast control mode when said clock signal differs in phase from said timing pulses by more than a certain threshold quantity, and setting said mode selection signal to a second state selecting said slow control mode when said clock





signal differs in phase from said timing pulses by less than said threshold quantity.

5. The clock recovery circuit of claim 4, wherein said mode selection signal also selects values of at least of one of said levels.

6. A clock recovery circuit (16) for recovering a clock signal from a differential phase signal, comprising:

a delay-and-difference circuit (28) for receiving said differential phase signal, delaying said differential phase signal by a certain first time to obtain a delayed signal, and taking a difference between said differential phase signal and said delayed signal to obtain a double differential phase signal;

a first comparator (30) coupled to said delay-and-difference circuit (28), for generating a first pulse when said double differential phase signal matches a certain positive level;

a second comparator (32) coupled to said delay-and-difference circuit (28), for generating a second pulse when said double differential phase signal matches a certain negative level;

a third comparator (34) coupled to said delay-and-difference circuit (28), for generating a third pulse when

31

said double differential phase signal matches a zero level;

a classifying circuit (40) coupled to said first comparator (30) and said second comparator (32), for activating a gate signal for a certain second time when said first pulse is followed by said second pulse within a certain third time, and for activating said gate signal for said second time when said second pulse is followed by said first pulse within said third time;

a delay circuit (36) coupled to said third comparator (34), for delaying said third pulse by a certain fourth time to obtain a delayed pulse;

a gate circuit (38) coupled to said delay circuit (36), for outputting said delayed pulse as a timing pulse if said gate signal is active; and

a digital phase-locked loop (26, 52) coupled to said gate circuit (38), for generating said clock signal and adjusting said clock signal in phase so as to synchronize a certain transition of said clock signal with said timing pulse.

7. The clock recovery circuit of claim 6, wherein said first time is equal to one period of said clock signal.

8. The clock recovery circuit of claim 6, wherein said fourth time is equal to one-half of one period of said clock



signal.

9. The clock recovery circuit of claim 6, wherein said classifying circuit (40) comprises:

a timer (42) for receiving said first pulse and said second pulse and measuring elapsed time from each pulse thus received; and

a decision circuit (44) for activating said gate signal responsive to two pulses most recently received by said timer (42), and to the elapsed time between said two pulses.

10. The clock recovery circuit of claim 6, wherein said digital phase-locked loop (52) adjusts said clock signal at a first rate when said clock signal differs in phase from said timing signal by more than a certain phase angle, and at a second rate when said clock signal differs in phase from said timing signal by less than said phase angle, said first rate being faster than said second rate.

11. The clock recovery circuit of claim 10, comprising a mode control circuit (56) for detecting a phase difference between said clock signal and said timing pulse, and generating a mode selection signal that switches said digital phase-locked loop (52) between said first rate and said second rate.



12. The clock recovery circuit of claim 11, wherein said mode selection signal also switches said positive level and said negative level between a first pair of levels when said clock signal differs in phase from said timing signal by more than said phase angle, and a second pair of levels when said clock signal differs in phase from said timing signal by less than said phase angle.

13. The clock recovery circuit of claim 11, wherein said second pair of levels is closer to said zero level than is said first pair of levels.

14. A method of recovering a clock signal from a differential phase signal, comprising the steps of:

 delaying said differential phase signal by a certain first time to obtain a delayed differential phase signal;

 taking a difference between said differential phase signal and said delayed differential phase signal to obtain a double differential phase signal;

 comparing said double differential phase signal with a plurality of levels, and generating respective pulse signals when said double differential phase signal matches said levels;

 detecting certain sequences of said pulse signals;



activating a gate signal for a certain second time when said certain sequences are detected;

delaying one of said pulse signals by a certain third time to obtain a delayed pulse signal;

outputting said delayed pulse signal as a timing signal when said gate signal is active; and

generating said clock signal and locking said clock signal in phase to said timing signal.

15. The method of claim 14, wherein said first time is equal to one period of said clock signal.

16. The method of claim 14 wherein, in said step of generating said clock signal, locking of said clock signal in phase to said timing signal is performed in a fast control mode when said clock signal differs in phase from said timing signal by more than a certain quantity, and in a slow control mode when said clock signal differs in phase from said timing signal by less than said certain quantity.

17. The method of claim 14, wherein said plurality of levels comprises a positive level, a negative level, and a zero level.

18. The method of claim 17, wherein said certain sequences



include:

a pulse signal generated when said double differential phase signal matches said positive level followed, within a certain fourth time, by a pulse signal generated when said double differential phase signal matches said negative level; and

a pulse signal generated when said double differential phase signal matches said negative level followed, within said fourth time, by a pulse signal generated when said double differential phase signal matches said positive level.

19. The method of claim 17, wherein said delayed pulse signal is obtained by delaying a pulse signal generated when said double differential phase signal matches said zero level.

20. The method of claim 19, wherein said third time is equal to one-half of one period of said clock signal.

21. The method of claim 17, comprising the further step of switching said positive level and said negative level between a first pair of levels when said clock signal differs in phase from said timing signal by more than said certain quantity, and a second pair of levels when said



REPLACEMENT SHEET

Date 06 MAR 1996

36

clock signal differs in phase from said timing signal by less than said certain quantity.

22. The method of claim 21, wherein said second pair of levels is closer to said zero level than is said first pair of levels.

1

FIG. 1


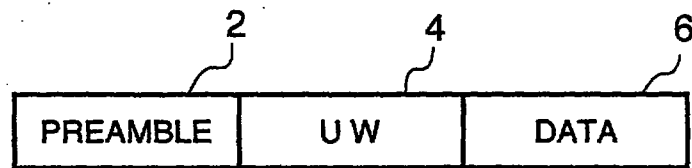


FIG. 2

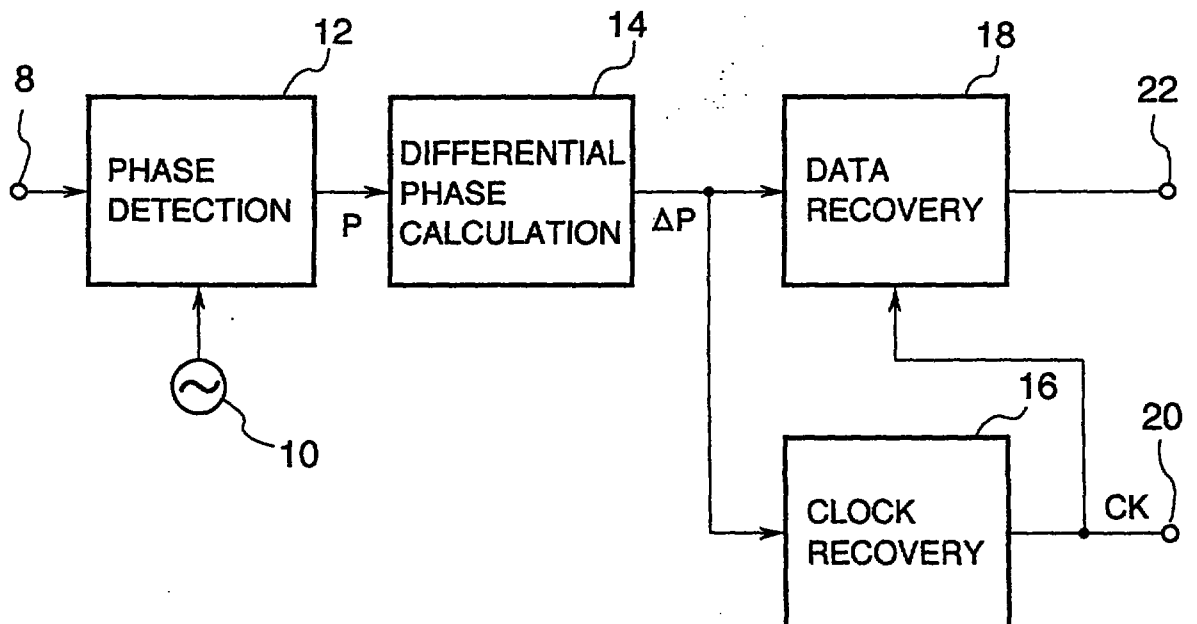

2

FIG. 3

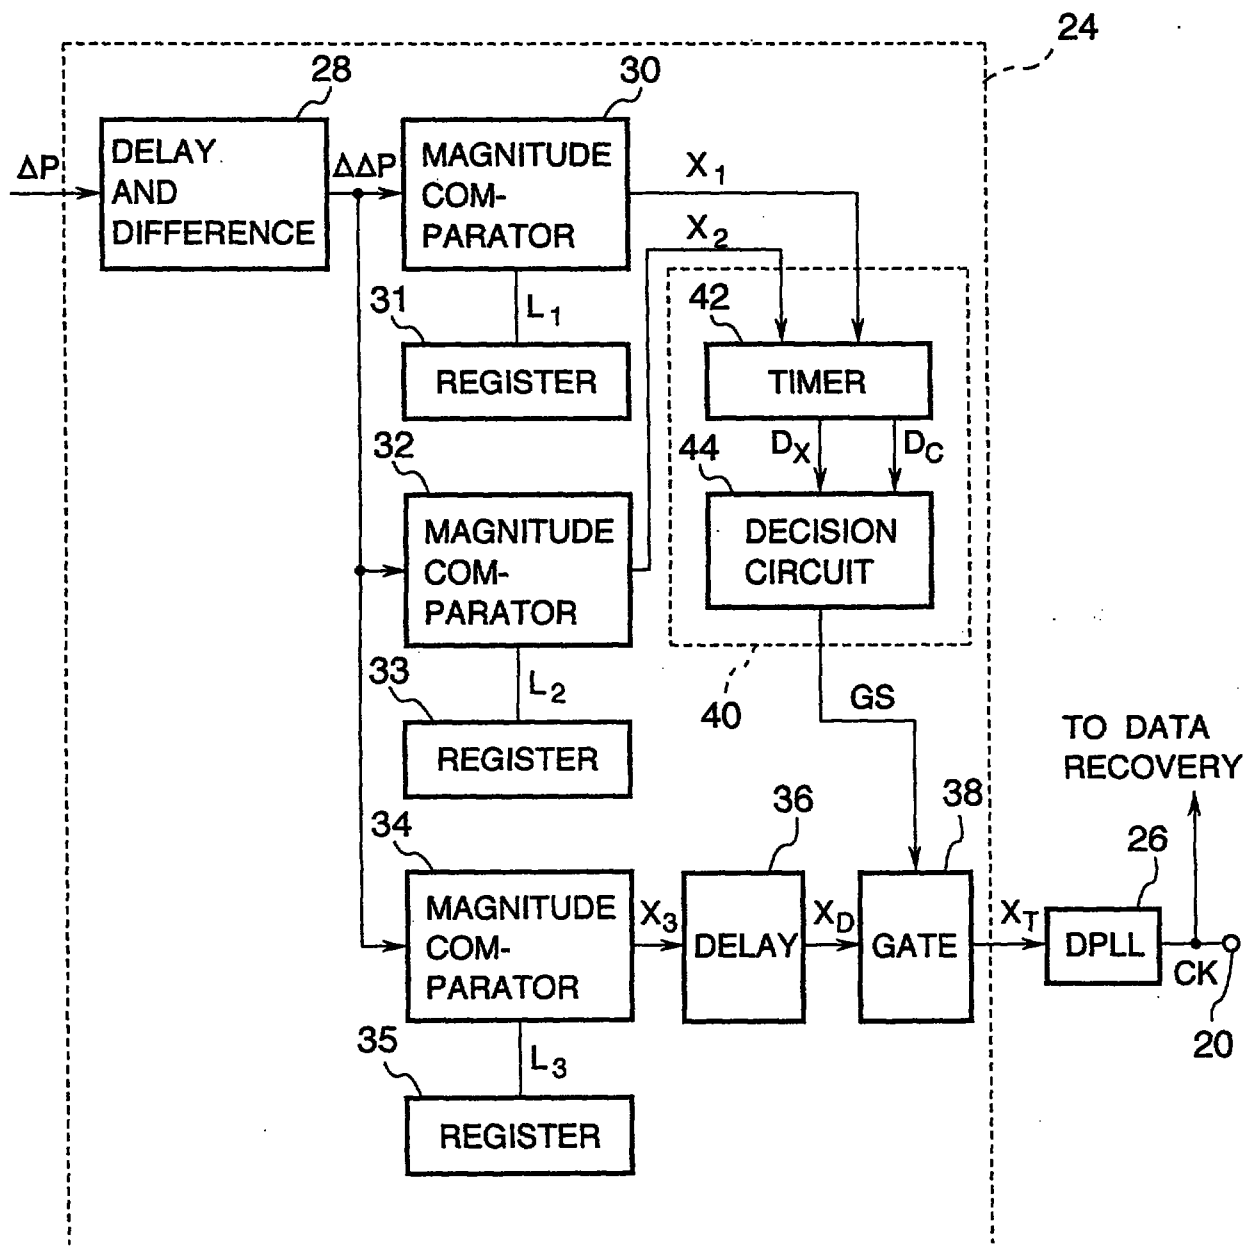


FIG. 4

46

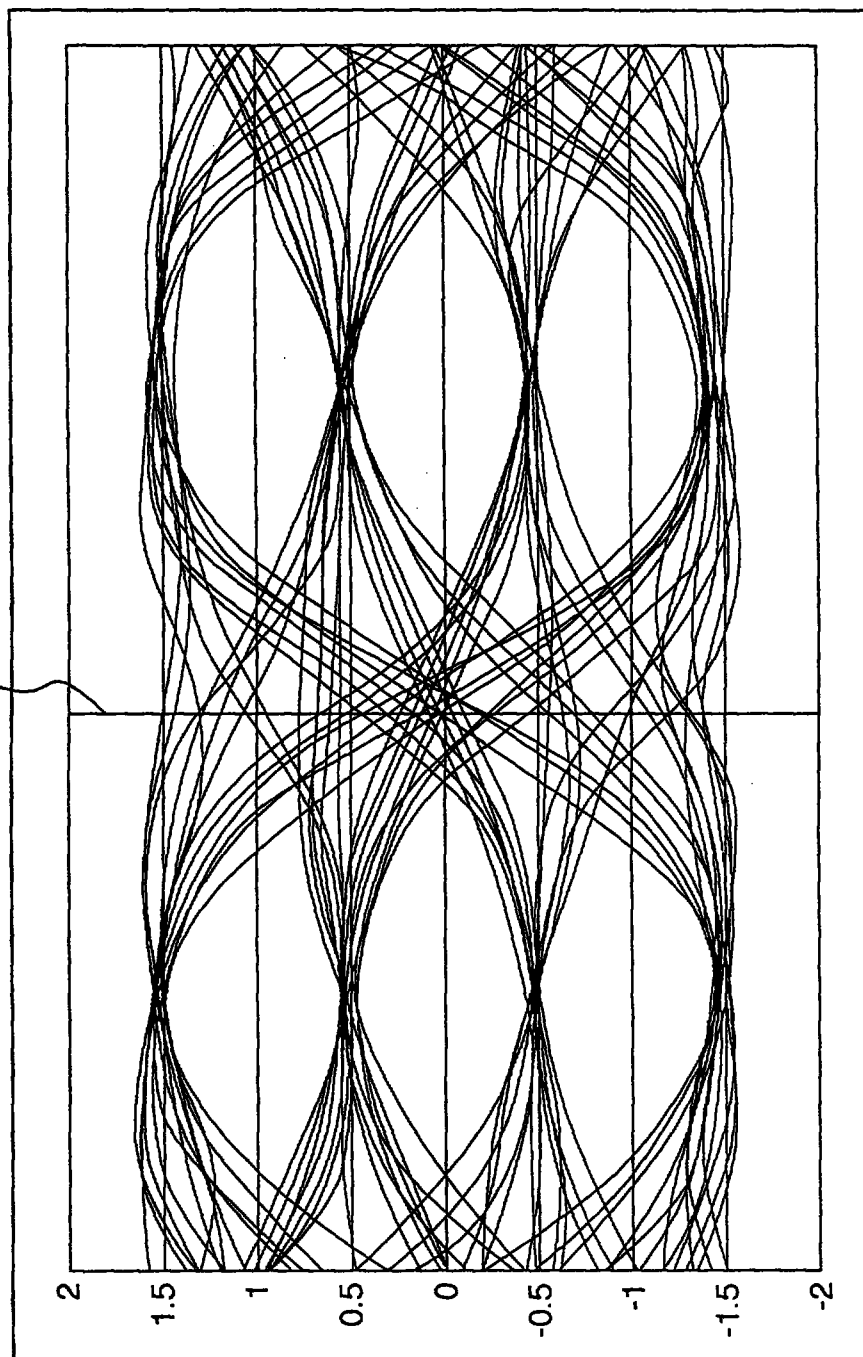


FIG. 5

46


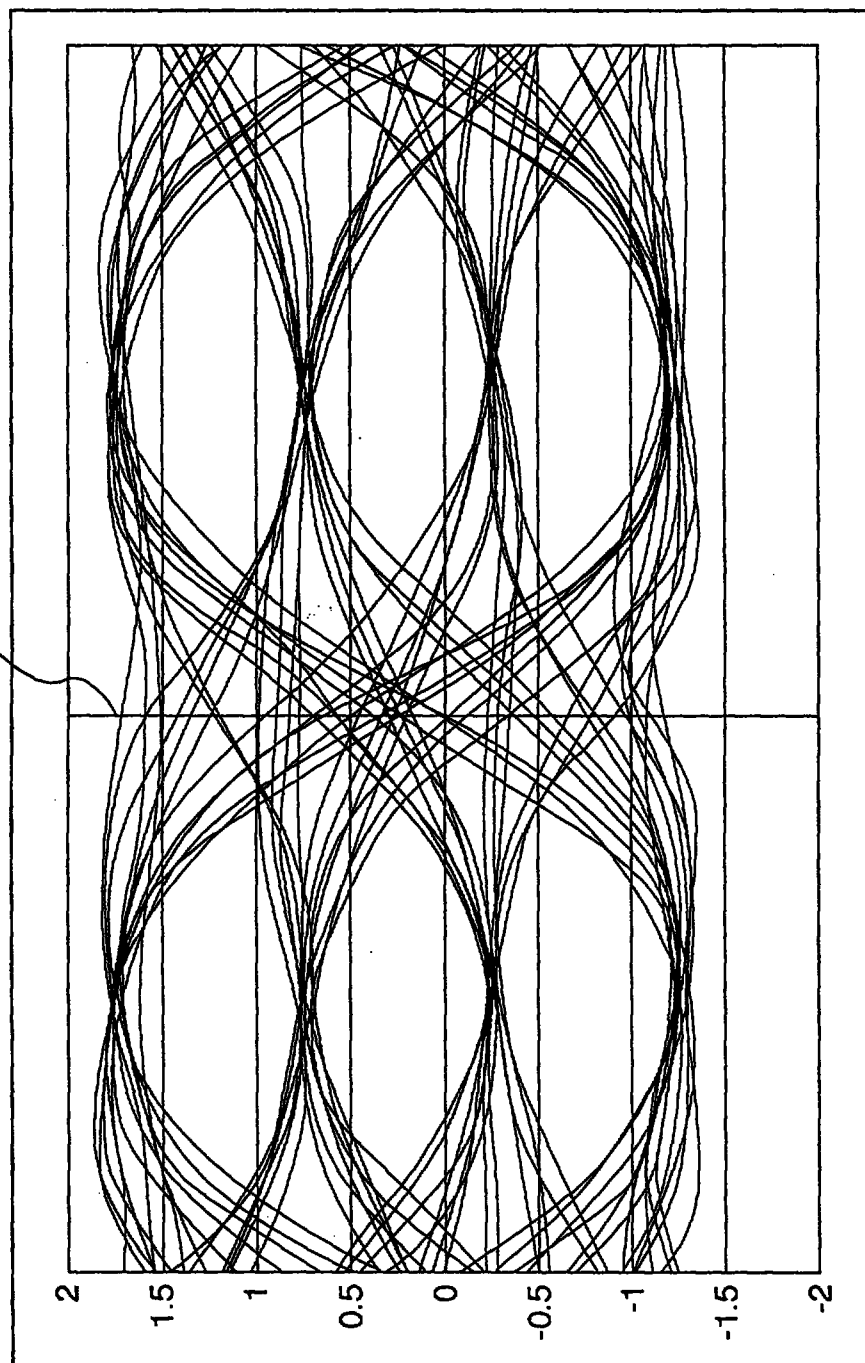


FIG. 6


46

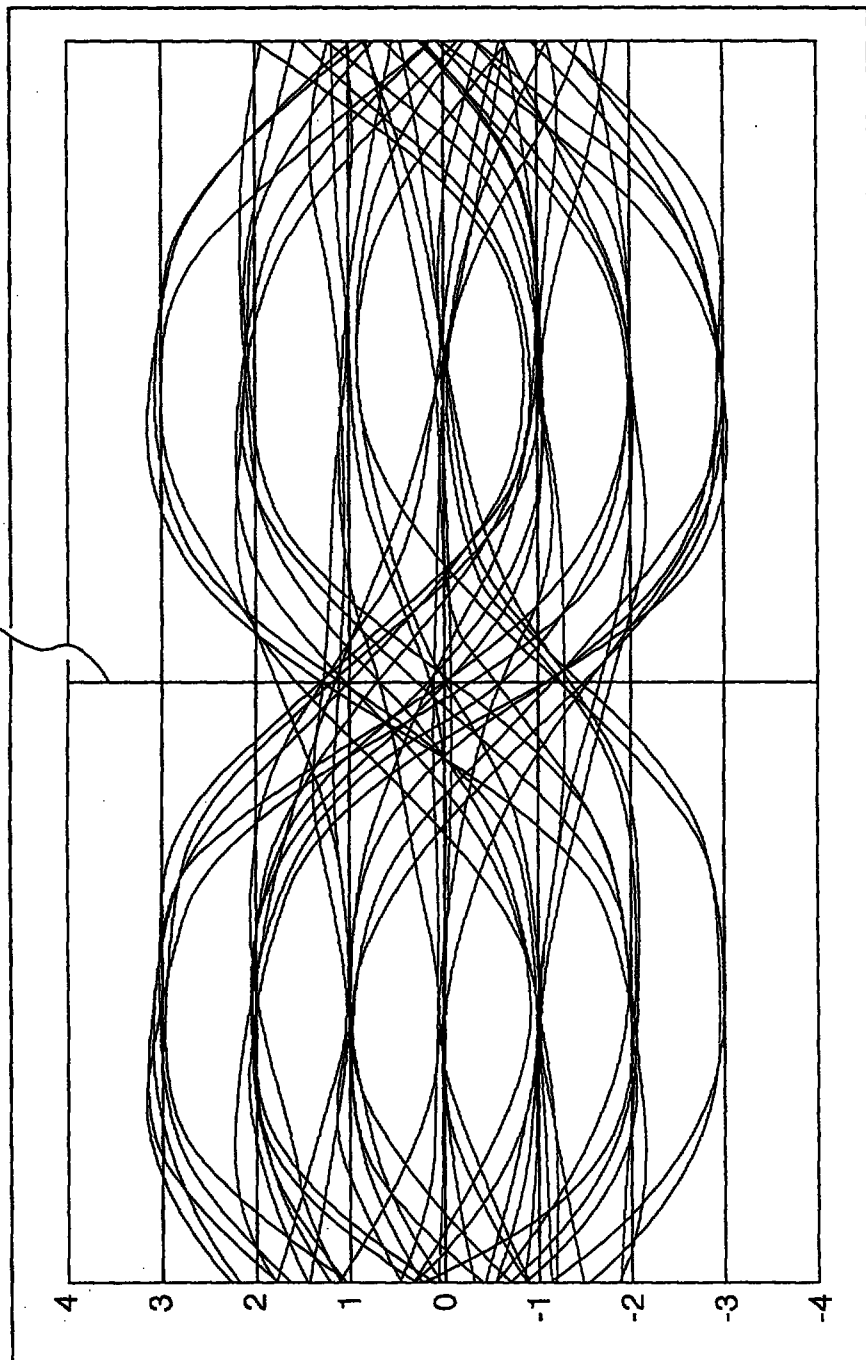

6


FIG. 7

46

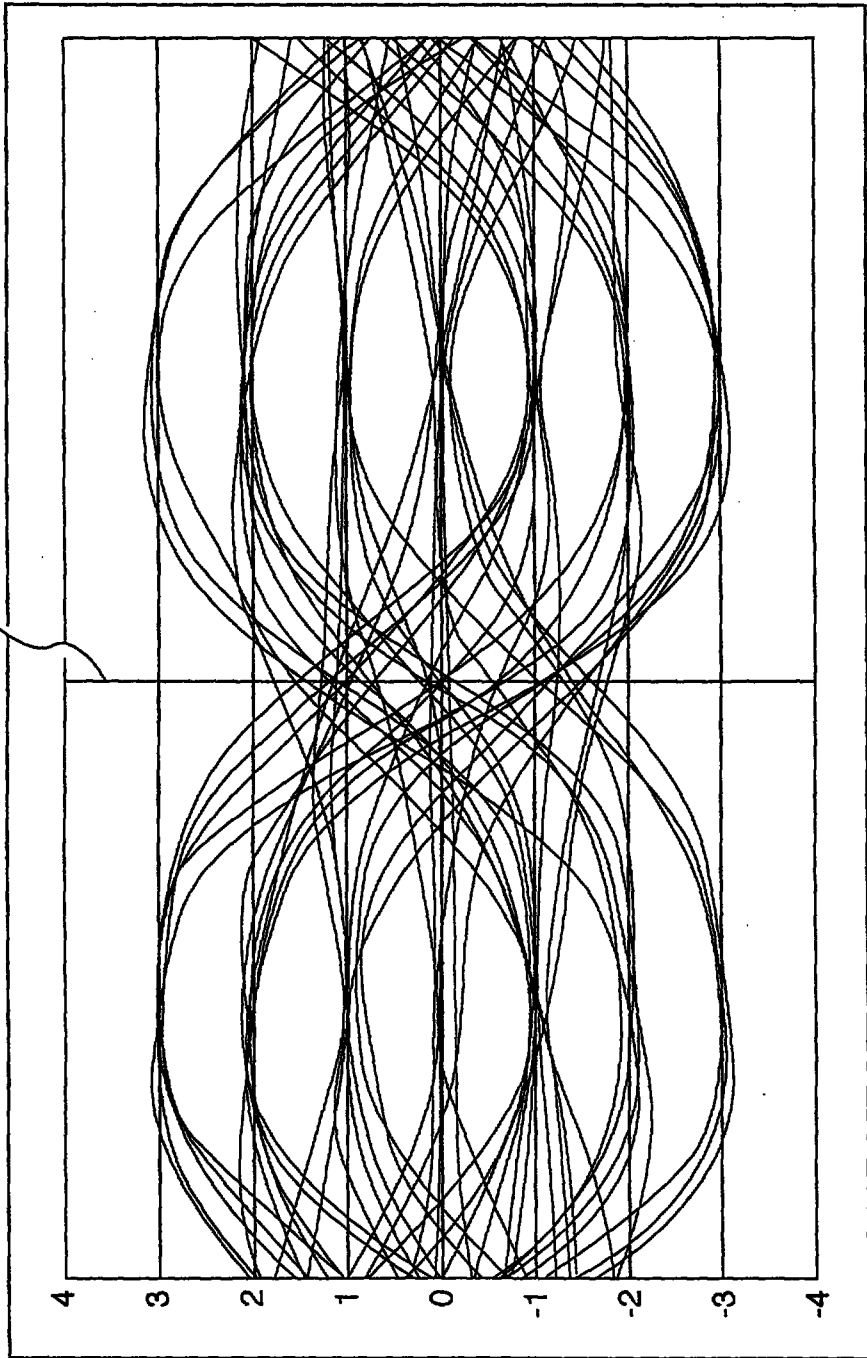

7

FIG. 8

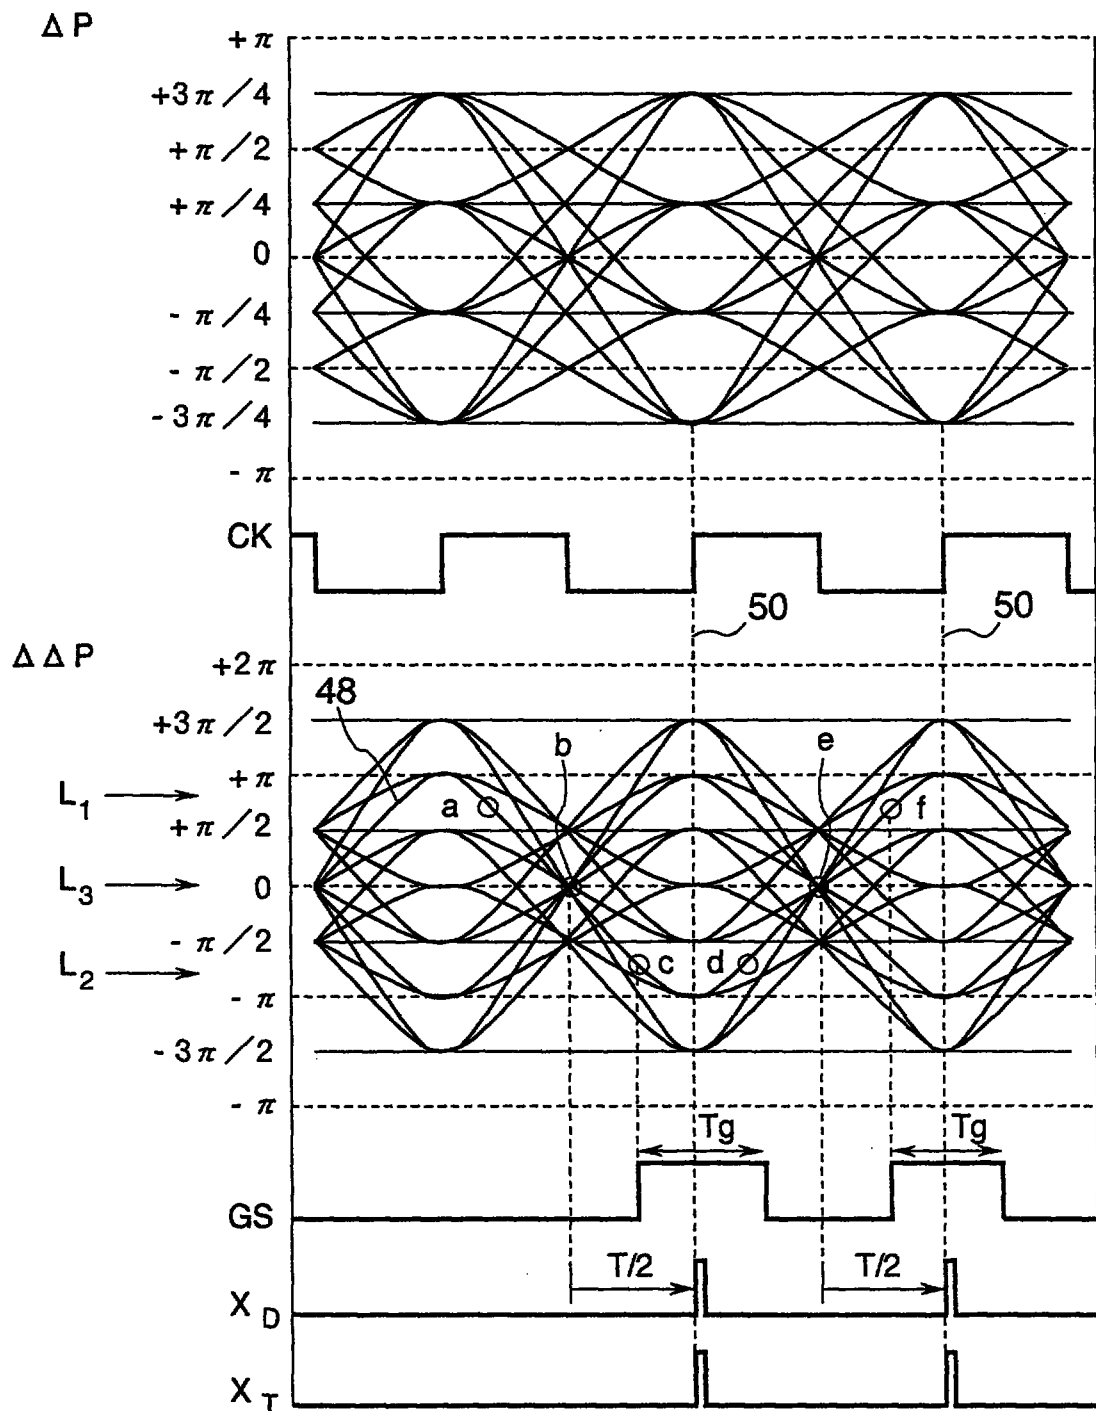

8

FIG. 9

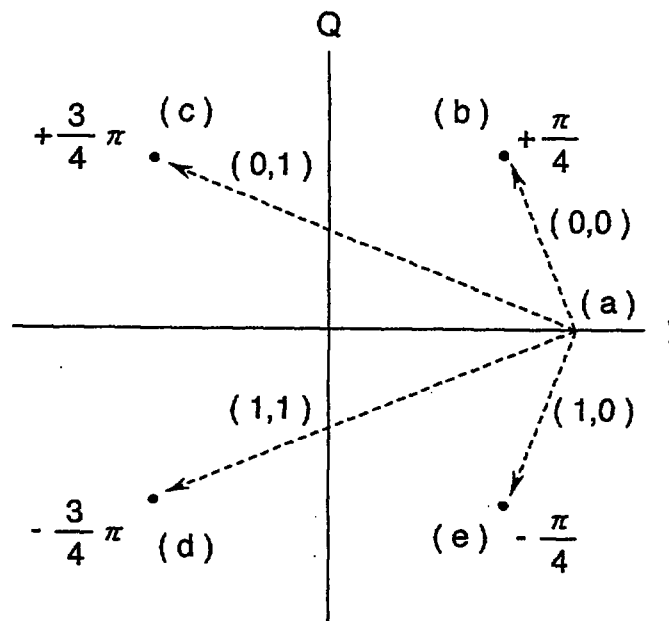


FIG. 10

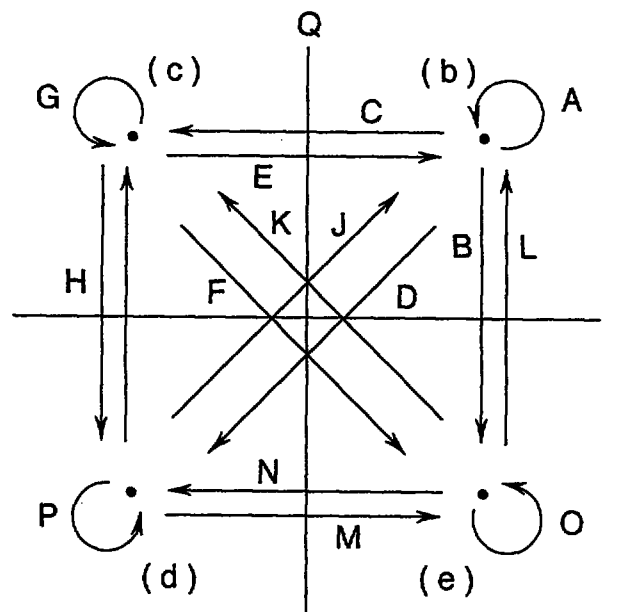


FIG. 11

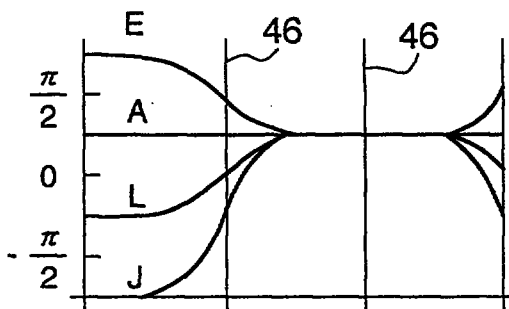


FIG. 14

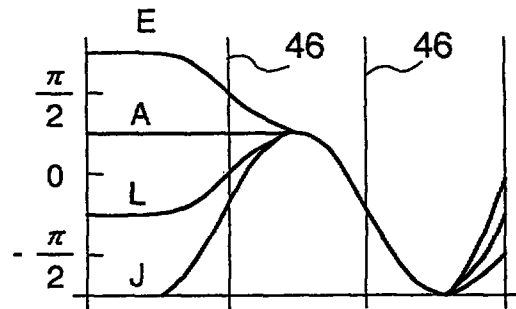


FIG. 12

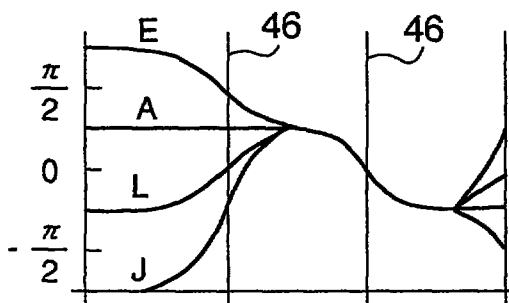


FIG. 15

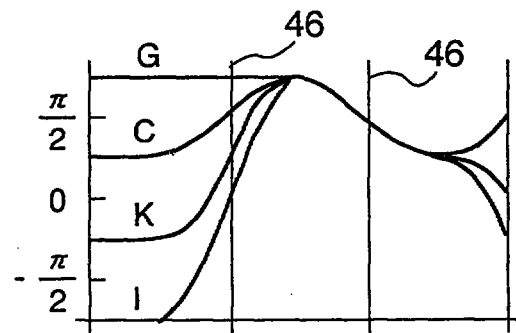


FIG. 13

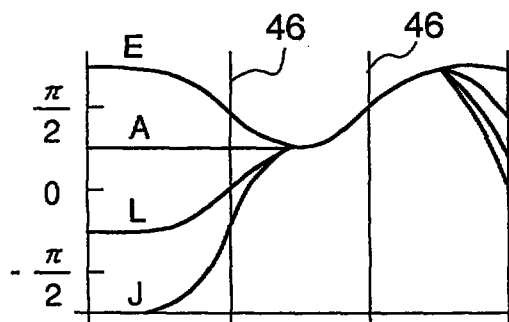


FIG. 16


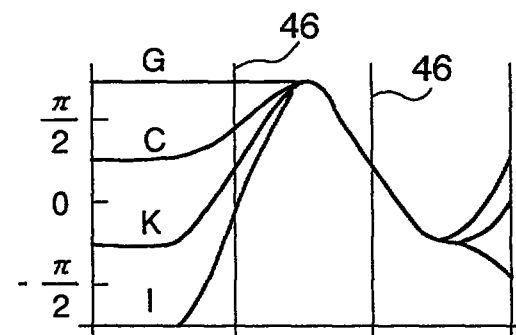


FIG. 17

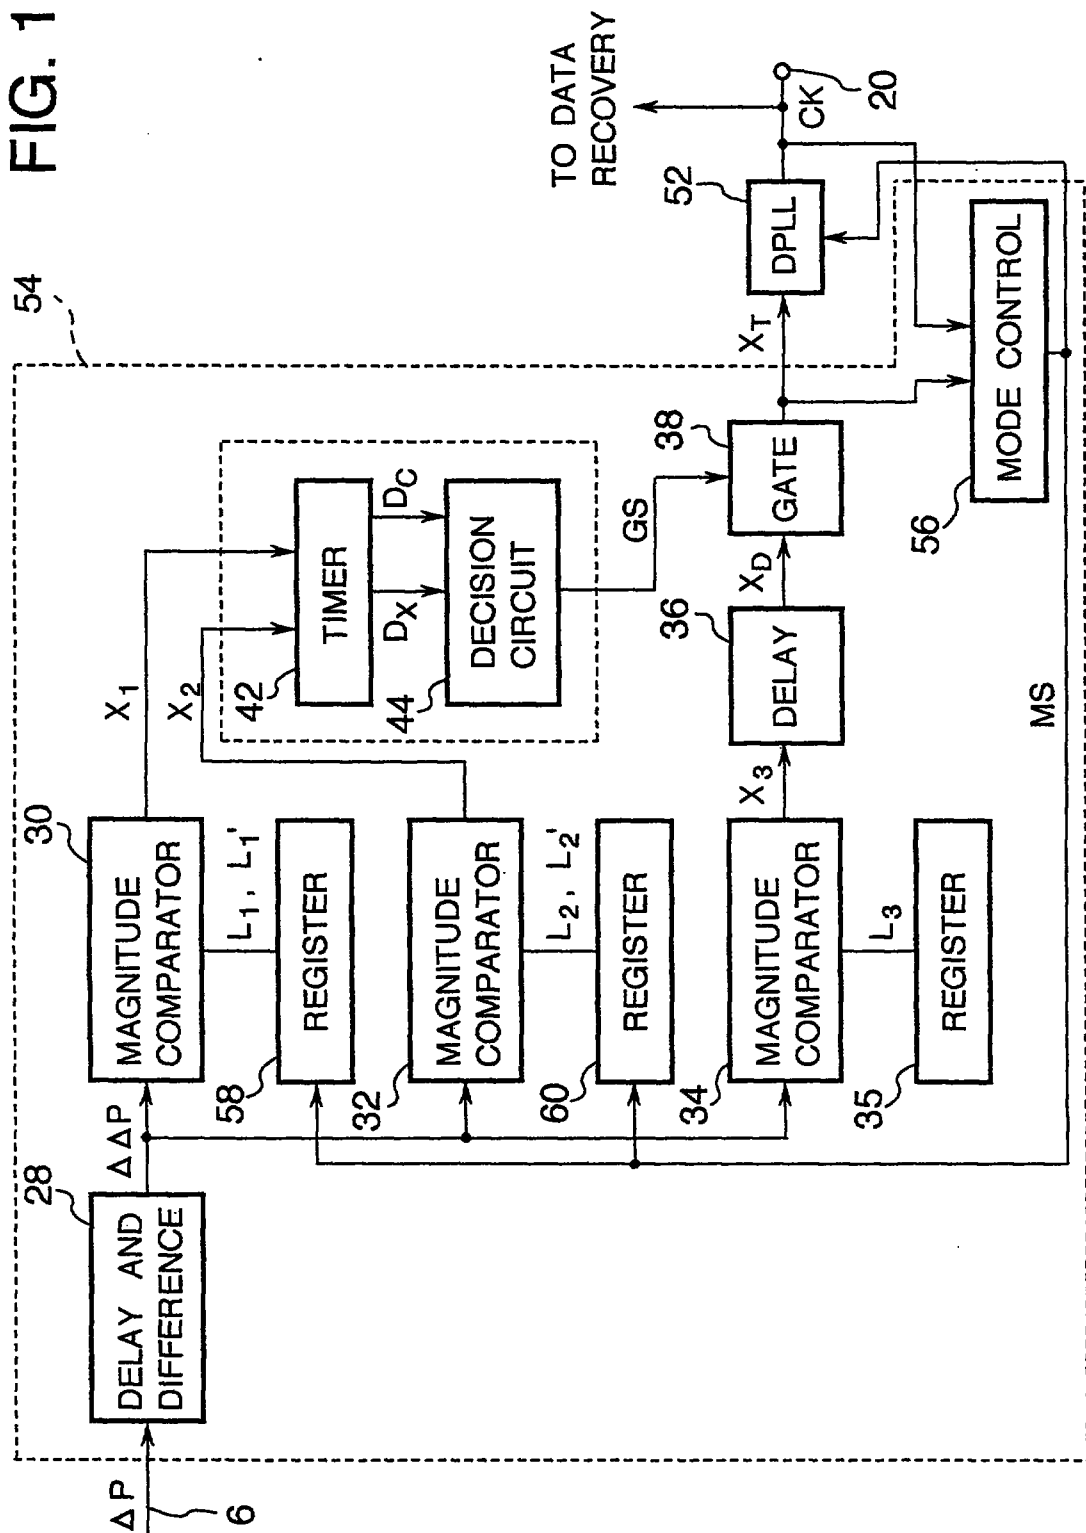

THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET
Date : 06 MAR 1996

CLOCK RECOVERY CIRCUIT EMPLOYING DELAY-AND-DIFFERENCE
CIRCUIT AND TRAJECTORY CLASSIFICATION

ABSTRACT

A clock recovery circuit receives an input signal having an eye pattern and takes differences at certain intervals to generate a differential signal. A set of comparators detect timings at which the differential signal matches different levels, and generate pulse signals at these timings. A classifying circuit classifies trajectories of the differential signal by detecting certain sequences of these pulse signals, and activates a gate signal when these sequences are detected. A delay circuit delays one of the pulse signals to create a delayed signal. A gate circuit outputs the delayed signal as a timing signal when the gate signal is active. A phase-locked loop generates a clock signal synchronized to the timing signal.

Figure 3

CLOCK RECOVERY CIRCUIT EMPLOYING DELAY-AND-DIFFERENCE
CIRCUIT AND TRAJECTORY CLASSIFICATION

ABSTRACT

A clock recovery receives an input signal having an eye pattern and takes differences at certain intervals to generate a differential signal. A set of comparators (30,32,34) detect timings at which the differential signal matches different levels, and generate pulse signals at these timings. A classifying circuit (40) classifies trajectories of the differential signal by detecting certain sequences of these pulse signals, and activates a gate signal when these sequences are detected. A delay circuit (36) delays one of the pulse signals to create a delayed signal. A gate circuit (38) outputs the delayed signal as a timing signal (X_T) when the gate signal is active. A phase-locked loop (26) generates a clock signal (CK) synchronized to the timing signal (X_T).

Figure 3