

REPLACED SHEETS	SG
☒ Description : paged1 to paged2	425
☒ Claim(s) : paged11 to paged14	
☒ Drawing(s) : paged1 to paged1	
☒ Abstract : paged15 to paged1	

Superconducting Field-Effect Transistors with Inverted MISFET Structure and Method for Making the Same

DESCRIPTION

This invention relates to field-effect transistors having a current channel consisting of high- T_c superconducting material the conductivity of which can be reproducibly influenced by an electrical field, and whose structure is that of an inverted MISFET (Metal-Insulator-Superconductor) in the sense that the substrate is used as the gate electrode. The invention further relates to a method for making superconducting field-effect transistors with inverted MISFET structure.

For several decades, the electronics industry has made enormous efforts to shrink the size of electronic components and circuits with the aim of increasing the speed of operation and of reducing the power consumption/dissipation. These efforts have led to the development of integrated circuits and multi-layer ceramic devices which, in a volume of a few cubic millimeters, contain many thousands of transistors and other circuit components. These devices have very high operating speeds owing to the shortened distances the electrons need to travel inside of them. All of the modern circuits use advanced semiconductor materials, such as silicon and gallium arsenide, for example.

The discovery by Bednorz and Müller (Z. Phys., B64 (1986) p. 189) of a new class of superconductor materials has of course opened another avenue to even lower power consumption and caused a worldwide search for possible applications of these materials in electronic circuitry. A number of studies on



the electric field-effect in copper oxide compounds have been reported (for example by U. Kabasawa et al. in Japanese Journ. of Appl. Phys. 29 L86, 1990), but so far only minor field-effects in high- T_c superconductors have been found. However, EP-A-0 324 044 already describes a three-terminal field-effect device with a superconducting channel in which electric fields are used to control the transport properties of channel layers consisting of high- T_c superconductor materials. While this seemed to be a promising approach, growth studies of such devices have shown that in the suggested configuration the ultrathin superconducting layers readily degrade during deposition of insulator layer and top electrode.

In accordance with the present invention, this drawback is avoided through deposition of the superconducting film *after* the insulating layer, and locating the gate electrode underneath the insulator and the high- T_c film. Still in accordance with the present invention, a conducting substrate is used as the gate electrode, and to facilitate the growth of preferably perfect crystals, substrate and insulator are chosen from the same crystallographic family of materials, that is, the lattice constants of the materials chosen to at least approximately match. For example, electrically conducting Nb-doped SrTiO_3 is used for the substrate, and undoped SrTiO_3 is used for the insulator layer.

The use of niobium-doped strontium titanate Nb:SrTiO_3 in a high- T_c superconductor structure was described by H. Hasegawa et al. in their paper "Contact between High- T_c Superconductor and Semiconducting Niobium-Doped SrTiO_3 ", Japanese Journ. of Appl. Phys., Vol. 28, No. 12, Dec. 1988, pp. L 2210-L 2212, and in their EP-A-0 371 462. These references describe a diode structure where a superconducting film is deposited onto an Nb-doped SrTiO_3 substrate. The authors of these references are only interested in measuring the rectifying properties and the resistance in forward and reverse directions. They "demonstrated that there are unknown interfacial layers between the two materials", a problem that the present invention elegantly overcomes.

This Sheet Has Been Replaced



This invention is based on experimental evidence for a significant electric field-effect recently discovered to exist in thin superconducting films. These experiments were performed with materials of the copper oxide class of superconductors, in particular $\text{YBa}_2\text{Cu}_3\text{O}_{7-\delta}$. Thin films of superconducting $\text{YBa}_2\text{Cu}_3\text{O}_{7-\delta}$ are already known from EP-A-0 293 836. Epitaxial growth of $\text{YBa}_2\text{Cu}_3\text{O}_{7-\delta}$ is described in EP-A-0 329 103. For the purposes of the present invention, the value of " δ " shall be considered to be close to zero (preferred), but it can be as large as 0.5. Those skilled in the art of high- T_c superconductor materials will appreciate that many other materials in that class will be equally suited for the field-effect transistor structures of the MISFET type, as herein suggested. Also, other methods for depositing films of high- T_c materials and of SrTiO_3 are known in the art, such as laser evaporation, electron beam evaporation and molecular beam epitaxy.

While the acronym "MISFET" is usually employed to characterize Metal-Insulator-Semiconductor Field-Effect Transistor structures, this term will in the following description be maintained for describing an analogous structure, although the embodiments of the present invention to be described will use different materials, viz. electrically conducting Nb-doped SrTiO_3 in place of the Metal, and a superconductor instead of the Semiconductor.

MISFET-type structures have been developed in accordance with the present invention which allow the application of electric fields larger than 10^7 V/cm across insulating SrTiO_3 barriers on ultrathin epitaxially grown $\text{YBa}_2\text{Cu}_3\text{O}_{7-\delta}$ channel layers. Epitaxial growth of $\text{YBa}_2\text{Cu}_3\text{O}_{7-\delta}$ by rf-magnetron sputtering is described in EP-A-0 343 649. In these structures, the normal-state resistivity and the density of free carriers in the $\text{YBa}_2\text{Cu}_3\text{O}_{7-\delta}$ films can be modified substantially with gate voltages of on the order of 50 V.

Shortly after the discovery of the high- T_c superconductor materials, Bednorz et al. in their above-cited EP-A-0 324 044 predicted on theoretical grounds that high- T_c superconductor materials may bear an electric field-effect which is much larger than that in low- T_c superconductor materials: The length scale by

which electrostatic fields are screened in conducting materials is given by the sum $L_D + L_{DZ}$ of the Debye length $L_D = (\epsilon_0 \epsilon_r kT / q^2 n)^{1/2}$ and the width of eventual depletion zones $L_{DZ} = N/n$. Here, ϵ_0 and ϵ_r are the dielectric constants of the vacuum and of the conducting material, respectively, k is the Boltzmann constant, T is the absolute temperature, q is the elementary charge, n is the density of mobile carriers, and N the induced areal carrier density. Because of their high carrier density, low- T_c superconductors usually screen electric fields so well that the fields only have a minor influence on materials properties. To attenuate the screening, recent experiments on the electric field-effect in low- T_c superconductors have focused on compounds with exceptionally low carrier density, like doped SrTiO_3 , with niobium as the dopant, for example.

In high- T_c superconductor compounds, larger field-effects are expected owing to their intrinsically low carrier concentration and because of their small coherence length. The low carrier concentration of about $3 \dots 5 \times 10^{21}/\text{cm}^3$ leads to screening lengths in the range of tenths of nanometers, and the small coherence lengths allow the fabrication of ultrathin layers with respectable critical temperatures. Superconducting films as thin as 1...2 nm have already been grown; electric fields can penetrate such films to a considerable extent.

It is an object of the present invention to propose superconducting field-effect transistors with an inverted MISFET structure where the superconducting channel layer is deposited on top of the insulating barrier layer so as to avoid degradation effects that have been found to impair the functioning of prior art devices.

It is a further object of the invention to teach a method for making superconducting field-effect transistors whose inverted MISFET structure permits the deposition of the superconducting channel layer after the deposition of the insulating barrier layer.

This Sheet Has Been Replaced



It is still another object of the invention to propose the use of materials for the substrate and insulator layer which have at least approximately the same lattice constants so as to facilitate crystal perfection.

Details of two embodiments of the transistor and of the inventive method will hereafter be explained by way of example, with reference to the attached drawings in which:

Fig. 1 is a schematic diagram of a first embodiment of a field-effect transistor in accordance with the invention;

Fig. 2 is a schematic diagram of a second embodiment of an inventive field-effect transistor;

Fig. 3 shows the I_G/V_G characteristics of the field-effect transistor of *Fig. 1*;

Fig. 4 is a diagram showing the dependence of the changes of the channel resistivity as a function of the gate voltage V_G ;

Fig. 5 shows the dependence of the channel resistivity as a function of the absolute temperature.

To apply large electric fields on thin films of superconducting $\text{YBa}_2\text{Cu}_3\text{O}_7$, in accordance with the invention, an inverted MISFET-structure as shown in *Fig. 1* is used. In this structure, a superconducting film 1 of the thickness s is separated from a gate electrode 2 by an insulating layer 3 of the thickness t . Besides the thickness of the superconductor, the resistivity ρ_i and the breakthrough field strength E_{BD} of the insulator are crucial parameters. The required values for E_{BD} and for ρ_i can be simply estimated, if space charge effects are neglected: To induce a surface charge density in superconducting film 1 which corresponds to the unperturbed density n of mobile charge carriers, the capacitor consisting of gate electrode 2 and superconductor film 1 has to be biased with a voltage

This Sheet Has Been Replaced



$$V_g = \frac{qnst}{\epsilon_0 \epsilon_i} \quad (1)$$

where ϵ_i is the dielectric constant of the insulator 3. Equation (1) implies that to modulate the carrier density in high- T_c superconductors substantially, the product $\epsilon_i \times E_{BD}$ of the dielectric constant ϵ_i and the breakdown field strength E_{BD} has to be of the order of 10^8 V/cm. (For comparison, SiO_2 has an $\epsilon_i \times E_{BD}$ product of 4×10^7 V/cm at room temperature).

In addition, the normal-state resistivity of the insulator has to be sufficiently high to avoid leakage currents which result in an input loss $V_g \times I_g$. For a typical case of $I_g < I_{DS}/100$ and $I_{DS} = 10 \mu\text{A}$, and an area of the gate electrode 2 of 1 mm^2 , the resistivity must be higher than $10^{14} \Omega\text{cm}/\epsilon_i$ at operating temperature.

In view of these requirements, insulating layers with high dielectric constants are recommended. Therefore, and for its good compatibility with the growth of $\text{YBa}_2\text{Cu}_3\text{O}_7$, SrTiO_3 is selected as barrier material for insulating layer 3. The compatibility of $\text{YBa}_2\text{Cu}_3\text{O}_7$ with SrTiO_3 has already been pointed out in EP-A-0 299 870 and EP-A-0 301 646, and the use of a buffer layer of oriented polycrystalline SrTiO_3 has been described in EP-A-0 324 220 and EP-A-0 341 788. The method recommended for fabricating the MISFET structure of Fig. 1 with a SrTiO_3 barrier layer 3 involves the following steps:

1. A gate electrode 2 is provided in the form of a (conductive) n-type $\{100\}$ -oriented Nb-doped SrTiO_3 single crystal grown by a conventional zone melting technique. The doping factor is between 10^{-3} and 5% niobium, preferably at 0,05% Nb. This gate electrode 2 is used as the substrate for all further depositions.

It should be pointed out that, while a single-crystal substrate is preferred, a polycrystalline or amorphous substrate may be used as well. Also, dopants other than niobium may be used to render the SrTiO_3 conducting. One example is an oxygen deficit.

2. On top of the substrate 2, a {100}-oriented insulating layer 3 of SrTiO_3 is epitaxially grown by reactive rf-magnetron sputtering at 6,7 Pa in an O_2/Ar atmosphere at 650°C (temperature of the sample holder). The thickness of this layer can be in the range of 1 to 1000 nm.
3. Without breaking vacuum, a superconducting film 1 of $\text{YBa}_2\text{Cu}_3\text{O}_{7-\delta}$ is epitaxially grown on top of the insulating SrTiO_3 layer 3 by hollow cathode magnetron sputtering, wherein the value of " δ " is preferably equal to zero, but can be as large as 0,5. The thickness of the superconductor layer can be in the range of 1 to 1000 nm.
4. Metal pads, for example gold pads 4 and 5, are then sputtered onto the $\text{YBa}_2\text{Cu}_3\text{O}_{7-\delta}$ top layer 1 to form source and drain contacts, respectively.
5. Finally, a gate contact 6 is provided by diffusing silver into the Nb-doped SrTiO_3 gate/substrate 2.

Fig. 2 shows a slightly different (but more truly MISFET) structure. The preferred way to manufacture this structure involves the following steps:

1. A {100}-oriented SrTiO_3 layer 7 is provided as an insulator which is polished down to a thickness of 20...30 μm .
2. On top of the thinned insulator 7, a $\text{YBa}_2\text{Cu}_3\text{O}_{7-\delta}$ film 8 is sputtered, wherein the value of " δ " is preferably equal to zero, but can be up to 0,5.
3. Gold pads 9 and 10 are provided on top of the superconductor layer 8 to form source and drain contacts, respectively.
4. On the back side of the thinned insulator, a conducting gate electrode 11 in the form of a metal layer, a gold layer, for example, is deposited. It bears an appropriate contact 12.

5. Optionally, gate electrode 11 may be supported on an insulating substrate 13, be it for stability, as indicated in Fig. 2.

Fig. 3 shows a typical characteristic of the gate current I_g through the insulating layer 3 as a function of the applied gate voltage V_g for a device in accordance with Fig. 1.

The measured characteristic is the one expected for a pin-junction, the superconductor and the substrate being the p and n electrodes, respectively. In one sample studied, the insulating barrier had a resistivity of $4 \times 10^{13} \Omega \text{ cm}$ at a forward bias of 3 V, and of $4 \times 10^{14} \Omega \text{ cm}$ at a reverse bias of 20 V. Breakdown field strengths at room temperature of $5 \times 10^5 \text{ V/cm}$ and of $1.5 \times 10^7 \text{ V/cm}$ were obtained in the forward and reverse directions, respectively. The capacitance of this sample was $2 \times 10^{-7} \text{ F/cm}^2$ at room temperature. This value corresponds to a relatively low $\epsilon_i = 8$ ($t = 40 \text{ nm}$). This low dielectric constant may be caused by an insulating surface layer on the Nb-doped SrTiO_3 substrate, which was observed in agreement with a report by Hasegawa et al. in Japan. Journ. of Appl. Phys., 28 L2210 (1989). The layer has a breakdown voltage of about 2 V. Nevertheless, the $\epsilon_i E_{BD}$ products of the SrTiO_3 barrier layers under reverse bias were about 10^8 V/cm , which is the limit of the values required by Eq. (1).

The influence of the gate voltage V_g on the channel resistance R_{DS} of a sample that consists of 10 nm thick $\text{YBa}_2\text{Cu}_3\text{O}_{7-\delta}$ film on a 40 nm thick SrTiO_3 barrier layer is shown in Fig. 4. Obvious from the diagram is an approximately linear dependence of the measured normal-state resistivity on the gate voltage, and that the effect on resistivity changes sign when the gate voltage is reversed. The measured polarity of the voltage induced resistance change agrees with the theoretical expectation: $\text{YBa}_2\text{Cu}_3\text{O}_{7-\delta}$ is a p-type conductor, hence a positive voltage V_g at the gate electrode depletes the free carrier concentration in the channel and, therefore, increases the channel resistance R_{DS} , whereas a negative voltage V_g at the gate electrode enhances the free carrier concentration in the channel and, therefore, decreases the channel resistance R_{DS} .

The value of the measured-channel resistance $R_{DS}(V_G)$ agrees well with the theoretical prediction: Applying 30 V to the sample that was used to generate Fig. 4 and which has a capacitance of $2 \times 10^{-7} \text{ F/cm}^2$, induces a change in the electron density on the electrodes of $2 \times 10^{13}/\text{cm}^2$. On the other hand, $\text{YBa}_2\text{Cu}_3\text{O}_{7-\delta}$ has a carrier density of about $3 - 5 \times 10^{21}/\text{cm}^3$, and this corresponds to an areal density of mobile holes in the 10 nm thick channel layer of $3 - 5 \times 10^{15}/\text{cm}^2$. This means that, within experimental error, at any temperature a change of the free carrier density in the channel results in a corresponding change in R_{DS} .

The temperature dependence of the resistivity $R_{DS}(T)$ of the $\text{YBa}_2\text{Cu}_3\text{O}_{7-\delta}$ film is shown in Fig. 5. The sample is typical for all devices of the type shown in Fig. 1.

The temperature dependence of the voltage-induced variation of the channel resistance change $\Delta R_{DS}/R_{DS}(V_G, T)$ for this sample is depicted in Fig. 4. As shown by this figure, within experimental scatter, the fractional change of the channel resistance $\Delta R_{DS}/R_{DS}$ is almost constant as a function of temperature. A temperature-independent $\Delta R_{DS}/R_{DS}(V_G)$ ratio is observed down to T_c ($R_{DS} = 0$).

The change of the channel resistance induced by the gate voltage V_G corresponds to a change of the $R_{DS}(T)$ characteristic at midpoint T_c of 50 mK for $V_G = 18 \text{ V}$.

From the measurements taken with several sample embodiments of the field-effect transistor in accordance with the invention, it has been determined that the operating gate voltage V_G should be in the range between 0,1 and 50 V, the thickness s of the superconducting film should be in the range between 1 and 30 nm, and the thickness of the insulating layer should be in the range between 0,3 and 100 nm.

To make sure that the structures prepared in accordance with the present invention indeed perform as expected, i.e. that the current flow in the channel can actually be controlled by the electrical field-effect, spot-checking measurements have been made as follows:

1. Measurement of $R_{DS}(V_G)$ on samples that had barrier layer resistances which were lower by a factor of 500 (at 20 V) than the sample yielding the curves in Fig. 4. This measurement showed the same $R_{DS}(V_G)$ characteristics, demonstrating that the observed effect is not caused by the finite gate current I_G .
2. To elucidate whether V_G primarily affects the channel resistance R_{DS} or whether the effect is based on a change of V_{DS} , R_{DS} was measured for different channel currents I_{DS} . Even if I_{DS} is varied by four orders of magnitude, an applied gate voltage results in a change of the channel resistance R_{DS} and does not induce significant voltages in the channel layer.

MISFET-type heterostructures consisting of $YBa_2Cu_3O_{7-\delta}/SrTiO_3$ multilayers have been developed which allow the application of electric fields larger than 10^7 V/cm to superconducting films of $YBa_2Cu_3O_{7-\delta}$. In these devices, electric field-effects generate changes in the channel resistance. The $YBa_2Cu_3O_{7-\delta}$ films have a preferred thickness on the order of 10 nm and are operated with gate voltages of about 30 Volts. The channel resistivity changes can be attributed to equally strong changes of the carrier density in the high- T_c superconductor.



CLAIMS

1. Superconducting field-effect transistor having an electrical-field-controlled current channel and gate, source and drain electrodes, *characterized* by an electrically conductive substrate (2) consisting of a single crystal of a first material of a certain crystallographic family and having a predetermined crystallographic orientation, said substrate (2) being provided with an appropriate contact (6) forming the gate electrode, an insulating barrier layer (3) deposited on top of said substrate (2) and consisting of a second material of the same crystallographic family and having the same crystallographic orientation as said substrate (2), a superconducting thin film layer (1) deposited on top of said insulating barrier layer (2) and consisting of a material having crystallographic properties similar to those of said family of materials, said superconducting thin film (1) serving as said current channel, and gold pads (4, 5) provided on top of said superconducting thin film (1) at a mutual distance from one another and serving as source and drain electrodes, respectively.
2. Field-effect transistor in accordance with claim 1, *characterized* in that said substrate (2) consists of niobium-doped strontium titanate Nb:SrTiO_3 , with a doping factor of between 10^{-3} and 10% niobium, preferably at 0,05% Nb.
3. Field-effect transistor in accordance with claim 1, *characterized* in that the crystallographic orientation of said substrate (2) is {100}.
4. Field-effect transistor in accordance with claim 1, *characterized* in that said contact (6) to said substrate (2) forming the gate of the transistor consists of silver diffused into said substrate (2).

This Sheet Has Been Replaced





5. Field-effect transistor in accordance with claim 1, *characterized* in that said insulator layer (3) deposited on top of said substrate (2) consists of strontium titanate SrTiO_3 having a {100} crystallographic orientation, with a thickness in the range of 0,3 to 100 nm.
6. Superconducting field-effect transistor having an electrical- field-controlled current channel and gate, source and drain electrodes, *characterized* by an electrically conductive substrate (11) consisting of a layer of gold coated onto the underside of an insulating layer (7) which on top carries a superconductive thin film (8) which in turn carries two electrodes (9, 10), respectively forming the source and drain electrodes of the transistor, said substrate layer (11) being provided with a contact (12).
7. Field-effect transistor in accordance with claims 1 and 6, *characterized* in that said superconductor layer (1, 8) consists of $\text{YBa}_2\text{Cu}_3\text{O}_{7-\delta}$, wherein $0 \leq \delta \leq 0,5$, and has a thickness in the range of 1 to 30 nm.
8. Method for making a field-effect transistor having an electrical-field-controlled current channel and gate, source and drain electrodes, *characterized* by the following steps:
 - Providing a gate electrode (2) in the form of an electrically conductive single crystal of a material of a certain crystallographic family and having a predetermined crystallographic orientation, to serve as a substrate;
 - depositing on top of said gate electrode (2) an insulating layer (3) of a material being a member of the same crystallographic family as the material of said gate electrode (2);
 - depositing a superconducting thin film (1) having a lattice constant at least approximately matching the lattice constant of said crystallographic family;


This Sheet Has Been Replaced





- depositing contacts (4, 5) onto the superconducting thin film (1) at a predetermined mutual distance to form source and drain contacts, respectively; and
 - providing a gate contact (6) on said substrate (2).
9. Method for making a field-effect transistor in accordance with claim 8, *characterized* in that
- said gate electrode (2) is provided in the form of a conductive n-type {100}-oriented Nb-doped SrTiO_3 single crystal having a doping factor between 10^{-3} and 10% niobium, preferably of 0,05% Nb;
 - on top of said gate electrode (2) a {100}-oriented insulating layer (3) of SrTiO_3 is deposited;
 - on top of said insulating SrTiO_3 layer (3), a superconducting thin film (1) of $\text{YBa}_2\text{Cu}_3\text{O}_{7-\delta}$ is deposited, wherein $0 \leq \delta \leq 0,5$;
 - onto said $\text{YBa}_2\text{Cu}_3\text{O}_{7-\delta}$ layer (1) gold pads (4, 5) are deposited to form source and drain contacts, respectively;
 - a gate contact (6) is deposited on the Nb-doped SrTiO_3 gate substrate (2).
10. Method in accordance with claim 8, *characterized* in that said layer (3) of SrTiO_3 is epitaxially grown by reactive rf-magnetron sputtering at 6,7 Pa in an O_2/Ar atmosphere at 400 to 900°C.
11. Method in accordance with claim 8, *characterized* in that said superconducting film (1) of $\text{YBa}_2\text{Cu}_3\text{O}_{7-\delta}$ is epitaxially grown on top of the insulating SrTiO_3 layer (3).
12. Method in accordance with claim 8, *characterized* in that said gate contact (6) is provided by diffusing silver into the Nb-doped SrTiO_3 gate/substrate (2).

This Sheet Has Been Replaced





13. Method for making a field-effect transistor having an electrical-field-controlled current channel and gate, source and drain electrodes, *characterized* by the following steps:

- Providing a {100}-oriented SrTiO_3 layer (7) as an insulator and thinning it down to a thickness of 20...30 μm ;
- sputtering on top of the thinned insulator (7), a $\text{YBa}_2\text{Cu}_3\text{O}_{7-\delta}$ film (8), wherein $0 \leq \delta \leq 0,5$, the thickness of this film (8) being in the range of 1 to 10 nm;
- providing metal pads (9, 10) on top of the superconductor layer (8) to form source and drain contacts, respectively;
- depositing a gate electrode (11) onto the back side of the thinned insulator (7) in the form of a metal layer;
- applying a contact (12) at the underside of said gate electrode (11).

14. Method in accordance with claim 13, *characterized* in that an insulating substrate (13) is provided underneath said gate electrode (11).

This Sheet Has Been Replaced



ABSTRACT

This field-effect transistor comprises a conductive substrate (2) serving as the gate electrode, an insulating barrier layer (3), and a superconducting channel layer (1) on top of the barrier layer (3). The superconductor layer (1) carries a pair of mutually spaced electrodes (4, 5) forming source and drain, respectively. The substrate is provided with an appropriate gate contact (6).

The substrate (2) consists of a material belonging to the same crystallographic family as the barrier layer (3). In a preferred embodiment, the substrate (2) is niobium-doped strontium titanate, the barrier layer (3) is undoped strontium titanate, and the superconductor (1) is a thin film of a material having a lattice constant at least approximately similar to the one of the materials of the substrate (2) and barrier (3) layers. A preferred material of this type is $\text{YBa}_2\text{Cu}_3\text{O}_{7-\delta}$, where $0 \leq \delta \leq 0,5$.

This Sheet Has Been Replaced





FIG. 1

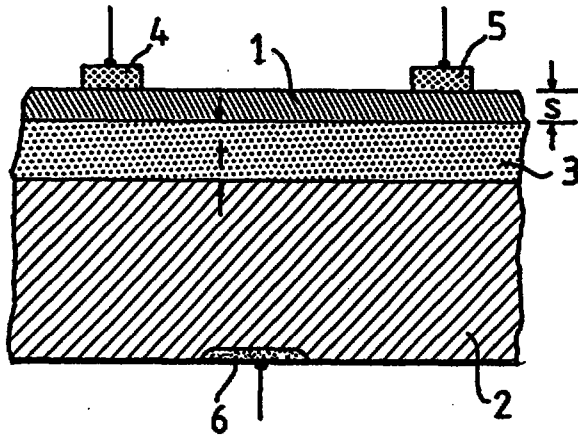


FIG. 2

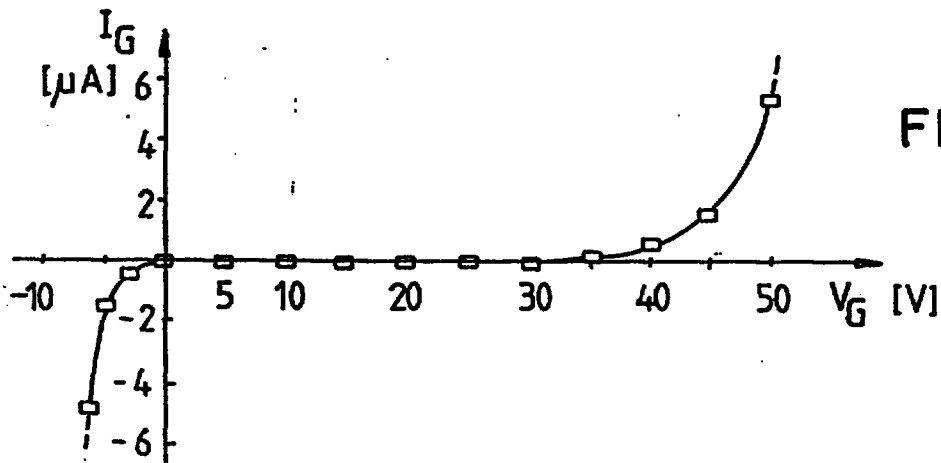
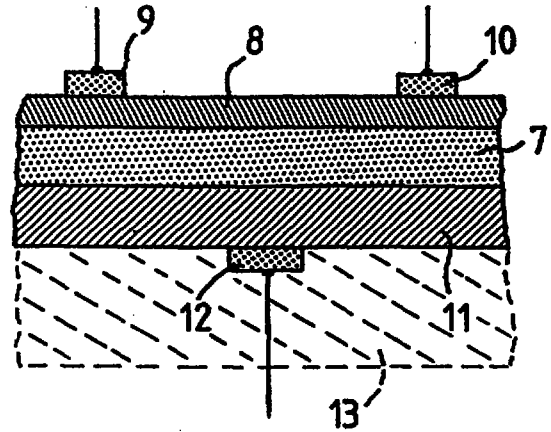


FIG. 3

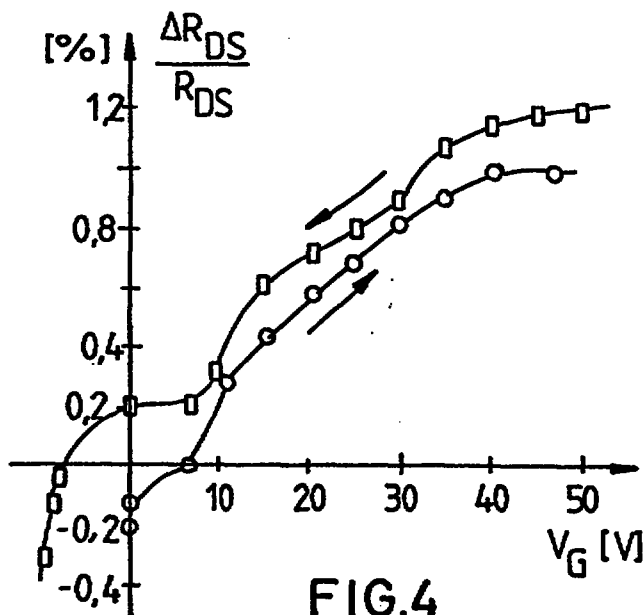


FIG. 4

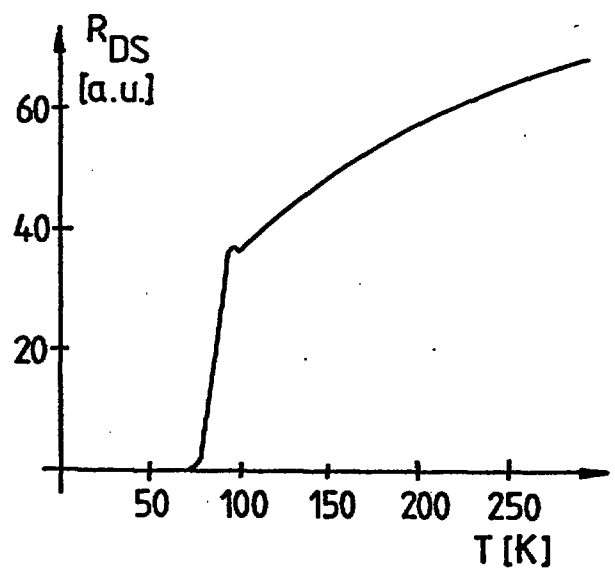


FIG. 5

REPLACEMENT SHEETS		SO
☒	Description : paged ... to paged ...	
☐	Claim(s) : paged ... to paged ...	
☒	Drawing(s) : paged ... to paged ...	
☒	Abstract : paged ... to paged ...	
DATE OF RECEIPT		27 MAY 1996

1

Superconducting Field-Effect Transistors with Inverted MISFET Structure and Method for Making the Same

DESCRIPTION

This invention relates to field-effect transistors having a current channel consisting of high- T_c superconducting material the conductivity of which can be reproducibly influenced by an electrical field, and whose structure is that of an inverted MISFET (Metal-Insulator-Superconductor) in the sense that the substrate is used as the gate electrode. The invention further relates to a method for making superconducting field-effect transistors with inverted MISFET structure.

For several decades, the electronics industry has made enormous efforts to shrink the size of electronic components and circuits with the aim of increasing the speed of operation and of reducing the power consumption/dissipation. These efforts have led to the development of integrated circuits and multi-layer ceramic devices which, in a volume of a few cubic millimeters, contain many thousands of transistors and other circuit components. These devices have very high operating speeds owing to the shortened distances the electrons need to travel inside of them. All of the modern circuits use advanced semiconductor materials, such as silicon and gallium arsenide, for example.

The discovery by Bednorz and Müller (Z. Phys., B64 (1986) p. 189) of a new class of superconductor materials has of course opened another avenue to even lower power consumption and caused a worldwide search for possible applications of these materials in electronic circuitry. A number of studies on

This is the replacement sheet

Date: 27 MAY 1996

FIG. 1

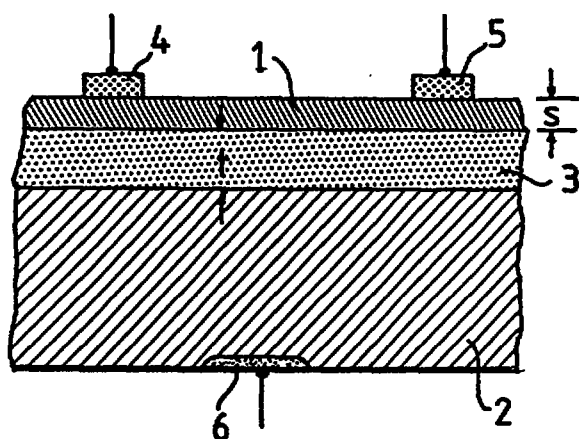


FIG. 2

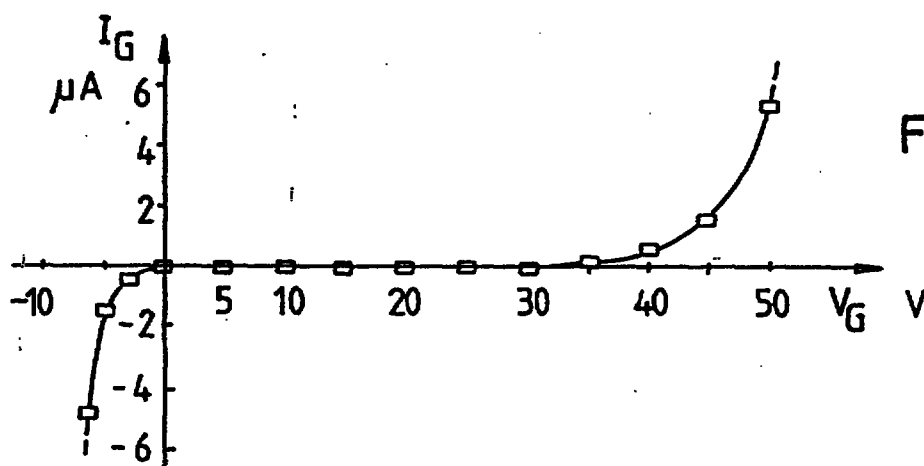
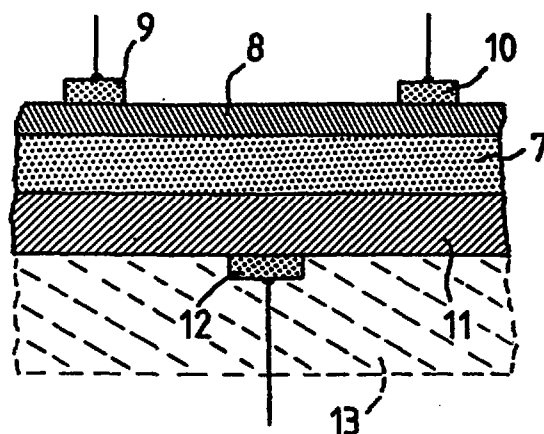


FIG. 3

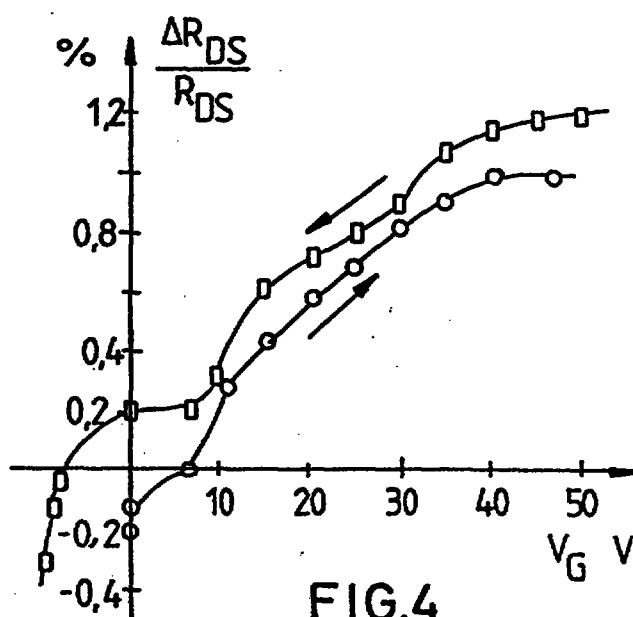


FIG. 4

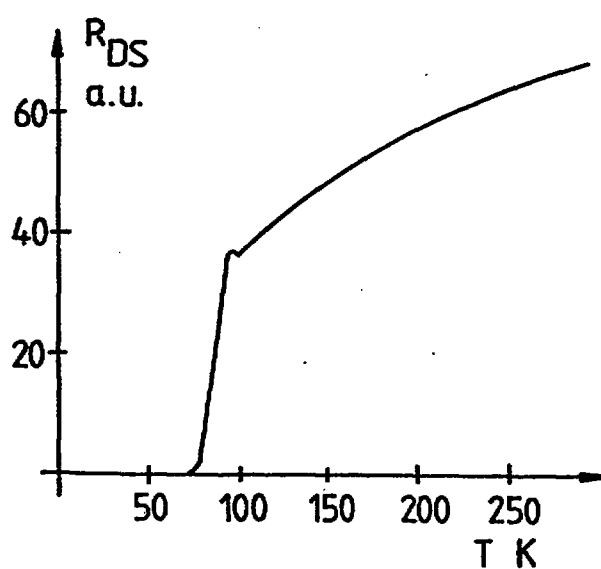


FIG. 5

This is the replacement sheet

Date; 27 MAY 1996

SUPERCONDUCTING FIELD-EFFECT TRANSISTORS WITH INVERTED MISFET STRUCTURE AND METHOD FOR MAKING THE SAME

ABSTRACT

This field-effect transistor comprises a conductive substrate (2) serving as the gate electrode, an insulating barrier layer (3), and a superconducting channel layer (1) on top of the barrier layer (3). The superconductor layer (1) carries a pair of mutually spaced electrodes (4, 5) forming source and drain, respectively. The substrate is provided with an appropriate gate contact (6).

The substrate (2) consists of a material belonging to the same crystallographic family as the barrier layer (3). In a preferred embodiment, the substrate (2) is niobium-doped strontium titanate, the barrier layer (3) is undoped strontium titanate, and the superconductor (1) is a thin film of a material having a lattice constant at least approximately similar to the one of the materials of the substrate (2) and barrier (3) layers. A preferred material of this type is $\text{YBa}_2\text{Cu}_3\text{O}_{7-\delta}$, where $0 \leq \delta \leq 0.5$.

Fig. 1

This is the replacement sheet

Date: 27 MAY 1996

REPLACEMENT SHEETS		SG
☒ Description	: paged 2 to paged 26	4 & 5
☐ Claim(s)	: paged 1 to paged 14	
☐ Drawing(s)	: paged 1 to paged 1	
☐ Abstract	: paged 1 to paged 1	
DATE OF RECEIPT		24 OCT 1997

the electric field-effect in copper oxide compounds have been reported (for example by U. Kabasawa et al. in Japanese Journ. of Appl. Phys. 29 L86, 1990), but so far only minor field-effects in high- T_c superconductors have been found. However, EP-A-0 324 044 already describes a three-terminal field-effect device with a superconducting channel in which electric fields are used to control the transport properties of channel layers consisting of high- T_c superconductor materials. While this seemed to be a promising approach, growth studies of such devices have shown that in the suggested configuration the ultrathin superconducting layers readily degrade during deposition of insulator layer and top electrode.

It is an object of the present invention to ameliorate one or more disadvantages of the prior art.

According to one aspect of the present invention there is provided a superconductor field-effect transistor comprising: an electrically conductive substrate of a single crystal of a material of a crystallographic family, said material consisting of niobium-doped strontium titanate $Nb:SrTiO_3$, with a doping factor of between 0.001% and 10% niobium, said crystal having a predetermined crystallographic orientation; a gate electrode being formed by a contact to said substrate; an insulating barrier layer on a top surface of said substrate, said insulating barrier layer being a second material of said crystallographic family and having the same said predetermined crystallographic orientation; a superconducting thin film layer on a top surface of said insulating barrier layer; a pair of gold pads on a top surface of said superconducting thin film, a first said gold pad being a source electrode and a second said gold pad being a drain electrode; and, an electrical-field-controlled current channel in said superconducting thin film layer between said pair of gold pads.

According to another aspect of the present invention there is provided a superconductor field-effect transistor comprising: an electrically conductive substrate of a single crystal of a first material of a crystallographic family, said crystal having a predetermined crystallographic orientation; a gate electrode being formed by a contact to

This is the replacement sheet

Date: 24 OCT 1997

said substrate; an insulating barrier layer on a top surface of said substrate, said insulating barrier layer being a second material of said crystallographic family and having the same said predetermined crystallographic orientation, said second material consisting of strontium titanate SrTiO_3 having a $\{100\}$ crystallographic orientation, and being between 0.3 and 100 nm thick; a superconducting thin film layer on a top surface of said insulating barrier layer; a pair of gold pads on a top surface of said superconducting thin film, a first said gold pad being a source electrode and a second gold pad being a drain electrode; and, an electrical-field-controlled current channel in said superconducting thin film layer between said pair of gold pads.

According to still another aspect of the present invention there is provided a superconductor field effect transistor comprising: an electrically conductive substrate of a single crystal of a first material of a crystallographic family, said crystal having a predetermined crystallographic orientation; a gate electrode being formed by a contact to said substrate; an insulating barrier layer on a top surface of said substrate, said insulating barrier layer being a second material of said crystallographic family and having the same said predetermined crystallographic orientation; a superconducting thin film layer on a top surface of said insulating barrier layer; a pair of gold pads on a top surface of said superconducting thin film, a first said gold pad being a source electrode and a second said gold pad being a drain electrode; and, an electrical-field-controlled current channel in said superconducting thin film layer between said pair of gold pads.

According to still another aspect of the present invention there is provided a superconducting field-effect transistor comprising: substrate consisting of a layer of gold on an underside of an insulating layer; a superconductive thin film on a top side of said insulating layer; a pair of electrodes on said superconductive thin film; and a contact on said layer of gold.

According to still another aspect of the present invention there is provided a method for making a field-effect transistor having an electrical field-controlled current channel and gate, source and drain electrodes comprising the steps of: a) providing a

This is the replacement sheet.

Date: 24 OCT 1997

gate electrode (2) of a conductive n-type {100} oriented Nb-doped SrTiO_3 single crystal that has a doping factor between 0.001% and 10% niobium, said gate electrode serving as a substrate; b) depositing on top of said gate electrode (2) a {100}-oriented insulating layer (3) of SrTiO_3 ; c) depositing on top of said insulating SrTiO_3 layer (3), a superconducting thin film (1) of $\text{YBa}_2\text{Cu}_3\text{O}_{7-\delta}$, wherein $0 \leq \delta \leq 0.5$; d) depositing onto said $\text{YBa}_2\text{Cu}_3\text{O}_{7-\delta}$ layer (1) gold pads (4,5) to form source and drain contacts, respectively; and e) depositing a gate contact (6) on the Nb-doped SrTiO_3 gate/substrate (2).

According to yet another aspect of the present invention there is provided a method for making a field-effect transistor having an electrical-field-controlled current channel and gate, source and drain electrodes comprising the steps of: a) providing a {100}-oriented SrTiO_3 layer (7) as an insulator and thinning said layer down to a thickness of 20 to 30 μm ; b) sputtering on top of the thinned insulator (7), a $\text{YBa}_2\text{Cu}_3\text{O}_{7-\delta}$ film (8), wherein $0 < \delta < 0.5$ the thickness of said sputtered film (8) being in the range of 1 to 10 nm; c) providing metal pads (9, 10) on top of the superconductor layer (8) to form source and drain contacts, respectively; d) depositing a gate electrode (11) onto the back side of the thinned insulator (7) in form of a metal layer; and e) applying a contact (12) at the underside of said gate electrode (11).

The use of niobium-doped strontium titanate Nb: SrTiO_3 in a high- T_c superconductor structure was described by H. Hasegawa et al. in their paper "Contact between High- T_c Superconductor and Semiconducting Niobium-Doped SrTiO_3 ", Japanese Journ. of Appl. Phys., Vol. 28, No. 12, Dec. 1988, pp. L 2210-L 2212, and in their EP-A-0 371 462. These references describe a diode structure where a superconducting film is deposited onto an Nb-doped SrTiO_3 substrate. The authors of these references are only interested in measuring the rectifying properties and the resistance in forward and reverse directions. They "demonstrated that there are unknown interfacial layers between the two materials", a problem that the present invention elegantly overcomes.

This is the replacement sheet

Date: 24 OCT 1997

which electrostatic fields are screened in conducting materials is given by the sum $L_D + L_{DZ}$ of the Debye length $L_D = (\epsilon_0 \epsilon_r kT / q^2 n)^{1/2}$ and the width of eventual depletion zones $L_{DZ} = N/n$. Here, ϵ_0 and ϵ_r are the dielectric constants of the vacuum and of the conducting material, respectively, k is the Boltzmann constant, T is the absolute temperature, q is the elementary charge, n is the density of mobile carriers, and N the induced areal carrier density. Because of their high carrier density, low- T_c superconductors usually screen electric fields so well that the fields only have a minor influence on materials properties. To attenuate the screening, recent experiments on the electric field-effect in low- T_c superconductors have focused on compounds with exceptionally low carrier density, like doped SrTiO_3 , with niobium as the dopant, for example.

In high- T_c superconductor compounds, larger field-effects are expected owing to their intrinsically low carrier concentration and because of their small coherence length. The low carrier concentration of about $3 \dots 5 \times 10^{21}/\text{cm}^3$ leads to screening lengths in the range of tenths of nanometers, and the small coherence lengths allow the fabrication of ultrathin layers with respectable critical temperatures. Superconducting films as thin as 1...2 nm have already been grown; electric fields can penetrate such films to a considerable extent.

This is the replacement sheet

Date: 24 OCT 1997

Details of two embodiments of the transistor and of the inventive method will hereafter be explained by way of example, with reference to the attached drawings in which:

Fig. 1 is a schematic diagram of a first embodiment of a field-effect transistor in accordance with the invention;

Fig. 2 is a schematic diagram of a second embodiment of an inventive field-effect transistor;

Fig. 3 shows the I_G/V_G characteristics of the field-effect transistor of *Fig. 1*;

Fig. 4 is a diagram showing the dependence of the changes of the channel resistivity as a function of the gate voltage V_G ;

Fig. 5 shows the dependence of the channel resistivity as a function of the absolute temperature.

To apply large electric fields on thin films of superconducting $\text{YBa}_2\text{Cu}_3\text{O}_7$, in accordance with the invention, an inverted MISFET-structure as shown in *Fig. 1* is used. In this structure, a superconducting film 1 of the thickness s is separated from a gate electrode 2 by an insulating layer 3 of the thickness t . Besides the thickness of the superconductor, the resistivity ρ_i and the breakthrough field strength E_{BD} of the insulator are crucial parameters. The required values for E_{BD} and for ρ_i can be simply estimated, if space charge effects are neglected: To induce a surface charge density in superconducting film 1 which corresponds to the unperturbed density n of mobile charge carriers, the capacitor consisting of gate electrode 2 and superconductor film 1 has to be biased with a voltage

This is the replacement sheet

Date: 24 OCT 1997

**CLAIMS**

1. A superconductor field-effect transistor comprising:

an electrically conductive substrate of a single crystal of a material of a crystallographic family, said material consisting of niobium-doped strontium titanate Nb:SrTiO_3 , with a doping factor of between 0.001% and 10% niobium, said crystal having a predetermined crystallographic orientation;

a gate electrode being formed by a contact to said substrate;

an insulating barrier layer on a top surface of said substrate, said insulating barrier layer being a second material of said crystallographic family and having the same said predetermined crystallographic orientation;

a superconducting thin film layer on a top surface of said insulating barrier layer;

a pair of gold pads on a top surface of said superconducting thin film, a first said gold pad being a source electrode and a second said gold pad being a drain electrode; and,

an electrical-field-controlled current channel in said superconducting thin film layer between said pair of gold pads.

2. A field effect transistor as in claim 1 wherein said doping factor of Niobium is 0.05%.

3. A field-effect transistor as in claim 1 wherein the crystallographic orientation of said substrate is $\{100\}$.

4. A field-effect transistor as in claim 1 wherein said contact to said substrate forming the gate electrode consists of silver diffused in said substrate.

5. A superconductor field-effect transistor comprising:

an electrically conductive substrate of a single crystal of a first material of a crystallographic family, said crystal having a predetermined crystallographic orientation;

a gate electrode being formed by a contact to said substrate;

an insulating barrier layer on a top surface of said substrate, said insulating barrier layer being a second material of said crystallographic family and having the same said

This is the replacement sheet

Date: 24 OCT 1997



predetermined crystallographic orientation, said second material consisting of strontium titanate SrTiO_3 having a $\{100\}$ crystallographic orientation, and being between 0.3 and 100 nm thick;

a superconducting thin film layer on a top surface of said insulating barrier layer;

a pair of gold pads on a top surface of said superconducting thin film, a first said gold pad being a source electrode and a second gold pad being a drain electrode; and,

an electrical-field-controlled current channel in said superconducting thin film layer between said pair of gold pads.

6. A superconductor field effect transistor comprising:

an electrically conductive substrate of a single crystal of a first material of a crystallographic family, said crystal having a predetermined crystallographic orientation;

a gate electrode being formed by a contact to said substrate;

an insulating barrier layer on a top surface of said substrate, said insulating barrier layer being a second material of said crystallographic family and having the same said predetermined crystallographic orientation;

a superconducting thin film layer on a top surface of said insulating barrier layer;

a pair of gold pads on a top surface of said superconducting thin film, a first said gold pad being a source electrode and a second said gold pad being a drain electrode; and,

an electrical-field-controlled current channel in said superconducting thin film layer between said pair of gold pads.

7. A field-effect transistor as in claim 6 wherein the crystallographic orientation of said substrate (2) is $\{100\}$.

8. A field-effect transistor as in claim 6 wherein said contact (60 to said substrate (2) forming the gate electrode consists of silver diffused in said substrate (2).

9. A superconducting field-effect transistor comprising:

substrate consisting of a layer of gold on an underside of an insulating layer;

a superconductive thin film on a top side of said insulating layer;

This is the replacement sheet

Date: 24 OCT 1997



a pair of electrodes on said superconductive thin film; and
a contact on said layer of gold.

10. A field-effect transistor as in claim 9, said superconductor layer (1, 8) consisting of $\text{YBa}_2\text{Cu}_3\text{O}_{7-\delta}$, wherein $0 \leq \delta \leq 0.5$ and said superconductor layer has a thickness in the range of 1 to 30 nm.

11. A method for making a field-effect transistor having an electrical field-controlled current channel and gate, source and drain electrodes comprising the steps of:

a) providing a gate electrode (2) of a conductive n-type {100} oriented Nb-doped SrTiO_3 single crystal that has a doping factor between 0.001% and 10% niobium, said gate electrode serving as a substrate;

b) depositing on top of said gate electrode (2) a {100}-oriented insulating layer (3) of SrTiO_3 ;

c) depositing on top of said insulating SrTiO_3 layer (3), a superconducting thin film (1) of $\text{YBa}_2\text{Cu}_3\text{O}_{7-\delta}$, wherein $0 \leq \delta \leq 0.5$;

d) depositing onto said $\text{YBa}_2\text{Cu}_3\text{O}_{7-\delta}$ layer (1) gold pads (4,5) to form source and drain contacts, respectively; and

e) depositing a gate contact (6) on the Nb-doped SrTiO_3 gate/substrate (2).

12. A method as in claim 11, wherein said layer (3) of SrTiO_3 is epitaxially grown by reactive rf-magnetron sputtering at 6.7 Pa in an O_2 /Ar atmosphere at 400° to 900° C.

13. A method as in claim 11, wherein said superconducting film (1) of $\text{YBa}_2\text{Cu}_3\text{O}_{7-\delta}$ is epitaxially grown on top of the insulating SrTiO_3 layer (3).

14. A method as in claim 11, wherein said gate contact (6) is provided by diffusing silver into the Nb-doped SrTiO_3 gate/substrate (2).

15. The method as in claim 11 wherein said doping factor is 0.05 % Nb.

16. A method for making a field-effect transistor having an electrical-field-controlled current channel and gate, source and drain electrodes comprising the steps of:

a) providing a {100}-oriented SrTiO_3 layer (7) as an insulator and thinning said layer down to a thickness of 20 to 30 μm ;

This is the replacement sheet

Date: 24 OCT 1997



b) sputtering on top of the thinned insulator (7), a $\text{YBa}_2\text{Cu}_3\text{O}_{7-\delta}$ film (8), wherein $0 < \delta < 0.5$ the thickness of said sputtered film (8) being in the range of 1 to 10 nm;

c) providing metal pads (9, 10) on top of the superconductor layer (8) to form source and drain contacts, respectively;

d) depositing a gate electrode (11) onto the back side of the thinned insulator (7) in form of a metal layer; and

e) applying a contact (12) at the underside of said gate electrode (11).

17. A method as in claim 16, further comprising, providing an insulating substrate (13) under said gate electrode (11).