

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
25 January 2007 (25.01.2007)

PCT

(10) International Publication Number
WO 2007/011304 A1

(51) International Patent Classification:

B67D 1/08 (2006.01) **B67D 5/37** (2006.01)
B67D 3/00 (2006.01)

(21) International Application Number:

PCT/SG2005/000235

(22) International Filing Date: 15 July 2005 (15.07.2005)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): **HYFLUX AQUOSUS (SINGAPORE) PTE. LTD.** [SG/SG]; 202 Kallang Bahru, Hyflux Building, Singapore 339339 (SG).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **KOH, Boon Kwang** [SG/SG]; Block 59C, #07-3319, Geylang Bahru, Singapore 332059 (SG).

(74) Agent: **ELLA CHEONG SPRUSON & FERGUSON (SINGAPORE) PTE LTD**; P.O. Box 1531, Robinson Road Post Office, Singapore 903031 (SG).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

[Continued on next page]

(54) Title: LIQUID DISPENSER WITH PIVOTABLE NOZZLE

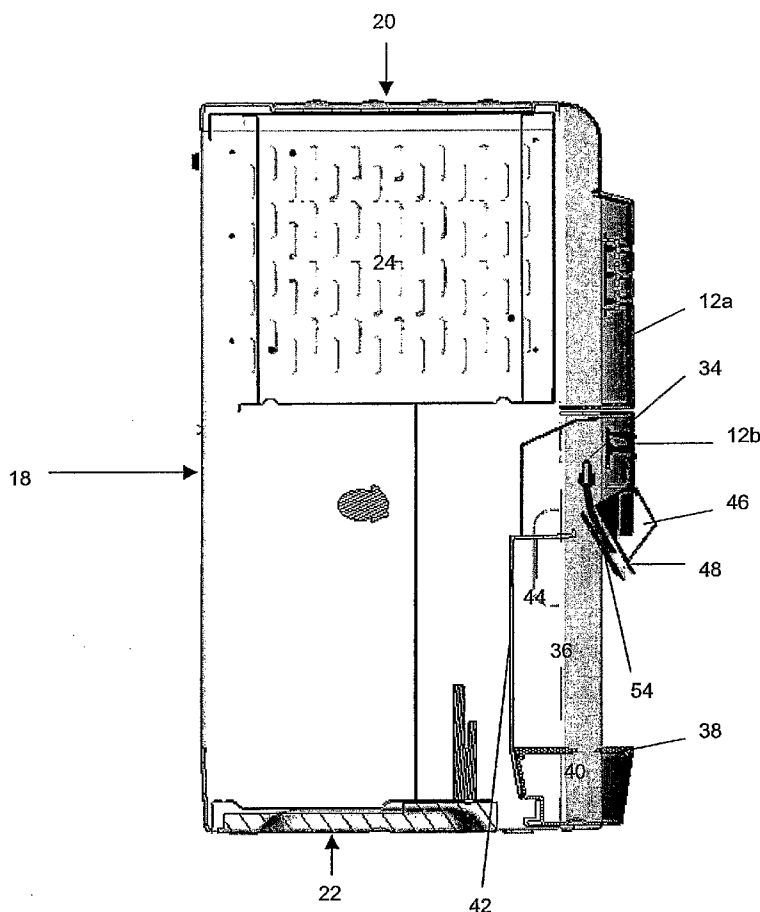

(57) Abstract: A liquid dispenser comprising a housing having a front wall (12a, 12b); a liquid conduit (34) provided in said housing for liquid communication with a chamber (24) capable of holding liquid; a nozzle (48) pivotally coupled to said front wall (12a, 12b) for dispensing liquid therefrom when in liquid communication with said liquid conduit (34), said nozzle (48) having a longitudinal axis, said pivotal coupling to said front wall (12a, 12b) allowing movement of said longitudinal axis along an arc extending between a first position at a first offset angle relative to said front wall (12a, 12b) and a second position at a second offset angle relative to said front wall (12a, 12b).

WO 2007/011304 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.