



(43) International Publication Date
22 August 2013 (22.08.2013)

- (51) International Patent Classification:
F16L 3/02 (2006.01)
- (21) International Application Number:
PCT/NO2013/050030
- (22) International Filing Date:
13 February 2013 (13.02.2013)
- (25) Filing Language: Norwegian
- (26) Publication Language: English
- (30) Priority Data:
20120166 17 February 2012 (17.02.2012) NO
- (71) Applicant: SMED T. KRISTIANSEN AS [NO/NO]; Fin-
nestadsvingen 28, N-4029 Stavanger (NO).
- (72) Inventor: KRISTIANSEN, Svein Westlund; Tungenes-
veien 13A, N-4070 Randaberg (NO).
- (74) Agent: HÅMSØ PATENTBYRÅ ANS; P.O. Box 171, N-
4302 Sandnes (NO).
- (81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU,
RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ,
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA,
ZM, ZW.

- (84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: PIPE SUPPORT DEVICE

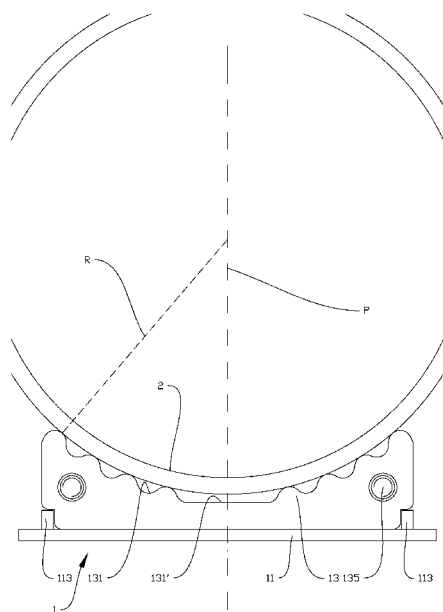


Fig. 1

(57) Abstract: A pipe support device (1) for relieving a pipeline (2), the pipe support (1) including : - a bracket (11) arranged to be fixed to a base; and - a relieving element (13), the surface of the relieving element (13) facing the pipeline (2) in the position of application being formed with a radius of curvature (R) adapted to the outer radius of curvature of the pipeline (2), characterized by the curved surface of the relieving element (13) being formed with a plurality of recesses (131, 131'), whereby a plurality of slots is provided between the pipeline (2) and the relieving element (13) in the position of application of the relieving element (13).