

DIGITALLY FREQUENCY-LOCKING A RADIO TRANSCEIVER TO THE RECEIVED SIGNAL

Background of the Invention

5

The present invention is generally related to radiotelephones, and more particularly to digitally frequency-locking a cellular telephone to the received signal.

10 In some countries, cellular telephones are required to meet a maximum transmitter frequency error specification. In order to maintain the transmitter frequency within the maximum transmitter frequency error specifications, such cellular telephones currently use an analog frequency control circuit which compares the received signal frequency to the
15 cellular telephone reference oscillator to develop an analog correction voltage. The analog correction voltage is applied to the cellular telephone reference oscillator to frequency lock it to the received signal frequency, which is very accurately maintained by the base station radio. However, such prior
20 analog frequency control circuits necessitate digital-to-analog conversion circuitry and analog comparators thereby incurring substantial additional costs.

Objects of the Invention

25

Accordingly, it is an object of the present invention to provide a method of digitally frequency-locking a transceiver to the frequency of the received signal.

In one aspect, the invention provides a method for
30 substantially frequency locking a reference oscillator of a radio transceiver to the radio signal received by the radio transceiver, said method characterized by the steps of:

setting the frequency of the reference oscillator to a stored initial frequency:

35 comparing the frequency of the reference oscillator to the frequency of the received signal and producing an error signal

having a binary one state if the frequency of the reference oscillator is less than or equal to the frequency of the received signal, and a binary zero state if the frequency of the reference oscillator is greater than the frequency of the received signal;

5 sampling the binary state of the error signal at a first predetermined rate and increasing the frequency of the reference oscillator by a first predetermined amount if the error signal has a binary one state and decreasing the frequency of the reference oscillator by the first predetermined amount if
10 the error signal has a binary zero state, until the binary state of the error signal changes;

 when the binary state of the error signal changes a first time, thereafter sampling the binary state of the error signal at a second predetermined rate and increasing the frequency of
15 the reference oscillator by a second predetermined amount if the error signal has a binary one state and decreasing the frequency of the reference oscillator by the second predetermined amount if the error signal has a binary zero state, said second predetermined rate being less than said first
20 predetermined rate, and said second predetermined amount being less than said first predetermined amount; and

 when the binary state of the error signal changes a second time, adjusting the stored initial frequency an amount related to the difference between the frequency of the reference
25 oscillator and the stored initial frequency.

 In another aspect, the invention provides a method for substantially frequency locking a reference oscillator of a radio transceiver to the radio signal received by the radio transceiver, said method characterized by the steps of:

30 setting the frequency of the reference oscillator to a stored initial frequency:

 comparing the frequency of the reference oscillator to the frequency of the received signal and producing an error signal having a first binary state if the frequency of the reference
35 oscillator is less than the frequency of the received signal, and

a second binary state if the frequency of the reference oscillator is greater than the frequency of the received signal; sampling the binary state of the error signal and increasing the frequency of the reference oscillator in successive increments by a first predetermined amount if the error signal has a first binary state and decreasing the frequency of the reference oscillator by the first predetermined amount in success are increments if the error signal has a second binary state, until the binary state of the error signal changes;

when the binary state of the error signal changes, increasing the frequency of the reference oscillator in successive movements by a second predetermined amount if the error signal has a first binary state and decreasing the frequency of the reference oscillator by the second predetermined amount if the error signal has a second binary state, said second predetermined amount being less than said first predetermined amount; and

when the binary state of the error signal changes a further time, adjusting the stored initial frequency an amount related to the difference between the frequency of the reference oscillator and the stored

The method of the invention provides digitally frequency-locking a transceiver to the frequency of the received signal and correcting the initial turn on frequency of the transceiver each time the transceiver is frequency locked.

Brief Description of the Drawings

Figure 1 is a block diagram of a cellular telephone 100 embodying the present invention.

Figure 2 is a flow chart for the process used by microcomputer 102 in Figure 1 for substantially frequency locking the reference oscillator 104 to the received signal.

Detailed Description of the Preferred Embodiment

Referring to Figure 1, there is illustrated a block diagram of a cellular telephone 100 embodying the present invention.

- 5 Cellular telephone 100 includes a radio transceiver 106, a reference oscillator 104, and microcomputer 102 with memory therein for controlling the operation thereof. Only the portion of transceiver 106 that generates the binary error signal 110 has been illustrated. According to the present invention,
- 10 microcomputer 102 is responsive to the binary error signal 110 for frequency locking reference oscillator 104 to the radio signal received by radio transceiver 106. Radio transceiver 106 also includes a radio receiver and transmitter (not shown), which may be a Nordic-type 900 MHz cellular telephone
- 15 transmitter and radio receiver, such as, for example, the transceiver shown and described in Motorola instruction manual number 86P09300A10, entitled "MICROTAC. Cellular Personal Telephone," published by and available from Motorola C & E Parts, 1313 East Algonquin Road, Schaumburg, Illinois 60196.
- 20 In the Nordic telephone system currently in use in Norway, Sweden, Denmark and Finland, the transmitter frequency of cellular telephone 100 must be within 900 Hertz of the specified transmitter frequency for each radio channel. Since the base station transmitter frequency is maintained
- 25 within 250 Hertz of its specified transmitter frequency, cellular telephone 100 may be frequency locked to the received base station transmitter signal in order to meet the Nordic specifications. Since the frequency of reference oscillator 104 changes with time, it is also important to compensate for the
- 30 frequency aging of reference oscillator 104 in order to meet the Nordic specifications, which further require that the frequency error of the cellular telephone transmitter be within specified limits within two seconds of acquisition of the base station transmitter signal over its entire operating life. By
- 35 utilizing the present invention, microcomputer 102 is responsive to the binary error signal 110 for rapidly frequency

locking reference oscillator 104 to the base station transmitter signal received by radio transceiver 106, such that the reference oscillator frequency is maintained within the Nordic specifications during the entire operating life of cellular telephone 100.

Referring to Figure 1, radio transceiver 106 includes a phase-locked loop (PLL) synthesizer 120, a receiver mixer 122 followed by one or more gain stages 124, a phase detector 126, and a reference oscillator divider 128. The PLL synthesizer 120 generates a signal locked to reference oscillator 104 that is mixed with the incoming base station transmitter signal in receive mixer 122 to generate an intermediate frequency signal that is then amplified by amplifier 124. The output of reference oscillator 104 also feeds a divider 128, which divides the reference oscillator signal by an amount so as to generate the divided signal having a frequency substantially the same as the frequency of the intermediate frequency signal from mixer 122. The output of divider 128 and the amplified intermediate frequency signal from amplifier 124 are both fed into the phase detector 126, which generates a binary error signal (BES) 110 which is either binary HI or binary LO depending on the frequency difference between reference oscillator 104 and the received base station transmitter signal. BES 110 is binary HI if the frequency of reference oscillator 104 is less than the frequency of the received base station transmitter signal. BES 110 is binary LO if the frequency of reference oscillator 104 is greater than the frequency of the received base station transmitter signal. Although theoretically the frequency of reference oscillator 104 and the frequency of the received base station transmitter signal may be identical, such will never occur in practice during operation of cellular telephone 100. Therefore, BES 110 may be chosen to be either binary HI or binary LO if the frequency of reference oscillator 104 and the frequency of the received base station transmitter signal are identical. BES 110 is then fed into microcomputer 102 as an input signal for decision making.

Microcomputer 102 is connected to and has control of the frequency of reference oscillator 104 via a communication bus therebetween. During operation of cellular telephone 100, microcomputer 102 loads the current frequency into reference oscillator 104 whenever it is changed.

Referring next to Figure 2, there is illustrated a flow chart for the process used by microcomputer 102 in Figure 1 for substantially frequency locking the reference oscillator 104 to the received base station transmitter signal. Entering at START block 202, the process proceeds to block 204, where the current frequency register (CFR) is set equal to the initial frequency register (IFR). Next a 265 ms. delay at block 206 is executed and CFR is loaded into reference oscillator 104. Then, at decision block 208, the binary error signal (RES) 110 is tested for binary HI or LO. If RES is determined to be binary HI, then a sequence beginning with block 210 is executed where three is subtracted from CFR. A decrement of three is selected to produce a relatively large change in the frequency of reference oscillator during initial acquisition of the base station transmitter signal. Next a 265 ms. delay at block 212 is executed and the new CFR is loaded into reference oscillator 104.

Then RES is tested for binary HI or LO in decision block 214. If RES is found to be binary HI, then execution returns to block 210 for continued execution. However, if RES is found to be binary LO, then execution proceeds to block 216 where one is added to CFR. At this point, the frequency of reference oscillator 104 has been adjusted in three unit increments beyond the desired frequency of the received base station transmitter signal, as indicated by the change in binary state of RES from binary HI to LO. Hereafter, a decrement of one is selected to produce a relatively small change in the frequency of reference oscillator during final acquisition of the base station transmitter signal. Next a 265 ms. delay at block 218 is executed and the new CFR is loaded into reference oscillator 104.

Next, in decision block 220, RES is tested for binary HI or LO. If RES is found to be binary LO, execution returns to block 216 for continued execution. However, if RES is found to be binary HI, execution proceeds to block 222 where one is
 5 subtracted from CFR. At this point, the frequency of reference oscillator 104 has been adjusted in one unit increments beyond the desired frequency of the received base station transmitter signal, as indicated by the change in binary state of RES from binary LO to HI. Hereafter, execution will proceed to block 302
 10 in Figure 3.

Returning to decision block 208, if RES was found to be binary LO, execution proceeds with a sequence beginning with block 224 where three is added to CFR. As explained above, three unit steps are taken in order to produce a relatively large
 15 change in the frequency of reference oscillator 104 during initial acquisition of the base station transmitter signal. Next a 265 ms. delay at block 226 is executed and the new CFR is loaded into reference oscillator 104. Then RES is tested for binary HI or LO in decision block 228. If RES is found to be
 20 binary LO, execution returns to block 224 for continued execution. If RES is found to be binary HI, then execution continues to block 230 where one is added to CFR. As explained above, one unit steps are taken in order to produce a relatively small change in the frequency of reference oscillator 104
 25 during final acquisition of the base station transmitter signal. Then a 265 ms. delay at block 232 is executed and the new CFR is loaded into reference oscillator 104. Next, RES is tested for binary HI or LO in decision block 234. If RES is found to be binary HI, execution returns to block 230 for continued
 30 execution. If RES is found to be binary LO, execution continues to block 236 where one is added to CFR. At this point, execution will proceed to block 302 in Figure 3.

Referring next to Figure 3, execution continues from Figure 2 to block 302 where IFR is set equal to the value of IFR
 35 - $(IFR - CFR)/256$. At this point, frequency lock has been obtained, and, according to a feature of the present invention,

IFR is updated to account for aging that occurred since the last update. Thus, according to the present invention, each time cellular telephone 100 is powered up or each time the base station transmitter signal is acquired or re-acquired, the
5 initial frequency for reference oscillator 104 is updated and stored for subsequent use. The difference between IFR and CFR is divided by 256 so that IFR is updated by a small amount each time the process of Figure 3 is executed. In other embodiments of cellular telephone 100, the incremental update to IFR may be
10 varied by selecting a different divisor.

Next, execution continues to block 304 where a one second delay is executed and the new CFR is loaded into reference oscillator 104. Once frequency lock has been obtained, the frequency of reference oscillator 104 is changed
15 at one second intervals instead of 265 ms. intervals. In other words, the rate of change of the frequency of reference oscillator 104 is decreased once frequency lock is reached. Then, in decision block 306, RES is tested for binary HI or LO. If RES is found to be binary LO, then execution continues to
20 block 308 where one is added to CFR and the new CFR is loaded into reference oscillator 104. Next, execution returns to block 304 for continued execution. However, if in decision block 306, RES is found to be binary HI, execution would proceed to block 310 where one is subtracted from CFR and the new CFR is
25 loaded into reference oscillator 104. Next, execution would return to block 304 for continued execution until cellular telephone 100 is powered up again or the base station transmitter signal is re-acquired, at which time execution returns to block 202 in Figure 2 to repeat the foregoing
30 process.

In summary, a unique cellular telephone has been described which digitally frequency-locks the transceiver thereof to the frequency of the received signal and corrects the initial turn on frequency of the transceiver each time the
35 transceiver is frequency locked.



Claims

1. A method for substantially frequency locking a reference oscillator of a radio transceiver to the radio signal received by the radio transceiver, said method CHARACTERIZED BY the steps of:

setting the frequency of the reference oscillator to a stored initial frequency:

comparing the frequency of the reference oscillator to the frequency of the received signal and producing an error signal having a binary one state if the frequency of the reference oscillator is less than or equal to the frequency of the received signal, and a binary zero state if the frequency of the reference oscillator is greater than the frequency of the received signal;

sampling the binary state of the error signal at a first predetermined rate and increasing the frequency of the reference oscillator by a first predetermined amount if the error signal has a binary one state and decreasing the frequency of the reference oscillator by the first predetermined amount if the error signal has a binary zero state, until the binary state of the error signal changes;

when the binary state of the error signal changes a first time, thereafter sampling the binary state of the error signal at a second predetermined rate and increasing the frequency of the reference oscillator by a second predetermined amount if the error signal has a binary one state and decreasing the frequency of the reference oscillator by the second predetermined amount if the error signal has a binary zero state, said second predetermined rate being less than said first predetermined rate, and said second predetermined amount being less than said first predetermined amount; and

when the binary state of the error signal changes a second time, adjusting the stored initial frequency an amount related to the difference between the frequency of the reference oscillator and the stored initial frequency.





2. The method according to claim 1, further
CHARACTERIZED BY the step of repeating the preceding steps
each time power is applied to the radio transceiver.

5

3. The method according to claim 1, further
CHARACTERIZED BY the step of repeating the preceding steps
each time the radio signal is first received by the radio
transceiver.

10

4. A method for substantially frequency locking a
reference oscillator of a radio transceiver to the radio signal
received by the radio transceiver, said method CHARACTERIZED
BY the steps of:

15


setting the frequency of the reference oscillator to
a stored initial frequency;

comparing the frequency of the reference oscillator
to the frequency of the received signal and producing an error
signal having a first binary state if the frequency of the
reference oscillator is less than the frequency of the received
signal, and a second binary state if the frequency of the
reference oscillator is greater than the frequency of the
received signal;

sampling the binary state of the error signal and
increasing the frequency of the reference oscillator in
successive increments by a first predetermined amount if the
error signal has a first binary state and decreasing the
frequency of the reference oscillator by the first
predetermined amount in success are increments if the error
signal has a second binary state, until the binary state of the
error signal changes;

when the binary state of the error signal changes,
increasing the frequency of the reference oscillator in
successive movements by a second predetermined amount if the
error signal has a first binary state and decreasing the
frequency of the reference oscillator by the second





This Sheet Has Been Replaced



predetermined amount if the error signal has a second binary state, said second predetermined amount being less than said first predetermined amount; and

- 5 when the binary state of the error signal changes a further time, adjusting the stored initial frequency an amount related to the difference between the frequency of the reference oscillator and the stored



DIGITALLY FREQUENCY-LOCKING
A RADIO TRANSCEIVER TO THE RECEIVED SIGNAL

5 Abstract of the Disclosure

 A unique cellular telephone (100) digitally frequency
locks to the received base station transmitter signal. The
cellular telephone (100) includes a radio transceiver (106), a
10 reference oscillator (104), and microcomputer (102) with
memory therein for controlling the operation thereof. The radio
transceiver (106) includes a phase-locked loop (PLL)
synthesizer 120, a receiver mixer (122) followed by one or
more gain stages (124), a phase detector (126), and a divider
15 (128). The PLL synthesizer (120) generates a signal locked to
the reference oscillator (104) that is mixed with the incoming
base station transmitter signal in the receive mixer (122) to
generate an intermediate frequency signal. The output of the
reference oscillator (104) also feeds the divider (128), which
20 divides the reference oscillator signal by an amount so as to
generate the divided signal having a frequency substantially the
same as the frequency of the intermediate frequency signal
from the mixer (122). The output of the divider (128) and the
amplified intermediate frequency signal from the amplifier
25 (124) are both fed into the phase detector (126), which
generates a binary error signal (110). The microcomputer (102)
is responsive to the binary error signal (110) for frequency
locking reference oscillator 104 to the received base station
transmitter signal.

30

Fig. 1 accompanies this abstract.

FIG. 1


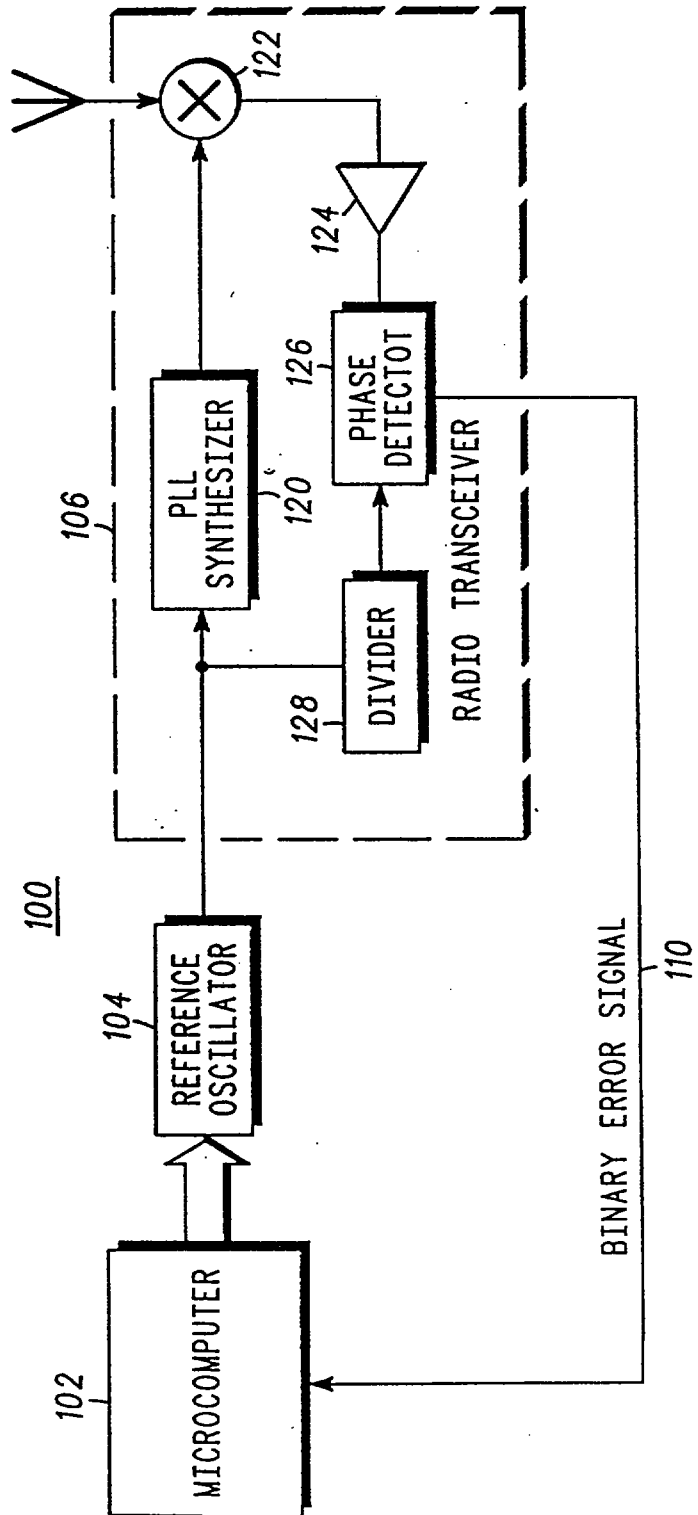


FIG. 2

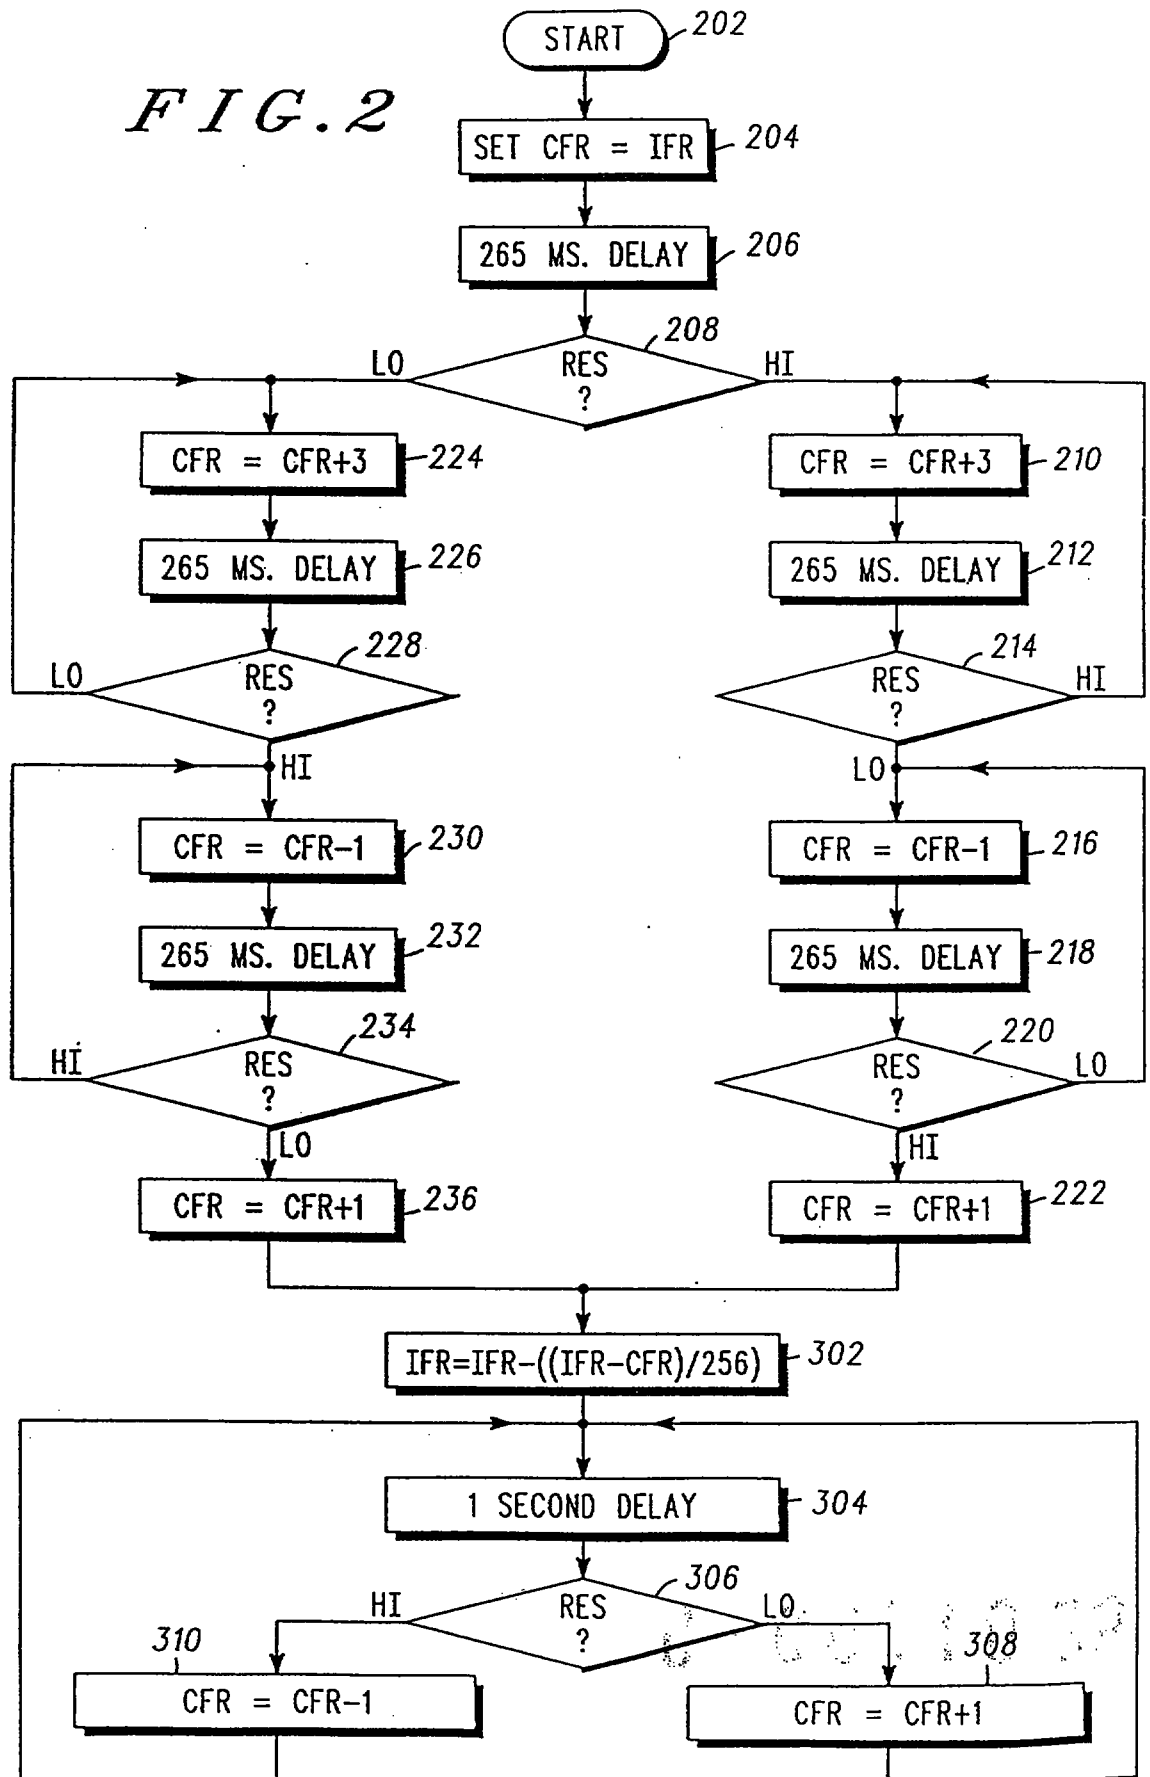

13 DEC 1997

Date

- 9 -



Claims

1. A method for substantially frequency locking a reference oscillator signal of a reference oscillator of a radio transceiver having a
5 microcomputer with a register, to the radio signal received by the radio transceiver, the register storing an initial frequency, said method comprising the steps of:
- setting the frequency of the reference oscillator to the stored initial frequency in the register;
- 10 dividing the reference oscillator signal to produce a divided reference oscillator signal;
- generating a synthesizer signal locked to the reference oscillator signal;
- mixing the synthesizer signal and the received radio signal to
15 produce an intermediate frequency signal;
- comparing the frequency of the divided reference oscillator signal to the frequency of the intermediate frequency signal and producing an error signal having a binary one state if the frequency of the divided reference oscillator signal is less than or equal to the frequency of the intermediate
20 frequency signal, and a binary zero state if the frequency of the divided reference oscillator signal is greater than the frequency of the intermediate frequency signal;
- sampling the binary state of the error signal at successive time intervals each having a first predetermined length of time and increasing
25 the frequency of the reference oscillator by a first predetermined amount if the error signal has a binary one state and decreasing the frequency of the reference oscillator by the first predetermined amount if the error signal has a binary zero state, until the binary state of the error signal changes;
- when the binary state of the error signal changes a first time,
30 thereafter sampling the binary state of the error signal at successive time intervals each having a second predetermined length of time and increasing the frequency of the reference oscillator by a second predetermined amount if the error signal has a binary one state and decreasing the frequency of the reference oscillator by the second
35 predetermined amount if the error signal has a binary zero state, said second predetermined amount being less than said first predetermined amount; and



- 10 -

REPLACEMENT SHEET
13 DEC 1997
Date

when the binary state of the error signal changes a second time, adjusting the stored initial frequency an amount related to the difference between the frequency of the reference oscillator and the stored initial frequency and storing the adjusted initial frequency in the register.

5

2. The method according to claim 1, further including the step of repeating the preceding steps each time power is applied to the radio transceiver.

10

3. The method according to claim 1, further including the step of repeating the preceding steps each time the radio signal is first received by the radio transceiver.

15

4. The method according to claim 1, further including the step of sampling the binary state of the error signal at successive time intervals each having a third predetermined length of time and increasing the frequency of the reference oscillator by the second predetermined amount if the error signal has a binary one state and decreasing the frequency of the reference oscillator by the second predetermined amount if the error signal has a binary zero state, the third predetermined length of time being greater than the second predetermined length of time.

20