

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau

(43) International Publication Date
30 January 2025 (30.01.2025)



(10) International Publication Number
WO 2025/024451 A1

(51) International Patent Classification:

B65G 47/66 (2006.01) *B65G 17/24* (2006.01)
B65G 13/06 (2006.01) *B65G 39/00* (2006.01)
B65G 15/30 (2006.01)

(21) International Application Number:

PCT/US2024/039165

(22) International Filing Date:

23 July 2024 (23.07.2024)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

63/528,572 24 July 2023 (24.07.2023) US

(71) Applicant: **FLEXIBLE STEEL LACING COMPANY**
[US/US]; 2525 Wisconsin Avenue, Downers Grove, Illinois
60515 (US).

(72) Inventors: **PETTINGA, Mark Steven**; 3820 N Big Spring
Drive SW, Grandville, Michigan 49418 (US). **JENSEN,
Parker**; 1863 S. Shore Drive, Holland, Michigan 49423
(US).

(74) Agent: **KRATZ, Rudy** et al.; FITCH, EVEN, TABIN &
FLANNERY LLP, 120 S. LaSalle Street, Suite 2100, Chica-
go, Illinois 60603 (US).

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CV, CZ, DE, DJ, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IQ, IR, IS, IT, JM, JO, JP, KE, KG,

(54) Title: CONVEYOR GAP BLOCKER

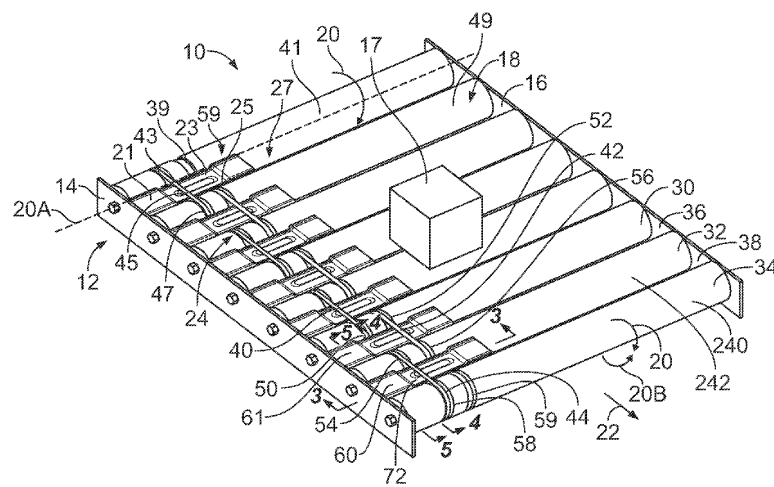


FIG. 1

(57) Abstract: In one aspect, a roller conveyor gap blocker is provided that includes a body configured to be supported in a gap by upstream and downstream rollers. The body has a plurality of laterally spaced upstream lower members with laterally aligned, upstream lower free end portions. At least one of the upstream lower free end portions has an upstream recessed portion that is above a lowermost end of one of the other laterally aligned, upstream lower free end portions to provide clearance for a drive member. The body has a plurality of laterally spaced downstream lower members of the body with laterally aligned, downstream lower free end portions. At least one of the downstream lower free end portions has a downstream recessed portion that is above a lowermost end of one of the other laterally aligned, downstream lower free end portions to provide clearance for the drive member.

[Continued on next page]

KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY,
MA, MD, MG, MK, MN, MU, MW, MX, MY, MZ, NA,
NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO,
RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH,
TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS,
ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, CV, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SC, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, ME, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*