

DIGITAL PULSE DETECTOR

FIELD OF THE INVENTION

This invention relates to computer systems and more particularly to data storage and data communication devices within such computer systems. Even more particularly, the invention relates to apparatus for detecting pulses resulting from bit transitions within a data stream being read from a recording medium of a data storage device or pulses in data being received from a data communication device.

BACKGROUND OF THE INVENTION

In a computer data storage device, data is typically stored on magnetic media by reversing the magnetic flux at each "one" bit location, and maintaining the same flux direction at each "zero" bit location, called NRZI recording. When these flux reversals pass a read head they cause a voltage change in the read head. The voltage from the various flux reversals along a data track appears as a varying signal level on the output of the read head, with the voltage caused by each flux reversal appearing as a positive or negative voltage pulse. These pulses must be detected by the electronics connected to the read head, typically by detecting the peak of each pulse to determine the pulse location.

Similarly, the voltage from a data transmission line appears as a varying signal level on the input to a data communication device, such as a modem, with the voltage of each bit change often appearing as a positive or negative voltage pulse.

In order to separate the voltage pulses from noise in the signal, the voltage may be compared to a predetermined threshold, and only peaks whose magnitude exceeds the threshold are considered to be possible pulses. If the peaks are too small with respect to the threshold, the signal gain must be adjusted higher, and if the peaks are too high the gain must be adjusted lower. To properly determine the gain setting, pulses must be detected so that the gain adjustment can maintain the proper level for a pulse peak.

Because the rotational speed of a disk may vary, a phase locked loop is used to synchronize a detector to the times of the pulses. The peaks of the pulses caused by bit transitions must be detected in order to correct for any timing deviations.

Several methods have been used to detect the pulses and thus the transitions within the data. In the prior art, peak detection circuitry has ordinarily been analog

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

in nature; while digital detectors have ordinarily been sequence detectors such as those implementing the Viterbi method, disclosed in Application Serial Number 07/852,015, filed March 16, 1992, of Richard T. Behrens, Kent D. Anderson and Neal Glover, entitled "Method and Apparatus for Reduced-Complexity Viterbi-Type Sequence Detectors", which is incorporated herein by reference for all that is disclosed and taught therein. However, most digital pulse detectors analyze the context of the pulses, and do not detect a pulse until several samples have been taken beyond the peak of the pulse. This latency in detecting pulses is a disadvantage when the location of a pulse needs to be known in order to make timing and/or gain corrections.

It is thus apparent that there is a need in the art for an improved apparatus which digitally detects pulses at the earliest possible time after the peak of the pulse occurs. The present invention meets these and other needs.

SUMMARY OF THE INVENTION

It is an aspect of the present invention to detect signal pulses caused by bit transitions within data being read from a data storage device.

It is another aspect of the invention to detect signal pulses within signals received by a data communications device.

It is another aspect of the invention to detect the pulses using samples of the signal wherein one of the samples occurs at a peak of the pulse caused by a bit transition.

Another aspect of the invention is to detect such pulses using samples of the signal wherein samples occur on each side of a peak of the pulse and wherein no sample occurs at the peak.

A further aspect is to detect a pulse within one half to one and one half sample periods from the peak of the pulse.

A still further aspect is to use signal level moving averages of two samples for detection.

The above and other aspects of the invention are accomplished in a digital pulse detector that uses four samples of a read signal to detect a data transition as soon as one sample beyond the time of the peak of the signal level at the bit transition. The pulse detector detects peaks by sampling at the center of the peak or by sampling at each side of the peak. The pulse detector detects pulses while tracking, where the pattern of pulses is not known in advance, or while acquiring

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

timing lock on the signal in a preamble, where the data pattern is fixed. Thus the pulse detector provides four combinations of detection to detect in tracking or acquisition mode, using either center or side sampling in either mode. The detection rules are summarized in Table 2.

5 In an alternative embodiment, the detector uses a moving average of two adjacent samples, as well as individual sample signal levels, to perform the detection. The alternative embodiment uses the sampled signal levels directly to determine peaks in side sampled acquisition mode, and in center sampled tracking mode. In the other two of the combinations, the alternative embodiment detector uses two-sample moving
10 averages to determine peaks. The preamble pattern for acquisition in the alternative embodiment is restricted to be a repeating sequence of alternating polarity pulses with a period of four sample intervals. This is more restrictive than the pattern handling capability of the first embodiment, however, it permits the alternative embodiment to perform earlier detection of the pulses in the side sampled acquisition case and it uses
15 simpler rules in acquisition. The detection rules for the alternative embodiment are summarized in Table 1.

Both embodiments avoid using a signal threshold to qualify the pulses during acquisition. This aspect prevents the gain at the beginning of the acquisition from affecting acquisition, since the gain may be incorrect at the beginning of acquisition.
20 During tracking, where the pulses may be more widely separated, a threshold is used to qualify pulses. This qualification prevents the detection of small noise-induced pulses as data pulses.

BRIEF DESCRIPTION OF THE DRAWINGS

The above and other aspects, features, and advantages of the invention will be better
25 understood by reading the following more particular description of the invention, presented in conjunction with the following drawings, wherein:

Fig. 1 shows a block diagram of the invention and the environment of the invention;

Fig. 2 shows a block diagram of the circuitry that provides data samples to the
30 invention;

Fig. 3 shows a block diagram of the digital circuitry of the read channel containing the invention;

Fig. 4 shows a signal waveform and illustrates center sampling of the pulses;



Fig. 5 shows a signal waveform and illustrates side sampling of the pulses;
Figs. 6, 7, and 8 show a high-level logic diagram of the pulse detector of the
present invention for the equations of Table 1; and
Figs. 9, 10, and 11 show a high-level logic diagram of the pulse detector of the
present invention for the equations of Table 2.

DESCRIPTION OF THE PREFERRED EMBODIMENT

The following description is of the best presently contemplated mode of carrying out the present invention. This description is not to be taken in a limiting sense but is made merely for the purpose of describing the general principles of the invention. The scope of the invention should be determined by referencing the appended claims.

Fig. 1 shows a block diagram of the invention and a typical environment of the invention. Referring now to Fig. 1, a computer system 100 contains a processing element 102 which communicates to other elements of the computer system 100 over a system bus 104. A keyboard 106 and a display 108 allow a user of the computer system 100 to communicate with the computer system 100. A memory 110 contains programs and data which cause the computer system 100 to perform operations desired by the user.

A disk data storage system 112 is connected to the system bus 104 for storing data and programs within the computer system 100. A disk controller 114 within the disk device 112 communicates to the system bus 104 and controls the operations of a disk drive 118, possibly in conjunction with a local microprocessor (not shown) within the disk data storage system 112. The disk drive 118 performs the storage function, typically storing the data on magnetic media. A bus 116 connects the disk controller 114 to the disk drive 118, specifically connecting to a write channel 120 to write data onto the disk through write heads and amplifiers 128. When data is being read from the disk through the read head and amplifiers 128 the data comes back through the read channel 122 which contains the pulse detector of the present invention. The read and write heads may be physically the same heads. The data first passes through the analog section 126 of the read channel 122 and then through the digital section 124 of the read channel 122 before being sent on the bus 116 to the disk controller 114. After being processed by the disk controller 114, the data is then sent over the system bus 104 to the memory 110 where it is processed.



The disk controller 114 also connects to other circuits, not shown, within the disk drive 118, such as a circuit which moves the read/write heads over the surface of the data storage media.

Although not shown in Fig. 1, the pulse detector of the present invention can
5 be used to detect pulses within data received from a transmission line, such as a telephone line or local area network, in a data communications receiver. It may also be used in any other device that must detect pulses within a signal.

Fig. 2 shows a block diagram of the analog circuitry 126 of the read channel 122. Referring now to Fig. 2, when a read head is passing over a track of the data
10 storage medium, it picks up a signal which is amplified by a preamplifier, not shown. After this preamplification, the signal 201 is passed to a variable gain amplifier 202. The signal is further amplified by the variable gain amplifier 202 and passed through an analog equalizer circuit 204, which filters the signal as desired, for example, so as
15 to remove unwanted high frequencies and shape the remaining spectrum, to an Analog to Digital converter 206. The A to D converter 206 converts the analog signal into a digital value, providing six bits of digital information in the preferred embodiment, and then the data is passed to a register/de-multiplexer 207. In the preferred embodiment, the digital section 124 of the read channel 122 processes two samples in parallel. To create these two samples, the register/de-multiplexer 207
20 stores every other sample taken by the A to D converter 206. After the second sample is taken, the data from the two samples is passed to the data bus 230. The bus 230 is clocked by a single half-frequency clock signal.

The timing necessary for converting the data, also called taking a sample, in the A to D converter 206 is supplied by a variable frequency oscillator 222 which is
25 controlled by the output of a digital to analog converter (DAC) 220. The input to the DAC 220 comes from the digital section of the read channel 124 as timing feedback signal 234.

The gain of the variable gain amplifier 202 is controlled through a gain feedback signal 232 which originates in the digital portion 124 of the read channel
30 122. The gain feedback signal 232 is input to a summing junction 210 which has a coarse gain control value as its other input. The coarse gain control can be set by the disk controller 114, or a local microprocessor within the disk drive (not shown), to provide a nominal gain level which is then adjusted up or down by the gain feedback signal 232. After being summed with the coarse gain control value, the feedback



signal is sent to a digital to analog converter 212 and then to a filter 214. Because of the nature of digital to analog converters, the output of the DAC 212 may contain glitches when it is changing values. Therefore, the filter 214 may be necessary to remove these glitches in the feedback signal. After being filtered, the signal is
5 converted to an exponential value by the exponential converter block 216 and then connected to the variable gain amplifier 202. This conversion makes the small-signal gain control dynamics independent of the input signal amplitude.

Fig. 3 shows a block diagram of the digital section 124 of the read channel 122 (Fig. 1). Referring now to Fig. 3, the digital data signal 230 from Fig. 2 is input to a
10 delay circuit 304 and a digital filter circuit 302. The digital data signal 230 is also input to a multiplexer 306 whose output is connected to a second multiplexer 310 with an output that feeds the pulse detector 312 of the present invention. The output of the pulse detector 312 is connected to a gain control circuit 330 which provides the gain feedback signal 232 that connects to Fig. 2. The output of the pulse detector 312
15 is also connected to a timing recovery circuit 328 whose output 234 connects to the digital to analog converter 220 of Fig. 2. The output of the pulse detector 312 of the present invention may also be connected to a sync mark detector 322 and an RLL decoder 320, as shown in Fig. 3, or a more sophisticated data detector (not shown) may be connected to the sync mark detector 322 and the RLL decoder 320. The
20 output of the RLL decoder 320 and the sync mark detector 322 are connected to the disk controller 114 (Fig. 1) through the bus 116.

The pulse detector 312 of the present invention is designed to detect pulses using one of two types of sampling methods, selected by the user. The first detection method is called center sampling wherein one of the samples taken will arrive at or
25 very near the center, or peak, of a pulse. The location of the sampling is controlled by the timing recovery block 328 of Fig. 3. In the other method of sampling, called side sampling, the timing recovery block 328 will adjust the timing of the VFO 222 (Fig. 2) such that two samples are taken wherein one of the two samples appears on one side of the peak of the pulse and the other of the two samples appears on the
30 other side of the peak. The user of the system determines whether center sampling or side sampling is used by setting a bit in a control register through the interface 116 (Fig. 1).

For either center or side sampling, sampling can occur at two different times within a data record being read from the disk media. The first time sampling occurs



is called acquisition, because it occurs when the gain control and timing control are acquiring the gain and timing relationships of the pulses. This occurs when the read head is passing a preamble portion of the data record which always has a known data pattern to facilitate acquisition of the timing and gain. When data is being
 5 transferred, a different mode is used for the pulse detector, called tracking, since data has an irregular and a priori unknown pattern of pulses.

Therefore, the pulse detector of the present invention is designed to detect pulses under four separate conditions. The first condition is acquisition mode using side sampling, the second is acquisition mode using center sampling, third is tracking
 10 mode using side sampling, and fourth is tracking mode using center sampling.

The pulse detector analyzes the current sample of the amplitude of the signal as well as the previous three samples of the signal amplitude. Using these four samples, Table 1 shows equations for one embodiment of the pulse detector, and Table 2 shows equations for another embodiment.

15 In Table 1, y_n is the current sample, y_{n-1} is the first previous sample, and y_{n-2} is the second previous sample. The third previous sample is used only through the moving averages, $(1+D)/2$ (described below). The equations of Table 1 will be further described below with respect to Figs. 5 and 6. Also, the equations of Table 1 show pulse detection of a pulse whose peak occurs at time y_{n-1} for center sampling,
 20 or between y_{n-1} and y_{n-2} for side sampling tracking mode, or between y_n and y_{n-1} for side sampling acquisition mode. The circuits of Figs. 6-8 processes two signal samples simultaneously. The equations for the second sample are the same as the equations of Table 1, with one time delay. Thus, for example, y_n in Table 1 would be replaced by y_{n-1} , y_{n-1} would be replaced by y_{n-2} , and y_{n-2} would be replaced by y_{n-3} .

25 Fig. 4 shows a signal waveform of an isolated pulse and illustrates center sampling of the pulse. Referring now to Fig. 4, a signal waveform 402 is shown having a positive level above a baseline 404. Four samples of this waveform have been taken with the sample identified by reference 412, y_n , being the most recent sample. Sample 410, y_{n-1} , is the sample just prior to the most recent sample, sample 408 is the next
 30 previous sample and sample 406 is the oldest of the four samples shown. A threshold value 414 is also shown and the signal value of sample 410 must be greater than the threshold 414 for the pulse to be detected in tracking mode. Negative pulses would appear as a mirror image of Fig. 4.

Fig. 5 shows a signal waveform of an isolated pulse and illustrates side



sampling of the pulse. Referring now to Fig. 5, a signal waveform 502 is shown as a positive level above a baseline 503. Four samples are shown, with the most recent sample being sample 510. Sample 508 is the sample previous to the most recent, 506 is the next previous sample and sample 504 is the oldest of the four samples shown.

5 These samples are also identified by the reference y_n through y_{n-3} . Also, a threshold 512 is illustrated, and sample $(y_{n-1} + y_{n-2}) / 2$ must be greater than the threshold 512 to be considered a pulse during tracking.

Figs. 6, 7, and 8 show a high-level logic diagram of the pulse detector 312 of the present invention. Referring now to Figs. 6, 7, and 8, signals 610 and 632 are received from the register/de-multiplexer 207 of Fig. 2 through digital data signal 230.

10 As discussed above with respect to Fig. 2, the analog section 126 sends two samples at a time to the digital section. Signal 610, also designated y_n , is the digitized value for the signal level of the most recent sample. Signal 632, also designated y_{n-1} , is the digitized value for the signal level of the next prior to the most recent sample. In the preferred embodiment, these two signals are each six bit digital values stored in two's complement number representation, with one of the bits being the sign bit. Signal 610 is fed to a multiplexer 608 and signal 632 is fed to a second multiplexer 640. These multiplexers are controlled by an exclusive-OR gate 606 which has two signals 602 and 604 as its inputs. Signal 602 determines whether the pulse detector is in acquisition

15 or tracking mode, as described above, and signal 604 determines whether the pulse detector is in center or side sampling mode, as discussed above. When the pulse detector is in acquisition and side sampling mode, or the pulse detector is in tracking and center sampling mode, signals 610 and 632 will be selected by the multiplexers 608 and 640 respectively. When the pulse detector is in acquisition mode center sampling or in tracking mode side sampling, the multiplexers 608 and 640 will select signals 631 and 639 respectively.

20

Signal 631 is called a $(1+D)/2$ signal and is formed by adding signal 610 to signal 632 in summing junction 628 and then dividing this sum by two with a divide by two circuit 630 to produce signal 631. The summing junction 628 is a six bit add circuit and the divide by two circuit 630 is a shift.

25

30 The signal 631 represents the sum of the y_n signal and y_{n-1} divided by two, therefore, it is the average of y_n and y_{n-1} .

Circuits 634, 636, and 638 produce a $(1+D)/2$ signal for the previous samples. That is, delay circuit 634, which is a set of D flip flops, is used to delay the y_n signal 610 by one clock cycle (two sample times), so it becomes signal y_{n-2} which is sent to



the summing junction 636. Summing junction 636 sums y_{n-2} with y_{n-1} and divides the result by two to produce the average at signal 639. As disclosed in Table 1, these $(1+D)/2$ signals are used in two of the four cases that the pulse detector can decode.

After passing through multiplexer 608, y_n signal 610 is sent to Figs. 7 and 8
5 over y_n signal 613. This signal is also delayed by delay circuit 617 to become y_{n-2} signal 614. In addition, y_n signal 613 is connected to a sign-bit circuit 616 which extracts only the sign-bit from the six-bit digital value. This sign-bit is connected to an exclusive-OR circuit 618 along with the other bits of the digital value 613. Also, the sign-bit 616 is connected to another summing junction 620 along with the output of the
10 exclusive-OR circuit 618 and a threshold value 656. The circuits 616, 618, and 620 convert the value of y_n to an absolute value, that is, y_n is negated if it was originally a negative value to produce a positive value and is unchanged if it was originally a positive value. The threshold signal 656 is then subtracted from the absolute value to produce a non-negative value if the absolute value of y_n is greater than or equal to
15 the threshold. The summing junction 620 produces a negative value if the absolute value of y_n is less than the threshold 656.

The output of the summing junction 622 is passed to another sign-bit circuit 624 which extracts the sign bit from the result and inverts it. This will indicate whether the absolute value of y_n is greater than or equal to the threshold value 656.
20 The inverted sign-bit is then sent through a delay circuit 626. The output signal 627 of the delay circuit 626 has a value of one if the absolute value of y_n delayed by one clock cycle, that is, $|y_{n-2}|$, is greater than or equal to the threshold value, and is zero if it is less than the threshold.

In a similar manner, y_{n-1} signal 642 is sent to a sign-bit circuit 644, an exclusive-OR circuit 646, and a summing junction 648. The output of the summing junction 648 indicates whether the absolute value of the y_{n-1} signal is greater than or equal to the threshold value 656. This result is passed through a sign-bit circuit 650 and then inverted to indicate whether the absolute value of y_{n-1} is greater than or equal to the threshold value 656.
25

30 Fig. 7 shows a high-level logic diagram of the section of the pulse detector 312 that detects pulses during data tracking. Referring now to Fig. 7, comparator circuits 702 and 704 compare the results of the last three samples taken of the signal. Y_n signal 613 is the most recent sample, y_{n-1} signal 642 is the previous sample, and y_{n-2} signal 614 is the sample prior to signal 642. The outputs of the comparator 702 and



704 are connected to a number of AND gates and delay circuits to implement the tracking equations shown in Table 1.

AND gate 706 determines whether a positive pulse is detected at time n (with the peak at time $n-1$). Output 736 of comparator 702 is a logical one if y_{n-2} is less than y_{n-1} , and output 740 of comparator 704 is a logical one if y_n is less than y_{n-1} . These signals are ANDed together with the inverted sign of the signal level of y_{n-1} to produce a logical one from AND gate 706 if a positive pulse has been detected at time n .

AND gate 708 determines whether there is a negative pulse at time n (with the peak at time $n-1$). Output 738 of comparator 702 is a logical one if y_{n-1} is less than y_{n-2} , and output 742 of comparator 704 is a logical one if y_{n-1} is less than y_n . These signals are ANDed together with the sign of y_{n-1} to produce a logical one from AND gate 708 if a negative pulse is detected at time n .

AND gates 716 and 718 determine whether a pulse is detected at time $n-1$ (with the peak at time $n-2$). Output 736 of comparator 702 indicates that y_{n-2} is less than y_{n-1} . Output 740 of comparator 704, after being delayed by delay circuit 710, indicates that y_{n-2} is less than y_{n-3} . Signal 744 indicates that y_{n-2} is negative, therefore, the ANDing of signals 736, 748, and 744 indicate there is a negative pulse detected at time $n-1$.

Signal 738 indicates that y_{n-2} is greater than y_{n-1} . Signal 746, the output of delay circuit 712, indicates that y_{n-2} is greater than y_{n-3} . By ANDing signals 738, 746, and the inverted signal 744, AND gate 718 indicates that a positive pulse is detected at time $n-1$.

The output of OR gate 714 indicates that a pulse, either positive or negative, is detected at time n , and the output of OR gate 724 indicates that a positive or negative pulse is detected at time $n-1$. AND gate 720 determines whether the magnitude of the pulse at time n was greater than the threshold value and it also determines whether the pulse detector is in tracking mode. AND gate 726 determines whether the pulse at time $n-1$ was greater than the threshold and whether the detector is in tracking mode. Because of the recording code used in writing data to the storage media in this application, a pulse can never occur at time n and also at time $n-1$. Therefore, the outputs of and gates 720 and 726 are cross-coupled to AND gates 728 and 730 to prevent detection of pulses in both locations at once. Thus, the output of gates 728 and 730 will indicate that a pulse occurred either at time n or at time $n-1$ but not both. These outputs are connected to the circuit of Fig. 8.



Fig. 8 shows a high level logic diagram of the portion of the pulse detector that implements the acquisition equations shown in Table 1 for acquisition mode. Referring now to Fig. 8, signal 602 indicates whether or not the detector is in acquisition mode. Sign-bit extractor circuit 802 and sign-bit extractor circuit 804
5 extract the sign bits from the values y_n and y_{n-1} respectively. These two sign bits are exclusive NORed in XNOR circuit 808, whose output indicates whether the sign of y_n is equal to the sign of y_{n-1} . Circuit 810 indicates whether the sign of y_{n-1} is not equal to the sign of y_{n-2} . If both these conditions are true, the output of AND gate 816 will indicate that a pulse is detected at time n (with the peak between time n and time $n-1$) in acquisition mode. This output is ORed with output 732 from Fig. 7 which
10 indicates whether a pulse is detected at time n in tracking mode, therefore, signal 824 indicates whether a pulse is detected in one of the modes at time n .

The sign-bit output of circuit 804 is delayed one clock cycle to indicate the sign of signal y_{n-3} . This signal is exclusive ORed with the sign bit of y_{n-2} by circuit 814,
15 whose output indicates whether the sign of y_{n-2} is not equal to the sign of y_{n-3} . The output of exclusive-OR circuit 810, after being inverted at the input of AND gate 818, indicates whether the sign of y_{n-1} is equal to the sign of y_{n-2} . Therefore, the output of AND gate 818 indicates whether a pulse is detected in acquisition mode at time $n-1$ (with the peak between time $n-1$ and time $n-2$). This output is ORed with the output
20 734 of Fig. 7, which indicates whether a pulse is detected in tracking mode at time $n-1$. Therefore, output 826 indicates whether a pulse is detected at time $n-1$, either in acquisition or tracking mode.

Figs. 9 through 11 show a circuit that implements the equations of Table 2. This circuit, and the equations of Table 2, provide an implementation of the pulse
25 detector that allows the preamble section of the data to contain different types of patterns. For example, the circuit of Figs. 6-8 works well for a preamble having a 2T pattern, which is an alternating 1-0 pattern (10101010...), where a 1 indicates presence of a pulse, a zero indicates absence of a pulse, and pulses alternate in polarity. The circuit of Figs 9-11 allows a 2T pattern, a 3T pattern (100100...), and an 4T pattern
30 (10001000...). Thus, the circuit of Figs. 9-11 and equations of Table 2 are the preferred embodiment and the best mode.

In all cases except side sampling acquisition mode, the equations of both Tables 1 and 2 detect pulses with the same latency. For side sampling acquisition, the equations of Table 1 detect peaks one sample sooner than the equations of Table 2.



However, the equations of Table 2 are consistent in the amount of latency in both acquisition and tracking modes, while with the equations of Table 1 for side sampling, the latency in acquisition mode is one sample shorter than the latency in tracking mode.

5 The equations of Table 2 show detection of a pulse at time y_n . As with the circuits of Figs. 6-8, the circuit of Figs. 9-11 processes two signal samples simultaneously. The equations for the second sample are the same as the equations of the first sample shown in Table 2, with one time delay. Thus, for example, y_n in Table 2 is replaced by y_{n-1} , y_{n-1} is replaced by y_{n-2} , etc., for the second sample.

10 Referring now to Figs 9-11, Fig. 9 shows a series of comparators, 912-922, that compare the values of y_n , y_{n-1} , y_{n-2} , and y_{n-3} , and compares y_n and y_{n-1} to the threshold value. Most of the comparators have a delay circuit, 924-938, on their output to also provide a comparison of y_{n-2} , y_{n-3} , y_{n-4} , and y_{n-5} . These circuits thus provide all the inputs necessary for the equations of Table 2, and the equivalent equations for the
15 second sample as discussed above.

Fig. 10 implements the equations of Table 2 for the current sample, and Fig. 11 implements the equations of Table 2 for the first previous sample. Therefore, in the following description, Figs. 10 and 11 will be described together.

In Figs. 10 and 11, NOR circuits 1002 and 1102 determine if the absolute
20 value of the signal is greater than the threshold. As shown in Table 2, this comparison is done in tracking mode, but not in acquisition mode. Multiplexers 1020 and 1120 select side or center sampling mode. Multiplexers 1008 and 1108 select positive or negative pulses in center sampling mode, and multiplexers 1018 and 1118 select positive or negative pulses in side sampling mode. NAND circuits 1004, and
25 1104 implement the equations for center sampling positive pulses, and NAND circuits 1010 and 1110 implement the equations for center sampling negative pulses. Multiplexers 1006, 1106, 1012, and 1112 allow a user to select one of two equations during center sampling. These equations are shown in Table 2, equation 3, for positive and negative pulses of center sampling. This provides flexibility to the user
30 of the circuit. NAND circuits 1016 and 1116 implement the equations for side sampling, positive pulses, and NAND circuits 1022 and 1122 implement the equations for side sampling, negative pulses. Condition 3 of Table 2 may be omitted during tracking mode when condition 4 is used.

Because data recorded on a magnetic storage medium is recorded using small

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

magnets having alternating north-south poles, the signal detected by the read head will always have alternating positive and negative pulses. Therefore, for detecting signals read from a magnetic recording medium, the equations of Tables 1 and 2 could be easily modified to detect a pulse only if the pulse is opposite in polarity to the
5 previous pulse detected. This could provide additional noise immunity.

Having thus described a presently preferred embodiment of the present invention, it will now be appreciated that the aspects of the invention have been fully achieved, and it will be understood by those skilled in the art that many changes in construction and circuitry and widely differing embodiments and applications of the
10 invention will suggest themselves without departing from the spirit and scope of the present invention. The disclosures and the description herein are intended to be illustrative and are not in any sense limiting of the invention, more preferably defined in scope by the following claims.

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

Table 1

	Acquisition	Tracking	
Side Sampled	1) $\text{SGN}(y_n) = \text{SGN}(y_{n-1})$ 2) $\text{SGN}(y_{n-1}) \neq \text{SGN}(y_{n-2})$	y_n sequence is filtered by $(1+D)/2$, then fed into Center Sampled tracking pulse detector	
Center Sampled	y_n sequence is filtered by $(1+D)/2$, then fed into Side Sampled acquisition pulse detector	<u>Pos Pulse</u> 1) $y_{n-1} > \text{Thr}$ 2) $y_{n-1} > y_{n-2}$ 3) $y_{n-1} > y_n$	<u>Neg Pulse</u> 1) $y_{n-1} < -\text{Thr}$ 2) $y_{n-1} < y_{n-2}$ 3) $y_{n-1} < y_n$

where Thr is the Threshold value

Table 2

	<u>Positive Pulse</u>	<u>Negative Pulse</u>
Side Sampled	1) $y_n < y_{n-2}$ 2) $y_{n-3} < y_{n-1}$ 3) $y_{n-4} < y_{n-2}$	1) $y_n > y_{n-2}$ 2) $y_{n-3} > y_{n-1}$ 3) $y_{n-4} > y_{n-2}$
Trk Only	4) $y_{n-1} > \text{Thr}$	4) $-y_{n-1} > \text{Thr}$
Center Sampled	1) $y_n < y_{n-1}$ 2) $y_{n-2} < y_{n-1}$ 3) $y_{n-3} < y_{n-2}$	1) $y_n > y_{n-1}$ 2) $y_{n-2} > y_{n-1}$ 3) $y_{n-3} > y_{n-2}$
	or $y_{n-3} < y_{n-1}$	or $y_{n-3} > y_{n-1}$
Trk Only	4) $y_{n-1} > \text{Thr}$	4) $-y_{n-1} > \text{Thr}$

where Thr is the Threshold value

THIS SHEET HAS BEEN
REPLACED

This Sheet Has Been Replaced



CLAIMS

What is claimed is:

- 1 1. A pulse detector for detecting pulses in a continuous signal, said pulse detector
- 2 comprising:
- 3 an analog to digital converter for converting said signal to digital sample
- 4 values at controlled sampling times;
- 5 at least one data storage register connected to an output of said analog to
- 6 digital converter for storing a previous digital sample value as said
- 7 digital sample value is created at said controlled sampling times;
- 8 at least one comparator connected to said data storage registers, and
- 9 connected to said output of said analog to digital converter, for
- 10 comparing said stored digital sample value and a current digital sample
- 11 value from said analog to digital converter;
- 12 at least one data storage register connected to an output of each of said at
- 13 least one comparator for storing a result of said comparing;
- 14 first logic circuit means connected to outputs of said at least one comparator
- 15 and outputs of said at least one data storage register for indicating a
- 16 pulse at a first previous sample time if a value of a second previous
- 17 sample is lower than a value of said first previous sample, a value of
- 18 a third previous sample is lower than said value of said second
- 19 previous sample, a value of the output of said analog to digital
- 20 converter is lower than said value of said first previous sample and the
- 21 value of the first previous sample is nonnegative; and
- 22 second logic circuit means connected to outputs of said at least one
- 23 comparator and outputs of said at least one data storage register for

This Sheet Has Been Replaced



* C L M S *

THIS SHEET HAS BEEN
REPLACED

24 indicating a pulse at a first previous sample time if a value of a second
25 previous sample is greater than a value of said first previous sample,
26 a value of a third previous sample is greater than said value of said
27 second previous sample, a value of the output of said analog to digital
28 converter is greater than said value of said first previous sample and
29 the value of the first previous sample is negative.

1 2. A pulse detector for detecting pulses in a continuous signal, said pulse detector
2 comprising:
3 an analog to digital converter for converting said signal to digital sample
4 values at controlled sampling times;
5 at least one data storage register connected to an output of said analog to
6 digital converter for storing a previous digital sample value as said
7 digital sample value is created at said controlled sampling times;
8 at least one comparator connected to said data storage registers, and
9 connected to said output of said analog to digital converter, for
10 comparing said stored digital sample value and a current digital sample
11 value from said analog to digital converter;
12 at least one data storage register connected to an output of each of said at
13 least one comparator for storing a result of said comparing;
14 first logic circuit means connected to outputs of said at least one comparator
15 and outputs of said at least one data storage register for indicating a
16 pulse at a first previous sample time if a value of a second previous
17 sample is lower than a value of said first previous sample, a value of
18 a third previous sample is lower than said value of said first previous

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

19 sample, a value of the output of said analog to digital converter is
20 lower than said value of said first previous sample and the value of the
21 first previous sample is nonnegative; and
22 second logic circuit means connected to outputs of said at least one
23 comparator and outputs of said at least one data storage register for
24 indicating a pulse at a first previous sample time if a value of a second
25 previous sample is greater than a value of said first previous sample,
26 a value of a third previous sample is greater than said value of said
27 first previous sample, a value of the output of said analog to digital
28 converter is greater than said value of said first previous sample and
29 the value of the first previous sample is negative.

1 3. The pulse detector of claims 1 or 2 wherein said first and second logic circuit
2 means further comprise:

3 a first threshold comparator connected to said first logic means for comparing
4 said value of said first previous sample to a predetermined threshold
5 value and allowing said indication of a pulse at said first previous
6 sample time if said value of said first previous sample is greater than
7 said predetermined threshold value; and

8 a second threshold comparator connected to said second logic means for
9 comparing said value of said first previous sample to a predetermined
10 threshold value and allowing said indication of a pulse at said first
11 previous sample time if said value of said first previous sample is less
12 than the negative of said predetermined threshold value.

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

1 4. The pulse detector of claims 1 or 2 further comprising:

2 a third logic circuit means connected to outputs of said comparators and
3 outputs of said plurality of data storage registers for indicating a pulse
4 at said second previous sample time if a value of said third previous
5 sample is lower than a value of said second previous sample, a value
6 of a fourth previous sample is lower than said value of said third
7 previous sample, and a value of said first previous sample is lower than
8 said value of said second previous sample and the value of the second
9 previous sample is nonnegative; and

10 a fourth logic circuit means connected to outputs of said comparators and
11 outputs of said plurality of data storage registers for indicating a pulse
12 at said second previous sample time if a value of said third previous
13 sample is greater than a value of said second previous sample, a value
14 of a fourth previous sample is greater than said value of said third
15 previous sample, and a value of said first previous sample is greater
16 than said value of said second previous sample and the value of the
17 second previous sample is negative.

1 5. The pulse detector of claim 4 wherein said first through fourth logic circuit means
2 further comprise:

3 a first threshold comparator connected to said first logic means for comparing
4 said value of said first previous sample to a predetermined threshold
5 value and allowing said indication of a pulse at said first previous
6 sample time if said value of said first previous sample is greater than
7 said predetermined threshold value;

This Sheet Has Been Replaced




THIS SHEET HAS BEEN
REPLACED

8 a second threshold comparator connected to said second logic means for
9 comparing said value of said first previous sample to a predetermined
10 threshold value and allowing said indication of a pulse at said first
11 previous sample time if said value of said first previous sample is less
12 than the negative of said predetermined threshold value;
13 a third threshold comparator connected to said third logic means for
14 comparing said value of said second previous sample to a
15 predetermined threshold value and allowing said indication of a pulse
16 at said second previous sample time if said value of said first previous
17 sample is greater than said predetermined threshold value; and
18 a fourth threshold comparator connected to said fourth logic means for
19 comparing said value of said second previous sample to a
20 predetermined threshold value and allowing said indication of a pulse
21 at said second previous sample time if said value of said first previous
22 sample is less than the negative of said predetermined threshold value.

1 6. The pulse detector of claims 1 or 2 further comprising:

2 a third logic circuit means connected to outputs of said comparators and
3 outputs of said plurality of data storage registers for indicating a pulse
4 at said second previous sample time if a value of said third previous
5 sample is lower than a value of said second previous sample, a value
6 of a fourth previous sample is lower than said value of said second
7 previous sample, and a value of said first previous sample is lower than
8 said value of said second previous sample and the value of the second
9 previous sample is nonnegative; and

This Sheet Has Been Replaced



* C L M S *

THIS SHEET HAS BEEN
REPLACED

10 a fourth logic circuit means connected to outputs of said comparators and
11 outputs of said plurality of data storage registers for indicating a pulse
12 at said second previous sample time if a value of said third previous
13 sample is greater than a value of said second previous sample, a value
14 of a fourth previous sample is greater than said value of said second
15 previous sample, and a value of said first previous sample is greater
16 than said value of said second previous sample and the value of the
17 second previous sample is negative.

1 7. The pulse detector of claim 6 wherein said first through fourth logic circuit means
2 further comprise:

3 a first threshold comparator connected to said first logic means for comparing
4 said value of said first previous sample to a predetermined threshold
5 value and allowing said indication of a pulse at said first previous
6 sample time if said value of said first previous sample is greater than
7 said predetermined threshold value;

8 a second threshold comparator connected to said second logic means for
9 comparing said value of said first previous sample to a predetermined
10 threshold value and allowing said indication of a pulse at said first
11 previous sample time if said value of said first previous sample is less
12 than the negative of said predetermined threshold value;

13 a third threshold comparator connected to said third logic means for
14 comparing said value of said second previous sample to a
15 predetermined threshold value and allowing said indication of a pulse
16 at said second previous sample time if said value of said first previous

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED



17 sample is greater than said predetermined threshold value; and
18 a fourth threshold comparator connected to said fourth logic means for
19 comparing said value of said second previous sample to a
20 predetermined threshold value and allowing said indication of a pulse
21 at said second previous sample time if said value of said first previous
22 sample is less than the negative of said predetermined threshold value.

1 8. A pulse detector for detecting pulses in a continuous signal, said pulse detector
2 comprising:

3 an analog to digital converter for converting said signal to digital sample
4 values at controlled sampling times;

5 at least one data storage register connected to an output of said analog to
6 digital converter for storing a previous digital sample value as said
7 digital sample value is created at said controlled sampling times;

8 at least one comparator connected to said data storage registers, and
9 connected to said output of said analog to digital converter, for
10 comparing said stored digital sample value and a current digital sample
11 value from said analog to digital converter;

12 at least one data storage register connected to an output of each of said at
13 least one comparator for storing a result of said comparing;

14 first logic circuit means connected to outputs of said at least one comparator
15 and outputs of said at least one data storage register for indicating a
16 pulse at a first previous sample time if a value of a second previous
17 sample is less than a value of said first previous sample, a value of said
18 first previous sample is greater than a predetermined threshold value,

This Sheet Has Been Replaced




THIS SHEET HAS BEEN
REPLACED

19 a value of the output of said analog to digital converter is lower than
20 said value of said first previous sample and the value of the first
21 previous sample is nonnegative; and
22 second logic circuit means connected to outputs of said at least one
23 comparator and outputs of said at least one data storage register for
24 indicating a pulse at a first previous sample time if a value of a second
25 previous sample is greater than a value of said first previous sample,
26 a value of said first previous sample is less than the negative of said
27 predetermined threshold value, a value of the output of said analog to
28 digital converter is greater than said value of said first previous sample
29 and the value of the first previous sample is negative.

- 1 9. A pulse detector for detecting pulses in a continuous signal, said pulse detector
2 comprising:
3 an analog to digital converter for converting said signal to digital sample
4 values at controlled sampling times;
5 at least one data storage register connected to an output of said analog to
6 digital converter for storing a previous digital sample value as said
7 digital sample value is created at said controlled sampling times;
8 at least one comparator connected to said data storage registers, and
9 connected to said output of said analog to digital converter, for
10 comparing said stored digital sample value and a current digital sample
11 value from said analog to digital converter;
12 at least one data storage register connected to an output of each of said at
13 least one comparator for storing a result of said comparing;

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

14 first logic circuit means connected to outputs of said at least one comparator
15 and outputs of said at least one data storage register for indicating a
16 pulse at a first previous sample time if a value of a second previous
17 sample is less than a value of said first previous sample, a value of said
18 first previous sample is greater than a predetermined threshold value,
19 a value of the output of said analog to digital converter is lower than
20 said value of said first previous sample and the value of the first
21 previous sample is nonnegative; and
22 second logic circuit means connected to outputs of said at least one
23 comparator and outputs of said at least one data storage register for
24 indicating a pulse at a first previous sample time if a value of a second
25 previous sample is greater than a value of said first previous sample,
26 a value of said first previous sample is less than the negative of said
27 predetermined threshold value, a value of the output of said analog to
28 digital converter is greater than said value of said first previous sample
29 and the value of the first previous sample is negative;
30 a third logic circuit means connected to outputs of said at least one
31 comparator and outputs of said at least one data storage register for
32 indicating a pulse at said second previous sample time if a value of
33 said third previous sample is lower than a value of said second
34 previous sample, a value of said second previous sample is greater than
35 a predetermined threshold value, a value of said first previous sample
36 is lower than said value of said second previous sample and the value
37 of the second previous sample is nonnegative; and
38 a fourth logic circuit means connected to outputs of said at least one



39 comparator and outputs of said at least one data storage register for
40 indicating a pulse at said second previous sample time if a value of
41 said third previous sample is greater than a value of said second
42 previous sample, a value of said second previous sample is less than a
43 predetermined threshold value, and a value of said first previous
44 sample is greater than said value of said second previous sample and
45 the value of the second previous sample is negative.

1 10. A pulse detector for detecting pulses in a continuous signal, said pulse detector
2 comprising:
3 an analog to digital converter for converting said signal to digital sample
4 values at controlled sampling times;
5 at least one data storage register connected to an output of said analog to
6 digital converter for storing a previous digital sample value as said
7 digital sample value is created at said controlled sampling times;
8 at least one comparator connected to said data storage registers, and
9 connected to said output of said analog to digital converter, for
10 comparing said stored digital sample value and a current digital sample
11 value from said analog to digital converter;
12 at least one data storage register connected to an output of each of said at
13 least one comparator for storing a result of said comparing;
14 first logic circuit means connected to outputs of said comparators and outputs
15 of said plurality of data storage registers for indicating a pulse at a first
16 previous sample time if a value of a third previous sample is lower
17 than a value of said first previous sample, a value of a fourth previous

This Sheet Has Been Replaced

THIS SHEET HAS BEEN
REPLACED

18 sample is lower than a value of a second previous sample, and a value
19 of the output of said analog to digital converter is lower than said
20 value of said second previous sample and the value of said first
21 previous sample is nonnegative; and
22 second logic circuit means connected to outputs of said comparators and
23 outputs of said plurality of data storage registers for indicating a pulse
24 at a first previous sample time if a value of a third previous sample is
25 greater than a value of said first previous sample, a value of a fourth
26 previous sample is greater than a value of a second previous sample,
27 and a value of the output of said analog to digital converter is greater
28 than said value of said second previous sample and the value of said
29 first previous sample is negative.

1 11. The pulse detector of claim 10 wherein said first and second logic circuit means
2 further comprise:

3 a first threshold comparator connected to said first logic means for comparing
4 said value of said first previous sample to a predetermined threshold
5 value and allowing said indication of a pulse at said first previous
6 sample time if said value of said first previous sample is greater than
7 said predetermined threshold value; and

8 a second threshold comparator connected to said second logic means for
9 comparing said value of said first previous sample to a predetermined
10 threshold value and allowing said indication of a pulse at said first
11 previous sample time if said value of said first previous sample is less
12 than the negative of said predetermined threshold value.

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

1 12. The pulse detector of claim 10 further comprising:

2 a third logic circuit means connected to outputs of said comparators and
3 outputs of said plurality of data storage registers for indicating a pulse
4 at said second previous sample time if a value of a fourth previous
5 sample is lower than a value of said second previous sample, a value
6 of a fifth previous sample is lower than said value of said third
7 previous sample, and a value of said first previous sample is lower than
8 said value of said third previous sample and the value of said second
9 previous sample is nonnegative; and

10 a fourth logic circuit means connected to outputs of said comparators and
11 outputs of said plurality of data storage registers for indicating a pulse
12 at said second previous sample time if a value of a fourth previous
13 sample is greater than a value of said second previous sample, a value
14 of a fifth previous sample is greater than said value of said third
15 previous sample, and a value of said first previous sample is greater
16 than said value of said third previous sample and the value of said
17 second previous sample is negative.

1 13. The pulse detector of claim 12 wherein said first through fourth logic circuit
2 means further comprise:

3 a first threshold comparator connected to said first logic means for comparing
4 said value of said first previous sample to a predetermined threshold
5 value and allowing said indication of a pulse at said first previous
6 sample time if said value of said first previous sample is greater than
7 said predetermined threshold value;



8 a second threshold comparator connected to said second logic means for
9 comparing said value of said first previous sample to a predetermined
10 threshold value and allowing said indication of a pulse at said first
11 previous sample time if said value of said first previous sample is less
12 than a negative of said predetermined threshold value;
13 a third threshold comparator connected to said third logic means for
14 comparing said value of said second previous sample to a
15 predetermined threshold value and allowing said indication of a pulse
16 at said second previous sample time if said value of said first previous
17 sample is greater than said predetermined threshold value; and
18 a fourth threshold comparator connected to said fourth logic means for
19 comparing said value of said second previous sample to a
20 predetermined threshold value and allowing said indication of a pulse
21 at said second previous sample time if said value of said first previous
22 sample is less than the negative of said predetermined threshold value.

1 14. A pulse detector for detecting pulses in a continuous signal, said pulse detector
2 comprising:

3 an analog to digital converter for converting said signal to digital sample
4 values at controlled sampling times;

5 at least one data storage register connected to an output of said analog to
6 digital converter for storing a previous digital sample value as said
7 digital sample value is created at said controlled sampling time;

8 at least one threshold comparator connected to said at least one data storage
9 register for comparing said stored digital sample value to a

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

10 predetermined threshold value;
11 at least one comparator connected to said at least one data storage register,
12 and connected to an output of said threshold comparator and further
13 connected to said output of said analog to digital converter, for
14 comparing said stored digital sample values and a current digital
15 sample value from said analog to digital converter and for indicating
16 a pulse at a most recently stored digital sample value if a next most
17 recently stored digital sample value is a lower value than said most
18 recently stored digital sample value and said current digital sample
19 value is a lower value than said most recently stored digital sample
20 value and said most recently stored digital sample value is a greater
21 value than said predetermined threshold value; and
22 at least one comparator connected to said at least one data storage register,
23 and connected to an output of said threshold comparator and further
24 connected to said output of said analog to digital converter, for
25 comparing said stored digital sample values and a current digital
26 sample value from said analog to digital converter and for indicating
27 a pulse at a most recently stored digital sample value if a next most
28 recently stored digital sample value is a higher value than said most
29 recently stored digital sample value and said current digital sample
30 value is a higher value than said most recently stored digital sample
31 value and said most recently stored digital sample value is a lower
32 value than the negative of said predetermined threshold value.

1 15. The pulse detector of claim 14 further comprising:

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

2 averaging means connected between said analog to digital converter and said
3 data storage registers for averaging an output of said analog to digital
4 converter with a most recent past output of said analog to digital
5 converter to produce an average value for storing in said data storage
6 registers.

1 16. A pulse detector for detecting pulses in a continuous signal, said pulse detector
2 comprising:

3 an analog to digital converter for converting said signal to digital sample
4 values at controlled sampling times;
5 at least one data storage register connected to an output of said analog to
6 digital converter for storing a previous digital sample value as said
7 digital sample value is created at said controlled sample time; and
8 at least one comparator connected to said at least one data storage register
9 and connected to said output of said analog to digital converter for
10 comparing a sign bit of each of said stored digital sample values and
11 a sign bit of a current digital sample value from said analog to digital
12 converter and for indicating a pulse at a most recently stored digital
13 sample value if a sign bit of a next most recently stored digital sample
14 value is not equal to a sign bit of said most recently stored digital
15 sample value and a sign bit of said current digital sample value is equal
16 to a sign bit of said most recently stored digital sample value.

1 17. The pulse detector of claim 16 further comprising:

2 averaging means connected between said analog to digital converter and said

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

3 data storage registers for averaging an output of said analog to digital
4 converter with a most recent past output of said analog to digital
5 converter to produce an average value for storing in said data storage
6 registers.

1 18. A pulse detector for detecting pulses in a continuous signal, said pulse detector
2 comprising:

3 an analog to digital converter for converting said signal to digital sample
4 values at controlled sampling times;

5 a first data storage register connected to an output of said analog to digital
6 converter and connected in such a manner as to store every other
7 sample;

8 a second data storage register connected to an output of said analog to digital
9 converter and connected in such a manner as to store every other
10 sample, wherein said second data register stores samples not stored by
11 said first data storage register;

12 a first threshold comparator connected to said output of said analog to digital
13 converter for comparing an absolute value of said output of said
14 analog to digital converter to a predetermined threshold value;

15 a third data storage register connected to an output of said first threshold
16 comparator for storing a result of said comparison;

17 a second threshold comparator connected to said first data storage register for
18 comparing an absolute value of an output of said first data storage
19 register to a predetermined threshold value;

20 a pair of comparators connected to said first and second data storage registers

This Sheet Has Been Replaced



21 and connected to said output of said analog to digital converter for
22 comparing said stored digital sample values and a current digital
23 sample value from said analog to digital converter; and
24 a first logic circuit connected to outputs of said pair of comparators and
25 connected to an output of said second threshold comparator, wherein
26 said first logic circuit indicates a pulse at a most recently stored digital
27 sample value if a next most recently stored digital sample value is less
28 than said most recently stored digital sample value and said current
29 digital sample value is less than said most recently stored digital sample
30 value and said second threshold comparator indicates that an absolute
31 value of said most recently stored digital sample value is greater than
32 said predetermined threshold value and said next most recently stored
33 digital sample value is nonnegative;
34 a second logic circuit connected to outputs of said pair of comparators and
35 connected to an output of said second threshold comparator, wherein
36 said first logic circuit indicates a pulse at a most recently stored digital
37 sample value if a next most recently stored digital sample value is
38 greater than said most recently stored digital sample value and said
39 current digital sample value is greater than said most recently stored
40 digital sample value and said second threshold comparator indicates
41 that an absolute value of said most recently stored digital sample value
42 is greater than said predetermined threshold value and said next most
43 recently stored digital sample value is negative;
44 a third logic circuit connected to outputs of said pair of comparators and
45 connected to an output of said third data storage register, wherein said

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

46 second logic circuit indicates a pulse at said next most recently stored
47 digital sample value if a second next most recently stored digital
48 sample value is less than said next most recently stored digital sample
49 value and said most recently stored digital sample value is less than
50 said next most recently stored digital sample value and said third data
51 storage register indicates that an absolute value of said next most
52 recently stored digital sample value is greater than said predetermined
53 threshold value and said next most recently stored digital sample value
54 is nonnegative; and

55 a fourth logic circuit connected to outputs of said pair of comparators and
56 connected to an output of said third data storage register, wherein said
57 second logic circuit indicates a pulse at said next most recently stored
58 digital sample value if a second next most recently stored digital
59 sample value is greater than said next most recently stored digital
60 sample value and said most recently stored digital sample value is
61 greater than said next most recently stored digital sample value and
62 said third data storage register indicates that an absolute value of said
63 next most recently stored digital sample value is greater than said
64 predetermined threshold value and said next most recently stored
65 digital sample value is negative.

1 19. The pulse detector of claim 18 further comprising:

2 averaging means connected between said analog to digital converter and said
3 data storage registers for averaging an output of said analog to digital
4 converter with a most recent past output of said analog to digital



5 converter to produce an average value for storing in said data storage
6 registers.

1 20. A pulse detector for detecting pulses in a continuous signal, said pulse detector
2 comprising:

3 an analog to digital converter for converting said signal to digital sample
4 values at controlled sampling times;

5 a first data storage register connected to an output of said analog to digital
6 converter and connected to store every other sample;

7 a second data storage register connected to an output of said analog to digital
8 converter and connected to store every other sample, wherein said
9 second data register stores samples not stored by said first data storage
10 register;

11 a first logic circuit connected to an output of said first data storage register
12 and connected to an output of said analog to digital converter,
13 wherein said first logic circuit indicates a pulse at a most recently
14 stored digital sample value if a sign of a next most recently stored
15 digital sample value is not equal to a sign of said most recently stored
16 digital sample value and a sign of an output of said analog to digital
17 converter is equal to said sign of said most recently stored digital
18 sample value;

19 a second logic circuit connected to outputs of said first and second data
20 storage registers, wherein said second logic circuit indicates a pulse at
21 said next most recently stored digital sample value if a sign of a second
22 next most recently stored digital sample value is not equal to said sign



23 of said next most recently stored digital sample value and said sign of
24 said most recently stored digital sample value is equal to said sign of
25 said next most recently stored digital sample value.

1 21. The pulse detector of claim 20 further comprising:
2 averaging means connected between said analog to digital converter and said
3 data storage registers for averaging an output of said analog to digital
4 converter with a most recent past output of said analog to digital
5 converter to produce an average value for storing in said data storage
6 registers.

THIS SHEET HAS BEEN
REPLACED

This Sheet Has Been Replaced



1/10

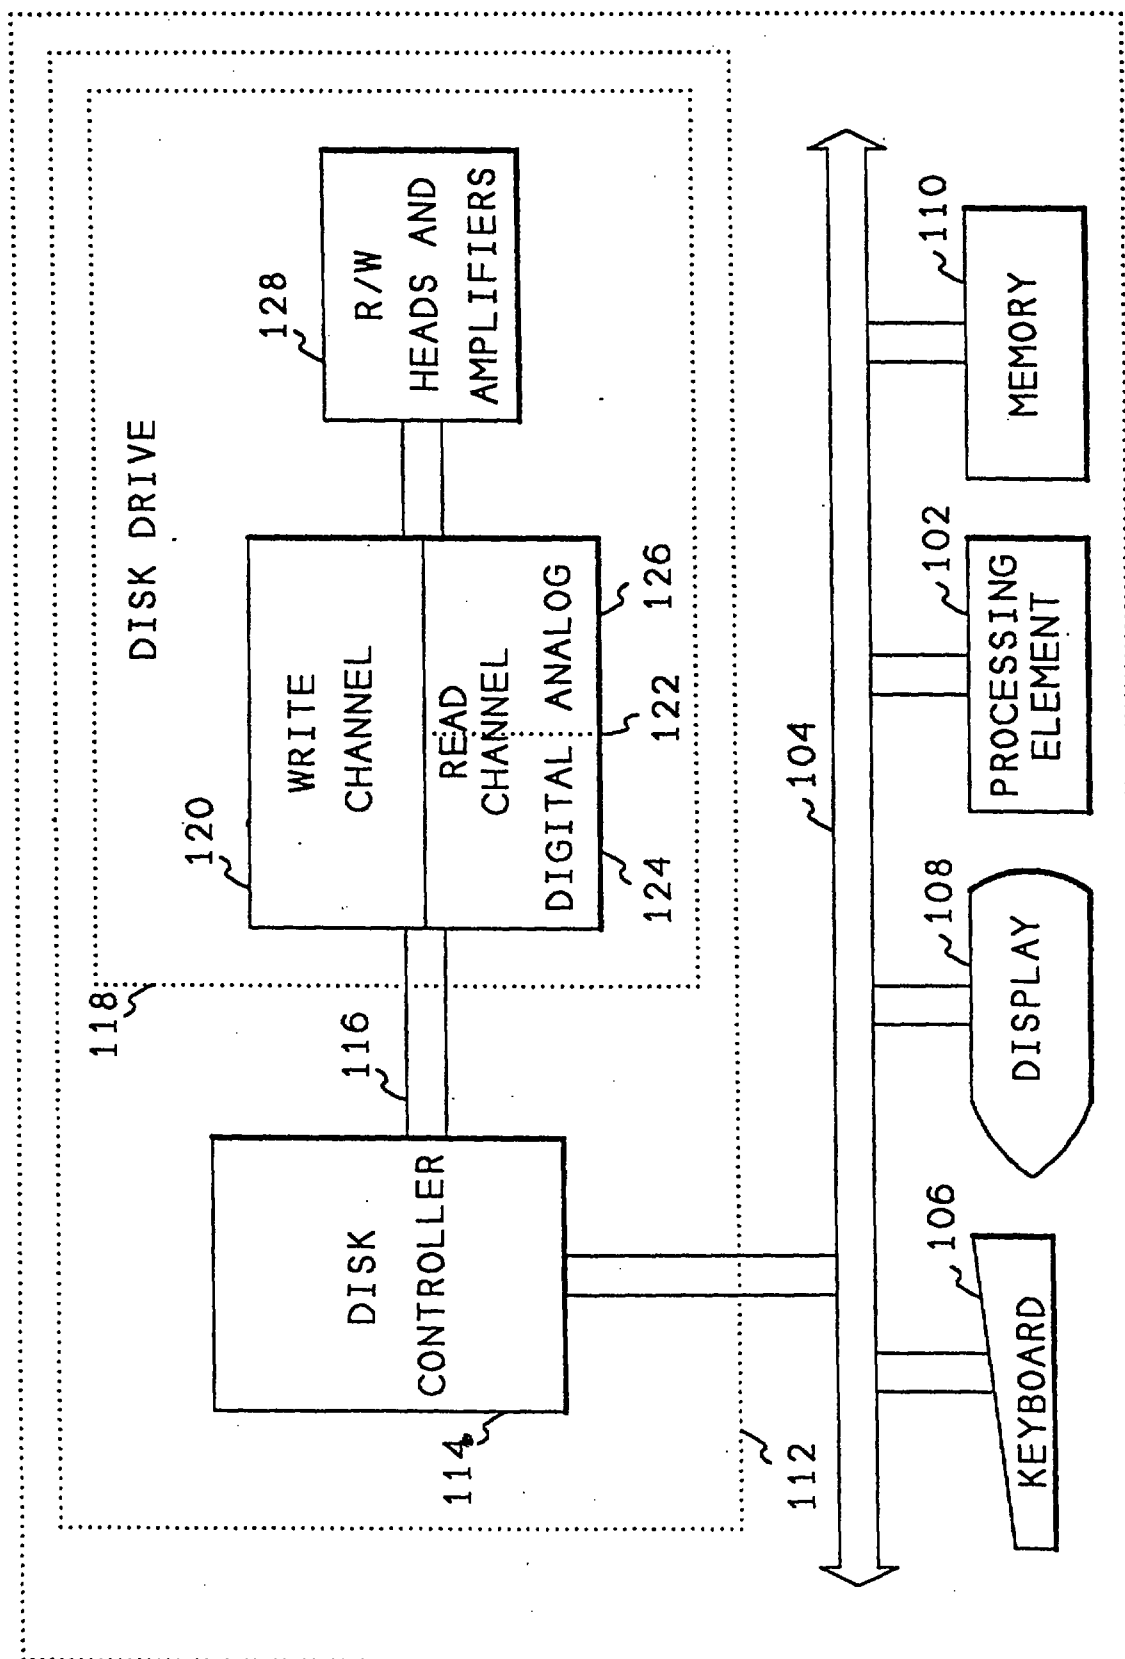


FIG. 1

2/10

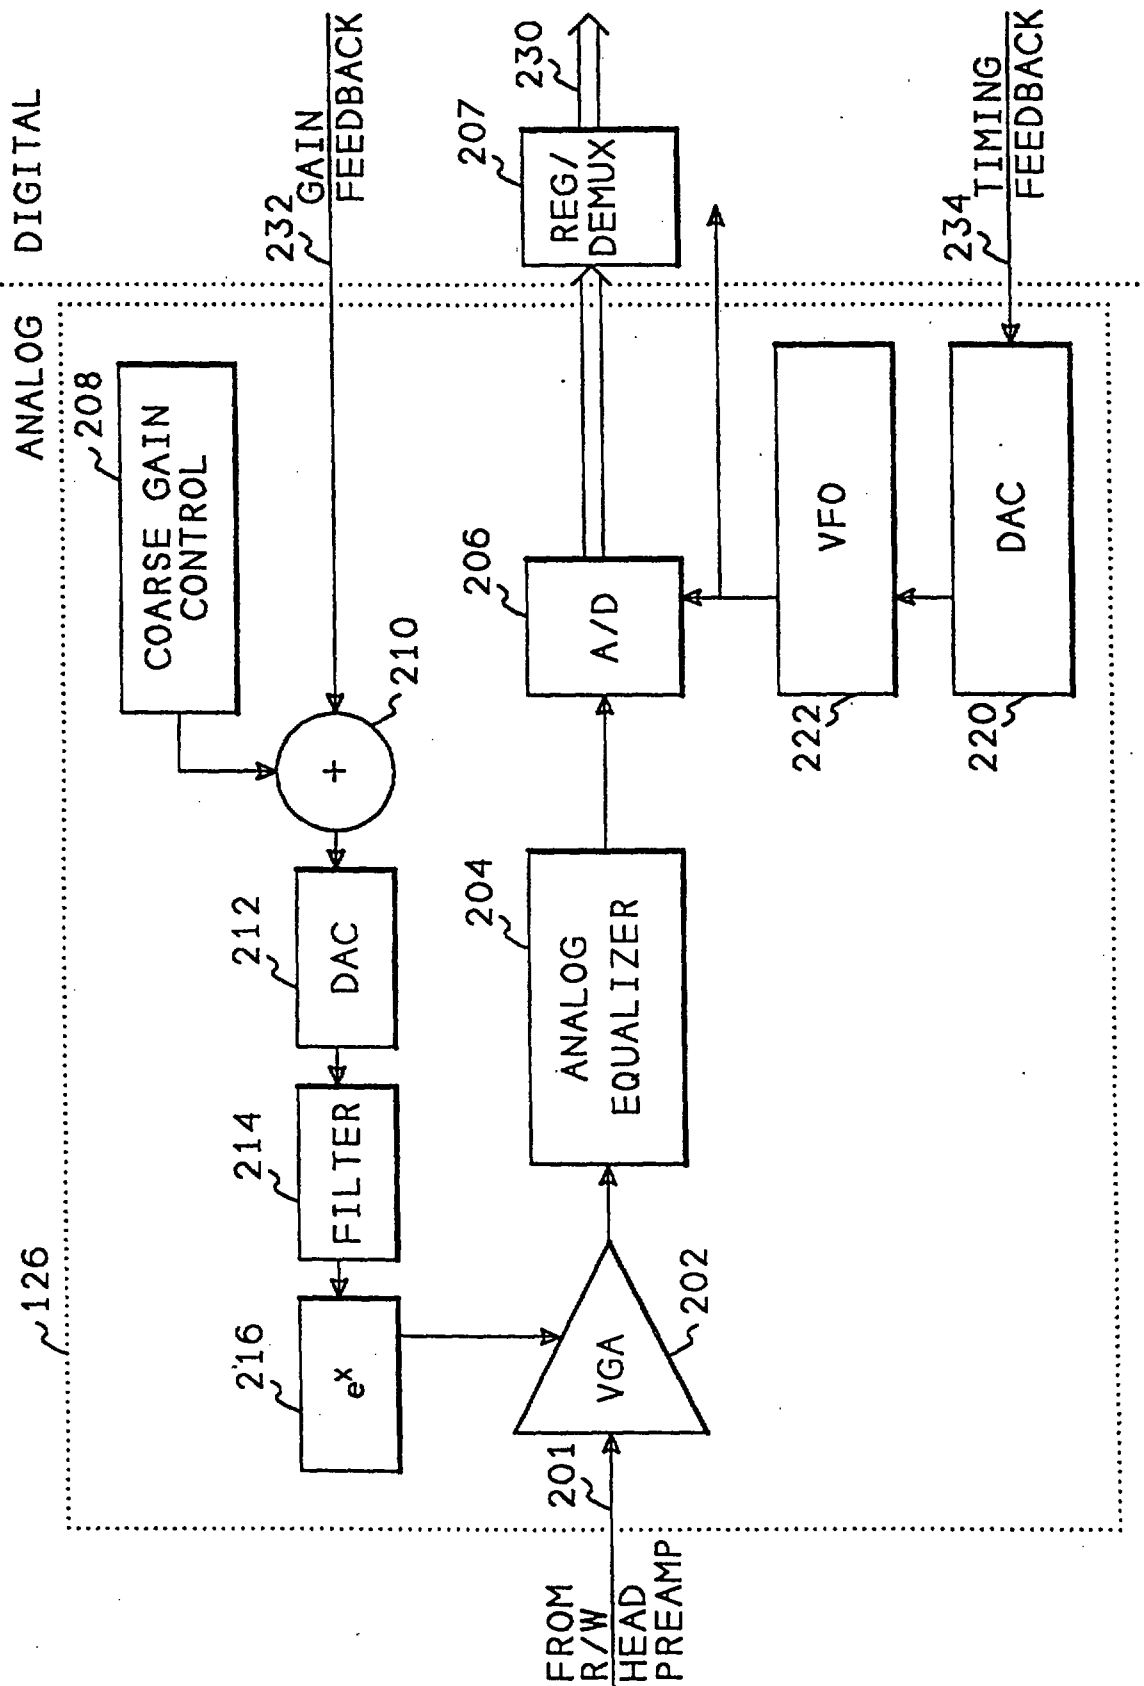


FIG. 2

3/10

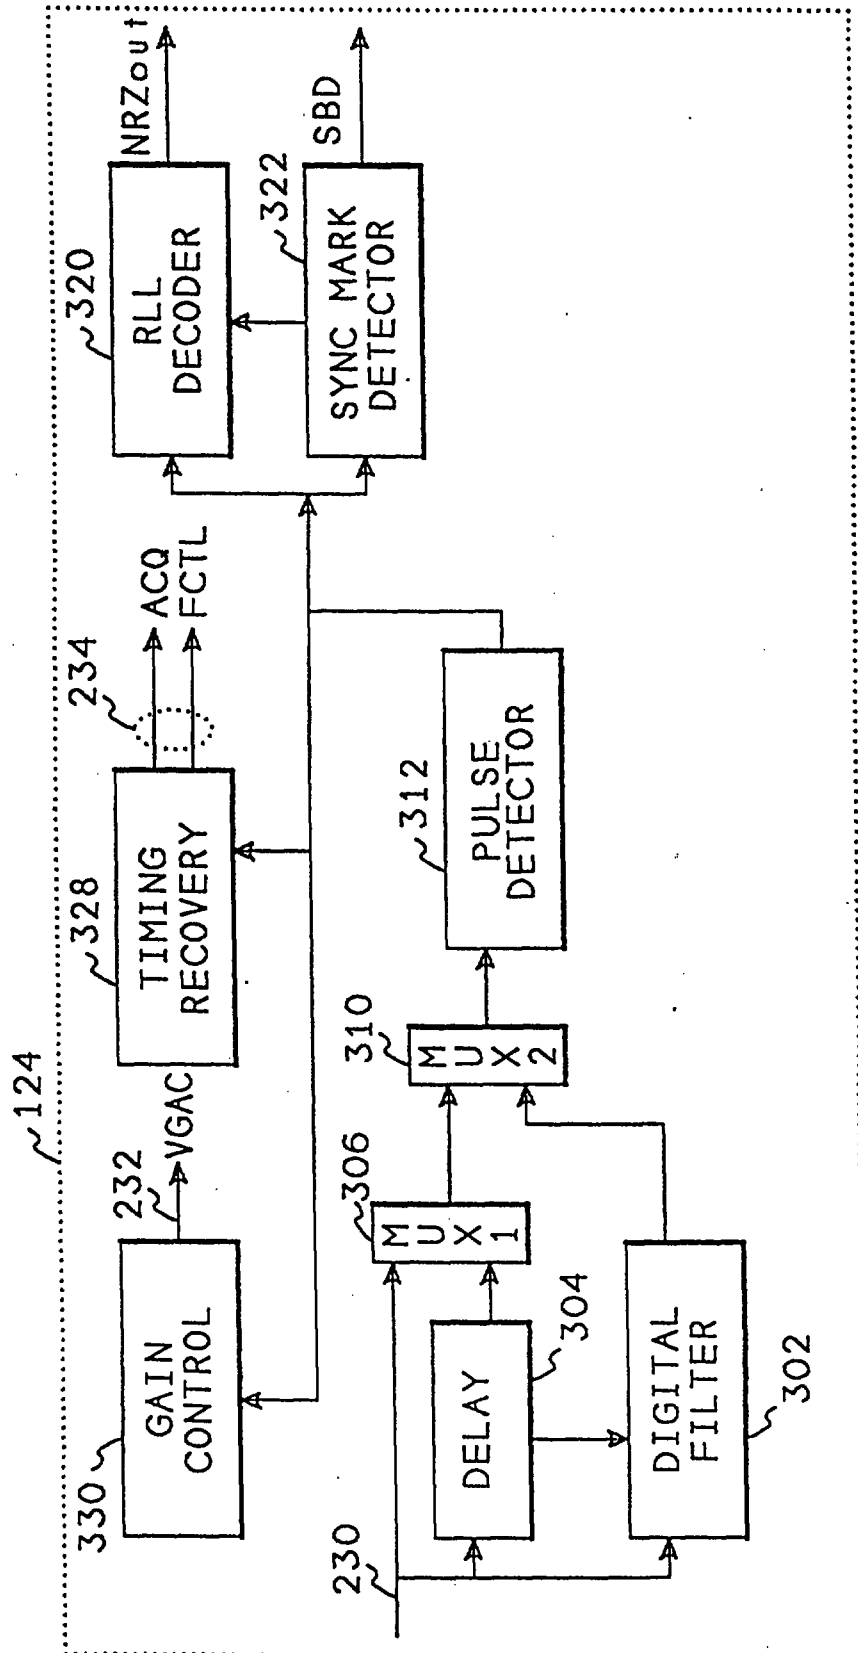
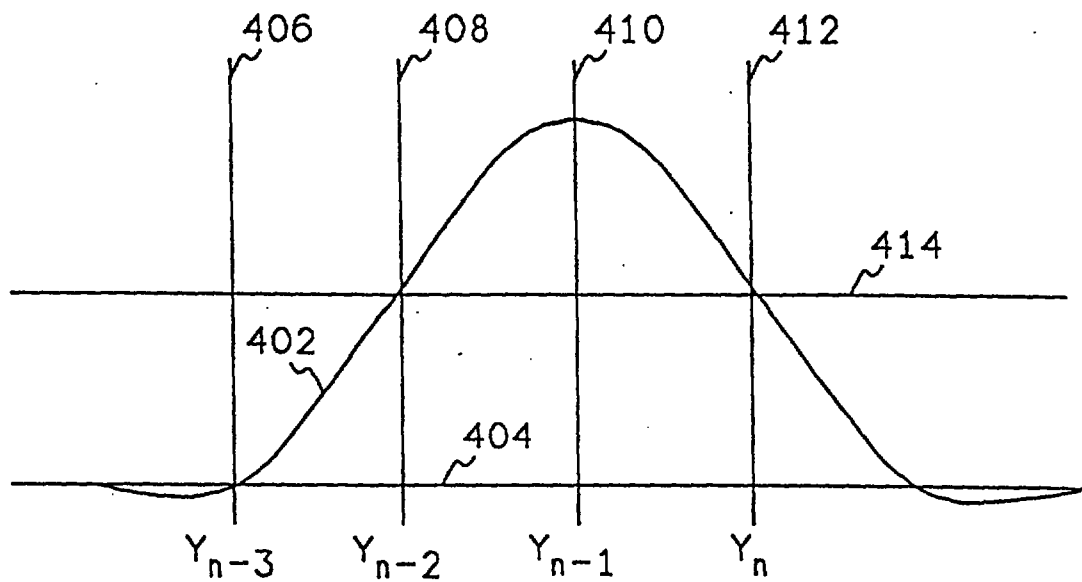
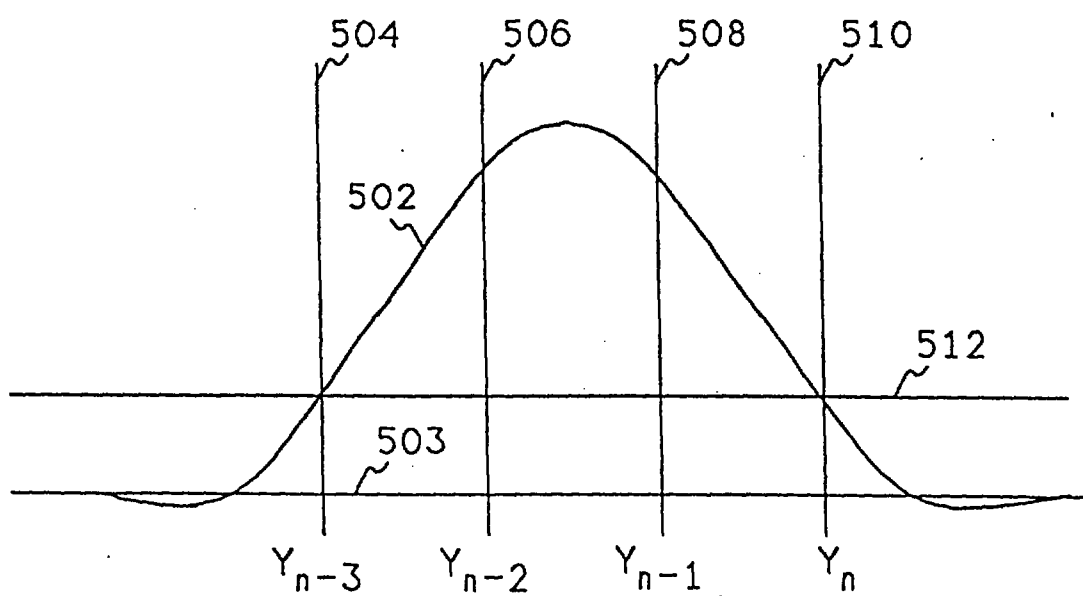


FIG. 3

4/10

*FIG. 4**FIG. 5*

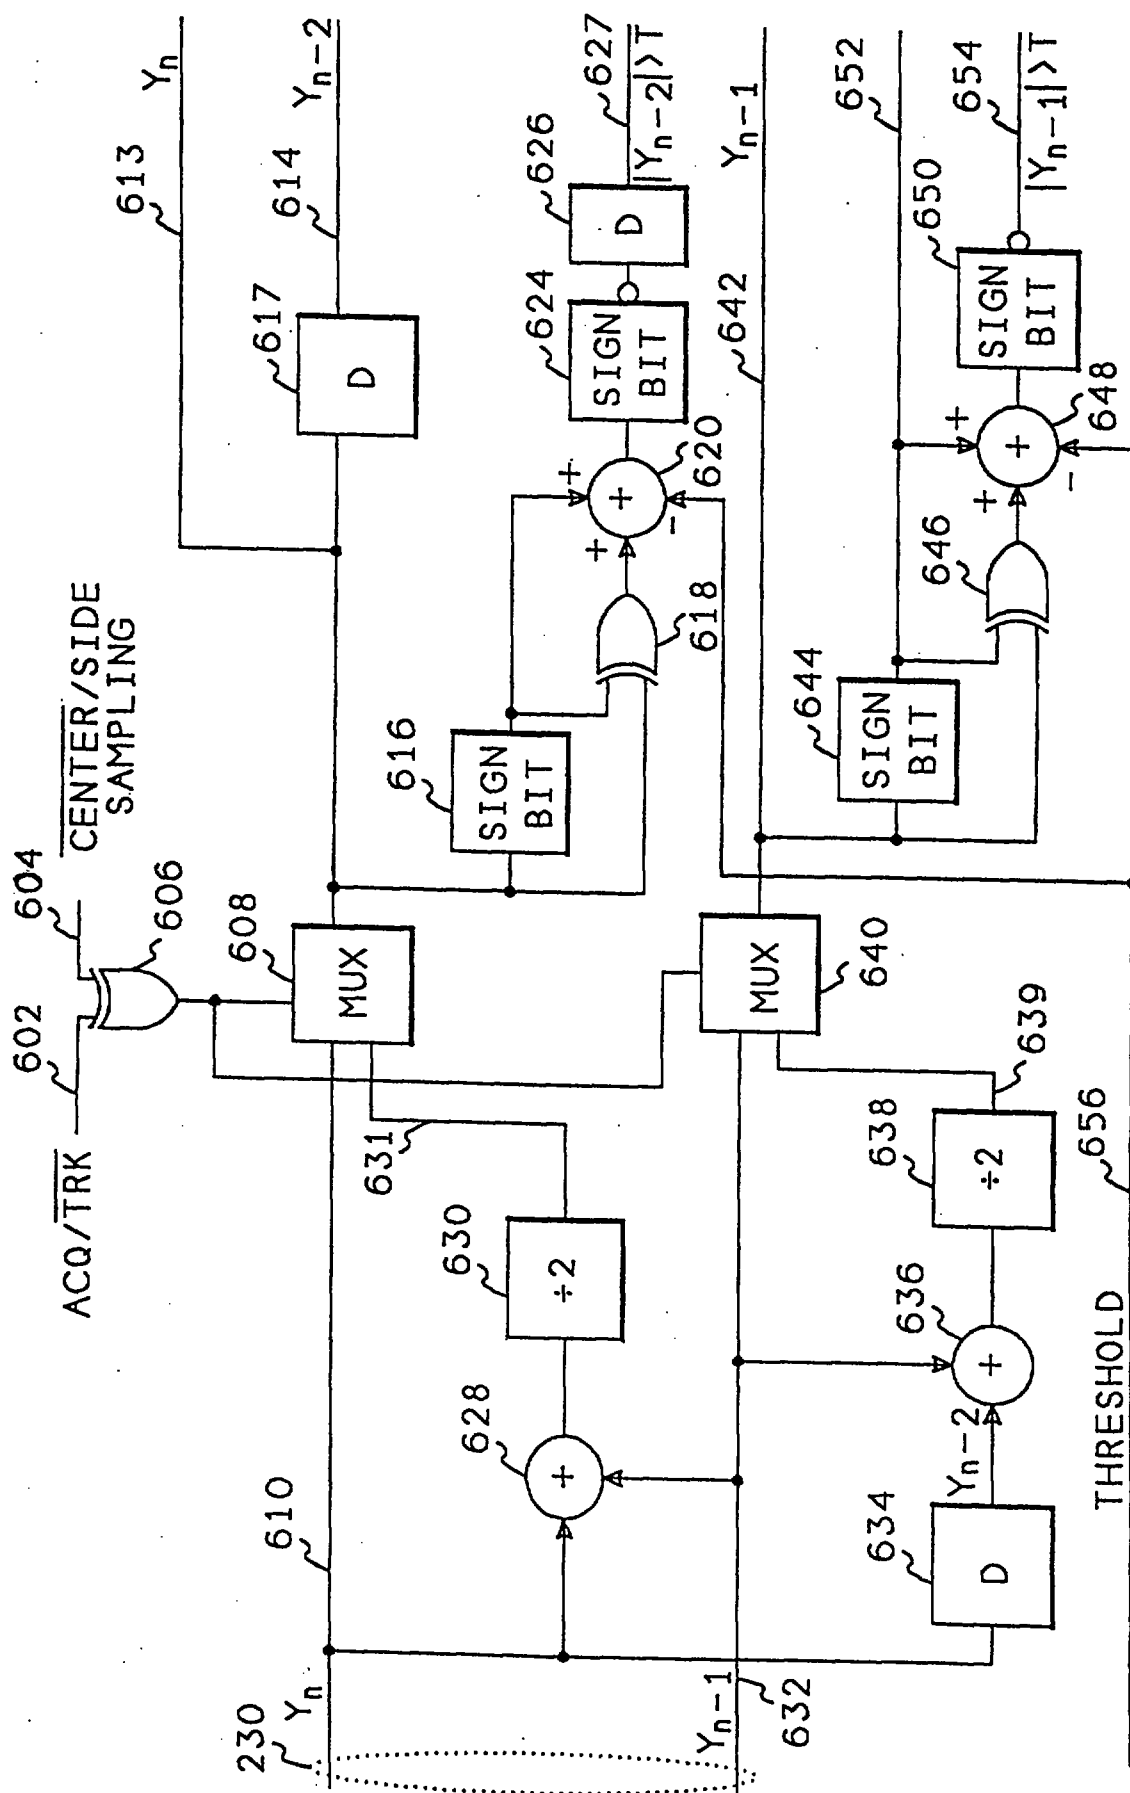


FIG. 6

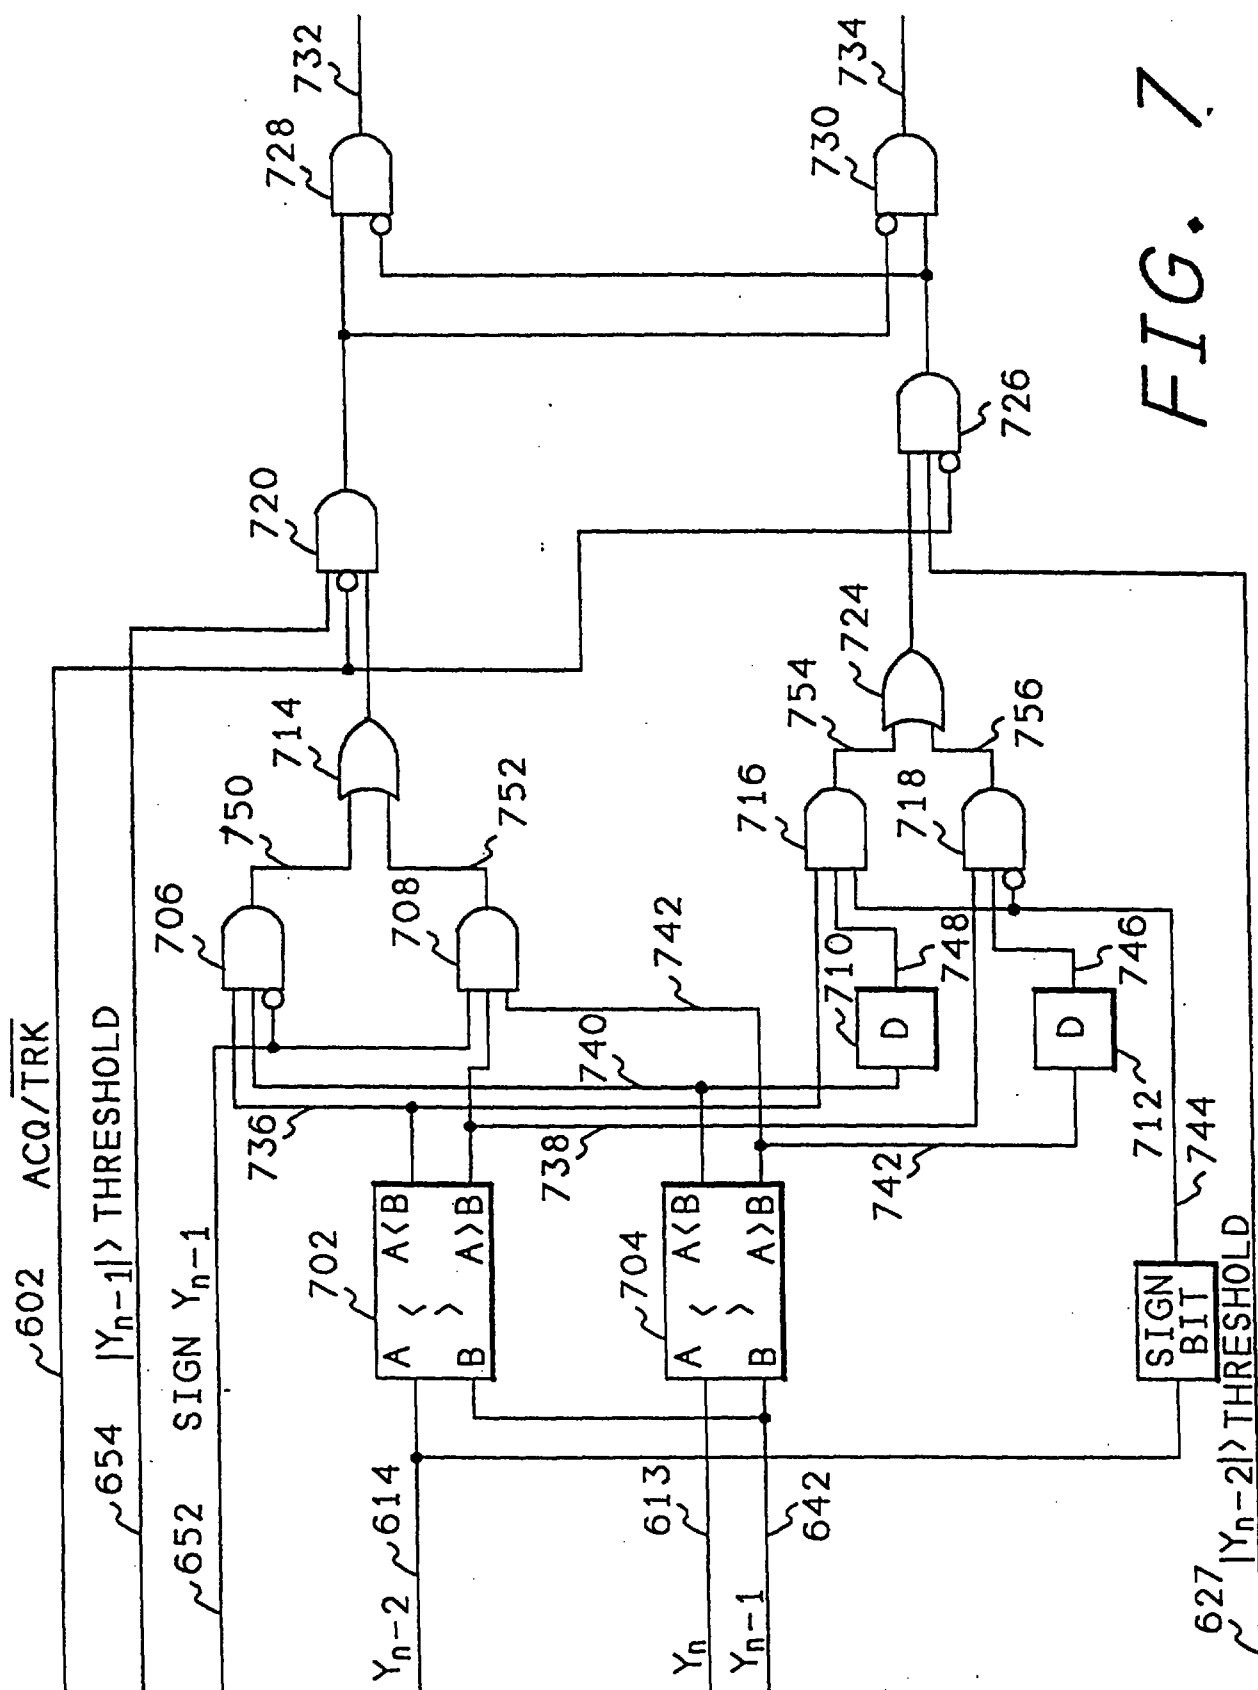


FIG. 7

7/10

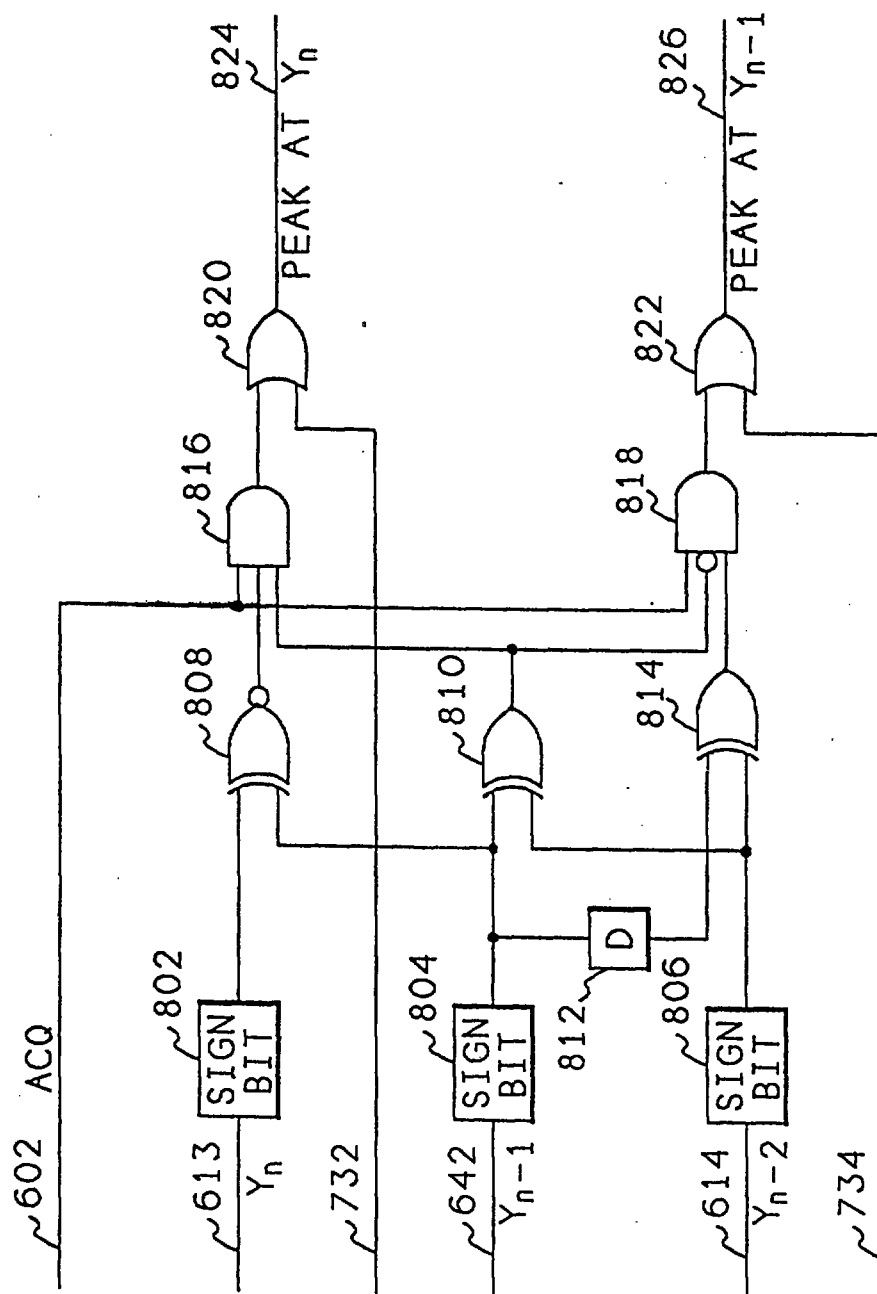


FIG. 8

8/10

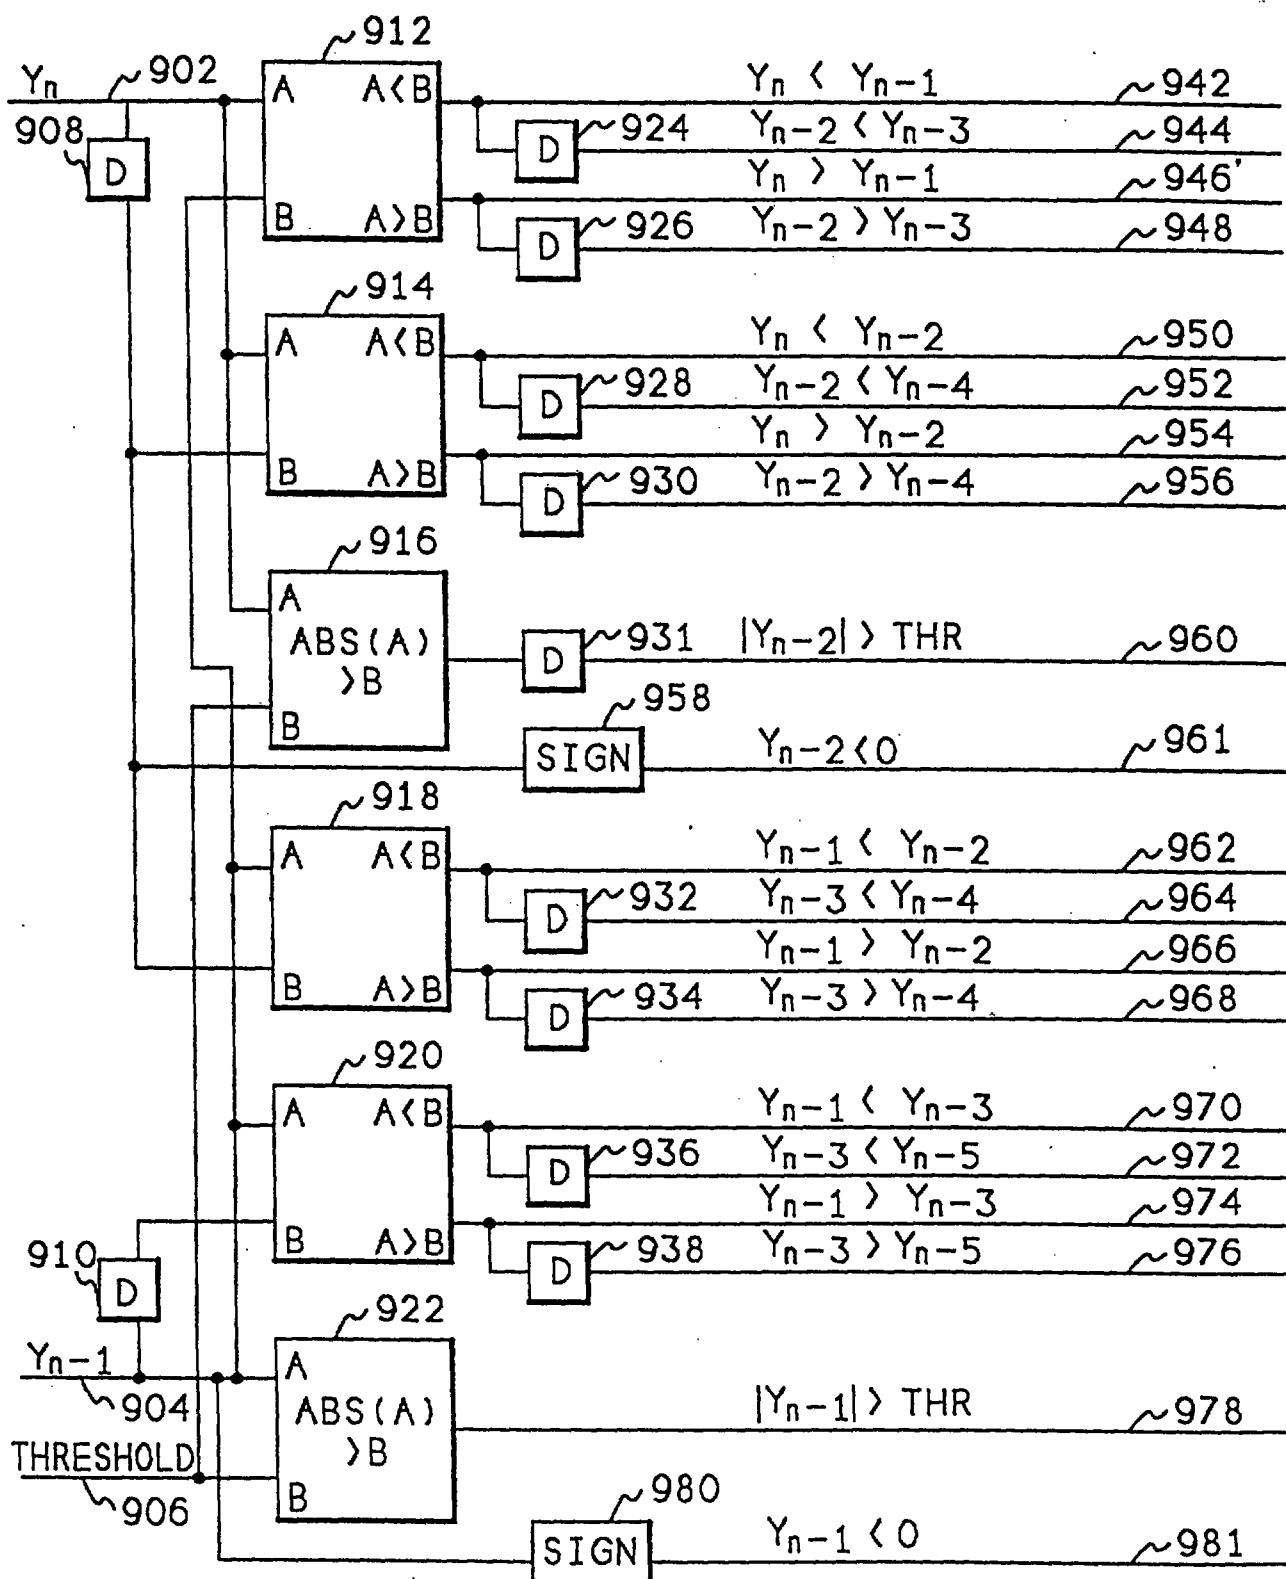


FIG. 9

9/10

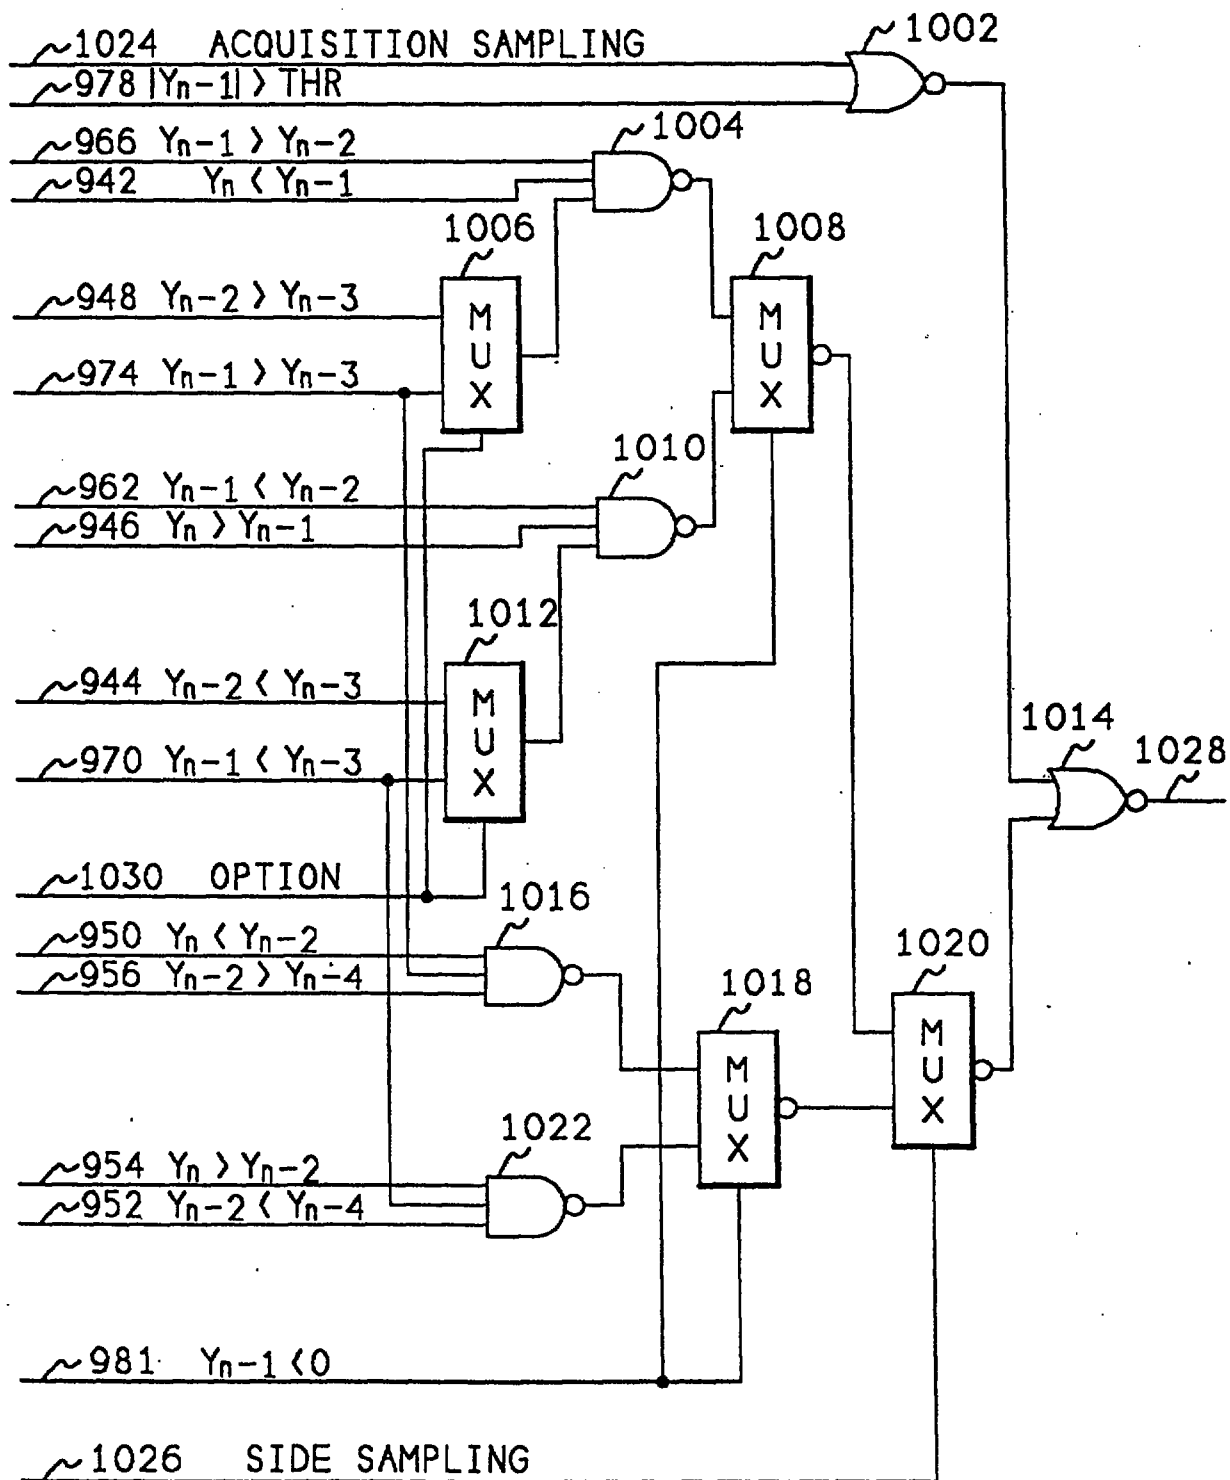


FIG. 10

10/10

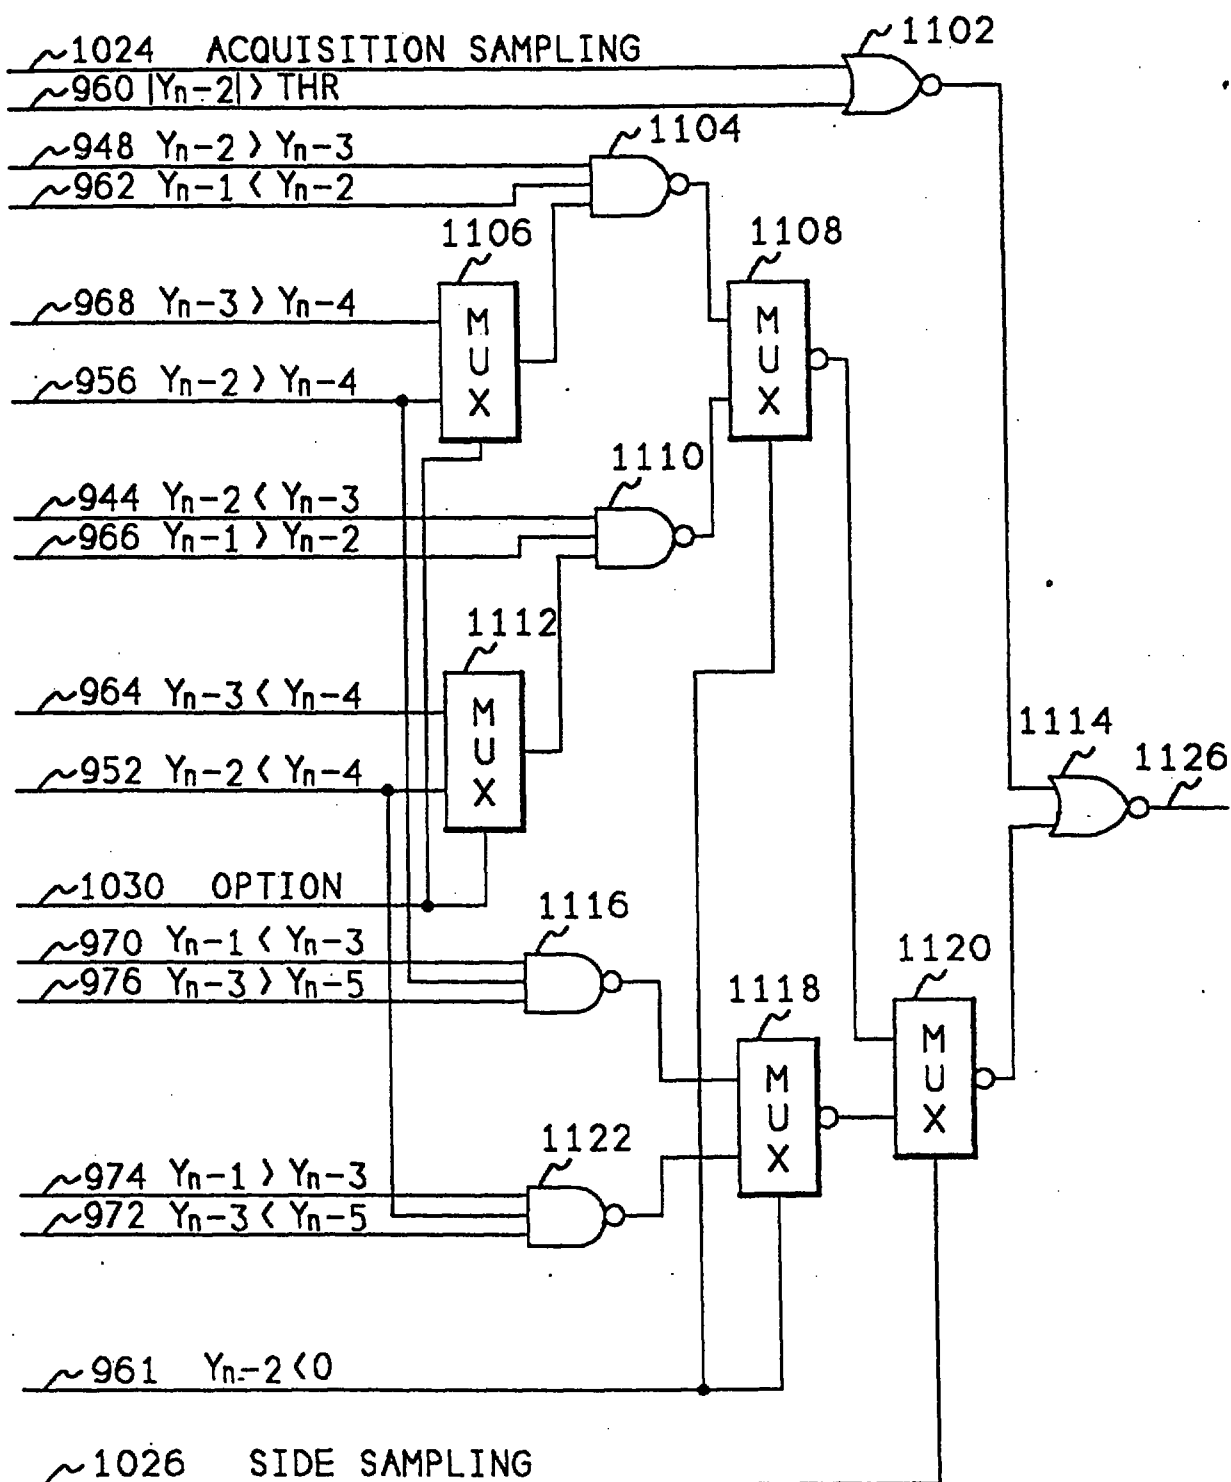


FIG. 11

9604703-0

DIGITAL PULSE DETECTOR

ABSTRACT

Disclosed is a pulse detector (312) that uses four samples (406, 408, 410, 412, 504, 506, 508, 510) of an analog signal to detect a pulse as soon as one sample beyond the time of the peak of signal level at the pulse. The pulse detector can detect pulses by sampling at the center of a peak of the pulse or by sampling at either side of the peak of the pulse. The pulse detector detects pulses while tracking data, and it uses an alternate detection system for detecting pulses while acquiring timing and gain lock on a signal having a known data pattern. The detector uses either the sampled signal levels directly, or a moving average of two samples to perform the detection.

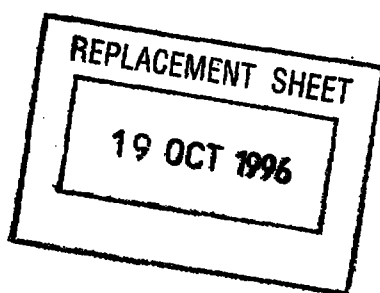


Figure 3

0-7071030

REPLACEMENT SHEET

21 JUN 1997


CLAIMS

What is claimed is:

- 1 1. A circuit for detecting pulses in a continuous signal, said circuit comprising:
 - 2 an analog to digital converter for converting said signal to digital sample values at
 - 3 controlled sampling times;
 - 4 at least one first data storage register connected to an output of said analog to
 - 5 digital converter for storing at least one previous digital sample value as
 - 6 said digital sample value is created at said controlled sampling times;
 - 7 at least one comparator connected to said at least one first data storage register,
 - 8 and connected to said output of said analog to digital converter, for
 - 9 comparing a previous digital sample value and a current digital sample
 - 10 value from said analog to digital converter;
 - 11 at least one second data storage register connected to an output of each of said at
 - 12 least one comparator for storing a result of said comparing;
 - 13 first logic circuit means connected to an output of said at least one comparator, an
 - 14 output of said at least one first data storage register, and an output of said
 - 15 at least one second data storage register for indicating a pulse at a first
 - 16 previous sample time if a value of a second previous sample is lower than
 - 17 a value of a first previous sample, a value of a third previous sample is
 - 18 lower than said value of said second previous sample, a value of said
 - 19 output of said analog to digital converter is lower than said value of said
 - 20 first previous sample and said value of said first previous sample is
 - 21 nonnegative; and
 - 22 second logic circuit means connected to an output of said at least one comparator,

This Sheet Has Been Replaced

THIS SHEET HAS BEEN
REPLACED

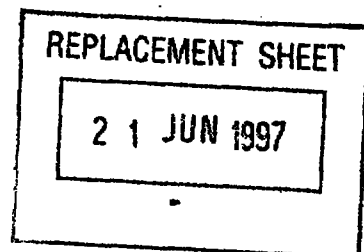

23 an output of said at least one first data storage register, and an output of
24 said at least one second data storage register for indicating a pulse at said
25 first previous sample time if a value of said second previous sample is
26 greater than a value of said first previous sample, a value of said third
27 previous sample is greater than said value of said second previous sample,
28 a value of said output of said analog to digital converter is greater than
29 said value of said first previous sample and said value of said first
30 previous sample is negative.

- 1 2. A circuit for detecting pulses in a continuous signal, said circuit comprising:
- 2 an analog to digital converter for converting said signal to digital sample values at
3 controlled sampling times;
- 4 at least one first data storage register connected to an output of said analog to
5 digital converter for storing at least one previous digital sample value as
6 said digital sample value is created at said controlled sampling times;
- 7 at least one comparator connected to said at least one first data storage register,
8 and connected to said output of said analog to digital converter, for
9 comparing a previous digital sample value and a current digital sample
10 value from said analog to digital converter;
- 11 at least one second data storage register connected to an output of each of said at
12 least one comparator for storing a result of said comparing;
- 13 first logic circuit means connected to an output of said at least one comparator, an
14 output of said at least one first data storage register, and an output of said
15 at least one second data storage register for indicating a pulse at a first
16 previous sample time if a value of a second previous sample is lower than

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

21 JUN 1997

17 a value of a first previous sample, a value of a third previous sample is
18 lower than said value of said first previous sample, a value of said output
19 of said analog to digital converter is lower than said value of said first
20 previous sample and said value of said first previous sample is
21 nonnegative; and

22 second logic circuit means connected to an output of said at least one comparator,
23 an output of said at least one first data storage register, and an output of
24 said at least one second data storage register for indicating a pulse at said
25 first previous sample time if a value of said second previous sample is
26 greater than a value of said first previous sample, a value of said third
27 previous sample is greater than said value of said first previous sample, a
28 value of said output of said analog to digital converter is greater than said
29 value of said first previous sample and said value of said first previous
30 sample is negative.


1 3. The circuit of claims 1 or 2 wherein said first and second logic circuit means further
2 comprise:

3 a first threshold comparator contained within said first logic means for comparing
4 said value of said first previous sample to a predetermined threshold value
5 and allowing said indication of a pulse at said first previous sample time
6 if said value of said first previous sample is greater than said
7 predetermined threshold value; and

8 a second threshold comparator contained within said second logic means for
9 comparing said value of said first previous sample to said predetermined
10 threshold value and allowing said indication of a pulse at said first



This Sheet Has Been Replaced

THIS SHEET HAS BEEN
REPLACED

21 JUN 1997

11 previous sample time if said value of said first previous sample is less than
12 a negative of said predetermined threshold value.

1 4. The circuit of claims 1 or 2 further comprising:

2 a third logic circuit means connected to an output of said at least one comparator,
3 an output of said at least one first data storage register, and an output of
4 said at least one second data storage register for indicating a pulse at a
5 second previous sample time if a value of said third previous sample is
6 lower than a value of said second previous sample, a value of a fourth
7 previous sample is lower than said value of said third previous sample, a
8 value of said first previous sample is lower than said value of said second
9 previous sample and said value of said second previous sample is
10 nonnegative; and

11 a fourth logic circuit means connected to an output of said at least one comparator,
12 an output of said at least one first data storage register, and an output of
13 said at least one second data storage register for indicating a pulse at said
14 second previous sample time if a value of said third previous sample is
15 greater than a value of said second previous sample, a value of said fourth
16 previous sample is greater than said value of said third previous sample,
17 a value of said first previous sample is greater than said value of said
18 second previous sample and said value of said second previous sample is
19 negative.

1 5. The circuit of claim 4 wherein said first through fourth logic circuit means further
2 comprise:

This Sheet Has Been Replaced

THIS SHEET HAS BEEN
REPLACED

21 JUN 1997

3 a first threshold comparator contained within said first logic means for comparing
4 said value of said first previous sample to a predetermined threshold value
5 and allowing said indication of a pulse at said first previous sample time
6 if said value of said first previous sample is greater than said
7 predetermined threshold value;
8 a second threshold comparator contained within said second logic means for
9 comparing said value of said first previous sample to said predetermined
10 threshold value and allowing said indication of a pulse at said first
11 previous sample time if said value of said first previous sample is less than
12 a negative of said predetermined threshold value;
13 a third threshold comparator contained within said third logic means for
14 comparing said value of said second previous sample to said
15 predetermined threshold value and allowing said indication of a pulse at
16 said second previous sample time if said value of said first previous
17 sample is greater than said predetermined threshold value; and
18 a fourth threshold comparator contained within said fourth logic means for
19 comparing said value of said second previous sample to said
20 predetermined threshold value and allowing said indication of a pulse at
21 said second previous sample time if said value of said first previous
22 sample is less than a negative of said predetermined threshold value.

1 6. The circuit of claims 1 or 2 further comprising:

2 a third logic circuit means connected to an output of said at least one comparator,
3 an output of said at least one first data storage register, and an output of
4 said at least one second data storage register for indicating a pulse at a



This Sheet Has Been Replaced

THIS SHEET HAS BEEN
REPLACED

21 JUN 1997

5 second previous sample time if a value of said third previous sample is
6 lower than a value of said second previous sample, a value of a fourth
7 previous sample is lower than said value of said second previous sample,
8 a value of said first previous sample is lower than said value of said
9 second previous sample and said value of said second previous sample is
10 nonnegative; and
11 a fourth logic circuit means connected to an output of said at least one comparator,
12 an output of said at least one first data storage register and an output of
13 said at least one second data storage register for indicating a pulse at said
14 second previous sample time if a value of said third previous sample is
15 greater than a value of said second previous sample, a value of said fourth
16 previous sample is greater than said value of said second previous sample,
17 a value of said first previous sample is greater than said value of said
18 second previous sample and said value of said second previous sample is
19 negative.

1 7. The circuit of claim 6 wherein said first through fourth logic circuit means further
2 comprise:

3 a first threshold comparator contained within said first logic means for comparing
4 said value of said first previous sample to a predetermined threshold value
5 and allowing said indication of a pulse at said first previous sample time
6 if said value of said first previous sample is greater than said
7 predetermined threshold value;

8 a second threshold comparator contained within said second logic means for
9 comparing said value of said first previous sample to said predetermined

This Sheet Has Been Replaced

THIS SHEET HAS BEEN
REPLACED

21 JUN 1997

10 threshold value and allowing said indication of a pulse at said first
11 previous sample time if said value of said first previous sample is less than
12 a negative of said predetermined threshold value;
13 a third threshold comparator contained within said third logic means for
14 comparing said value of said second previous sample to said
15 predetermined threshold value and allowing said indication of a pulse at
16 said second previous sample time if said value of said first previous
17 sample is greater than said predetermined threshold value; and
18 a fourth threshold comparator contained within said fourth logic means for
19 comparing said value of said second previous sample to said
20 predetermined threshold value and allowing said indication of a pulse at
21 said second previous sample time if said value of said first previous
22 sample is less than a negative of said predetermined threshold value.

- 1 8. A circuit for detecting pulses in a continuous signal, said circuit comprising:
2 an analog to digital converter for converting said signal to digital sample values at
3 controlled sampling times;
4 at least one first data storage register connected to an output of said analog to
5 digital converter for storing at least one previous digital sample value as
6 said digital sample value is created at said controlled sampling times;
7 at least one comparator connected to said at least one first data storage register,
8 and connected to said output of said analog to digital converter, for
9 comparing a previous digital sample value and a current digital sample
10 value from said analog to digital converter;
11 at least one ~~second data storage register~~ connected to an output of each of said at



This Sheet Has Been Replaced

THIS SHEET HAS BEEN
REPLACED

21 JUN 1997

12 least one comparator for storing a result of said comparing;
13 first logic circuit means connected to an output of said at least one comparator, an
14 output of said at least one first data storage register and an output of said
15 at least one second data storage register for indicating a pulse at a first
16 previous sample time if a value of a second previous sample is less than
17 a value of a first previous sample, a value of said first previous sample is
18 greater than a predetermined threshold value, a value of said output of said
19 analog to digital converter is lower than said value of said first previous
20 sample and said value of said first previous sample is nonnegative; and
21 second logic circuit means connected to an output of said at least one comparator,
22 an output of said at least one first data storage register and an output of
23 said at least one second data storage register for indicating a pulse at said
24 first previous sample time if a value of said second previous sample is
25 greater than a value of said first previous sample, a value of said first
26 previous sample is less than a negative of said predetermined threshold
27 value, a value of said output of said analog to digital converter is greater
28 than said value of said first previous sample and said value of said first
29 previous sample is negative.

- 1 9. A circuit for detecting pulses in a continuous signal, said circuit comprising:
2 an analog to digital converter for converting said signal to digital sample values at
3 controlled sampling times;
4 at least one first data storage register connected to an output of said analog to
5 digital converter for storing at least one previous digital sample value as
6 said digital sample value is created at said controlled sampling times;

This Sheet Has Been Replaced

THIS SHEET HAS BEEN
REPLACED

21 JUN 1997

7 at least one comparator connected to said at least one first data storage register,
8 and connected to said output of said analog to digital converter, for
9 comparing a previous digital sample value and a current digital sample
10 value from said analog to digital converter;
11 at least one second data storage register connected to an output of each of said at
12 least one comparator for storing a result of said comparing;
13 first logic circuit means connected to an output of said at least one comparator, an
14 output of said at least one first data storage register and an output of said
15 at least one second data storage register for indicating a pulse at a first
16 previous sample time if a value of a second previous sample is less than
17 a value of a first previous sample, a value of said first previous sample is
18 greater than a predetermined threshold value, a value of said output of said
19 analog to digital converter is lower than said value of said first previous
20 sample and said value of said first previous sample is nonnegative;
21 second logic circuit means connected to an output of said at least one comparator,
22 an output of said at least one first data storage register and an output of
23 said at least one second data storage register for indicating a pulse at said
24 first previous sample time if a value of said second previous sample is
25 greater than a value of said first previous sample, a value of said first
26 previous sample is less than a negative of said predetermined threshold
27 value, a value of said output of said analog to digital converter is greater
28 than said value of said first previous sample and said value of said first
29 previous sample is negative;
30 a third logic circuit means connected to an output of said at least one comparator,
31 an output of said at least one first data storage register and an output of

This Sheet Has Been Replaced

THIS SHEET HAS BEEN
REPLACED


21 JUN 1997

32 said at least one second data storage register for indicating a pulse at a
33 second previous sample time if a value of a third previous sample is lower
34 than a value of said second previous sample, a value of said second
35 previous sample is greater than said predetermined threshold value, a
36 value of said first previous sample is lower than said value of said second
37 previous sample and said value of said second previous sample is
38 nonnegative; and
39 a fourth logic circuit means connected to an output of said at least one comparator,
40 an output of said at least one first data storage register and an output of
41 said at least one second data storage register for indicating a pulse at said
42 second previous sample time if a value of said third previous sample is
43 greater than a value of said second previous sample, a value of said second
44 previous sample is less than said predetermined threshold value, and a
45 value of said first previous sample is greater than said value of said second
46 previous sample and said value of said second previous sample is negative.

- 1 10. A circuit for detecting pulses in a continuous signal, said circuit comprising:
2 an analog to digital converter for converting said signal to digital sample values at
3 controlled sampling times;
4 at least one first data storage register connected to an output of said analog to
5 digital converter for storing at least one previous digital sample value as
6 said digital sample value is created at said controlled sampling times;
7 at least one comparator connected to said first data storage register, and connected
8 to said output of said analog to digital converter, for comparing a previous
9 digital sample value and a current digital sample value from said analog

This Sheet Has Been Replaced

THIS SHEET HAS BEEN
REPLACED

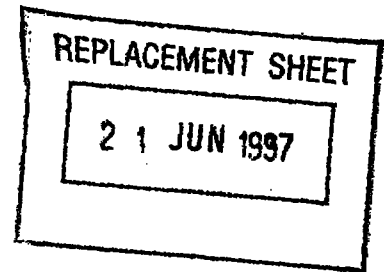

10 to digital converter;

11 at least one second data storage register connected to an output of each of said at

12 least one comparator for storing a result of said comparing;

13 first logic circuit means connected to an output of said at least one comparator, an

14 output of said at least one first data storage register, and an output of said

15 at least one second data storage register for indicating a pulse at a first

16 previous sample time if a value of a third previous sample is lower than

17 a value of a first previous sample, a value of a fourth previous sample is

18 lower than a value of a second previous sample, a value of said output of

19 said analog to digital converter is lower than said value of said second

20 previous sample and said value of said first previous sample is

21 nonnegative; and

22 second logic circuit means connected to an output of said at least one comparator,

23 an output of said at least one first data storage register, and an output of

24 said at least one second data storage register for indicating a pulse at said

25 first previous sample time if a value of said third previous sample is

26 greater than a value of said first previous sample, a value of said fourth

27 previous sample is greater than a value of said second previous sample, a

28 value of said output of said analog to digital converter is greater than said

29 value of said second previous sample and said value of said first previous

30 sample is negative.

1 11. The circuit of claim 10 wherein said first and second logic circuit means further


2 comprise:

3 a first threshold comparator contained within said first logic means for comparing

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

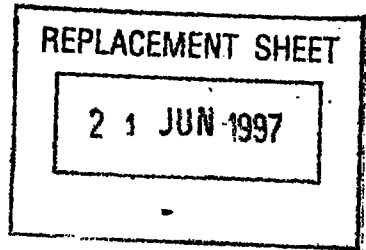

4 said value of said first previous sample to a predetermined threshold value
5 and allowing said indication of a pulse at said first previous sample time
6 if said value of said first previous sample is greater than said
7 predetermined threshold value; and
8 a second threshold comparator contained within said second logic means for
9 comparing said value of said first previous sample to said predetermined
10 threshold value and allowing said indication of a pulse at said first
11 previous sample time if said value of said first previous sample is less than
a negative of said predetermined threshold value.

1 12. The circuit of claim 10 further comprising:

2 a third logic circuit means connected to an output of said at least one comparator,
3 an output of said at least one first data storage register, and an output of
4 said at least one second data storage register for indicating a pulse at a
5 second previous sample time if a value of said fourth previous sample is
6 lower than a value of said second previous sample, a value of a fifth
7 previous sample is lower than said value of said third previous sample, a
8 value of said first previous sample is lower than said value of said third
9 previous sample and said value of said second previous sample is
10 nonnegative; and

11 a fourth logic circuit means connected to an output of said at least one comparator,
12 an output of said at least one first data storage register and an output of
13 said at least one second data storage register for indicating a pulse at said
14 second previous sample time if a value of said fourth previous sample is
15 greater than a value of said second previous sample, a value of said fifth

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

21 JUN 1997

16 previous sample is greater than said value of said third previous sample,
17 a value of said first previous sample is greater than said value of said third
18 previous sample and said value of said second previous sample is negative.

1 13. The circuit of claim 12 wherein said first through fourth logic circuit means further
2 comprise:

3 a first threshold comparator contained within said first logic means for comparing
4 said value of said first previous sample to a predetermined threshold value
5 and allowing said indication of a pulse at said first previous sample time
6 if said value of said first previous sample is greater than said
7 predetermined threshold value;

8 a second threshold comparator contained within said second logic means for
9 comparing said value of said first previous sample to said predetermined
10 threshold value and allowing said indication of a pulse at said first
11 previous sample time if said value of said first previous sample is less than
12 a negative of said predetermined threshold value;

13 a third threshold comparator contained within said third logic means for
14 comparing said value of said second previous sample to said
15 predetermined threshold value and allowing said indication of a pulse at
16 said second previous sample time if said value of said first previous
17 sample is greater than said predetermined threshold value; and

18 a fourth threshold comparator contained within said fourth logic means for
19 comparing said value of said second previous sample to said
20 predetermined threshold value and allowing said indication of a pulse at
21 said second previous sample time if said value of said first previous

This Sheet Has Been Replaced



* C L M S *

THIS SHEET HAS BEEN
REPLACED

21 JUN 1997

22 sample is less than a negative of said predetermined threshold value.

- 1 14. A circuit for detecting pulses in a continuous signal, said circuit comprising:
2 an analog to digital converter for converting said signal to digital sample values at
3 controlled sampling times;
4 at least one data storage register connected to an output of said analog to digital
5 converter for storing a previous digital sample value as said digital sample
6 value is created at said controlled sampling time;
7 at least one threshold comparator connected to said at least one data storage
8 register for comparing said stored digital sample value to a predetermined
9 threshold value;
10 at least one comparator connected to said at least one data storage register, and
11 connected to an output of said threshold comparator and further connected
12 to said output of said analog to digital converter, for comparing said stored
13 digital sample values and a current digital sample value from said analog
14 to digital converter and for indicating a pulse at a most recently stored
15 digital sample value if a next most recently stored digital sample value is
16 a lower value than said most recently stored digital sample value and said
17 current digital sample value is a lower value than said most recently stored
18 digital sample value and said most recently stored digital sample value is
19 a greater value than said predetermined threshold value; and
20 at least one comparator connected to said at least one data storage register, and
21 connected to an output of said threshold comparator and further connected
22 to said output of said analog to digital converter, for comparing said stored
23 digital sample values and a current digital sample value from said analog

This Sheet Has Been Replaced



* C L M S *

THIS SHEET HAS BEEN
REPLACED

21 JUN 1997

24 to digital converter and for indicating a pulse at a most recently stored
25 digital sample value if a next most recently stored digital sample value is
26 a higher value than said most recently stored digital sample value and said
27 current digital sample value is a higher value than said most recently
28 stored digital sample value and said most recently stored digital sample
29 value is a lower value than the negative of said predetermined threshold
30 value.

1 15. The circuit of claim 14 further comprising:

2 averaging means connected between said analog to digital converter and said at
3 least one data storage register for averaging an output of said analog to
4 digital converter with a most recent past output of said analog to digital
5 converter to produce an average value for storing in said at least one data
6 storage register.

1 16. A circuit for detecting pulses in a continuous signal, said circuit comprising:

2 an analog to digital converter for converting said signal to digital sample values at
3 controlled sampling times;
4 at least one data storage register connected to an output of said analog to digital
5 converter for storing a previous digital sample value as said digital sample
6 value is created at said controlled sample time; and
7 at least one comparator connected to said at least one data storage register and
8 connected to said output of said analog to digital converter for comparing
9 a sign bit of each of said stored digital sample values and a sign bit of a
10 current digital sample value from said analog to digital converter and for

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

21 JUN 1997

11 indicating a pulse at a most recently stored digital sample value if a sign
12 bit of a next most recently stored digital sample value is not equal to a sign
13 bit of said most recently stored digital sample value and a sign bit of said
14 current digital sample value is equal to a sign bit of said most recently
15 stored digital sample value.

1 17. The circuit of claim 16 further comprising:

2 averaging means connected between said analog to digital converter and said at
3 least one data storage register for averaging an output of said analog to
4 digital converter with a most recent past output of said analog to digital
5 converter to produce an average value for storing in said at least one data
6 storage register.

1 18. A circuit for detecting pulses in a continuous signal, said circuit comprising:

2 an analog to digital converter for converting said signal to digital sample values at
3 controlled sampling times;
4 a first data storage register connected to an output of said analog to digital
5 converter and connected in such a manner as to store every other sample;
6 a second data storage register connected to an output of said analog to digital
7 converter and connected in such a manner as to store every other sample,
8 wherein said second data register stores samples not stored by said first
9 data storage register;
10 a first threshold comparator connected to said output of said analog to digital
11 converter for comparing an absolute value of said output of said analog to
12 digital converter to a predetermined threshold value;

This Sheet Has Been Replaced

THIS SHEET HAS BEEN
REPLACED

21 JUN 1997

13 a third data storage register connected to an output of said first threshold
14 comparator for storing a result of said comparison;

15 a second threshold comparator connected to said first data storage register for
16 comparing an absolute value of an output of said first data storage register
17 to said predetermined threshold value;


18 a pair of comparators connected to said first and second data storage registers and
19 connected to said output of said analog to digital converter for comparing
20 said stored digital sample values and a current digital sample value from
21 said analog to digital converter; and

22 a first logic circuit connected to outputs of said pair of comparators and connected
23 to an output of said second threshold comparator, wherein said first logic
24 circuit indicates a pulse at a most recently stored digital sample value if a
25 next most recently stored digital sample value is less than said most
26 recently stored digital sample value and said current digital sample value
27 is less than said most recently stored digital sample value and said second
28 threshold comparator indicates that an absolute value of said most recently
29 stored digital sample value is greater than said predetermined threshold
30 value and said next most recently stored digital sample value is
31 nonnegative;

32 a second logic circuit connected to outputs of said pair of comparators and
33 connected to an output of said second threshold comparator, wherein said
34 first logic circuit indicates a pulse at a most recently stored digital sample
35 value if a next most recently stored digital sample value is greater than
36 said most recently stored digital sample value and said current digital
37 sample value is greater than said most recently stored digital sample value

This Sheet Has Been Replaced

THIS SHEET HAS BEEN
REPLACED

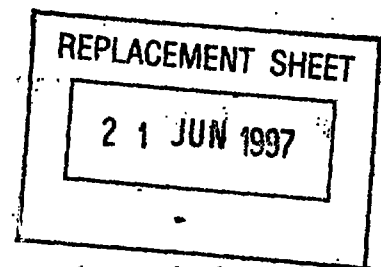

38 and said second threshold comparator indicates that an absolute value of
39 said most recently stored digital sample value is greater than said
40 predetermined threshold value and said next most recently stored digital
41 sample value is negative;

42 a third logic circuit connected to outputs of said pair of comparators and connected
43 to an output of said third data storage register, wherein said second logic
44 circuit indicates a pulse at said next most recently stored digital sample
45 value if a second next most recently stored digital sample value is less than
46 said next most recently stored digital sample value and said most recently
47 stored digital sample value is less than said next most recently stored
48 digital sample value and said third data storage register indicates that an
49 absolute value of said next most recently stored digital sample value is
50 greater than said predetermined threshold value and said next most
51 recently stored digital sample value is nonnegative; and

52 a fourth logic circuit connected to outputs of said pair of comparators and
53 connected to an output of said third data storage register, wherein said
54 second logic circuit indicates a pulse at said next most recently stored
55 digital sample value if a second next most recently stored digital sample
56 value is greater than said next most recently stored digital sample value
57 and said most recently stored digital sample value is greater than said next
58 most recently stored digital sample value and said third data storage
59 register indicates that an absolute value of said next most recently stored
60 digital sample value is greater than said predetermined threshold value and
61 said next most recently stored digital sample value is negative.

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

21 JUN 1997

1 19. The circuit of claim 18 further comprising:

2 averaging means connected between said analog to digital converter and said first
3 and second data storage registers for averaging an output of said analog
4 to digital converter with a most recent past output of said analog to digital
5 converter to produce an average value for storing in said first and second
6 data storage registers.

1 20. A circuit for detecting pulses in a continuous signal, said circuit comprising:

2 an analog to digital converter for converting said signal to digital sample values at
3 controlled sampling times;
4 a first data storage register connected to an output of said analog to digital
5 converter and connected to store every other sample;
6 a second data storage register connected to an output of said analog to digital
7 converter and connected to store every other sample, wherein said second
8 data register stores samples not stored by said first data storage register;
9 a first logic circuit connected to an output of said first data storage register and
10 connected to an output of said analog to digital converter, wherein said
11 first logic circuit indicates a pulse at a most recently stored digital sample
12 value if a sign of a next most recently stored digital sample value is not
13 equal to a sign of said most recently stored digital sample value and a sign
14 of an output of said analog to digital converter is equal to said sign of said
15 most recently stored digital sample value;
16 a second logic circuit connected to outputs of said first and second data storage
17 registers, wherein said second logic circuit indicates a pulse at said next
18 most recently stored digital sample value if a sign of a second next most

This Sheet Has Been Replaced




THIS SHEET HAS BEEN
REPLACED

19 recently stored digital sample value is not equal to said sign of said next
20 most recently stored digital sample value and said sign of said most
21 recently stored digital sample value is equal to said sign of said next most
22 recently stored digital sample value.


1 21. The circuit of claim 20 further comprising:

2 averaging means connected between said analog to digital converter and said first
3 and second data storage register for averaging an output of said analog to
4 digital converter with a most recent past output of said analog to digital
5 converter to produce an average value for storing in said first and second
6 data storage registers.

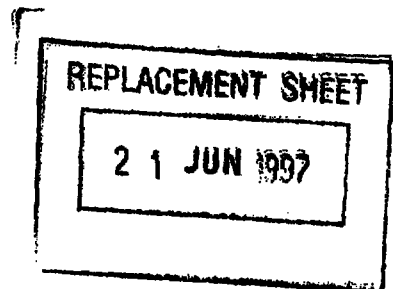

THIS SHEET HAS BEEN
REPLACED

This Sheet Has Been Replaced



22 OCT 1997

DIGITAL PULSE DETECTOR

FIELD OF THE INVENTION

This invention relates to computer systems and more particularly to data storage and data communication devices within such computer systems. Even more particularly, the invention relates to apparatus for detecting pulses resulting from bit transitions within a data stream being read from a recording medium of a data storage device or pulses in data being received from a data communication device.

BACKGROUND OF THE INVENTION

In a computer data storage device, data is typically stored on magnetic media by reversing the magnetic flux at each "one" bit location, and maintaining the same flux direction at each "zero" bit location, called NRZI recording. When these flux reversals pass a read head they cause a voltage change in the read head. The voltage from the various flux reversals along a data track appears as a varying signal level on the output of the read head, with the voltage caused by each flux reversal appearing as a positive or negative voltage pulse. These pulses must be detected by the electronics connected to the read head, typically by detecting the peak of each pulse to determine the pulse location.

Similarly, the voltage from a data transmission line appears as a varying signal level on the input to a data communication device, such as a modem, with the voltage of each bit change often appearing as a positive or negative voltage pulse.

In order to separate the voltage pulses from noise in the signal, the voltage may be compared to a predetermined threshold, and only peaks whose magnitude exceeds the threshold are considered to be possible pulses. If the peaks are too small with respect to the threshold, the signal gain must be adjusted higher, and if the peaks are too high the gain must be adjusted lower. To properly determine the gain setting, pulses must be detected so that the gain adjustment can maintain the proper level for a pulse peak.

Because the rotational speed of a disk may vary, a phase locked loop is used to synchronize a detector to the times of the pulses. The peaks of the pulses caused by bit transitions must be detected in order to correct for any timing deviations.

Several methods have been used to detect the pulses and thus the transitions within the data. In the prior art, peak detection circuitry has ordinarily been analog

22 OCT 1997

in nature, while digital detectors have ordinarily been sequence detectors such as those implementing the Viterbi method, disclosed in Application Serial Number 07/852,015, filed March 16, 1992, of Richard T. Behrens, Kent D. Anderson and Neal Glover, entitled "Method and Apparatus for Reduced-Complexity Viterbi-Type Sequence Detectors", which is incorporated herein by reference for all that is disclosed and taught therein. However, most digital pulse detectors analyze the context of the pulses, and do not detect a pulse until several samples have been taken beyond the peak of the pulse. This latency in detecting pulses is a disadvantage when the location of a pulse needs to be known in order to make timing and/or gain corrections.

10 It is thus apparent that there is a need in the art for an improved apparatus which digitally detects pulses at the earliest possible time after the peak of the pulse occurs. The present invention meets these and other needs.

SUMMARY OF THE INVENTION

15 It is an aspect of the present invention to detect signal pulses caused by bit transitions within data being read from a data storage device.

 It is another aspect of the invention to detect signal pulses within signals received by a data communications device.


20 It is another aspect of the invention to detect the pulses using samples of the signal wherein one of the samples occurs at a peak of the pulse caused by a bit transition.

 Another aspect of the invention is to detect such pulses using samples of the signal wherein samples occur on each side of a peak of the pulse and wherein no sample occurs at the peak.

25 A further aspect is to detect a pulse within one half to one and one half sample periods from the peak of the pulse.

 A still further aspect is to use signal level moving averages of two samples for detection.

30 The above and other aspects of the invention are accomplished in a digital pulse detector that uses four samples of a read signal to detect a data transition as soon as one sample beyond the time of the peak of the signal level at the bit transition. The pulse detector detects peaks by sampling at the center of the peak or by sampling at each side of the peak. The pulse detector detects pulses while tracking, where the pattern of pulses is not known in advance, or while acquiring

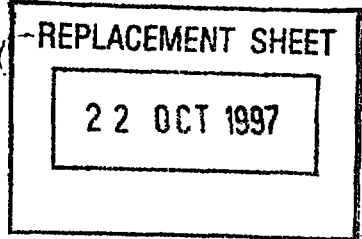

timing lock on the signal in a preamble, where the data pattern is fixed. Thus the pulse detector provides four combinations of detection to detect in tracking or acquisition mode, using either center or side sampling in either mode. The detection rules are summarized in Table 2.

5 In an alternative embodiment, the detector uses a moving average of two adjacent samples, as well as individual sample signal levels, to perform the detection. The alternative embodiment uses the sampled signal levels directly to determine peaks in side sampled acquisition mode, and in center sampled tracking mode. In the other two of the combinations, the alternative embodiment detector uses two-sample moving
10 averages to determine peaks. The preamble pattern for acquisition in the alternative embodiment is restricted to be a repeating sequence of alternating polarity pulses with a period of four sample intervals. This is more restrictive than the pattern handling capability of the first embodiment, however, it permits the alternative embodiment to perform earlier detection of the pulses in the side sampled acquisition case and it uses
15 simpler rules in acquisition. The detection rules for the alternative embodiment are summarized in Table 1.

Both embodiments avoid using a signal threshold to qualify the pulses during acquisition. This aspect prevents the gain at the beginning of the acquisition from affecting acquisition, since the gain may be incorrect at the beginning of acquisition.
20 During tracking, where the pulses may be more widely separated, a threshold is used to qualify pulses. This qualification prevents the detection of small noise-induced pulses as data pulses.

BRIEF DESCRIPTION OF THE DRAWINGS

The above and other aspects, features, and advantages of the invention will be better
25 understood by reading the following more particular description of the invention, presented in conjunction with the following drawings, wherein:

Fig. 1 shows a block diagram of the invention and the environment of the invention;

Fig. 2 shows a block diagram of the circuitry that provides data samples to the
30 invention;

Fig. 3 shows a block diagram of the digital circuitry of the read channel containing the invention;

Fig. 4 shows a signal waveform and illustrates center sampling of the pulses;

22 OCT 1997

Fig. 5 shows a signal waveform and illustrates side sampling of the pulses;
Figs. 6, 7, and 8 show a high-level logic diagram of the pulse detector of the
present invention for the equations of Table 1; and
Figs. 9, 10, and 11 show a high-level logic diagram of the pulse detector of the
present invention for the equations of Table 2.

DESCRIPTION OF THE PREFERRED EMBODIMENT

The following description is of the best presently contemplated mode of
carrying out the present invention. This description is not to be taken in a limiting
sense but is made merely for the purpose of describing the general principles of the
invention. The scope of the invention should be determined by referencing the
appended claims.

Fig. 1 shows a block diagram of the invention and a typical environment of
the invention. Referring now to Fig. 1, a computer system 100 contains a processing
element 102 which communicates to other elements of the computer system 100 over
a system bus 104. A keyboard 106 and a display 108 allow a user of the computer
system 100 to communicate with the computer system 100. A memory 110 contains
programs and data which cause the computer system 100 to perform operations
desired by the user.

A disk data storage system 112 is connected to the system bus 104 for storing
data and programs within the computer system 100. A disk controller 114 within the
disk device 112 communicates to the system bus 104 and controls the operations of
a disk drive 118, possibly in conjunction with a local microprocessor (not shown)
within the disk data storage system 112. The disk drive 118 performs the storage
function, typically storing the data on magnetic media. A bus 116 connects the disk
controller 114 to the disk drive 118, specifically connecting to a write channel 120 to
write data onto the disk through write heads and amplifiers 128. When data is being
read from the disk through the read head and amplifiers 128 the data comes back
through the read channel 122 which contains the pulse detector of the present
invention. The read and write heads may be physically the same heads. The data first
passes through the analog section 126 of the read channel 122 and then through the
digital section 124 of the read channel 122 before being sent on the bus 116 to the
disk controller 114. After being processed by the disk controller 114, the data is then
sent over the system bus 104 to the memory 110 where it is processed.

22 OCT 1997

The disk controller 114 also connects to other circuits, not shown, within the disk drive 118, such as a circuit which moves the read/write heads over the surface of the data storage media.

Although not shown in Fig. 1, the pulse detector of the present invention can be used to detect pulses within data received from a transmission line, such as a telephone line or local area network, in a data communications receiver. It may also be used in any other device that must detect pulses within a signal.

Fig. 2 shows a block diagram of the analog circuitry 126 of the read channel 122. Referring now to Fig. 2, when a read head is passing over a track of the data storage medium, it picks up a signal which is amplified by a preamplifier, not shown. After this preamplification, the signal 201 is passed to a variable gain amplifier 202. The signal is further amplified by the variable gain amplifier 202 and passed through an analog equalizer circuit 204, which filters the signal as desired, for example, so as to remove unwanted high frequencies and shape the remaining spectrum, to an Analog to Digital converter 206. The A to D converter 206 converts the analog signal into a digital value, providing six bits of digital information in the preferred embodiment, and then the data is passed to a register/de-multiplexer 207. In the preferred embodiment, the digital section 124 of the read channel 122 processes two samples in parallel. To create these two samples, the register/de-multiplexer 207 stores every other sample taken by the A to D converter 206. After the second sample is taken, the data from the two samples is passed to the data bus 230. The bus 230 is clocked by a single half-frequency clock signal.

The timing necessary for converting the data, also called taking a sample, in the A to D converter 206 is supplied by a variable frequency oscillator 222 which is controlled by the output of a digital to analog converter (DAC) 220. The input to the DAC 220 comes from the digital section of the read channel 124 as timing feedback signal 234.

The gain of the variable gain amplifier 202 is controlled through a gain feedback signal 232 which originates in the digital portion 124 of the read channel 122. The gain feedback signal 232 is input to a summing junction 210 which has a coarse gain control value as its other input. The coarse gain control can be set by the disk controller 114, or a local microprocessor within the disk drive (not shown), to provide a nominal gain level which is then adjusted up or down by the gain feedback signal 232. After being summed with the coarse gain control value, the feedback


22 OCT 1997

signal is sent to a digital to analog converter 212 and then to a filter 214. Because of the nature of digital to analog converters, the output of the DAC 212 may contain glitches when it is changing values. Therefore, the filter 214 may be necessary to remove these glitches in the feedback signal. After being filtered, the signal is converted to an exponential value by the exponential converter block 216 and then connected to the variable gain amplifier 202. This conversion makes the small-signal gain control dynamics independent of the input signal amplitude.

Fig. 3 shows a block diagram of the digital section 124 of the read channel 122 (Fig. 1). Referring now to Fig. 3, the digital data signal 230 from Fig. 2 is input to a delay circuit 304 and a digital filter circuit 302. The digital data signal 230 is also input to a multiplexer 306 whose output is connected to a second multiplexer 310 with an output that feeds the pulse detector 312 of the present invention. The output of the pulse detector 312 is connected to a gain control circuit 330 which provides the gain feedback signal 232 that connects to Fig. 2. The output of the pulse detector 312 is also connected to a timing recovery circuit 328 whose output 234 connects to the digital to analog converter 220 of Fig. 2. The output of the pulse detector 312 of the present invention may also be connected to a sync mark detector 322 and an RLL decoder 320, as shown in Fig. 3, or a more sophisticated data detector (not shown) may be connected to the sync mark detector 322 and the RLL decoder 320. The output of the RLL decoder 320 and the sync mark detector 322 are connected to the disk controller 114 (Fig. 1) through the bus 116.

The pulse detector 312 of the present invention is designed to detect pulses using one of two types of sampling methods, selected by the user. The first detection method is called center sampling wherein one of the samples taken will arrive at or very near the center, or peak, of a pulse. The location of the sampling is controlled by the timing recovery block 328 of Fig. 3. In the other method of sampling, called side sampling, the timing recovery block 328 will adjust the timing of the VFO 222 (Fig. 2) such that two samples are taken wherein one of the two samples appears on one side of the peak of the pulse and the other of the two samples appears on the other side of the peak. The user of the system determines whether center sampling or side sampling is used by setting a bit in a control register through the interface 116 (Fig. 1).

For either center or side sampling, sampling can occur at two different times within a data record being read from the disk media. The first time sampling occurs

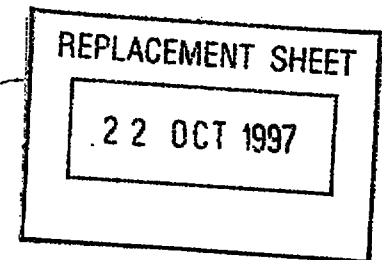

is called acquisition, because it occurs when the gain control and timing control are acquiring the gain and timing relationships of the pulses. This occurs when the read head is passing a preamble portion of the data record which always has a known data pattern to facilitate acquisition of the timing and gain. When data is being
 5 transferred, a different mode is used for the pulse detector, called tracking, since data has an irregular and a priori unknown pattern of pulses.

Therefore, the pulse detector of the present invention is designed to detect pulses under four separate conditions. The first condition is acquisition mode using side sampling, the second is acquisition mode using center sampling, third is tracking
 10 mode using side sampling, and fourth is tracking mode using center sampling.

The pulse detector analyzes the current sample of the amplitude of the signal as well as the previous three samples of the signal amplitude. Using these four samples, Table 1 shows equations for one embodiment of the pulse detector, and Table 2 shows equations for another embodiment.

15 In Table 1, y_n is the current sample, y_{n-1} is the first previous sample, and y_{n-2} is the second previous sample. The third previous sample is used only through the moving averages, $(1+D)/2$ (described below). The equations of Table 1 will be further described below with respect to Figs. 5 and 6. Also, the equations of Table 1 show pulse detection of a pulse whose peak occurs at time y_{n-1} for center sampling,
 20 or between y_{n-1} and y_{n-2} for side sampling tracking mode, or between y_n and y_{n-1} for side sampling acquisition mode. The circuits of Figs. 6-8 processes two signal samples simultaneously. The equations for the second sample are the same as the equations of Table 1, with one time delay. Thus, for example, y_n in Table 1 would be replaced by y_{n-1} , y_{n-1} would be replaced by y_{n-2} , and y_{n-2} would be replaced by y_{n-3} .

25 Fig. 4 shows a signal waveform of an isolated pulse and illustrates center sampling of the pulse. Referring now to Fig. 4, a signal waveform 402 is shown having a positive level above a baseline 404. Four samples of this waveform have been taken with the sample identified by reference 412, y_n , being the most recent sample. Sample 410, y_{n-1} , is the sample just prior to the most recent sample, sample 408 is the next
 30 previous sample and sample 406 is the oldest of the four samples shown. A threshold value 414 is also shown and the signal value of sample 410 must be greater than the threshold 414 for the pulse to be detected in tracking mode. Negative pulses would appear as a mirror image of Fig. 4.

Fig. 5 shows a signal waveform of an isolated pulse and illustrates side

22 OCT 1997

sampling of the pulse. Referring now to Fig. 5, a signal waveform 502 is shown as a positive level above a baseline 503. Four samples are shown, with the most recent sample being sample 510. Sample 508 is the sample previous to the most recent, 506 is the next previous sample and sample 504 is the oldest of the four samples shown.

5 These samples are also identified by the reference y_n through y_{n-3} . Also, a threshold 512 is illustrated, and sample $(y_{n-1} + y_{n-2}) / 2$ must be greater than the threshold 512 to be considered a pulse during tracking.

Figs. 6, 7, and 8 show a high-level logic diagram of the pulse detector 312 of the present invention. Referring now to Figs. 6, 7, and 8, signals 610 and 632 are

10 received from the register/de-multiplexer 207 of Fig. 2 through digital data signal 230. As discussed above with respect to Fig. 2, the analog section 126 sends two samples at a time to the digital section. Signal 610, also designated y_n , is the digitized value for the signal level of the most recent sample. Signal 632, also designated y_{n-1} , is the digitized value for the signal level of the next prior to the most recent sample. In the

15 preferred embodiment, these two signals are each six bit digital values stored in two's complement number representation, with one of the bits being the sign bit. Signal 610 is fed to a multiplexer 608 and signal 632 is fed to a second multiplexer 640. These multiplexers are controlled by an exclusive-OR gate 606 which has two signals 602 and 604 as its inputs. Signal 602 determines whether the pulse detector is in acquisition


20 or tracking mode, as described above, and signal 604 determines whether the pulse detector is in center or side sampling mode, as discussed above. When the pulse detector is in acquisition and side sampling mode, or the pulse detector is in tracking and center sampling mode, signals 610 and 632 will be selected by the multiplexers 608 and 640 respectively. When the pulse detector is in acquisition mode center sampling

25 or in tracking mode side sampling, the multiplexers 608 and 640 will select signals 631 and 639 respectively.

Signal 631 is called a $(1+D)/2$ signal and is formed by adding signal 610 to signal 632 in summing junction 628 and then dividing this sum by two with a divide by two circuit 630 to produce signal 631. The summing junction 628 is a six bit add

30 circuit and the divide by two circuit 630 is a shift. The signal 631 represents the sum of the y_n signal and y_{n-1} divided by two, therefore, it is the average of y_n and y_{n-1} .

Circuits 634, 636, and 638 produce a $(1+D)/2$ signal for the previous samples. That is, delay circuit 634, which is a set of D flip flops, is used to delay the y_n signal 610 by one clock cycle (two sample times), so it becomes signal y_{n-2} , which is sent to

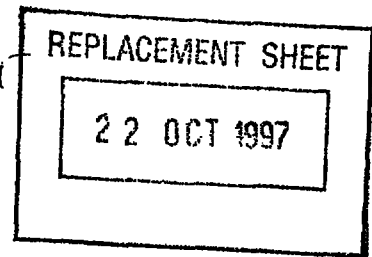

the summing junction 636. Summing junction 636 sums y_{n-2} with y_{n-1} and divides the result by two to produce the average at signal 639. As disclosed in Table 1, these $(1+D)/2$ signals are used in two of the four cases that the pulse detector can decode.

After passing through multiplexer 608, y_n signal 610 is sent to Figs. 7 and 8 over y_n signal 613. This signal is also delayed by delay circuit 617 to become y_{n-2} signal 614. In addition, y_n signal 613 is connected to a sign-bit circuit 616 which extracts only the sign-bit from the six-bit digital value. This sign-bit is connected to an exclusive-OR circuit 618 along with the other bits of the digital value 613. Also, the sign-bit 616 is connected to another summing junction 620 along with the output of the exclusive-OR circuit 618 and a threshold value 656. The circuits 616, 618, and 620 convert the value of y_n to an absolute value, that is, y_n is negated if it was originally a negative value to produce a positive value and is unchanged if it was originally a positive value. The threshold signal 656 is then subtracted from the absolute value to produce a non-negative value if the absolute value of y_n is greater than or equal to the threshold. The summing junction 620 produces a negative value if the absolute value of y_n is less than the threshold 656.

The output of the summing junction 622 is passed to another sign-bit circuit 624 which extracts the sign bit from the result and inverts it. This will indicate whether the absolute value of y_n is greater than or equal to the threshold value 656. The inverted sign-bit is then sent through a delay circuit 626. The output signal 627 of the delay circuit 626 has a value of one if the absolute value of y_n delayed by one clock cycle, that is, $|y_{n-2}|$, is greater than or equal to the threshold value, and is zero if it is less than the threshold.

In a similar manner, y_{n-1} signal 642 is sent to a sign-bit circuit 644, an exclusive-OR circuit 646, and a summing junction 648. The output of the summing junction 648 indicates whether the absolute value of the y_{n-1} signal is greater than or equal to the threshold value 656. This result is passed through a sign-bit circuit 650 and then inverted to indicate whether the absolute value of y_{n-1} is greater than or equal to the threshold value 656.

Fig. 7 shows a high-level logic diagram of the section of the pulse detector 312 that detects pulses during data tracking. Referring now to Fig. 7, comparator circuits 702 and 704 compare the results of the last three samples taken of the signal. Y_n signal 613 is the most recent sample, y_{n-1} signal 642 is the previous sample, and y_{n-2} signal 614 is the sample prior to signal 642. The outputs of the comparator 702 and

22 OCT 1997

704 are connected to a number of AND gates and delay circuits to implement the tracking equations shown in Table 1.

AND gate 706 determines whether a positive pulse is detected at time n (with the peak at time $n-1$). Output 736 of comparator 702 is a logical one if y_{n-2} is less than y_{n-1} , and output 740 of comparator 704 is a logical one if y_n is less than y_{n-1} . These signals are ANDed together with the inverted sign of the signal level of y_{n-1} to produce a logical one from AND gate 706 if a positive pulse has been detected at time n .

AND gate 708 determines whether there is a negative pulse at time n (with the peak at time $n-1$). Output 738 of comparator 702 is a logical one if y_{n-1} is less than y_{n-2} , and output 742 of comparator 704 is a logical one if y_{n-1} is less than y_n . These signals are ANDed together with the sign of y_{n-1} to produce a logical one from AND gate 708 if a negative pulse is detected at time n .

AND gates 716 and 718 determine whether a pulse is detected at time $n-1$ (with the peak at time $n-2$). Output 736 of comparator 702 indicates that y_{n-2} is less than y_{n-1} . Output 740 of comparator 704, after being delayed by delay circuit 710, indicates that y_{n-2} is less than y_{n-3} . Signal 744 indicates that y_{n-2} is negative, therefore, the ANDing of signals 736, 748, and 744 indicate there is a negative pulse detected at time $n-1$.

Signal 738 indicates that y_{n-2} is greater than y_{n-1} . Signal 746, the output of delay circuit 712, indicates that y_{n-2} is greater than y_{n-3} . By ANDing signals 738, 746, and the inverted signal 744, AND gate 718 indicates that a positive pulse is detected at time $n-1$.

The output of OR gate 714 indicates that a pulse, either positive or negative, is detected at time n , and the output of OR gate 724 indicates that a positive or negative pulse is detected at time $n-1$. AND gate 720 determines whether the magnitude of the pulse at time n was greater than the threshold value and it also determines whether the pulse detector is in tracking mode. AND gate 726 determines whether the pulse at time $n-1$ was greater than the threshold and whether the detector is in tracking mode. Because of the recording code used in writing data to the storage media in this application, a pulse can never occur at time n and also at time $n-1$. Therefore, the outputs of and gates 720 and 726 are cross-coupled to AND gates 728 and 730 to prevent detection of pulses in both locations at once. Thus, the output of gates 728 and 730 will indicate that a pulse occurred either at time n or at time $n-1$ but not both. These outputs are connected to the circuit of Fig. 8.


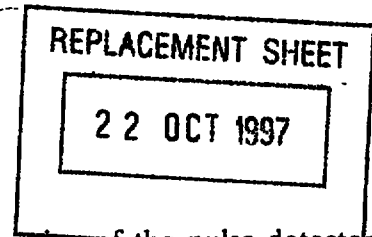


Fig. 8 shows a high level logic diagram of the ~~portion of the pulse detector~~ that implements the acquisition equations shown in Table 1 for acquisition mode. Referring now to Fig. 8, signal 602 indicates whether or not the detector is in acquisition mode. Sign-bit extractor circuit 802 and sign-bit extractor circuit 804
 5 extract the sign bits from the values y_n and y_{n-1} respectively. These two sign bits are exclusive NORed in XNOR circuit 808, whose output indicates whether the sign of y_n is equal to the sign of y_{n-1} . Circuit 810 indicates whether the sign of y_{n-1} is not equal to the sign of y_{n-2} . If both these conditions are true, the output of AND gate 816 will
 10 indicate that a pulse is detected at time n (with the peak between time n and time $n-1$) in acquisition mode. This output is ORed with output 732 from Fig. 7 which indicates whether a pulse is detected at time n in tracking mode, therefore, signal 824 indicates whether a pulse is detected in one of the modes at time n .

The sign-bit output of circuit 804 is delayed one clock cycle to indicate the sign of signal y_{n-3} . This signal is exclusive ORed with the sign bit of y_{n-2} by circuit 814,
 15 whose output indicates whether the sign of y_{n-2} is not equal to the sign of y_{n-3} . The output of exclusive-OR circuit 810, after being inverted at the input of AND gate 818, indicates whether the sign of y_{n-1} is equal to the sign of y_{n-2} . Therefore, the output of AND gate 818 indicates whether a pulse is detected in acquisition mode at time $n-1$ (with the peak between time $n-1$ and time $n-2$). This output is ORed with the output
 20 734 of Fig. 7, which indicates whether a pulse is detected in tracking mode at time $n-1$. Therefore, output 826 indicates whether a pulse is detected at time $n-1$, either in acquisition or tracking mode.

Figs. 9 through 11 show a circuit that implements the equations of Table 2. This circuit, and the equations of Table 2, provide an implementation of the pulse
 25 detector that allows the preamble section of the data to contain different types of patterns. For example, the circuit of Figs. 6-8 works well for a preamble having a 2T pattern, which is an alternating 1-0 pattern (10101010...), where a 1 indicates presence of a pulse, a zero indicates absence of a pulse, and pulses alternate in polarity. The circuit of Figs 9-11 allows a 2T pattern, a 3T pattern (100100...), and an 4T pattern
 30 (10001000...). Thus, the circuit of Figs. 9-11 and equations of Table 2 are the preferred embodiment and the best mode.

In all cases except side sampling acquisition mode, the equations of both Tables 1 and 2 detect pulses with the same latency. For side sampling acquisition, the equations of Table 1 detect peaks one sample sooner than the equations of Table 2.

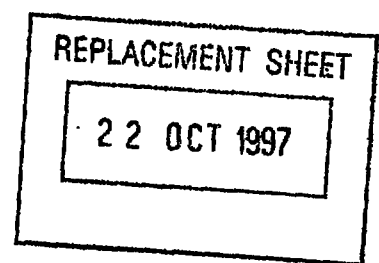

However, the equations of Table 2 are consistent in the amount of latency in both acquisition and tracking modes, while with the equations of Table 1 for side sampling, the latency in acquisition mode is one sample shorter than the latency in tracking mode.


5 The equations of Table 2 show detection of a pulse at time y_n . As with the circuits of Figs. 6-8, the circuit of Figs. 9-11 processes two signal samples simultaneously. The equations for the second sample are the same as the equations of the first sample shown in Table 2, with one time delay. Thus, for example, y_n in Table 2 is replaced by y_{n-1} , y_{n-1} is replaced by y_{n-2} , etc., for the second sample.

10 Referring now to Figs 9-11, Fig. 9 shows a series of comparators, 912-922, that compare the values of y_n , y_{n-1} , y_{n-2} , and y_{n-3} , and compares y_n and y_{n-1} to the threshold value. Most of the comparators have a delay circuit, 924-938, on their output to also provide a comparison of y_{n-2} , y_{n-3} , y_{n-4} , and y_{n-5} . These circuits thus provide all the inputs necessary for the equations of Table 2, and the equivalent equations for the
15 second sample as discussed above.

Fig. 10 implements the equations of Table 2 for the current sample, and Fig. 11 implements the equations of Table 2 for the first previous sample. Therefore, in the following description, Figs. 10 and 11 will be described together.


In Figs. 10 and 11, NOR circuits 1002 and 1102 determine if the absolute
20 value of the signal is greater than the threshold. As shown in Table 2, this comparison is done in tracking mode, but not in acquisition mode. Multiplexers 1020 and 1120 select side or center sampling mode. Multiplexers 1008 and 1108 select positive or negative pulses in center sampling mode, and multiplexers 1018 and 1118 select positive or negative pulses in side sampling mode. NAND circuits 1004, and
25 1104 implement the equations for center sampling positive pulses, and NAND circuits 1010 and 1110 implement the equations for center sampling negative pulses. Multiplexers 1006, 1106, 1012, and 1112 allow a user to select one of two equations during center sampling. These equations are shown in Table 2, equation 3, for positive and negative pulses of center sampling. This provides flexibility to the user
30 of the circuit. NAND circuits 1016 and 1116 implement the equations for side sampling, positive pulses, and NAND circuits 1022 and 1122 implement the equations for side sampling, negative pulses. Condition 3 of Table 2 may be omitted during tracking mode when condition 4 is used.

Because data recorded on a magnetic storage medium is recorded using small

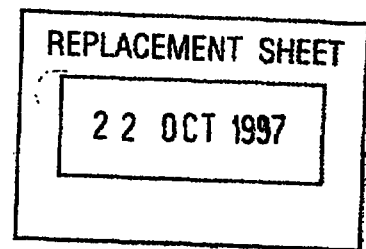

magnets having alternating north-south poles, the signal detected by the read head will always have alternating positive and negative pulses. Therefore, for detecting signals read from a magnetic recording medium, the equations of Tables 1 and 2 could be easily modified to detect a pulse only if the pulse is opposite in polarity to the previous pulse detected. This could provide additional noise immunity.

Having thus described a presently preferred embodiment of the present invention, it will now be appreciated that the aspects of the invention have been fully achieved, and it will be understood by those skilled in the art that many changes in construction and circuitry and widely differing embodiments and applications of the invention will suggest themselves without departing from the spirit and scope of the present invention. The disclosures and the description herein are intended to be illustrative and are not in any sense limiting of the invention, more preferably defined in scope by the following claims.

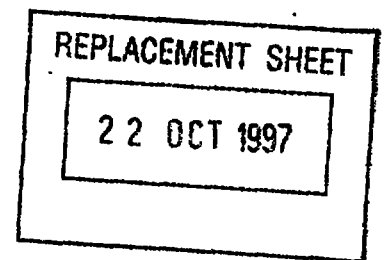Table 1


	Acquisition	Tracking	
Side Sampled	1) $\text{SGN}(y_n) = \text{SGN}(y_{n-1})$ 2) $\text{SGN}(y_{n-1}) \neq \text{SGN}(y_{n-2})$	y_n sequence is filtered by $(1+D)/2$, then fed into Center Sampled tracking pulse detector	
Center Sampled	y_n sequence is filtered by $(1+D)/2$, then fed into Side Sampled acquisition pulse detector	<u>Pos Pulse</u> 1) $y_{n-1} > \text{Thr}$ 2) $y_{n-1} > y_{n-2}$ 3) $y_{n-1} > y_n$	<u>Neg Pulse</u> 1) $y_{n-1} < -\text{Thr}$ 2) $y_{n-1} < y_{n-2}$ 3) $y_{n-1} < y_n$

where Thr is the Threshold value

Table 2

	<u>Positive Pulse</u>	<u>Negative Pulse</u>
Side Sampled	1) $y_n < y_{n-2}$ 2) $y_{n-3} < y_{n-1}$ 3) $y_{n-4} < y_{n-2}$	1) $y_n > y_{n-2}$ 2) $y_{n-3} > y_{n-1}$ 3) $y_{n-4} > y_{n-2}$
Trk Only	4) $y_{n-1} > \text{Thr}$	4) $-y_{n-1} > \text{Thr}$
Center Sampled	1) $y_n < y_{n-1}$ 2) $y_{n-2} < y_{n-1}$ 3) $y_{n-3} < y_{n-2}$	1) $y_n > y_{n-1}$ 2) $y_{n-2} > y_{n-1}$ 3) $y_{n-3} > y_{n-2}$
	or	or
Trk Only	$y_{n-3} < y_{n-1}$ 4) $y_{n-1} > \text{Thr}$	$y_{n-3} > y_{n-1}$ 4) $-y_{n-1} > \text{Thr}$

where Thr is the Threshold value

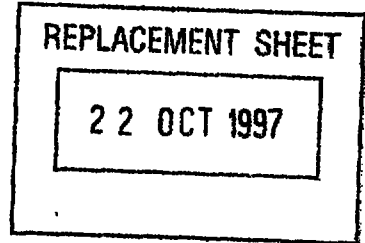

CLAIMS

What is claimed is:

- 1 1. A pulse detector for detecting pulses in a continuous signal, said pulse detector
- 2 comprising:
- 3 an analog to digital converter for converting said signal to digital sample
- 4 values at controlled sampling times;
- 5 at least one data storage register connected to an output of said analog to
- 6 digital converter for storing a previous digital sample value as said
- 7 digital sample value is created at said controlled sampling times;
- 8 at least one comparator connected to said data storage registers, and
- 9 connected to said output of said analog to digital converter, for
- 10 comparing said stored digital sample value and a current digital sample
- 11 value from said analog to digital converter;
- 12 at least one data storage register connected to an output of each of said at
- 13 least one comparator for storing a result of said comparing;
- 14 first logic circuit means connected to outputs of said at least one comparator
- 15 and outputs of said at least one data storage register for indicating a
- 16 pulse at a first previous sample time if a value of a second previous
- 17 sample is lower than a value of said first previous sample, a value of
- 18 a third previous sample is lower than said value of said second
- 19 previous sample, a value of the output of said analog to digital
- 20 converter is lower than said value of said first previous sample and the
- 21 value of the first previous sample is nonnegative; and
- 22 second logic circuit means connected to outputs of said at least one
- 23 comparator and outputs of said at least one data storage register for




22 OCT 1997

24 indicating a pulse at a first previous sample time if a value of a second
25 previous sample is greater than a value of said first previous sample,
26 a value of a third previous sample is greater than said value of said
27 second previous sample, a value of the output of said analog to digital
28 converter is greater than said value of said first previous sample and
29 the value of the first previous sample is negative.

- 1 2. A pulse detector for detecting pulses in a continuous signal, said pulse detector
2 comprising:
- 3 an analog to digital converter for converting said signal to digital sample
4 values at controlled sampling times;
- 5 at least one data storage register connected to an output of said analog to
6 digital converter for storing a previous digital sample value as said
7 digital sample value is created at said controlled sampling times;
- 8 at least one comparator connected to said data storage registers, and
9 connected to said output of said analog to digital converter, for
10 comparing said stored digital sample value and a current digital sample
11 value from said analog to digital converter;
- 12 at least one data storage register connected to an output of each of said at
13 least one comparator for storing a result of said comparing;
- 14 first logic circuit means connected to outputs of said at least one comparator
15 and outputs of said at least one data storage register for indicating a
16 pulse at a first previous sample time if a value of a second previous
17 sample is lower than a value of said first previous sample, a value of
18 a third previous sample is lower than said value of said first previous



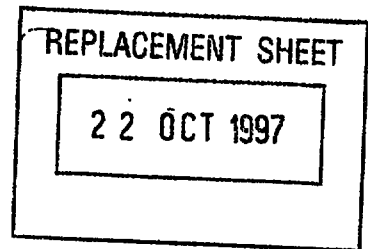


19 sample, a value of the output of said analog to digital converter is
20 lower than said value of said first previous sample and the value of the
21 first previous sample is nonnegative; and
22 second logic circuit means connected to outputs of said at least one
23 comparator and outputs of said at least one data storage register for
24 indicating a pulse at a first previous sample time if a value of a second
25 previous sample is greater than a value of said first previous sample,
26 a value of a third previous sample is greater than said value of said
27 first previous sample, a value of the output of said analog to digital
28 converter is greater than said value of said first previous sample and
29 the value of the first previous sample is negative.

1 3. The pulse detector of claims 1 or 2 wherein said first and second logic circuit
2 means further comprise:

3 a first threshold comparator connected to said first logic means for comparing
4 said value of said first previous sample to a predetermined threshold
5 value and allowing said indication of a pulse at said first previous
6 sample time if said value of said first previous sample is greater than
7 said predetermined threshold value; and

8 a second threshold comparator connected to said second logic means for
9 comparing said value of said first previous sample to a predetermined
10 threshold value and allowing said indication of a pulse at said first
11 previous sample time if said value of said first previous sample is less
12 than the negative of said predetermined threshold value.



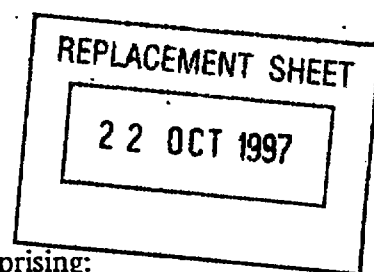

1 4. The pulse detector of claims 1 or 2 further comprising:

2 a third logic circuit means connected to outputs of said comparators and
3 outputs of said plurality of data storage registers for indicating a pulse
4 at said second previous sample time if a value of said third previous
5 sample is lower than a value of said second previous sample, a value
6 of a fourth previous sample is lower than said value of said third
7 previous sample, and a value of said first previous sample is lower than
8 said value of said second previous sample and the value of the second
9 previous sample is nonnegative; and

10 a fourth logic circuit means connected to outputs of said comparators and
11 outputs of said plurality of data storage registers for indicating a pulse
12 at said second previous sample time if a value of said third previous
13 sample is greater than a value of said second previous sample, a value
14 of a fourth previous sample is greater than said value of said third
15 previous sample, and a value of said first previous sample is greater
16 than said value of said second previous sample and the value of the
17 second previous sample is negative.

1 5. The pulse detector of claim 4 wherein said first through fourth logic circuit means
2 further comprise:

3 a first threshold comparator connected to said first logic means for comparing
4 said value of said first previous sample to a predetermined threshold
5 value and allowing said indication of a pulse at said first previous
6 sample time if said value of said first previous sample is greater than
7 said predetermined threshold value;




22 OCT 1997

8 a second threshold comparator connected to said second logic means for
9 comparing said value of said first previous sample to a predetermined
10 threshold value and allowing said indication of a pulse at said first
11 previous sample time if said value of said first previous sample is less
12 than the negative of said predetermined threshold value;
13 a third threshold comparator connected to said third logic means for
14 comparing said value of said second previous sample to a
15 predetermined threshold value and allowing said indication of a pulse
16 at said second previous sample time if said value of said first previous
17 sample is greater than said predetermined threshold value; and
18 a fourth threshold comparator connected to said fourth logic means for
19 comparing said value of said second previous sample to a
20 predetermined threshold value and allowing said indication of a pulse
21 at said second previous sample time if said value of said first previous
22 sample is less than the negative of said predetermined threshold value.

1 6. The pulse detector of claims 1 or 2 further comprising:

2 a third logic circuit means connected to outputs of said comparators and
3 outputs of said plurality of data storage registers for indicating a pulse
4 at said second previous sample time if a value of said third previous
5 sample is lower than a value of said second previous sample, a value
6 of a fourth previous sample is lower than said value of said second
7 previous sample, and a value of said first previous sample is lower than
8 said value of said second previous sample and the value of the second
9 previous sample is nonnegative; and



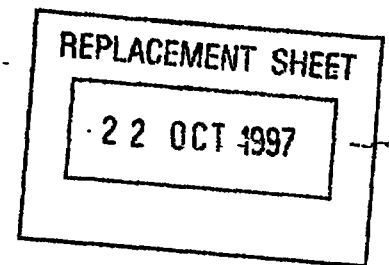

10 a fourth logic circuit means connected to outputs of said comparators and
11 outputs of said plurality of data storage registers for indicating a pulse
12 at said second previous sample time if a value of said third previous
13 sample is greater than a value of said second previous sample, a value
14 of a fourth previous sample is greater than said value of said second
15 previous sample, and a value of said first previous sample is greater
16 than said value of said second previous sample and the value of the
17 second previous sample is negative.


1 7. The pulse detector of claim 6 wherein said first through fourth logic circuit means
2 further comprise:

3 a first threshold comparator connected to said first logic means for comparing
4 said value of said first previous sample to a predetermined threshold
5 value and allowing said indication of a pulse at said first previous
6 sample time if said value of said first previous sample is greater than
7 said predetermined threshold value;

8 a second threshold comparator connected to said second logic means for
9 comparing said value of said first previous sample to a predetermined
10 threshold value and allowing said indication of a pulse at said first
11 previous sample time if said value of said first previous sample is less
12 than the negative of said predetermined threshold value;

13 a third threshold comparator connected to said third logic means for
14 comparing said value of said second previous sample to a
15 predetermined threshold value and allowing said indication of a pulse
16 at said second previous sample time if said value of said first previous




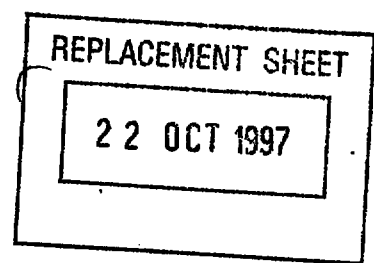

17 sample is greater than said predetermined threshold value; and
18 a fourth threshold comparator connected to said fourth logic means for
19 comparing said value of said second previous sample to a
20 predetermined threshold value and allowing said indication of a pulse
21 at said second previous sample time if said value of said first previous
22 sample is less than the negative of said predetermined threshold value.

- 1 8. A pulse detector for detecting pulses in a continuous signal, said pulse detector
2 comprising:
- 3 an analog to digital converter for converting said signal to digital sample
4 values at controlled sampling times;
- 5 at least one data storage register connected to an output of said analog to
6 digital converter for storing a previous digital sample value as said
7 digital sample value is created at said controlled sampling times;
- 8 at least one comparator connected to said data storage registers, and
9 connected to said output of said analog to digital converter, for
10 comparing said stored digital sample value and a current digital sample
11 value from said analog to digital converter;
- 12 at least one data storage register connected to an output of each of said at
13 least one comparator for storing a result of said comparing;
- 14 first logic circuit means connected to outputs of said at least one comparator
15 and outputs of said at least one data storage register for indicating a
16 pulse at a first previous sample time if a value of a second previous
17 sample is less than a value of said first previous sample, a value of said
18 first previous sample is greater than a predetermined threshold value,



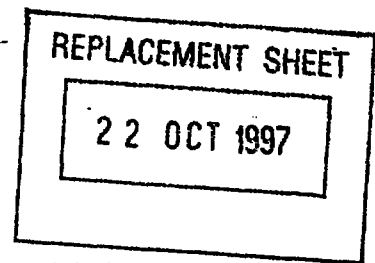

19 a value of the output of said analog to digital converter is lower than
20 said value of said first previous sample and the value of the first
21 previous sample is nonnegative; and
22 second logic circuit means connected to outputs of said at least one
23 comparator and outputs of said at least one data storage register for
24 indicating a pulse at a first previous sample time if a value of a second
25 previous sample is greater than a value of said first previous sample,
26 a value of said first previous sample is less than the negative of said
27 predetermined threshold value, a value of the output of said analog to
28 digital converter is greater than said value of said first previous sample
29 and the value of the first previous sample is negative.


- 1 9. A pulse detector for detecting pulses in a continuous signal, said pulse detector
2 comprising:
3 an analog to digital converter for converting said signal to digital sample
4 values at controlled sampling times;
5 at least one data storage register connected to an output of said analog to
6 digital converter for storing a previous digital sample value as said
7 digital sample value is created at said controlled sampling times;
8 at least one comparator connected to said data storage registers, and
9 connected to said output of said analog to digital converter, for
10 comparing said stored digital sample value and a current digital sample
11 value from said analog to digital converter;
12 at least one data storage register connected to an output of each of said at
13 least one comparator for storing a result of said comparing;



22 OCT 1997

14 first logic circuit means connected to outputs of said at least one comparator
15 and outputs of said at least one data storage register for indicating a
16 pulse at a first previous sample time if a value of a second previous
17 sample is less than a value of said first previous sample, a value of said
18 first previous sample is greater than a predetermined threshold value,
19 a value of the output of said analog to digital converter is lower than
20 said value of said first previous sample and the value of the first
21 previous sample is nonnegative; and
22 second logic circuit means connected to outputs of said at least one
23 comparator and outputs of said at least one data storage register for
24 indicating a pulse at a first previous sample time if a value of a second
25 previous sample is greater than a value of said first previous sample,
26 a value of said first previous sample is less than the negative of said
27 predetermined threshold value, a value of the output of said analog to
28 digital converter is greater than said value of said first previous sample
29 and the value of the first previous sample is negative;
30 a third logic circuit means connected to outputs of said at least one
31 comparator and outputs of said at least one data storage register for
32 indicating a pulse at said second previous sample time if a value of
33 said third previous sample is lower than a value of said second
34 previous sample, a value of said second previous sample is greater than
35 a predetermined threshold value, a value of said first previous sample
36 is lower than said value of said second previous sample and the value
37 of the second previous sample is nonnegative; and
38 a fourth logic circuit means connected to outputs of said at least one



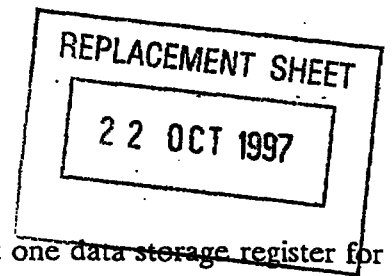

39 comparator and outputs of said at least one data storage register for
40 indicating a pulse at said second previous sample time if a value of
41 said third previous sample is greater than a value of said second
42 previous sample, a value of said second previous sample is less than a
43 predetermined threshold value, and a value of said first previous
44 sample is greater than said value of said second previous sample and
45 the value of the second previous sample is negative.

- 1 10. A pulse detector for detecting pulses in a continuous signal, said pulse detector
- 2 comprising:
 - 3 an analog to digital converter for converting said signal to digital sample
 - 4 values at controlled sampling times;
 - 5 at least one data storage register connected to an output of said analog to
 - 6 digital converter for storing a previous digital sample value as said
 - 7 digital sample value is created at said controlled sampling times;
 - 8 at least one comparator connected to said data storage registers, and
 - 9 connected to said output of said analog to digital converter, for
 - 10 comparing said stored digital sample value and a current digital sample
 - 11 value from said analog to digital converter;
 - 12 at least one data storage register connected to an output of each of said at
 - 13 least one comparator for storing a result of said comparing;
 - 14 first logic circuit means connected to outputs of said comparators and outputs
 - 15 of said plurality of data storage registers for indicating a pulse at a first
 - 16 previous sample time if a value of a third previous sample is lower
 - 17 than a value of said first previous sample, a value of a fourth previous




22 OCT 1997


18 sample is lower than a value of a second previous sample, and a value
19 of the output of said analog to digital converter is lower than said
20 value of said second previous sample and the value of said first
21 previous sample is nonnegative; and
22 second logic circuit means connected to outputs of said comparators and
23 outputs of said plurality of data storage registers for indicating a pulse
24 at a first previous sample time if a value of a third previous sample is
25 greater than a value of said first previous sample, a value of a fourth
26 previous sample is greater than a value of a second previous sample,
27 and a value of the output of said analog to digital converter is greater
28 than said value of said second previous sample and the value of said
29 first previous sample is negative.

1 11. The pulse detector of claim 10 wherein said first and second logic circuit means
2 further comprise:

3 a first threshold comparator connected to said first logic means for comparing
4 said value of said first previous sample to a predetermined threshold
5 value and allowing said indication of a pulse at said first previous
6 sample time if said value of said first previous sample is greater than
7 said predetermined threshold value; and

8 a second threshold comparator connected to said second logic means for
9 comparing said value of said first previous sample to a predetermined
10 threshold value and allowing said indication of a pulse at said first
11 previous sample time if said value of said first previous sample is less
12 than the negative of said predetermined threshold value.



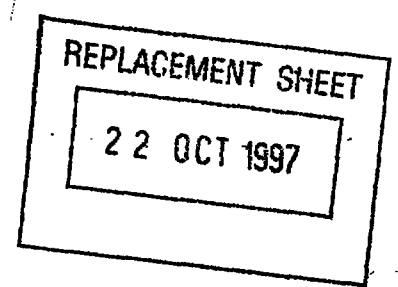

1 12. The pulse detector of claim 10 further comprising:

2 a third logic circuit means connected to outputs of said comparators and
3 outputs of said plurality of data storage registers for indicating a pulse
4 at said second previous sample time if a value of a fourth previous
5 sample is lower than a value of said second previous sample, a value
6 of a fifth previous sample is lower than said value of said third
7 previous sample, and a value of said first previous sample is lower than
8 said value of said third previous sample and the value of said second
9 previous sample is nonnegative; and

10 a fourth logic circuit means connected to outputs of said comparators and
11 outputs of said plurality of data storage registers for indicating a pulse
12 at said second previous sample time if a value of a fourth previous
13 sample is greater than a value of said second previous sample, a value
14 of a fifth previous sample is greater than said value of said third
15 previous sample, and a value of said first previous sample is greater
16 than said value of said third previous sample and the value of said
17 second previous sample is negative.

1 13. The pulse detector of claim 12 wherein said first through fourth logic circuit
2 means further comprise:

3 a first threshold comparator connected to said first logic means for comparing
4 said value of said first previous sample to a predetermined threshold
5 value and allowing said indication of a pulse at said first previous
6 sample time if said value of said first previous sample is greater than
7 said predetermined threshold value;



22 OCT 1997

8 a second threshold comparator connected to said second logic means for
9 comparing said value of said first previous sample to a predetermined
10 threshold value and allowing said indication of a pulse at said first
11 previous sample time if said value of said first previous sample is less
12 than a negative of said predetermined threshold value;
13 a third threshold comparator connected to said third logic means for
14 comparing said value of said second previous sample to a
15 predetermined threshold value and allowing said indication of a pulse
16 at said second previous sample time if said value of said first previous
17 sample is greater than said predetermined threshold value; and
18 a fourth threshold comparator connected to said fourth logic means for
19 comparing said value of said second previous sample to a
20 predetermined threshold value and allowing said indication of a pulse
21 at said second previous sample time if said value of said first previous
22 sample is less than the negative of said predetermined threshold value.


1 14. A pulse detector for detecting pulses in a continuous signal, said pulse detector
2 comprising:

3 an analog to digital converter for converting said signal to digital sample
4 values at controlled sampling times;

5 at least one data storage register connected to an output of said analog to
6 digital converter for storing a previous digital sample value as said
7 digital sample value is created at said controlled sampling time;

8 at least one threshold comparator connected to said at least one data storage
9 register for comparing said stored digital sample value to a



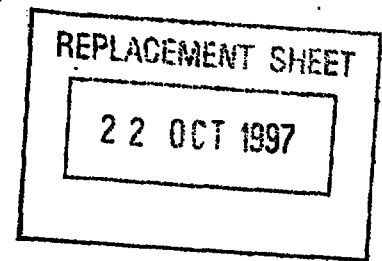

10 predetermined threshold value;

11 at least one comparator connected to said at least one data storage register,

12 and connected to an output of said threshold comparator and further

13 connected to said output of said analog to digital converter, for

14 comparing said stored digital sample values and a current digital

15 sample value from said analog to digital converter and for indicating

16 a pulse at a most recently stored digital sample value if a next most

17 recently stored digital sample value is a lower value than said most

18 recently stored digital sample value and said current digital sample

19 value is a lower value than said most recently stored digital sample

20 value and said most recently stored digital sample value is a greater

21 value than said predetermined threshold value; and

22 at least one comparator connected to said at least one data storage register,

23 and connected to an output of said threshold comparator and further

24 connected to said output of said analog to digital converter, for

25 comparing said stored digital sample values and a current digital

26 sample value from said analog to digital converter and for indicating

27 a pulse at a most recently stored digital sample value if a next most

28 recently stored digital sample value is a higher value than said most

29 recently stored digital sample value and said current digital sample

30 value is a higher value than said most recently stored digital sample

31 value and said most recently stored digital sample value is a lower

32 value than the negative of said predetermined threshold value.

1 15. The pulse detector of claim 14 further comprising:



22 OCT 1997

2 averaging means connected between said analog to digital converter and said
3 data storage registers for averaging an output of said analog to digital
4 converter with a most recent past output of said analog to digital
5 converter to produce an average value for storing in said data storage
6 registers.

1 16. A pulse detector for detecting pulses in a continuous signal, said pulse detector
2 comprising:


3 an analog to digital converter for converting said signal to digital sample
4 values at controlled sampling times;

5 at least one data storage register connected to an output of said analog to
6 digital converter for storing a previous digital sample value as said
7 digital sample value is created at said controlled sample time; and

8 at least one comparator connected to said at least one data storage register
9 and connected to said output of said analog to digital converter for
10 comparing a sign bit of each of said stored digital sample values and
11 a sign bit of a current digital sample value from said analog to digital
12 converter and for indicating a pulse at a most recently stored digital
13 sample value if a sign bit of a next most recently stored digital sample
14 value is not equal to a sign bit of said most recently stored digital
15 sample value and a sign bit of said current digital sample value is equal
16 to a sign bit of said most recently stored digital sample value.

1 17. The pulse detector of claim 16 further comprising:

2 averaging means connected between said analog to digital converter and said



* C L M S *

22 OCT 1997

3 data storage registers for averaging an output of said analog to digital
4 converter with a most recent past output of said analog to digital
5 converter to produce an average value for storing in said data storage
6 registers.

1 18. A pulse detector for detecting pulses in a continuous signal, said pulse detector
2 comprising:

3 an analog to digital converter for converting said signal to digital sample
4 values at controlled sampling times;

5 a first data storage register connected to an output of said analog to digital
6 converter and connected in such a manner as to store every other
7 sample;

8 a second data storage register connected to an output of said analog to digital
9 converter and connected in such a manner as to store every other
10 sample, wherein said second data register stores samples not stored by
11 said first data storage register;

12 a first threshold comparator connected to said output of said analog to digital
13 converter for comparing an absolute value of said output of said
14 analog to digital converter to a predetermined threshold value;

15 a third data storage register connected to an output of said first threshold
16 comparator for storing a result of said comparison;

17 a second threshold comparator connected to said first data storage register for
18 comparing an absolute value of an output of said first data storage
19 register to a predetermined threshold value;


20 a pair of comparators connected to said first and second data storage registers



* C L M S *

22 OCT 1997

21 and connected to said output of said analog-to-digital converter for
22 comparing said stored digital sample values and a current digital
23 sample value from said analog to digital converter; and
24 a first logic circuit connected to outputs of said pair of comparators and
25 connected to an output of said second threshold comparator, wherein
26 said first logic circuit indicates a pulse at a most recently stored digital
27 sample value if a next most recently stored digital sample value is less
28 than said most recently stored digital sample value and said current
29 digital sample value is less than said most recently stored digital sample
30 value and said second threshold comparator indicates that an absolute
31 value of said most recently stored digital sample value is greater than
32 said predetermined threshold value and said next most recently stored
33 digital sample value is nonnegative;
34 a second logic circuit connected to outputs of said pair of comparators and
35 connected to an output of said second threshold comparator, wherein
36 said first logic circuit indicates a pulse at a most recently stored digital
37 sample value if a next most recently stored digital sample value is
38 greater than said most recently stored digital sample value and said
39 current digital sample value is greater than said most recently stored
40 digital sample value and said second threshold comparator indicates
41 that an absolute value of said most recently stored digital sample value
42 is greater than said predetermined threshold value and said next most
43 recently stored digital sample value is negative;
44 a third logic circuit connected to outputs of said pair of comparators and
45 connected to an output of said third data storage register, wherein said



22 OCT 1997


46 second logic circuit indicates a pulse at said next most recently stored
47 digital sample value if a second next most recently stored digital
48 sample value is less than said next most recently stored digital sample
49 value and said most recently stored digital sample value is less than
50 said next most recently stored digital sample value and said third data
51 storage register indicates that an absolute value of said next most
52 recently stored digital sample value is greater than said predetermined
53 threshold value and said next most recently stored digital sample value
54 is nonnegative; and

55 a fourth logic circuit connected to outputs of said pair of comparators and
56 connected to an output of said third data storage register, wherein said
57 second logic circuit indicates a pulse at said next most recently stored
58 digital sample value if a second next most recently stored digital
59 sample value is greater than said next most recently stored digital
60 sample value and said most recently stored digital sample value is
61 greater than said next most recently stored digital sample value and
62 said third data storage register indicates that an absolute value of said
63 next most recently stored digital sample value is greater than said
64 predetermined threshold value and said next most recently stored
65 digital sample value is negative.

1 19. The pulse detector of claim 18 further comprising:

2 averaging means connected between said analog to digital converter and said
3 data storage registers for averaging an output of said analog to digital
4 converter with a most recent past output of said analog to digital



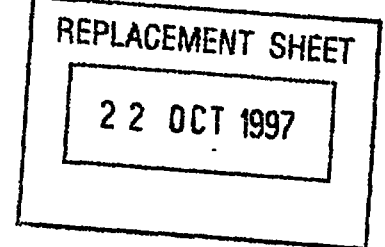

5 converter to produce an average value for storing in said data storage
6 registers.

1 20. A pulse detector for detecting pulses in a continuous signal, said pulse detector
2 comprising:

3 an analog to digital converter for converting said signal to digital sample
4 values at controlled sampling times;

5 a first data storage register connected to an output of said analog to digital
6 converter and connected to store every other sample;

7 a second data storage register connected to an output of said analog to digital
8 converter and connected to store every other sample, wherein said
9 second data register stores samples not stored by said first data storage
10 register;

11 a first logic circuit connected to an output of said first data storage register
12 and connected to an output of said analog to digital converter,
13 wherein said first logic circuit indicates a pulse at a most recently
14 stored digital sample value if a sign of a next most recently stored
15 digital sample value is not equal to a sign of said most recently stored
16 digital sample value and a sign of an output of said analog to digital
17 converter is equal to said sign of said most recently stored digital
18 sample value;


19 a second logic circuit connected to outputs of said first and second data
20 storage registers, wherein said second logic circuit indicates a pulse at
21 said next most recently stored digital sample value if a sign of a second
22 next most recently stored digital sample value is not equal to said sign



23 of said next most recently stored digital sample value and said sign of
24 said most recently stored digital sample value is equal to said sign of
25 said next most recently stored digital sample value.

1 21. The pulse detector of claim 20 further comprising:

2 averaging means connected between said analog to digital converter and said
3 data storage registers for averaging an output of said analog to digital
4 converter with a most recent past output of said analog to digital
5 converter to produce an average value for storing in said data storage
6 registers.

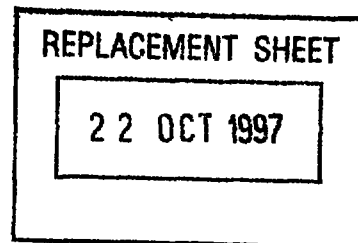

22 OCT 1997

1/10

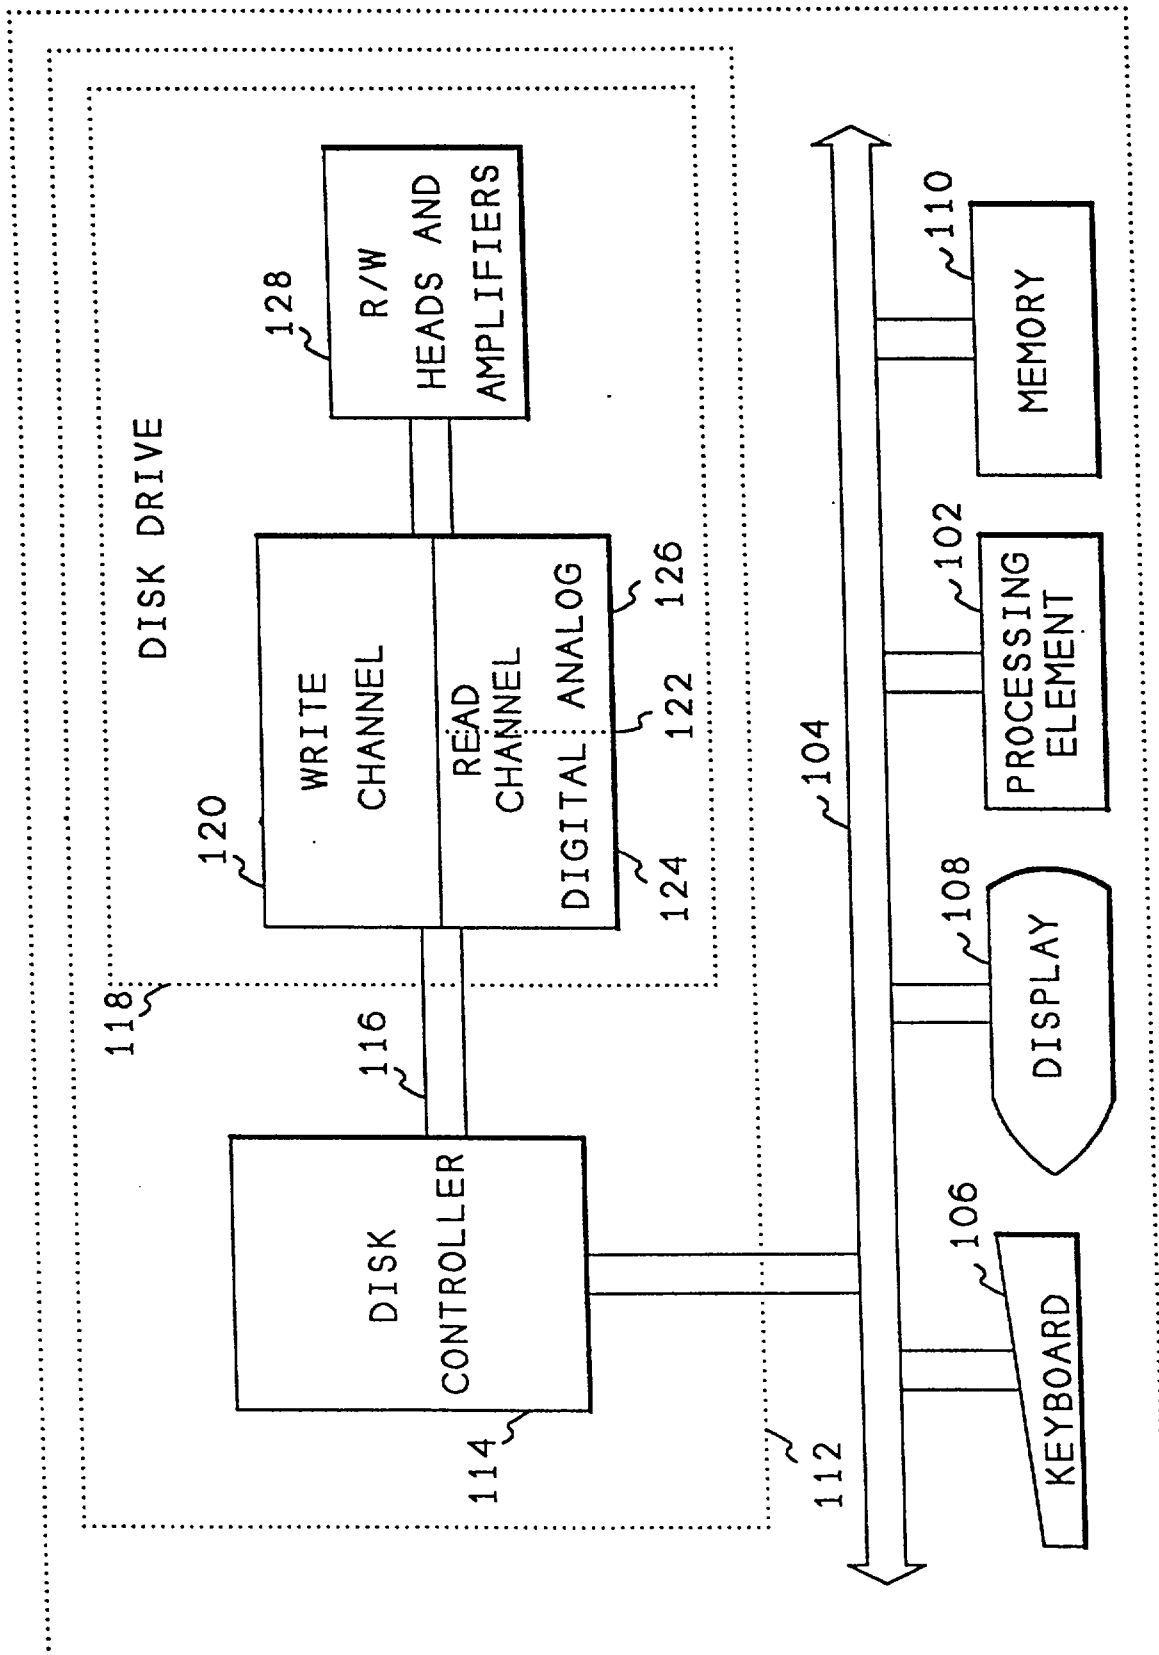


FIG. 1

22 OCT 1997

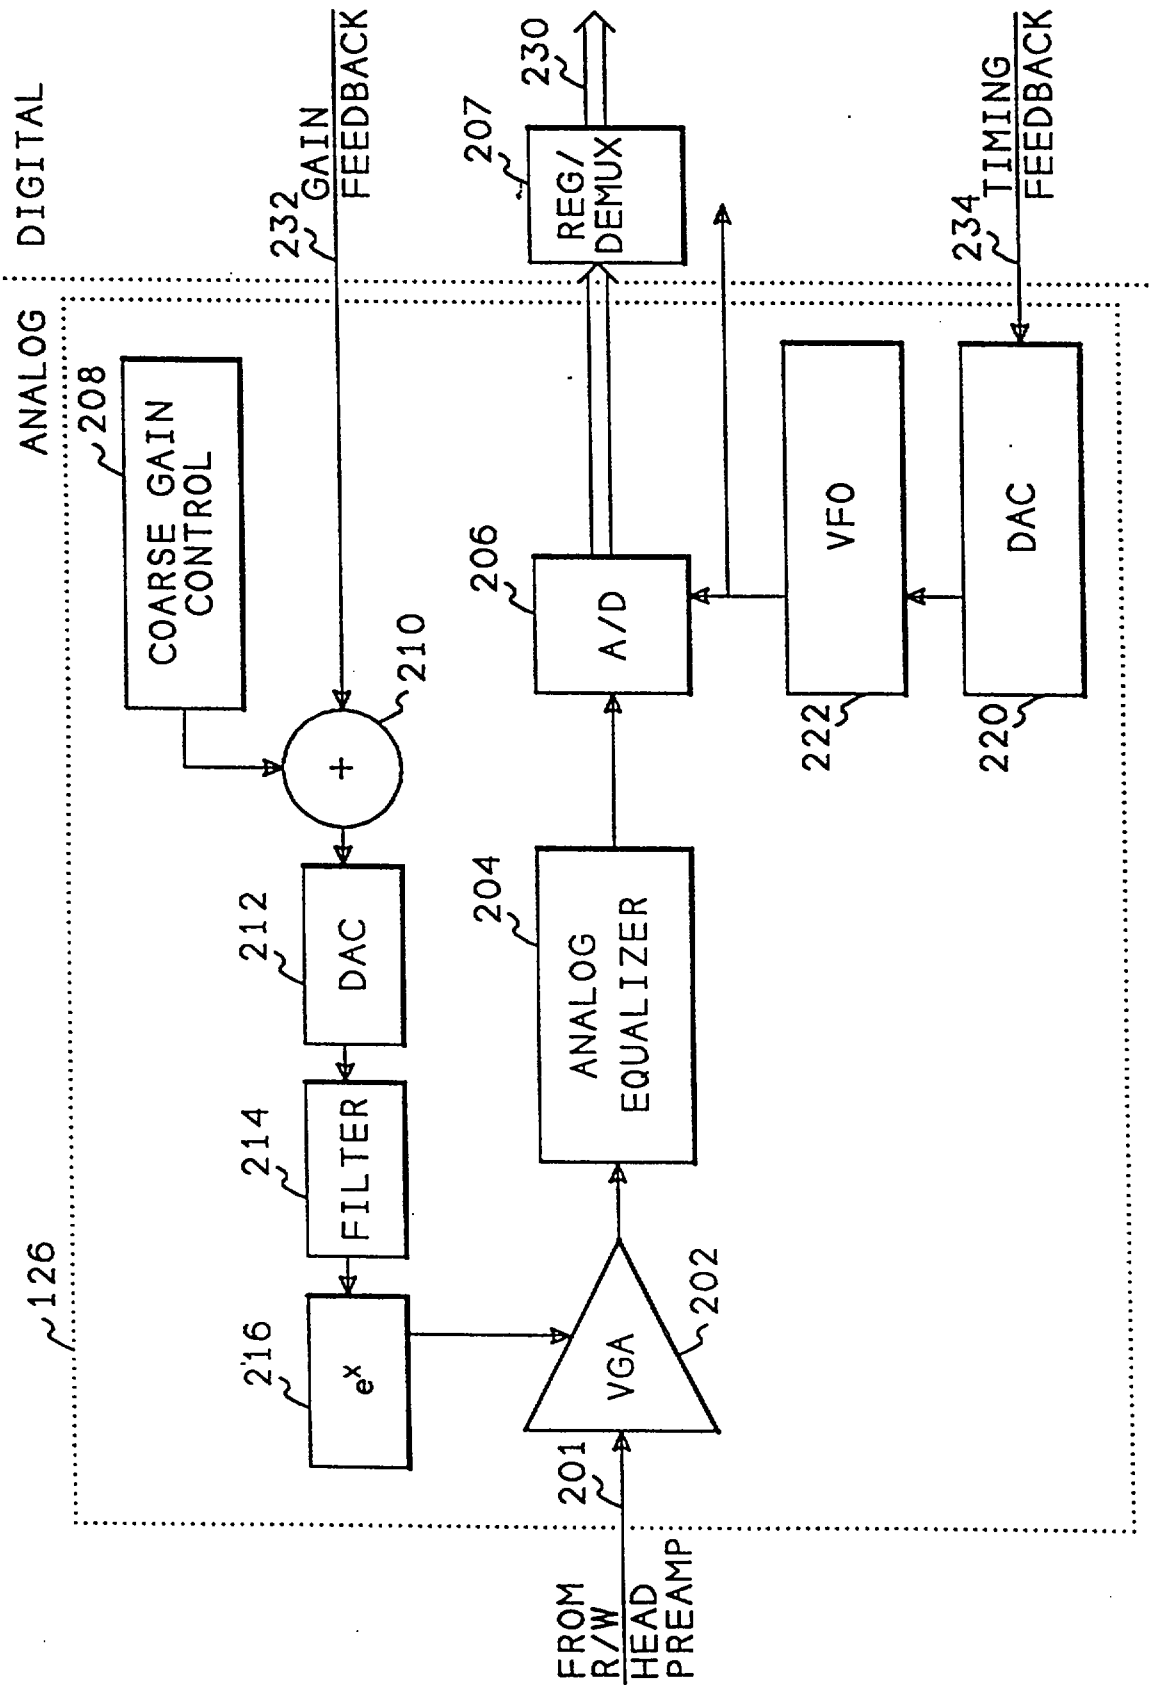


FIG. 2

22 OCT 1997

3/10

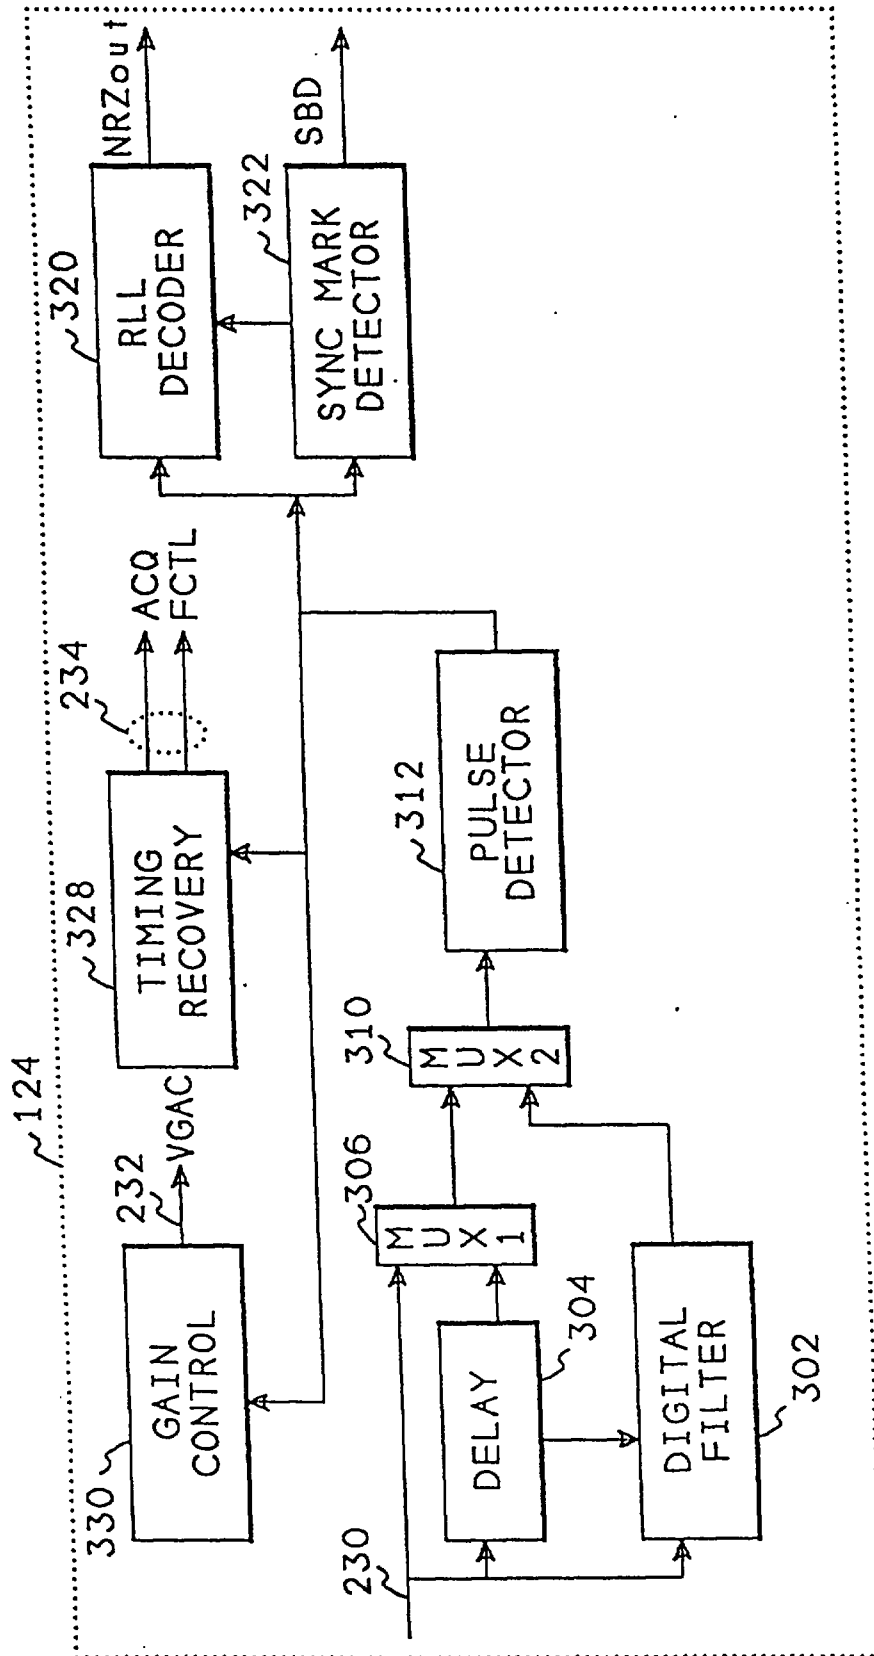


FIG. 3

22 OCT 1997

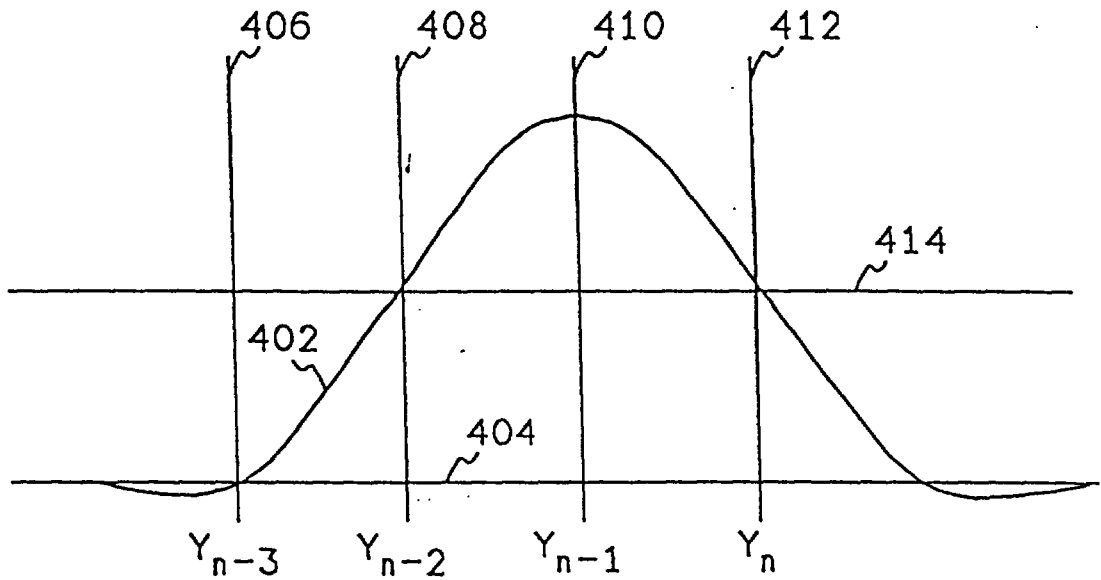


FIG. 4

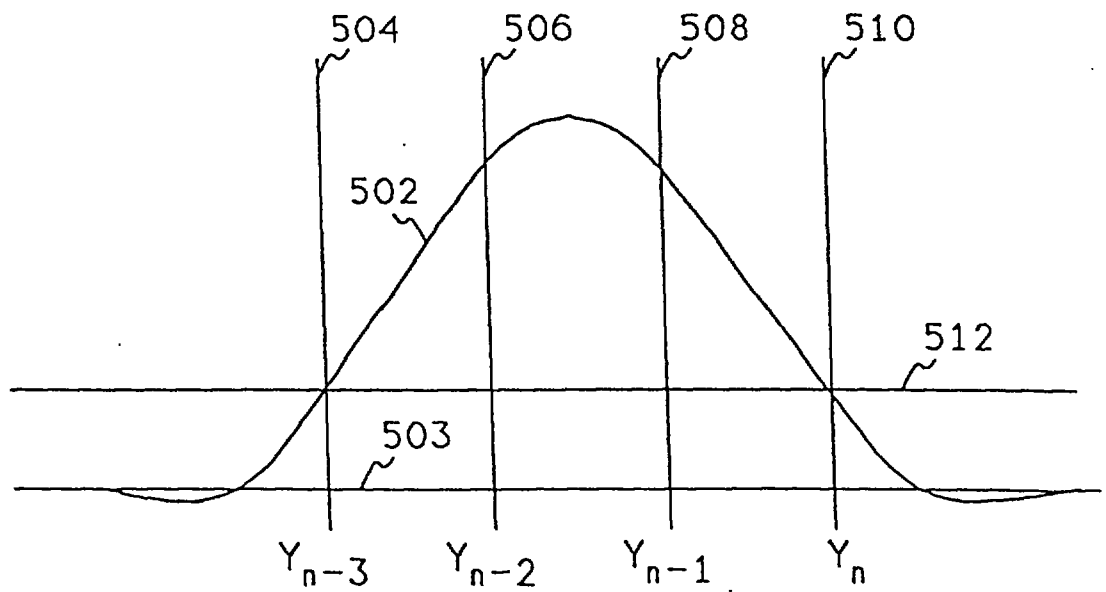


FIG. 5

5/10


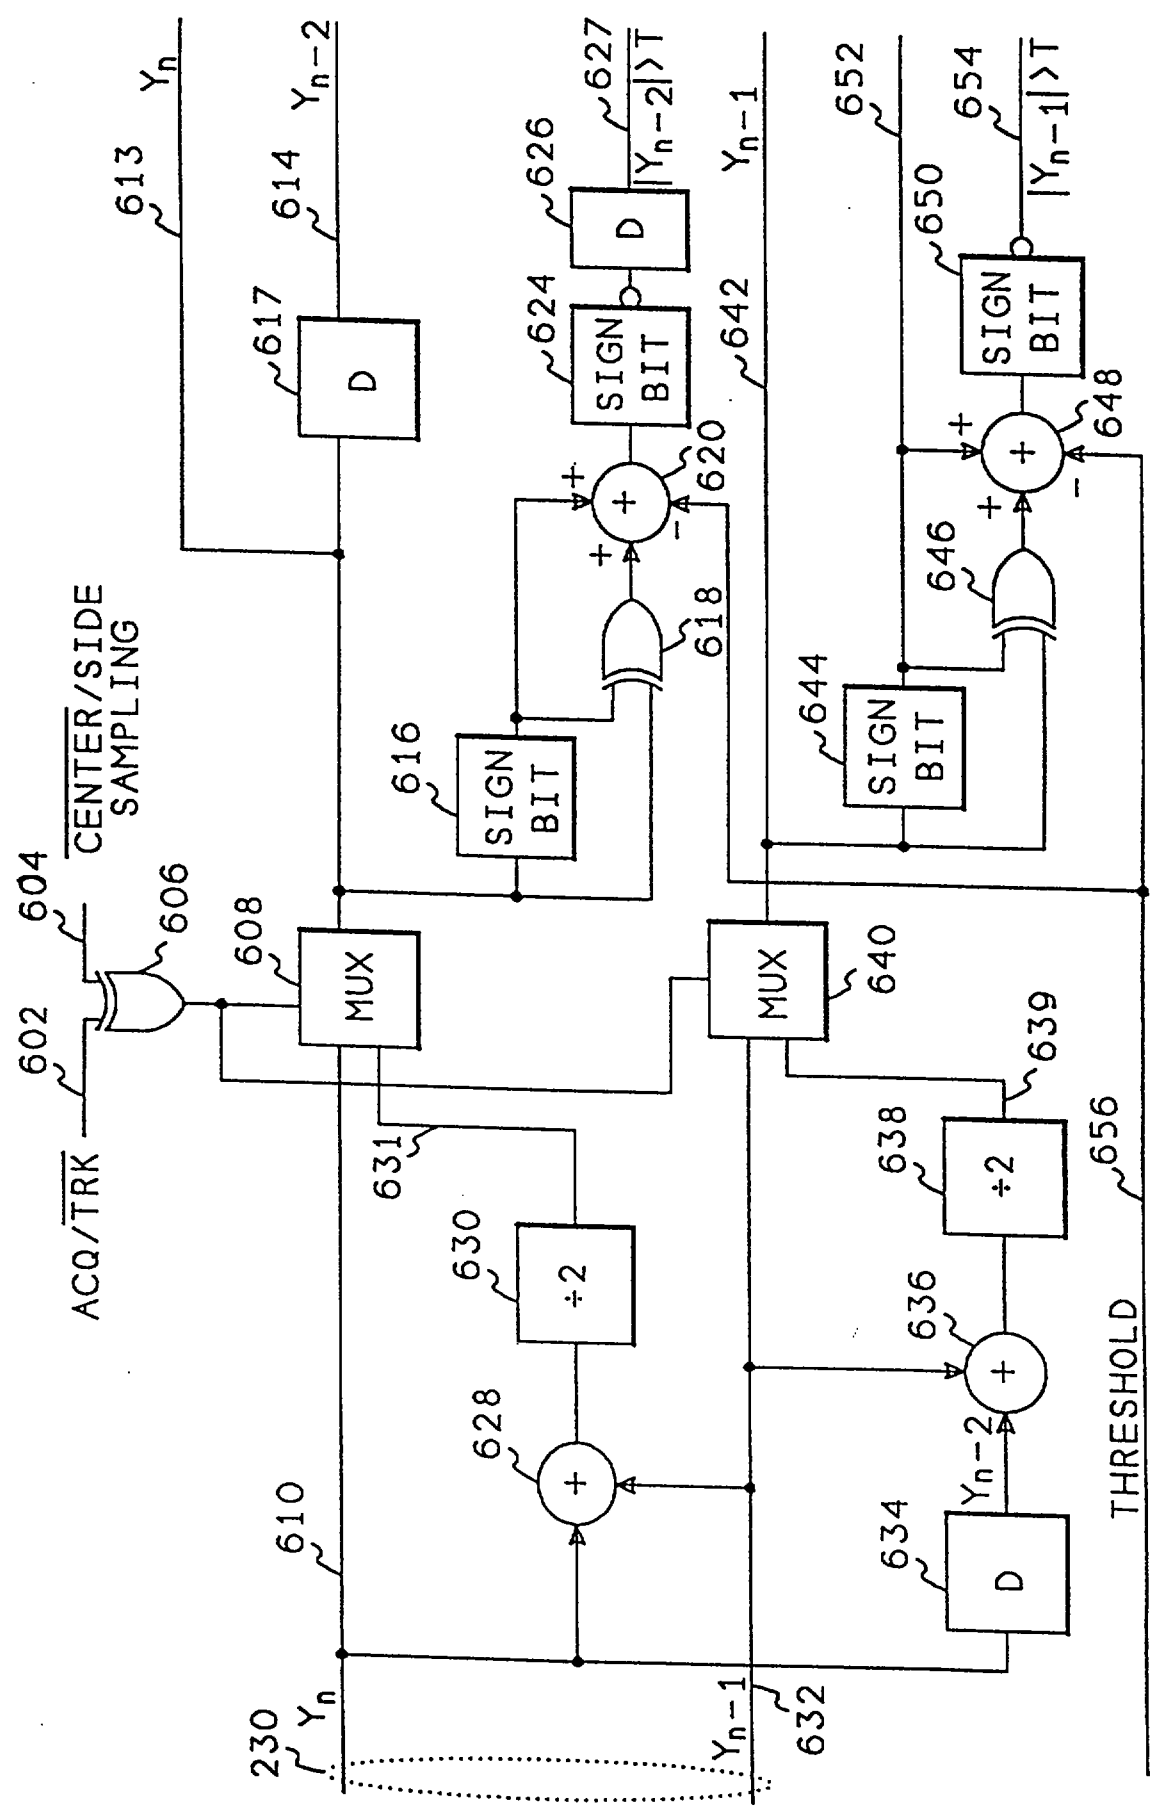


FIG. 6

22 OCT 1997

6/10

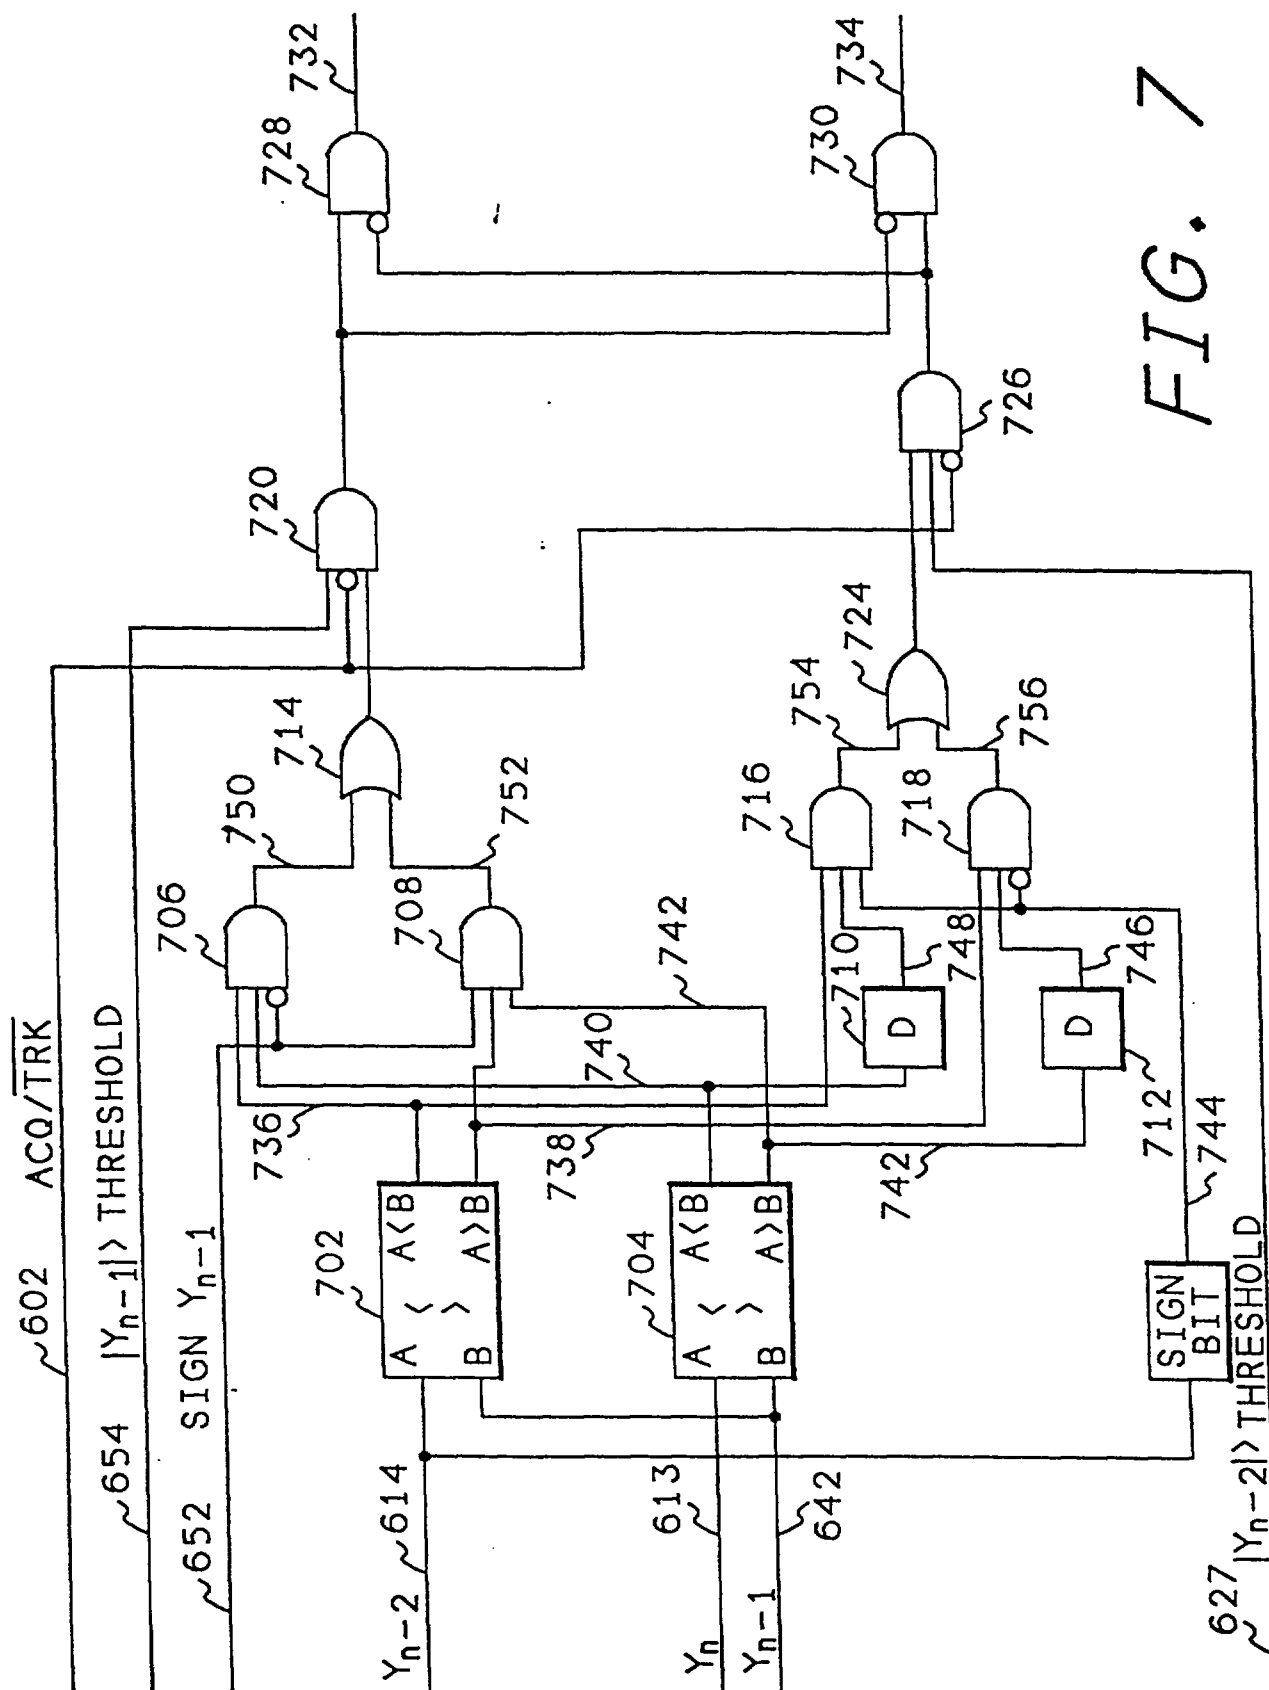

REPLACEMENT SHEET

22 OCT 1997

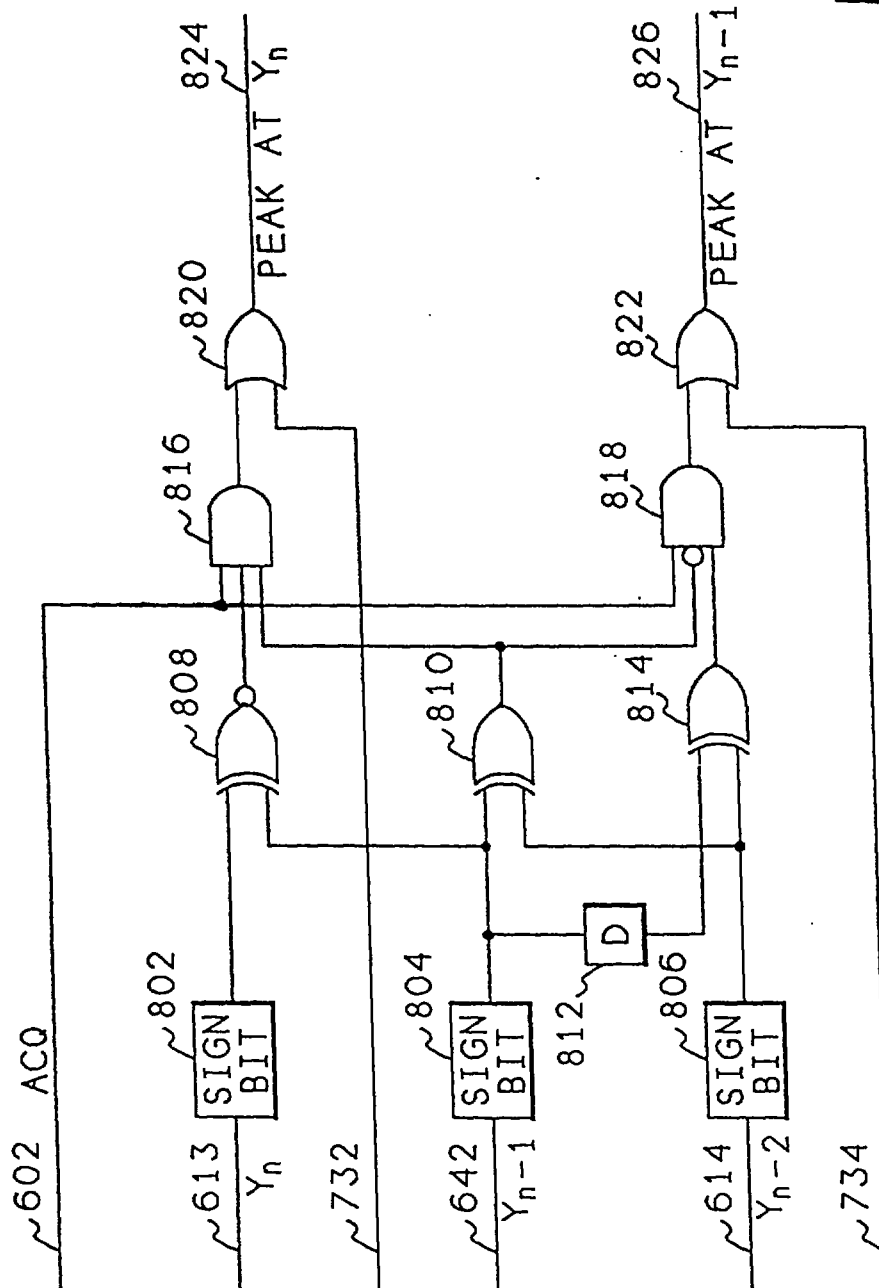


FIG. 8

22 OCT 1997

8/10

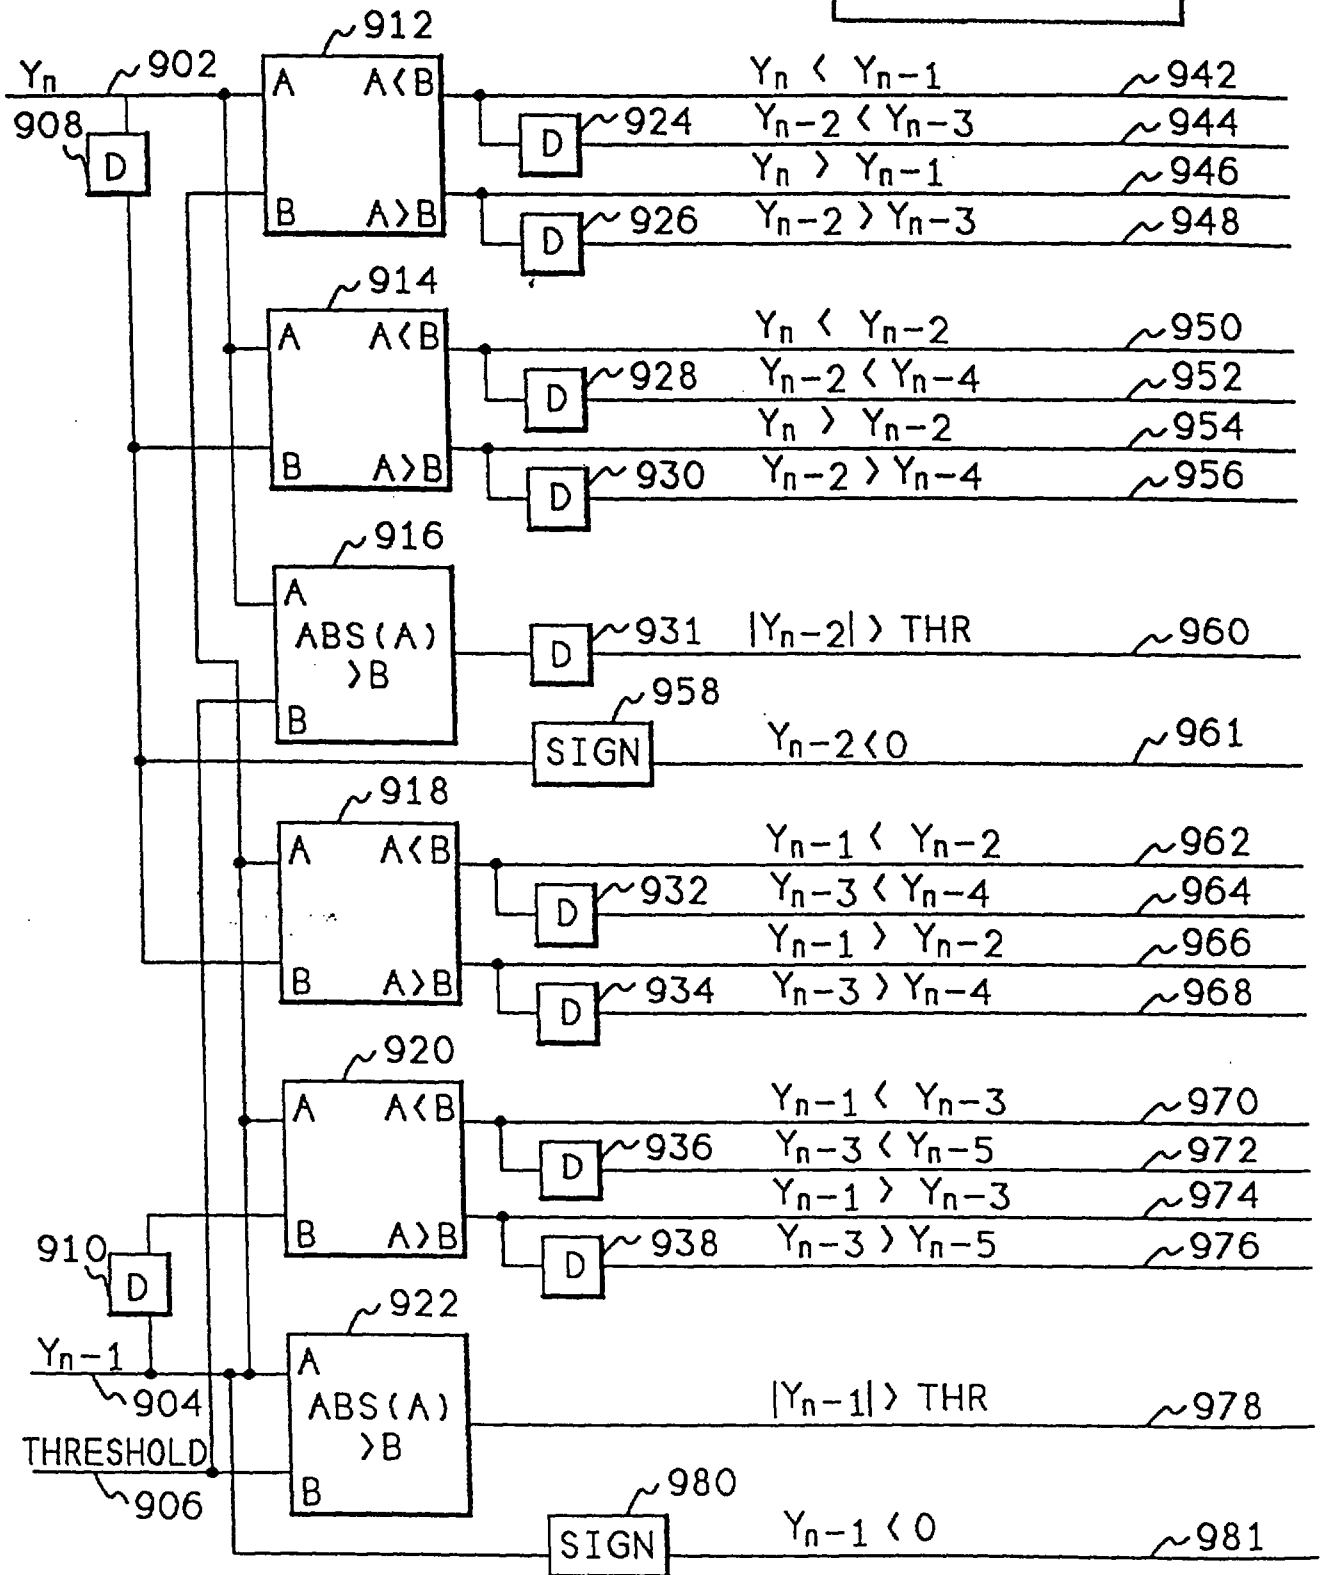


FIG. 9

22 OCT 1997

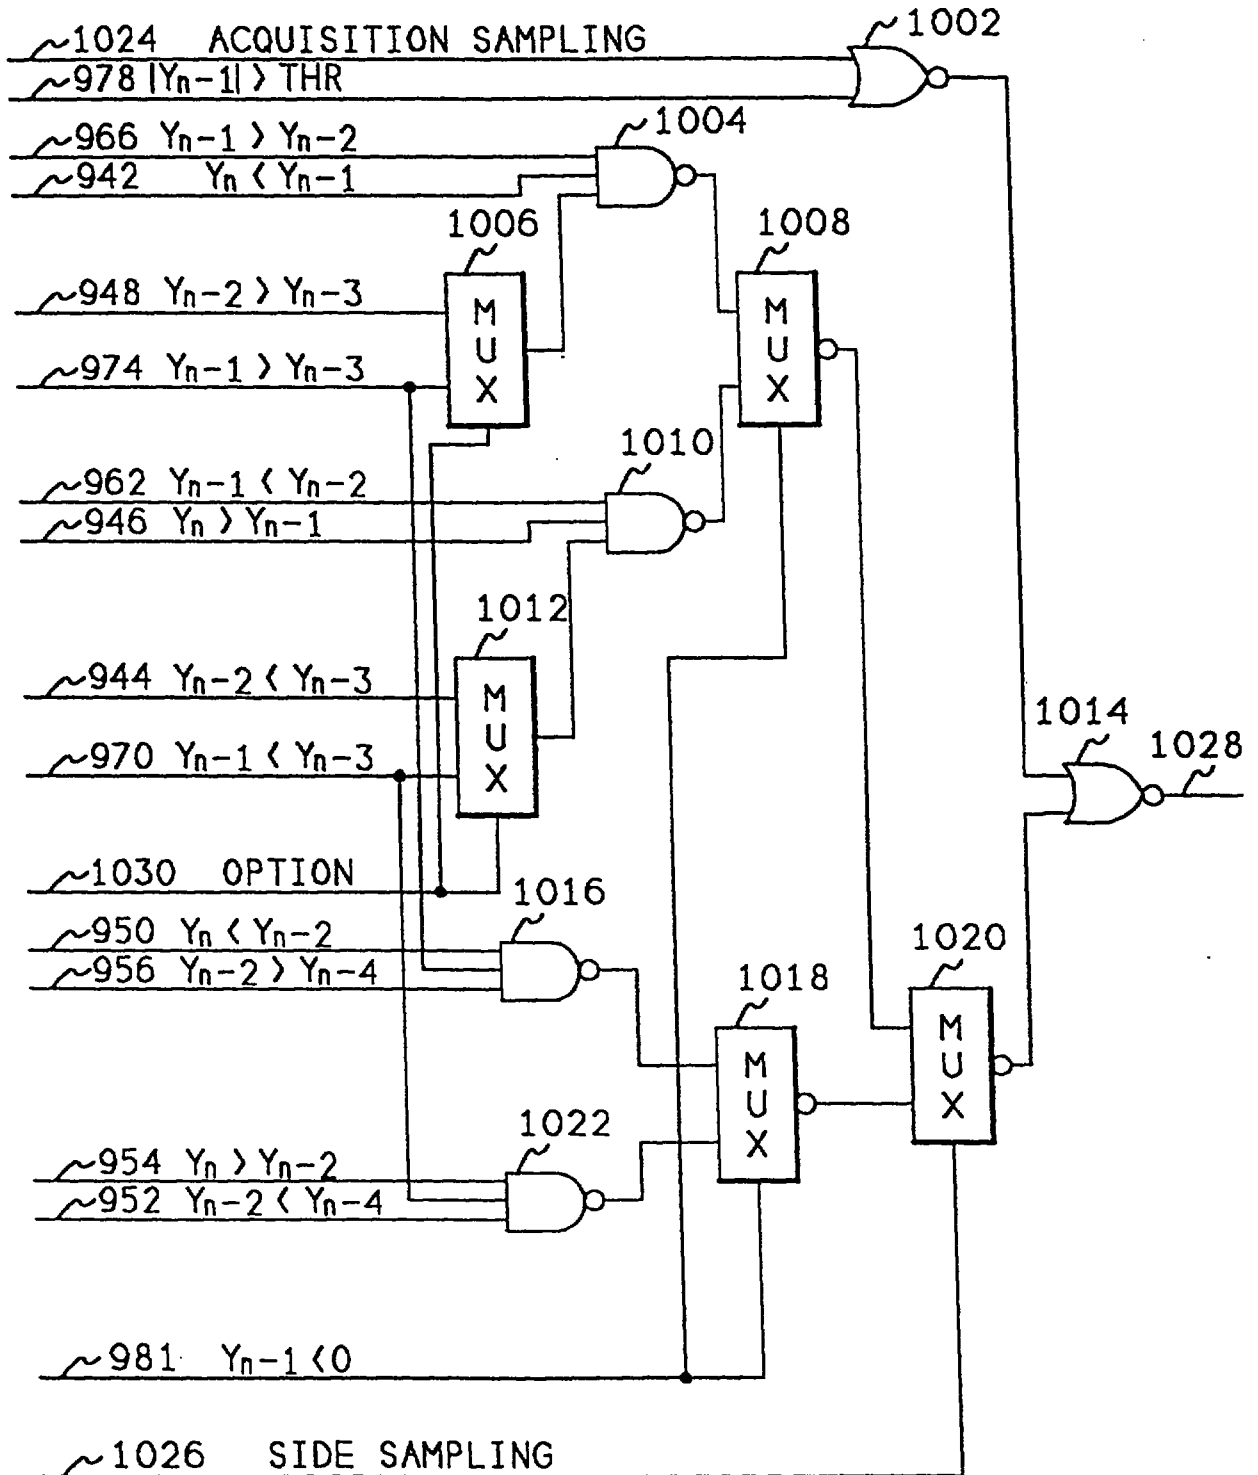


FIG. 10

22 OCT 1997

10/10

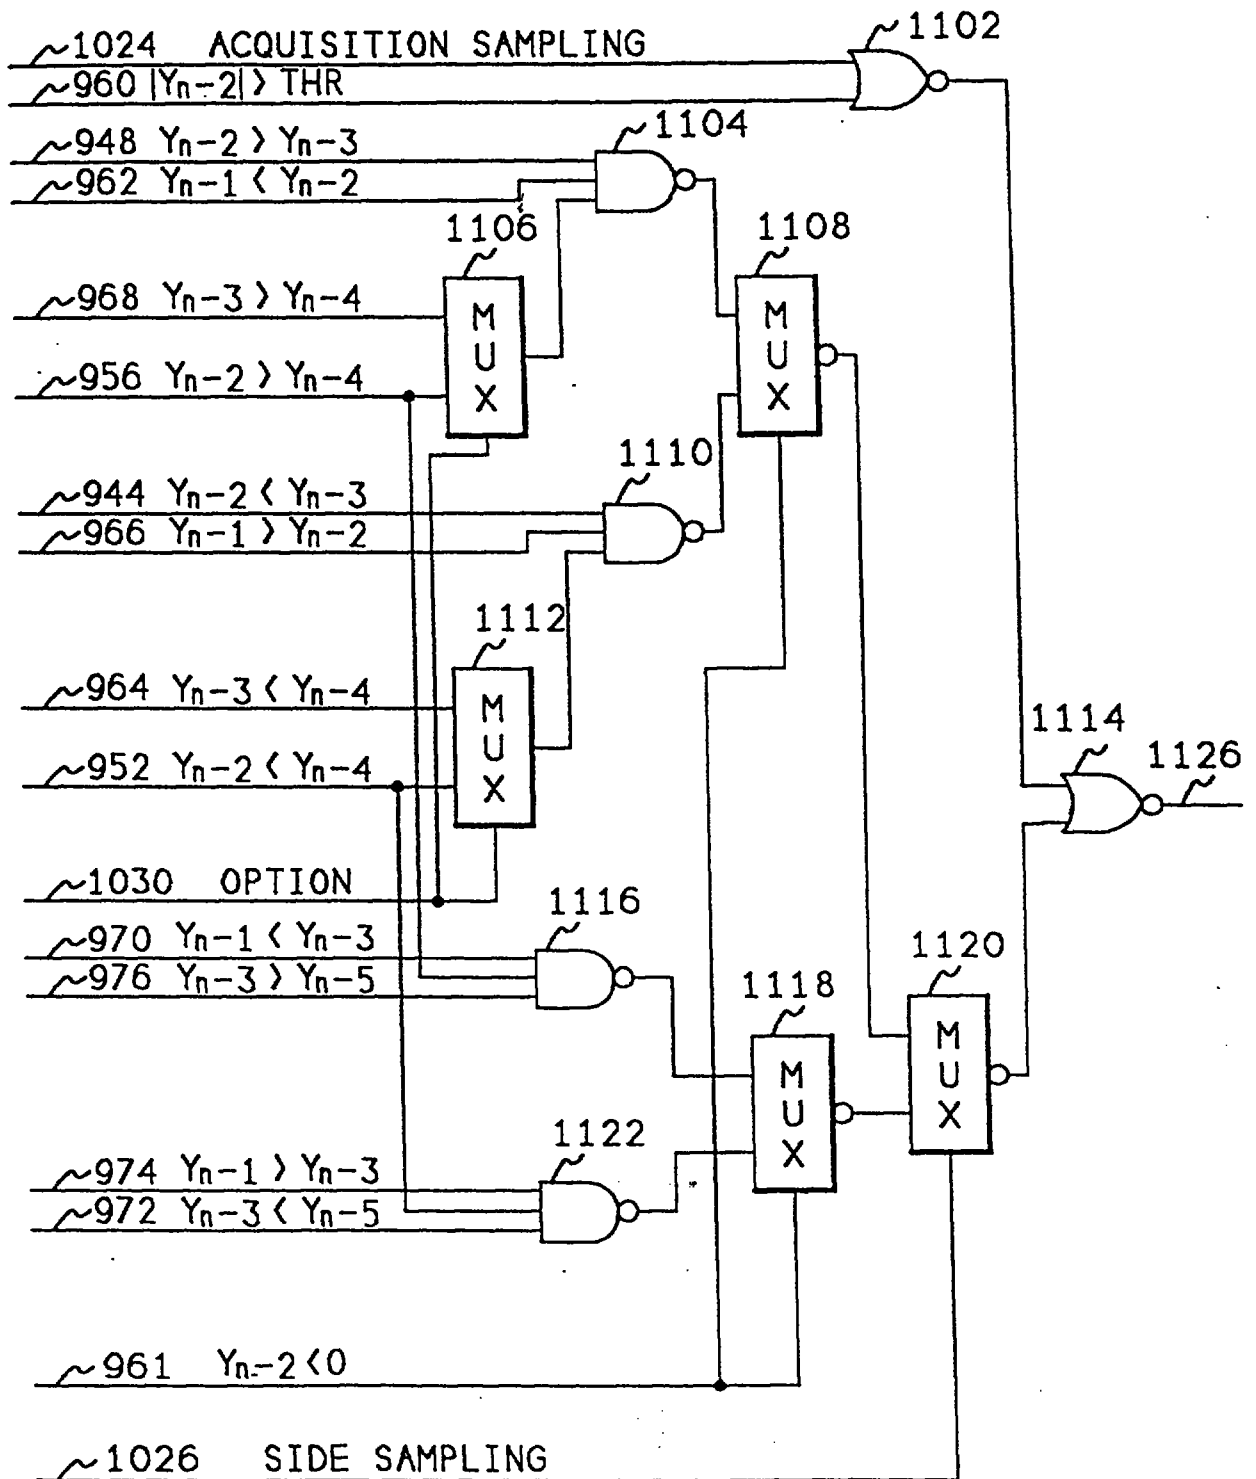


FIG. 11




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 5 : H04L 27/06, H03K 5/153		A1	(11) International Publication Number: WO 93/23941
			(43) International Publication Date: 25 November 1993 (25.11.93)
(21) International Application Number: PCT/US93/04234		(74) Agent: YOUNG, James, R.; 1333 W. 120th Avenue, Suite 302, Westminster, CO 80234 (US).	
(22) International Filing Date: 5 May 1993 (05.05.93)		(81) Designated States: JP, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).	
(30) Priority data: 07/879,938 8 May 1992 (08.05.92) US		Published With international search report.	
(71) Applicant: CIRRUS LOGIC, INC. [US/US]; 3100 West Warren Avenue, Fremont, CA 94538 (US).			
(72) Inventors: BEHRENS, Richard, T. ; 659 West Owl Drive, Louisville, CO 80027 (US). DUDLEY, Trent ; 5348 South Fox Street, #101, Littleton, CO 80120 (US). GLOVER, Neal ; 17 Amesbury, Broomfield, CO 80120 (US).			

This Sheet Has Been Replaced



(54) Title: DIGITAL PULSE DETECTOR

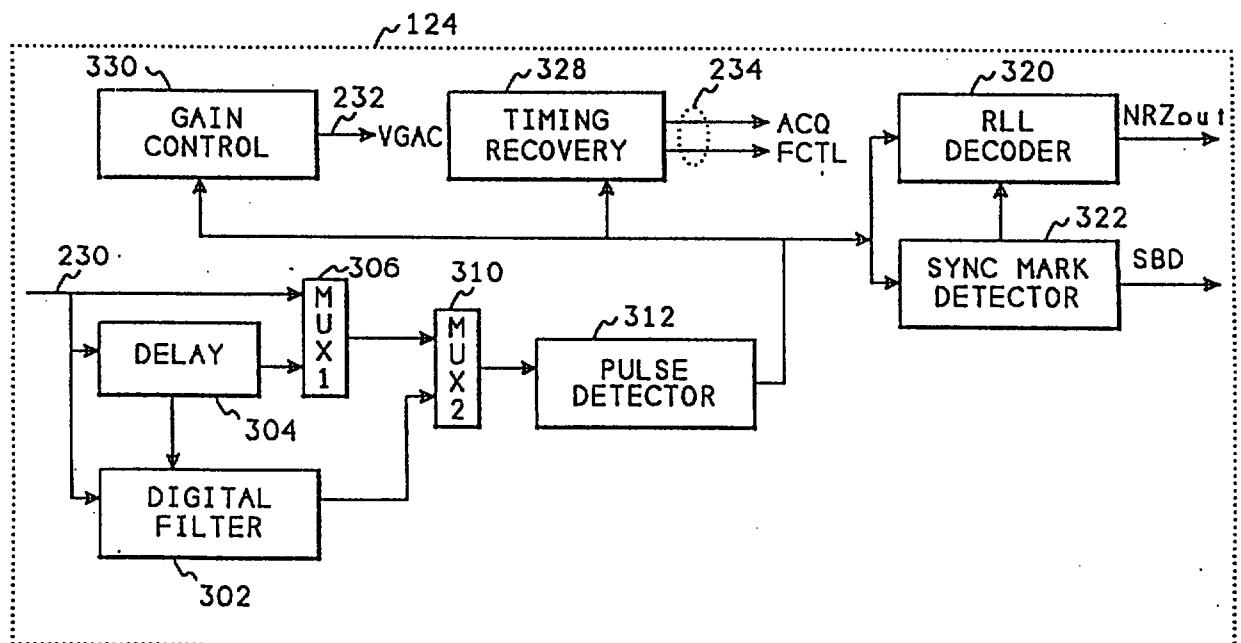

(57) Abstract

Disclosed is a pulse detector (312) that uses four samples (406, 408, 410, 412, 504, 506, 508, 510) of an analog signal to detect a pulse as soon as one sample beyond the time of the peak of signal level at the pulse. The pulse detector can detect pulses by sampling at the center of a peak of the pulse or by sampling at either side of the peak of the pulse. The pulse detector detects pulses while tracking data, and it uses an alternate detection system for detecting pulses while acquiring timing and gain lock on a signal having a known data pattern. The detector uses either the sampled signal levels directly, or a moving average of two samples to perform the detection.