



(51) International Patent Classification:
G01L 1/00 (2006.01) *G01B 21/32* (2006.01)

(21) International Application Number:
PCT/US2011/037028

(22) International Filing Date:
18 May 2011 (18.05.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/345,782 18 May 2010 (18.05.2010) US

(71) Applicant (for all designated States except US): **LOAD-TEST, INC.** [US/US]; 2631-D N.W. 41st Street, Gainesville, FL 32606 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **HAYES, John, A.** [CA/US]; 927 N.W. 40th Drive, Gainesville, FL 32605 (US).


(74) Agents: **PARKER, James, S.** et al.; Saliwanchik, Lloyd & Eisenschenk, P.O. Box 142950, Gainesville, FL 32614-2950 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,

[Continued on next page]

(54) Title: METHOD AND APPARATUS FOR INTERNALLY DETERMINING A LOAD APPLIED BY A JACK

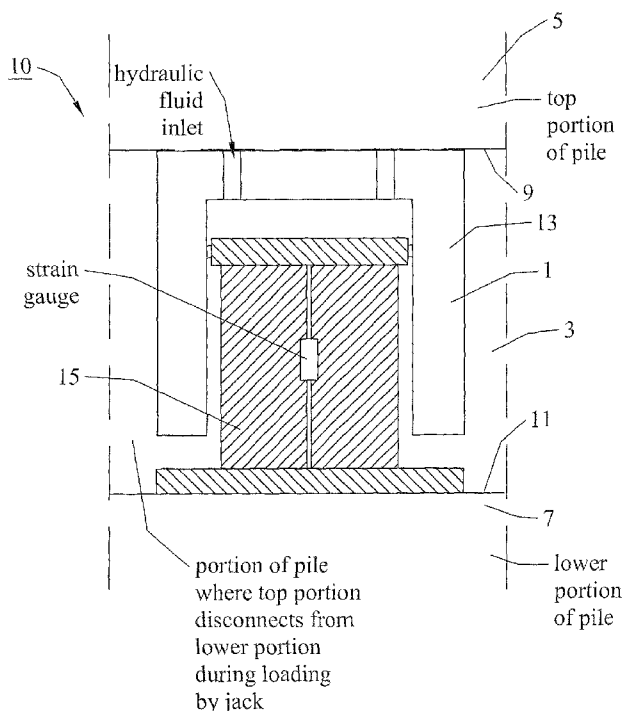

(57) Abstract: An embodiment of the subject invention is directed to a jack incorporating one or more strain gauges. The one or more strain gauges can be positioned on, within, or integral to the jack. When a load or force is applied by the jack, one or more materials within the jack are deformed or displaced as a result of the applied load. The one or more strain gauges are used to measure the deformation or displacement and thus measure the strain. The measured strain can be used to determine the magnitude of the load applied by the jack. In an embodiment, a plurality of strain gauges are used and the resulting strain measurements can be combined to determine the applied load.

FIG. 2



EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

— *before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments (Rule 48.2(h))*

Published:

— *with international search report (Art. 21(3))*

(88) Date of publication of the international search report:

8 March 2012