

SWITCH MODE POWER SUPPLY WITH REDUCED INPUT CURRENT DISTORTION

BACKGROUND OF THE INVENTION

5 The invention relates to a switch mode power supply (SMPS). In particular, the invention relates to a SMPS that derives a rectified input supply voltage from an AC, mains supply voltage to produce an output supply voltage.

Typically, such SMPS employs a full wave rectifier
10 bridge that rectifies a sinusoidal mains supply voltage and charges an input filter capacitor to produce the rectified input supply voltage. The filter capacitor has a sufficiently large value for reducing, in the input supply voltage, the magnitude of a ripple at the fundamental frequency and at the harmonics of the mains
15 supply voltage. In this way, ripple voltage is prevented from occurring in the output supply voltage.

The filter capacitor draws narrow pulses of input current having a high peak value from the mains supply voltage source. The current pulses occur only in the vicinity of the peaks
20 of the sinusoidal mains supply voltage. Therefore, the waveform of the input current contains undesirable low frequency harmonics of the mains supply voltage frequency. The result is an undesirable decrease in the power factor to about 0.65 and an undesirable increase in distortions of the waveform of the mains
25 supply voltage.

Recently, an interest has evolved for revising European Standard EN60 555-2 for the purpose of reducing the permissible low frequency harmonic content of the waveform of the input current. It may be desirable to reduce the low
30 frequency harmonic content of the waveform of the input current without significantly increasing a ripple voltage in the output supply voltage.

SUMMARY OF THE INVENTION

35 A switch mode power supply, embodying an aspect of the invention, includes a source of an AC, mains supply voltage. A first rectifier is coupled to the mains source for rectifying the mains supply voltage without filtering out a low frequency

This Sheet Has Been Replaced



REPLACED SHEETS		80
✓ Description	: paged 1 to paged 13	
✓ Claim(s)	: paged 14 to paged 19	
✓ Drawing(s)	: paged 47 to paged 77	
✓ Abstract	: paged 20 to paged 21	
DATE OF RECEIPT		

component at a frequency related to that of the mains supply voltage to develop an unfiltered, rectified, first supply voltage. A first switching arrangement is responsive to a first switching signal and coupled to an inductance having applied thereto the first supply voltage for developing a first plurality of current pulses at a frequency that is substantially higher than that of the mains supply voltage. The first plurality of current pulses are coupled via a second rectifier to produce a first portion of a rectified output supply current. A third rectifier is coupled to the mains source and to a filter capacitor for rectifying the mains supply voltage to develop current pulses in the capacitor for producing a rectified, second supply voltage in the capacitor. A second switching arrangement is coupled to the second supply voltage and responsive to a second switching signal for developing in an inductance that is coupled to the capacitor a second plurality of current pulses at a frequency that is substantially higher than that of the mains supply voltage. The second plurality of current pulses are coupled via a rectifier to produce a second portion of the output supply current. A pulse-width is lengthened and a peak amplitude is decreased of a given current pulse in the capacitor.

BRIEF DESCRIPTION OF THE DRAWINGS

FIGURE 1 illustrates an SMPS, embodying an aspect of the invention, that utilizes a current super-position technique;

FIGURES 2a-2h illustrate waveforms useful for explaining the operation of the SMPS of FIGURE 1;

FIGURES 3a-3c illustrate additional waveforms useful for explaining the operation of the SMPS of FIGURE 1;

FIGURE 4 illustrates a second embodiment of the invention;

FIGURES 5a-5e illustrate waveforms useful for explaining the operation of the arrangement of FIGURE 4;

FIGURE 6 illustrates a graph providing the input power factor in the arrangement of FIGURE 4; and

FIGURE 7 illustrates a graph providing the harmonics content of the input current in the arrangement of FIGURE 4.



DETAILED DESCRIPTION OF THE DRAWINGS

FIGURE 1 illustrates an SMPS 100, embodying an aspect of the invention, that utilizes a technique, referred to herein as current super-position technique. SMPS 100 of FIGURE 1 is suitable for providing, for example, 120 watts power. A mains supply voltage source 107 that produces an AC voltage VM is coupled to a full-wave bridge rectifier 102 that produces an AC full-wave rectified input supply voltage V1 in a relatively small filter capacitor C1. AC voltage VM of source 107 is sinusoidal at, for example, a line frequency of 50 Hz. Because of the small capacitance of capacitor C1, low frequency harmonics of voltage V1 are not filtered out by capacitor C1. Voltage V1, having a waveform of an unfiltered, full wave rectified sinusoidal voltage, is coupled via a switching diode D1 to an end terminal W2a of a primary winding W1 of a flyback transformer T.

A switching signal V9, having a controllable frequency and duty cycle, is coupled via a resistor R3 to a resistor R14 and to a gate of an MOS switching transistor Q1 to turn on transistor Q1 only when signal V9 is at a HIGH level or 12 volts. The drain electrode of transistor Q1 is coupled to the other end terminal of winding W1. Signal V9 is developed at an output terminal of an integrated circuit (IC) 103 of the type TDA4605 operating as a pulse-width modulator. The frequency of signal V9 is selected to be within a range of 20-50 KHz.

In a given cycle of signal V9, after signal V9 attains the HIGH level, a pulse current i_{p1} flows through diode D1. An upramping current i_p that is equal to current i_{p1} in diode D1 is produced in winding W1, storing magnetic energy in transformer T. Immediately after signal V9 changes from the HIGH to a LOW level, transistor Q1 becomes non-conductive and a flyback operation occurs. The result is that flyback pulse currents are produced in secondary windings W2, W3, W4 and W5 of transformer T. The drain voltage of transistor Q1 is limited, during flyback, by means of a snubber circuit, not shown.

As a result of flyback current pulses, such as a current pulse i_{s4} in winding W4, that are produced from pulses i_p , DC output supply voltages V3, V4, V5 and V8 are produced in capacitors C3, C4, C5 and C8 via rectifying diodes D3, D4, D5 and



D8, respectively. Voltage V4 energizes, for example, a horizontal deflection output stage 37 and voltage V5 energizes, for example, an audio stage of a television receiver.

Transformer T isolates, with respect to electrical shock hazard, source 107 and a "hot" ground conductor, H, from a "cold" ground conductor G. Voltages V3 and V8 are referenced to hot ground conductor H. Whereas, voltages V4 and V5 are referenced to cold ground conductor G.

In normal operation, a DC sense voltage V30 that is indicative of, for example, voltage V4 is produced in a circuit 30 by filtering and rectifying the flyback pulses in winding W3 and voltage dividing. A resistor 30a is adjustable for adjusting the output supply voltages by the adjustment of voltage V30. Sense voltage V30 is applied to a sense input terminal, pin 1, of IC 103. Voltage V30 is compared in IC 103 with a reference voltage 103a. An error voltage 103b is produced from a difference between voltage V30 and reference voltage 103a. Error voltage 103b is coupled to an input of a stop comparator 103c to control a pulse-width or a HIGH-to-LOW transition of signal V9 to regulate the levels of output voltages V4 and V5.

Voltage V1 is also coupled via a series arrangement of a resistor R13, embodying an inventive feature, and a rectifying diode D2 to a filter capacitor C2 for producing a supply voltage V2 in capacitor C2. Voltage V2 is a constant, DC voltage that is proportional to the peak voltage of voltage V1. Voltage V2 is coupled via an MOS switching transistor Q2 and a switching diode D6, when transistor Q2 is conductive, to junction terminal W2a. Terminal W2a is coupled between diode D1 of winding W1 and a secondary winding W2 of transformer T.

DC voltage V8 developed, during flyback, via winding W2 is larger by about 15V than voltage V2. Voltage V8 is coupled to the gate of transistor Q2 via a resistor R8 and a resistor R12, coupled in series, to turn on switching transistor Q2 when a transistor Q3 that is coupled to the gate of transistor Q2 is turned off. By being larger than voltage V2, voltage V8 is sufficient to turn on MOS transistor Q2. A protection diode D7 coupled between the source electrode and gate electrode of transistor Q2 limits gate-source voltage excursions of transistor Q2.



Signal V9 of FIGURE 1 also controls the switching operation frequency of transistor Q2. To control the switching operation of transistor Q2, signal V9 of FIGURE 1 is coupled via a diode D9 to a ramp generator that is formed by a resistor R7 and a capacitor C7. A zener diode D10 limits the maximum voltage of a ramp signal V7 in capacitor C7 to 9.1 volt. When signal V9 is HIGH, diode D9 is reverse biased and capacitor C7 is charged by means of voltage V2 through resistor R7. Consequently, signal V7 in capacitor C7 increases linearly. When signal V9 becomes LOW, diode D9 conducts and capacitor C7 is immediately discharged through the low impedance output formed at pin 5 of IC 103.

FIGURES 2a-2h illustrate waveforms useful for explaining the operation of the circuit of FIGURE 1. Similar symbols and numerals in FIGURES 1 and 2a-2h indicate similar items or functions.

The pulse width of signal V9 of FIGURE 1 determines the peak level of signal V7 that is developed in capacitor C7. Because the voltage that is coupled via diode D1 to winding W1 has a full wave rectified sinusoid waveform, the feedback signal to IC 103 causes the pulse width of signal V9 to vary as a function of full wave rectified voltage V1. Consequently, the peaks or envelope of signal V7 also varies as a function of voltage V1, during the 10 millisecond period of voltage V1, as shown in FIGURE 2d. In FIGURE 2d, for example, the ratio between the period of signal V7 and that of voltage V1 of FIGURE 2a is exaggerated for better clarity.

Signal V7 of FIGURE 1 is applied to an inverting input terminal of a comparator formed by a transistor Q4 and a transistor Q5. A resistor R5 produces emitter currents in transistors Q4 and Q5. A collector resistor R4 of transistor Q4 develops an output signal V10 at an output terminal 13a of the comparator.

Output signal V10 is coupled to the base of transistor Q3 to control switching operation of transistor Q3. The collector of transistor Q3 is coupled to a load arrangement formed by resistors R8 and R12 and energized by supply voltage V8 to develop a switching signal V12 at the gate of transistor Q2.



Immediately after the transition to the HIGH level of signal V9, diode D1 becomes conductive and current i_{p1} is generated. As long as transistor Q2 remains turned off, current i_{p2} is not generated. Transistor Q2 remains nonconductive as long
5 as output signal V10 of the comparator is HIGH in a manner to turn on transistor Q3 and, thereby, to turn off transistor Q2. Each of primary current i_{p1} and signal V7 increases in an upramping manner after signal V9 becomes HIGH.

During a given switching period of signal V9, when
10 signal V7 of FIGURE 2d reaches a higher level than a threshold voltage V11 of the comparator, comparator output signal V10 of FIGURE 2e changes from the HIGH to the LOW level. When signal V10 attains the LOW level, transistor Q3 of FIGURE 1 is turned off and transistor Q2 is turned on by means of signal V12 of FIGURE
15 2f.

When transistor Q2 becomes conductive, diode D6 of FIGURE 1 becomes conductive causing diode D1 to become nonconductive. Therefore, input supply voltage V1 is decoupled from winding W1 and voltage V2 is coupled to winding W1 via
20 transistor Q2. Primary current i_{p2} of FIGURE 2g in diode D6 of FIGURE 1 causes current i_p to continue flowing without a gap of time from the time the pulse of current i_{p1} ceases, as shown in FIGURES 2g and 2h.

After a predetermined interval that is determined in
25 accordance with voltage V30 by IC 103 of FIGURE 1, signal V9 changes again to the LOW level that causes signal V7 to become LOW. Signal V9 is also coupled via a diode D13 to junction terminal 13a between resistor R4 and resistor R10. Diode D13 conduct when signal V9 is at the LOW level. Immediately after
30 signal V9 becomes LOW, signal V10 of Figure 2e is forced to be LOW because diode D13 of FIGURE 1 conducts. Therefore, transistors Q1 and Q3 are turned off. Transistor Q2 does not conduct current although signal V12 at the collector of transistor Q3 is HIGH because transistor Q1 is turned off. Advantageously,
35 because of the operation of diode D13, no current flows in resistors R8 and R12 when signal V9 is LOW. The resulting reduction in power dissipation is about 2,5 watts at 120 watts



input power. Diodes D9 and D13 are turned off when signal V9 becomes HIGH and a new cycle begins.

Primary current i_p that is determined by the superposition of currents i_{p1} and i_{p2} is shown in FIGURE 3a for a 100 watts input power. A resulting mains current i_M has a waveform that is shown in FIGURE 3b. as a solid line. For comparison purposes, the broken line waveform in FIGURE 3b corresponds to mains current i_M'' of a conventional power supply that includes a large filter capacitance at the output of the bridge rectifier for the same input power rate of a 100 watts. In each half-period of voltage V_M , the peaks of the pulses of current i_{p1} vary predominantly in a sinusoidal manner at the fundamental mains frequency. Capacitor C2 is charged via resistor R13 only in the vicinity of the peaks of mains voltage V_M .

In accordance with an inventive feature, resistor R13 causes an increase in the conduction interval of the diodes of bridge rectifier 102; thereby, resistor R13 reduces the rate of change and peak amplitude of charging current i_3 , as illustrated in FIGURE 3b. Thus, advantageously, high harmonics content of current i_M such as at the 3rd, 5th, 7th, 9th and 11th harmonics is reduced. The peak value of the pulses of current i_3 is low, because the energy stored in capacitor C2 supplies only a portion of primary current i_p . About 65% of the power consumption is obtained by means of current i_{p1} and 35% by means of current i_{p2} .

Threshold voltage V11 controls the ratio between the pulse-width of the pulse of current i_{p2} and that of the pulse of current i_{p1} . Because of a ripple voltage contained in voltage V30 during a given period of full wave rectified voltage V1, each of the pulse-width of pulse-width modulated signal V9 and the peak of signal V7 is approximately at a maximum when voltage V1 is zero and at a minimum when voltage V1 is at a maximum. To establish threshold voltage V11 for the comparator formed by transistors Q4 and Q5, signal V7 is coupled via a diode D12 to a parallel arrangement of a resistor R9 and a capacitor C10. A voltage developed in capacitor C10 varies in accordance with the low frequency envelope of the peaks of signal V7; whereas, the high frequency component is filtered out. The voltage in capacitor



C10 is coupled via a diode D11 to a capacitor C9 and to a base electrode of transistor Q5. Diode D11 and capacitor C9 operate as a minimum level detector for detecting the minimum value of the envelope of the peaks of signal V7. A forward voltage in diode D12 is temperature compensated by the opposite forward voltage developed in diode D11. The envelope of the peaks of signal V7 varies as a function of voltage V1. Slice level or threshold voltage V11 that is developed in capacitor C9 is determined by the minimum pulse-width of signal V9 within a period of voltage V1. Voltage V11 is applied to the noninverting input of the comparator formed by transistors Q4 and Q5.

For constant loading, the level of voltage V11 is relatively constant. Therefore, the pulse-width of each of the pulses of current i_{p1} is the same. Whereas, advantageously, the pulse-width of the pulses of current i_{p2} varies from a maximum, when voltage V1 is zero, to a minimum, when voltage V1 is at a peak.

Increased loading, for example, causes, in each period of signal V9, an increase in the pulse-width of signal V9. Thus, the minimum pulse-width of signal V9 also increases that tends to cause an increase in voltage V11. The increase in voltage V11 tends to delay the instant, during each pulse of signal V9, when signal V10 becomes LOW, and, therefore, when transistor Q2 becomes conductive. The result is an increase in the pulse-width of the pulse of current i_{p1} . Since the pulse-width of signal V9 also increases, a ratio between the length of the conduction interval of transistor Q2 and that of transistor Q1 tends to vary less than if, for example, voltage V11 were a constant voltage. Therefore, advantageously, the ripple voltage of output voltage V4 is less affected by loading variations than if voltage V11 were constant. It follows that the ratio between current i_3 and i_{p1} varies less by loading. Therefore, the harmonic content of current i_M or the power factor is also less affected by loading.

At a predetermined increased loading condition, the peak value of current i_2 is limited. A further increased loading causes also the peak value of current i_1 to be limited. An even further increased loading, such as a short circuit in the secondary side, results in a burst mode operation in IC 103.



In each cycle of signal V9, when signal V9 of FIGURE 2c attains the HIGH level, capacitor C6 of FIGURE 1 at pin 2 of IC 103 is charged by a current that is equal to a sum of a constant current i_2 , developed via a resistor R2 from voltage V2, and a current i_1 , having a full wave rectified sinusoid waveform, developed via a resistor R1 from voltage V1. When signal V9 of FIGURE 2c is at the LOW level, voltage V6 of FIGURE 2b is clamped to 1 volt, as determined by IC 103 of FIGURE 1. When signal V9 of FIGURE 2c attains the HIGH level, capacitor C6 of FIGURE 1 develops ramping voltage V6, as shown in FIGURE 2b. Because capacitor C6 is charged by means of current i_1 from full wave rectified voltage V1, current i_1 has a similar waveform as that of voltage V1. In IC 103, voltage V6 is coupled to an input of an over-load comparator 103d. When, under over-load condition, voltage V6 is sufficiently large to trigger comparator 103d, a HIGH-to-LOW transition occurs in signal V9. Thus, voltage V6 determines the maximum pulse-width of signal V9 that can be produced under the over-load condition. It follows that voltage V6 determines the maximum power that can be provided by SMPS 100.

The rate of change or peak level of voltage V6 varies during the period of voltage V1 such that when voltage V1 is at a minimum, the upper limit of the pulse-width of signal V9, before an over-load condition occurs, is larger than when voltage V1 is at a maximum. In this way, for a given upper limit of the pulse width of signal V9, occurring at the peak of voltage V1, an even larger pulse-width of the pulse of signal V9 and, therefore, a larger regulation range is obtained remote from the peak of voltage V1.

In IC 103, voltage V6 is coupled to an input of stop comparator 103c. In normal operation, voltage V6, in addition to voltage V30, controls the pulse-width of signal V9. The result is that when voltage V1 is at its peak, voltage V6 causes the pulse-width of signal V9 to be smaller than when voltage V1 is smaller than the peak. In this way, the pulse-width of signal V9 is modulated in a feed-forward manner via voltage V6. Advantageously, the feed-forward manner results in a reduction of the ripple voltage in output voltages V4, V5, V8 and V3.



When SMPS 100 is used in a television receiver, a signal ON/OFF determines when the television receiver is required to operate in a standby mode of operation and when in normal operation mode. The magnitudes of the load coupled to winding W4 and energized by SMPS 100 is determined by on/off control signal ON/OFF, that is produced in, for example, a microprocessor, not shown. Signal ON/OFF is referenced to the cold ground conductor G.

Detection of the standby mode of operation, activated by signal ON/OFF, is performed by a detector 31 that produces an on/off control signal V13 referenced to hot ground conductor H. In the standby mode of operation, the magnitude of the load coupled to windings W4 and W5 is substantially smaller than in normal operation. Because of decreased load, an increase in sense voltage V30 tends to occur in the standby mode. Therefore, IC 103 decreases the pulse-width of signal V9. Also, the frequency of signal V9 increases to the resonance frequency of flyback transformer T, around 100 KHz.

Detector 31 is responsive to the pulses in winding W3 that are determined by signal V9 and detects the magnitude of the loads coupled to windings W4 and W5 in accordance with the frequency of the pulses in winding W3. The pulses in winding W3 are coupled, in detector 31, via a low pass filter that is formed by a resistor 32 and a capacitor 33, to a rectifier 34. Thus, rectifier 34 produces in a capacitor 35 a DC voltage representative of the length of the interval between transition edges of the pulses in winding W3.

In the standby mode of operation, winding W3 supplies an almost sinusoidal voltage at 100 KHz. This voltage is attenuated by the low pass filter formed by resistor 32 and capacitor 33. Therefore, the voltage in capacitor 35 becomes insufficiently small to turn-on an output transistor 36 of detector 31. The result is that signal V13 is at the HIGH level. On the other hand, in the normal mode of operation, the frequency is lower and transistor 36 is maintained continuously conductive and signal V13 is at the LOW level. In this way, frequency detector 31 produces signal V13 referenced to hot ground H that is indicative of standby/normal mode of operation.



Signal V13 is coupled via a diode D14 to the base of transistor Q3. Signal V13 causes transistor Q3 to conduct regardless of the level of signal V9. Therefore, transistor Q2 is turned off, during standby, and current i_{p2} is zero. In this case, DC current flows through resistors R8 and R12 and via transistor Q3 to ground. Resistor R12 that is a positive temperature coefficient resistor heats and increases considerably in value. Thus, the losses in resistor R8 are further decreased, during standby. The overall circuit dissipation is further reduced because transistor Q2 is always turned off, during standby. Using this technique has two advantages. Firstly, standby input power is reduced from 14 watts to 10 watts. Secondly, during Standby, the harmonics are significantly reduced because there is only current i_{p1} current component.

During the standby mode of operation, voltages V3, V4 and V5 are also regulated. However, because of leakage inductance, the ratio between sense voltage V30 and output voltage V4 is such that voltage V4 tends to be larger, in standby, than in normal mode of operation. Such increase in voltage V4 that energizes output stage 37 may be undesirable because of increased component stress.

On/off control signal V13 is coupled via a series arrangement of a resistor 38 and a diode 39 to the sense input terminal, pin 1, of IC 103 for increasing the level of sense voltage V30. As a result, the duty cycle of signal V9 decreases. Consequently, advantageously, voltage V4 is decreased relative to what it would have been without the effect of the signal that is coupled via diode 39. For example, the value of circuit components can be selected in such a way that voltage V4 becomes, in standby, even smaller than in normal mode of operation.

FIGURE 4 illustrates a second embodiment of the invention that is similar to that of FIGURE 1 with the differences noted below. FIGURES 5a-5e illustrate waveforms useful for explaining the operation the circuit of FIGURE 4. Similar symbols and numerals in FIGURES 1, 2a-2h, 3a-3c, 4 and 5a-5e indicate similar items or functions except that the symbol prime (') is added in FIGURE 4 for the corresponding element. In SMPS 100'



of FIGURE 4, transistor Q2' is a bipolar transistor. The base current for transistor Q2' is supplied via a half-wave rectifier diode D8' and a base resistor R8'. Signal V10' is derived from the collector of transistor Q5' and coupled to the base of transistor Q3' via an inverter stage formed by a transistor Q6'. The collector voltage of transistor Q6' is relatively large when turn on of transistor Q3 is required. Therefore, a base resistor 70' may be a relatively large resistor. Advantageously, because resistor 70' may be large, the circuit is less sensitive to tolerances in the level of signal V9' when signal V9' is at the LOW level and transistor Q3' is required to be turned off.

Increased loading causes a larger voltage drop across resistor R13'. Therefore, the base voltage of transistor Q2' also decreases when transistor Q2' is turned on. Advantageously, the base current also increases because of the decrease in the base voltage. The increase in the base current is desirable for maintaining transistor Q2' in saturation when its collector current increases. Signal V13' is coupled to the base of transistor Q6' to turn on transistor Q6' in the standby mode.

When a short circuit condition occurs in the load, not shown, the voltage across winding W3' is zero. Therefore, transistor 36' is turned off. The result is an increase in voltage V30' that tends to decrease the duty cycle of signal V9' so as to provide short circuit protection.

When loading of the power supply becomes smaller than a predetermined value, for example, 80 watts, a diode 200' that is coupled to the base of transistor Q5' clamps the base voltage of transistor Q5' to 4 volts. Thus, the base voltage of transistor Q5' cannot decrease below that level. Therefore, diode 200' establishes a maximum value for the conduction interval or maximum duty cycle of transistor Q2' at low loading. Thus, advantageously, the power factor that is determined by current i3' does not decrease when the loading further decreases. By providing upper limit to the duty cycle of transistor Q2', the value of resistor R13' can be smaller than if the maximum duty cycle of transistor Q2' could further increase when the load decreases. Therefore, advantageously, the power dissipation in resistor R13' can be made lower than if the clamping operation of diode 200'



were not employed. Advantageously, the duty cycle upper limitation of transistor Q2' does not cause an increase in a ripple voltage at the output of the power supply because filter capacitors at the output of the power supply, are sufficiently large to reduce
5 ripple at low loading.

In FIGURE 6, a family of graphs shows the variation of the power factor for different values of resistor R13' of FIGURE 4, as a function of the input power to the power supply. The efficiency factor η at an input power of 100W for different values
10 of resistor R13' is also provided.

In FIGURE 7, a family of graphs shows the harmonics contents of input current IM' of FIGURE 4 when resistor R13' is equal to 22 Ohm and when it is equal to 100 Ohm. For comparison purposes, the maximum allowed harmonics content in what is
15 believed to be the proposed standard is also shown.

This Sheet Has Been Replaced





CLAIMS

1. A switch mode power supply, comprising:
 - a source (107) of an AC, mains supply voltage (VM);
 - a first rectifier (102) coupled to said mains source for
 - 5 rectifying said mains supply voltage without filtering out a low frequency component at a frequency (100 Hz) related to that of said mains supply voltage to develop an unfiltered, rectified, first supply voltage (V1);
 - first switching means (Q1) responsive to a first
 - 10 switching signal (V9) and coupled to an inductance (W1) having applied thereto said first supply voltage for developing a first plurality of current pulses (iP1) at a frequency that is substantially higher than that of said mains supply voltage, said first plurality of current pulses being coupled via a second
 - 15 rectifier (D4) to produce a first portion of a rectified output supply current (iS4);
 - a filter capacitor (C2);
 - a third rectifier (d2) coupled to said mains source and to said capacitor for rectifying said mains supply voltage to
 - 20 develop current pulses (i3) in said capacitor for producing a rectified, second supply voltage (V2) in said capacitor;
 - second switching means (Q2) coupled to said second supply voltage and responsive to a second switching signal (V12) for developing in an inductance (W1) that is coupled to said
 - 25 capacitor a second plurality of current pulses (iP2) at a frequency that is substantially higher than that of said mains supply voltage, said second plurality of current pulses being coupled via a rectifier (D4) to produce a second portion of said output supply current; and characterized by
 - 30 means (R13) coupled to said capacitor for lengthening a pulse-width and decreasing a peak amplitude of a given current pulse in said capacitor.
2. A power supply according to Claim 1 characterized
- 35 in that said pulse-width interval lengthening means (R13) comprises a resistor (R13) that is coupled in series with said capacitor (C2).





3. A power supply according to Claim 2 characterized in that said first plurality of current pulses (iP1) are developed in a current path that bypasses said resistor (R13).

5 4. A power supply according to Claim 1 further characterized by, a pulse-width modulator (103) responsive to a feedback signal (V30) for pulse-width modulating current pulses (iP1,iP2) of one (iP1 or iP2) of said first and second pluralities of current pulses.

10

5. A power supply according to Claim 1 characterized in that said inductance (W1) comprises a winding of a flyback transformer (T).

15

6. A power supply according to Claim 1 characterized in that the absence of low frequency component filtering prevents said first plurality of current pulses (iP1) from causing a significant increase of said harmonic content in said mains input supply current (iM).

20

7. A power supply according to Claim 1 characterized in that said second plurality of current pulses (iP2) reduces a ripple component in an output (V4) of said power supply.

25

8. A power supply according to Claim 1 characterized in that said capacitor current pulses (i3) tend to increase a harmonic content in a mains input supply current (iM) and reduce a power factor and wherein said peak amplitude decreasing means (R13) decreases the tendency of said capacitor current pulses to increase said harmonic content in said mains input supply current and increases said power factor.

30

9. A power supply according to Claim 1 characterized in that each of said first (iP1) and second (iP2) pluralities of current pulses occur at least during a portion of said period of said mains supply voltage when said first supply voltage ($V_M=0$) is at a substantially smaller magnitude than a peak magnitude thereof.

35





10. A power supply according to Claim 1 characterized in that said capacitor current pulses (i3) occur at a low frequency (100 Hz) that is related to said frequency of said mains supply voltage and that is substantially lower than that (20 KHz) of said first plurality of current pulses (iP1).

11. A switch mode power supply, comprising:
a source (107) of an AC, mains supply voltage (VM) and an AC, mains supply current (iM);
10 a filter capacitor (C2);
a first rectifier (D2) coupled to said mains source and to said capacitor for rectifying said mains supply voltage to develop current pulses (i3) in said capacitor at a frequency (100 Hz) that is related to said frequency of said mains supply voltage
15 (V2) for producing a second supply voltage at a terminal (between D2 and Q2) of said capacitor, said capacitor current pulses producing a distortion in said mains supply current that tends to decrease a power factor associated with said mains source; characterized by
20 means (R13) coupled to said capacitor for lengthening a pulse-width of a given current pulse and for decreasing a peak amplitude of said given current pulse so as to reduce the distortion and increase the power factor;
first switching means (Q1,D1) responsive to a first
25 switching signal (V9) for generating in an inductance (W1) that is coupled to said mains source (107), a first plurality of current pulses (iP1) at a substantially higher frequency (20 KHz) than said frequency of said mains supply voltage (50 Hz), said first plurality of current pulses (iP1) being coupled via a rectifier (D4) to
30 produce a first portion of a rectified output supply current (iS4), said first plurality of current pulses having magnitudes that vary during a period of said mains supply voltage in accordance therewith in a manner to increase said power factor; and
second switching means (Q2,D2) responsive to a second
35 switching signal for generating, in an inductance (W1) that is coupled to said terminal where said second supply voltage is developed, a second plurality of current pulses (iP2) at a substantially higher frequency than said frequency of said mains





supply voltage, said second plurality of current pulses being coupled via a rectifier (D4) to produce a second portion of said rectified output supply current, in a manner to reduce a ripple component at an output of said power supply.

5

12. A power supply according to Claim 11 characterized in that a given current pulse of said second plurality of current pulses (iP2) occurs closely to a corresponding current pulse of said first plurality of current pulses (iP1).

10

13. A power supply according to Claim 12 characterized in that a ratio between magnitudes of first plurality of current pulses (iP1) and magnitudes of said second plurality of current pulses (iP2) varies, during said period (of VM).

15

14. A power supply according to Claim 11 characterized in that said first (iP1) and second (iP2) pluralities of current pulses are generated in a transformer (T) and transformer-coupled therethrough to a load circuit (37).

20

15. A power supply according to Claim 11 characterized in that said first (iP1) and second (iP2) pluralities of current pulses are generated in the same winding (W1) of said transformer.

25

16. A power supply according to Claim 11 characterized in that a ratio between a magnitude of said mains supply voltage (VM) and a magnitude of a current pulse of said first plurality of current pulses (iP1) that occurs when said mains supply voltage is at a peak value ($VM=325V$) is approximately the same as a ratio between a magnitude of said mains supply voltage and a current pulse of said first plurality of current pulses that occurs when said magnitude of said mains supply voltage is substantially smaller ($VM=0$) than said peak value.

30

17. A power supply according to Claim 11 further characterized by, means (Q4,Q5,Q3) responsive to a control signal (V7) that varies during said period of said mains supply voltage

35





(VM) for varying magnitudes of said second plurality of current pulses (iP2), during said period of said mains supply voltage, in a manner to reduce said ripple.

5 18. A power supply according to Claim 11 characterized in that a current path of said first plurality of current pulses (iP1) excludes said terminal (between D2 and Q2) where said second supply voltage (V2) is developed.

10 19. A power supply according to Claim 11 characterized in that said first switching means (Q1,D1) comprises a rectifier (D1) coupled to said mains source (107) for rectifying said mains supply voltage (VM) without filtering out low frequency harmonic components of said rectified mains supply
15 voltage from said rectified mains supply voltage (V1) such that variations of said rectified mains supply voltage during said period produce amplitude modulation in said first plurality of current pulses (iP1).

20 20. A power supply according to Claim 11 further characterized by, a pulse-width modulator (Q5,Q4,Q3,103) responsive to a feedback signal (V30) that is indicative of said ripple component for varying said magnitudes of second plurality of current pulses (iP2) , during said period, in a manner to reduce
25 said ripple component (of e.g. V4).

 21. A power supply according to Claim 11 further characterized by a pulse-width modulator (103) responsive to a feedback signal (V30) for pulse-width modulating said first
30 plurality of current pulses (iP1) to provide output supply regulation.

 22. A power supply according to Claim 11 further characterized by a pulse width modulator (103) responsive to a
35 feedback signal (V30) for varying magnitudes of said first plurality (iP1) and of said second plurality (iP2) of current pulses in the same direction in a manner to provide output supply regulation.





23. A power supply according to Claim 11 characterized in that current pulses of said first plurality (iP1) of current pulses occur in one of a current interleaving manner and a
5 current superposition manner with respect to current pulses of said second plurality (iP2) of current pulses.

24. A switch mode power supply, comprising:
a source of an AC, mains supply voltage (107);
10 a filter capacitor (C2);
a first rectifier (D2) coupled to said mains source and to said capacitor for rectifying said mains supply voltage to develop current pulses (i3) in said capacitor for producing a rectified, first supply voltage (V2) in said capacitor;
15 means (R13) coupled to said capacitor for lengthening a pulse-width and decreasing a peak amplitude of a given current pulse in said capacitor; characterized by
first switching means (Q2) coupled to said first supply voltage and responsive to a first switching signal (V12) for
20 developing in an inductance (W1) that is coupled to said capacitor a first plurality of current pulses (iP2) at a frequency (20 KHz) that is substantially higher than that (50 Hz) of said mains supply voltage, said first plurality of current pulses being coupled via a rectifier (D4) to produce a first portion of a rectified output supply
25 current (iS4);
a second rectifier (102) coupled to said mains source for rectifying said mains supply voltage to develop a rectified, second supply voltage (V1); and
second switching means (Q1,D1) responsive to a second
30 switching signal (V9) and coupled to an inductance (W1) having applied thereto said second supply voltage for developing a second plurality of current pulses (iP1) at a frequency that is substantially higher than that of said mains supply voltage via a current path that bypasses said capacitor, said second plurality of
35 current pulses being coupled via a second rectifier (D4) to produce a second portion of said rectified output supply current.



ABSTRACT

In a switch mode power supply, a full wave rectified AC mains supply voltage (V1) is produced from an AC mains supply voltage (VM) without low-pass filtering. The unfiltered rectified voltage is applied to a winding (W1) of a flyback transformer (T) that is coupled to a switching transistor (Q1). A first plurality of current pulses (iP1) are generated in the winding from the rectified voltage at a frequency (20 KHz) that is higher than the frequency (50 HZ) of the mains supply voltage and at peak amplitudes that vary in accordance with the rectified voltage in a manner to increase a power factor. The rectified voltage is further rectified via a rectifier (D2) coupled in series with a resistor (R13) and a low-pass filter capacitor (C2) and produces current pulses (i3) in the capacitor. A voltage (V2) in the capacitor is coupled via a second switching transistor (Q2) to the winding to produce in the winding a second plurality of current pulses (iP2) that reduce a ripple component at an output (37) of the power supply. The resistor increases the pulse-width and decreases the magnitude of the capacitor current pulses in a manner to reduce input harmonic contents and increase the power factor.

USE FIGURE 1.

This Sheet Has Been Replaced



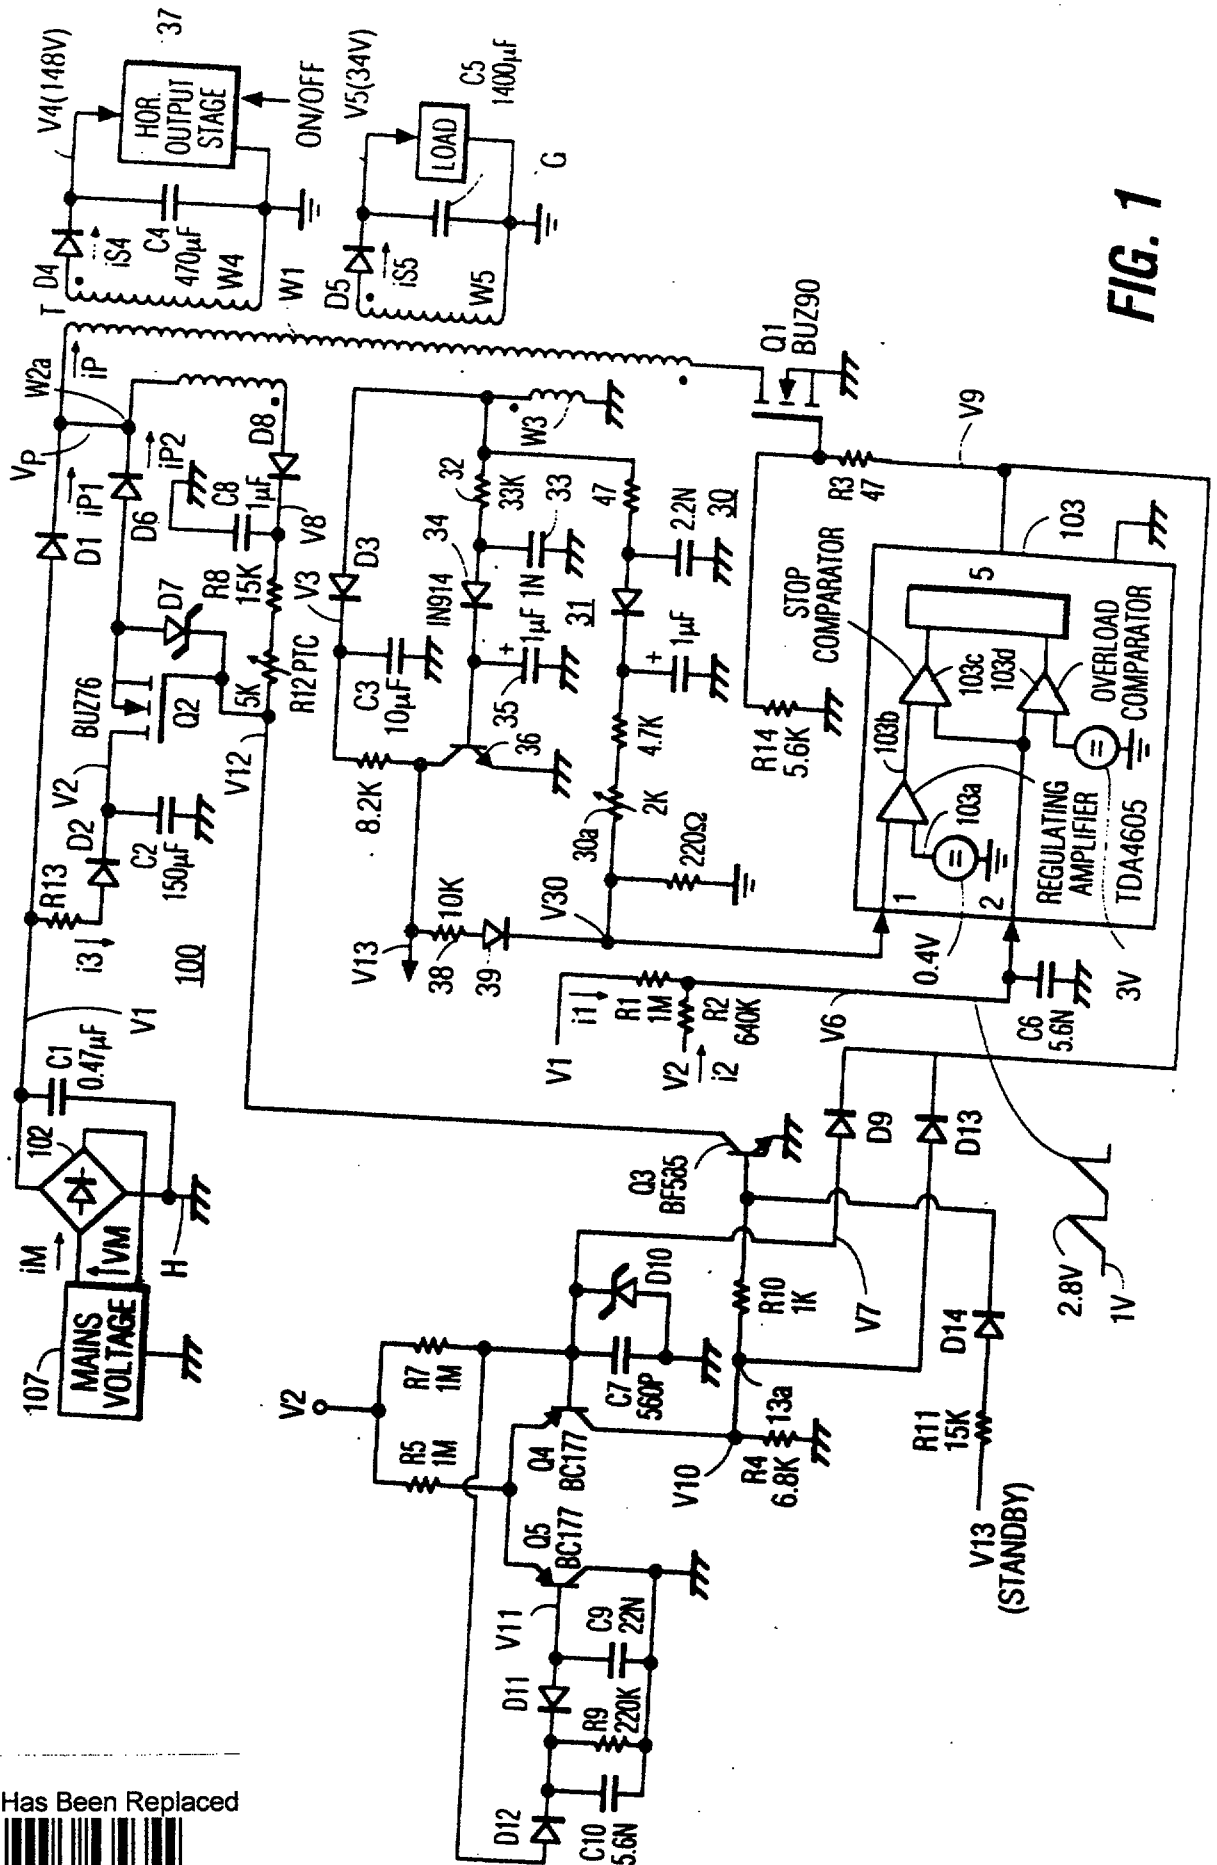


FIG. 1

FIG. 2a

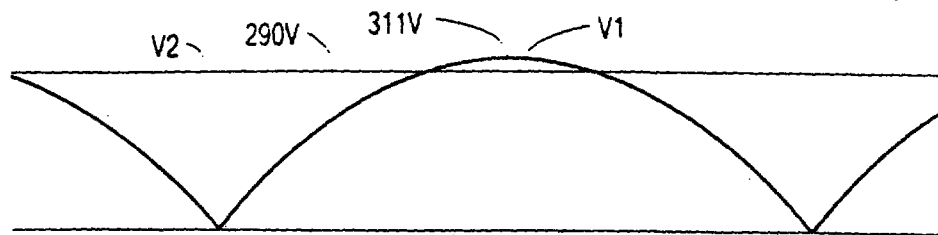


FIG. 2b



FIG. 2c




FIG. 2d

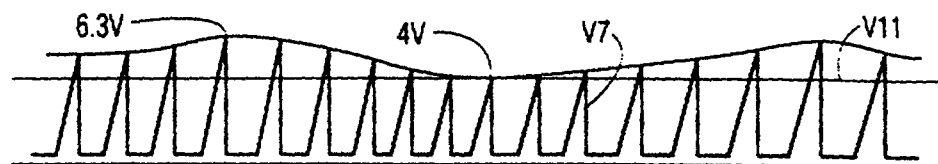


FIG. 2e



FIG. 2f

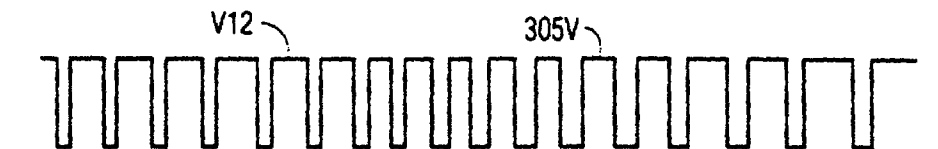


FIG. 2g

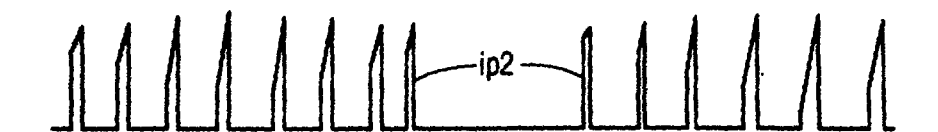
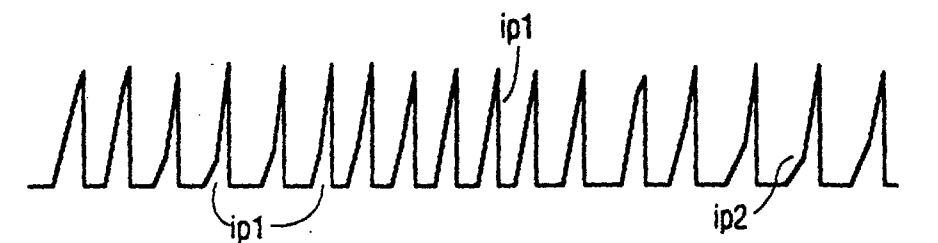


FIG. 2h



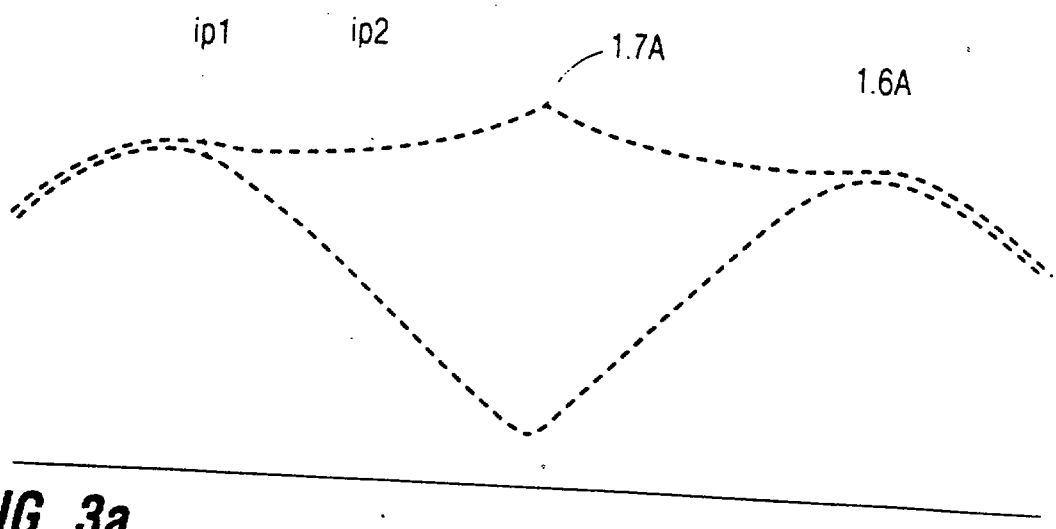


FIG. 3a

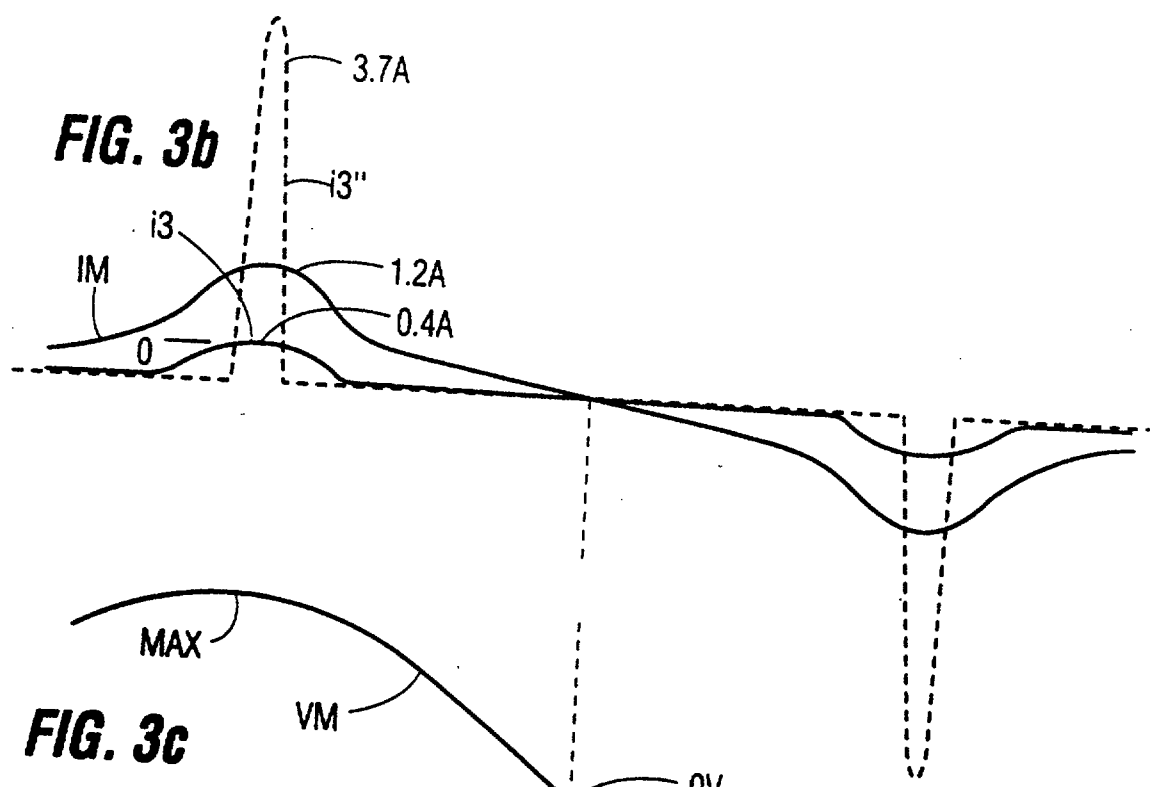


FIG. 3b

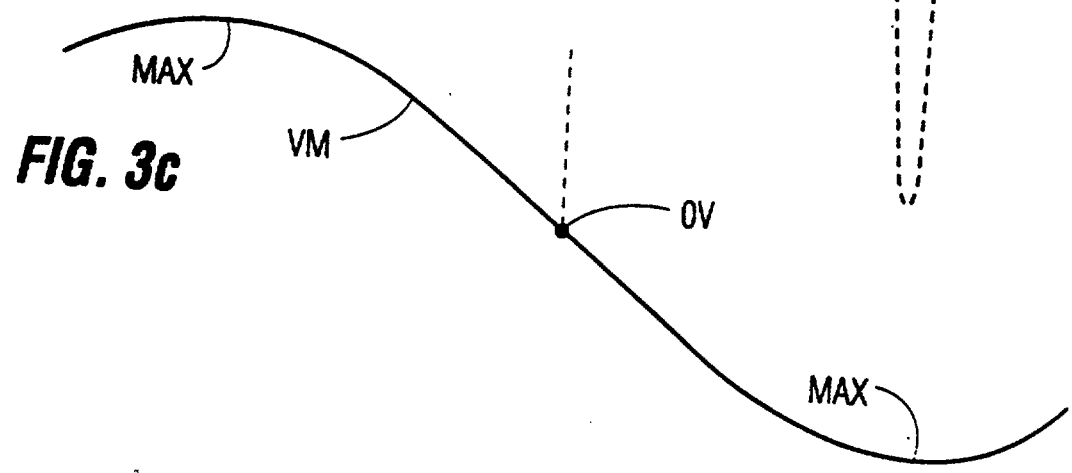


FIG. 3c

This Sheet Has Been Replaced








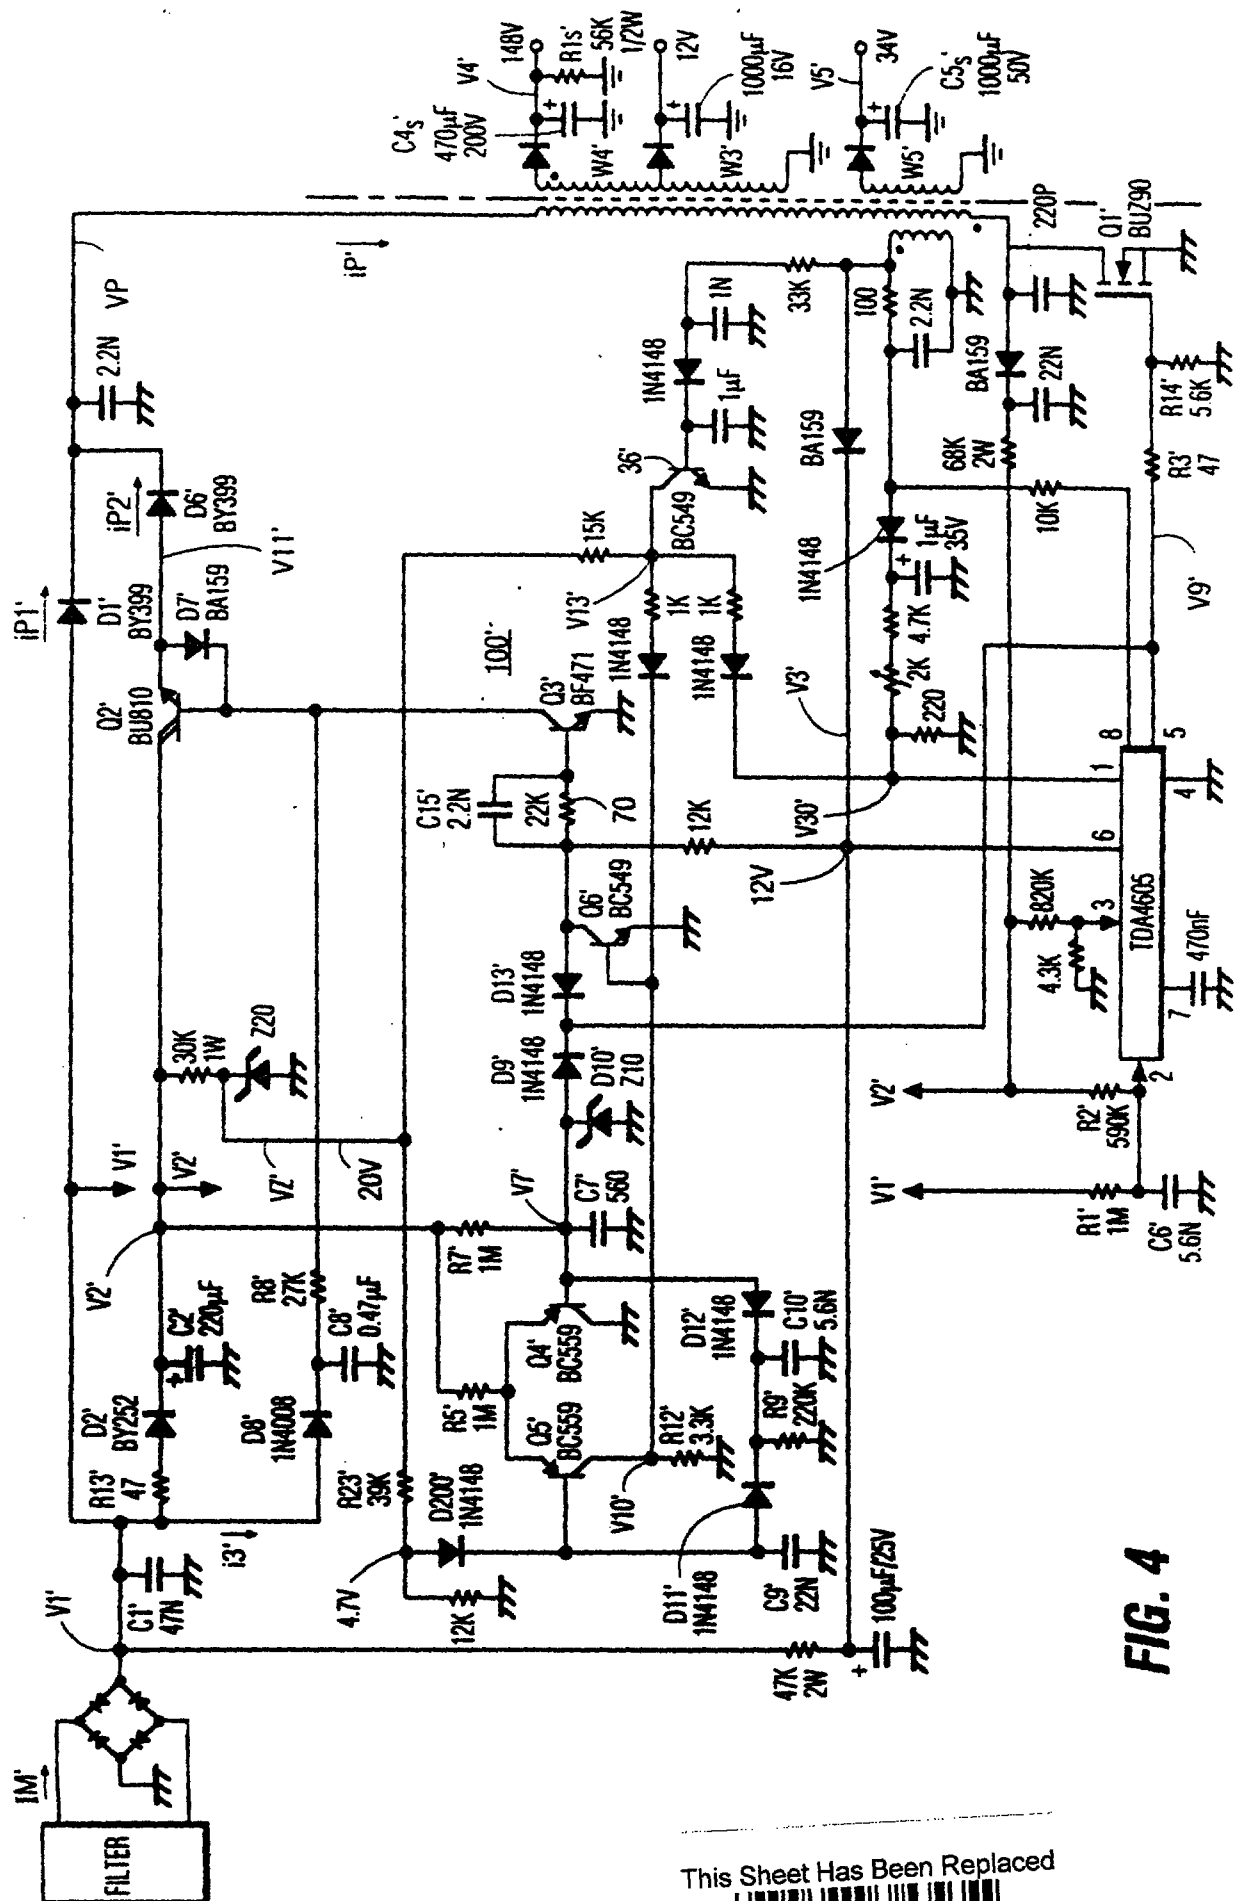


FIG. 4

This Sheet Has Been Replaced

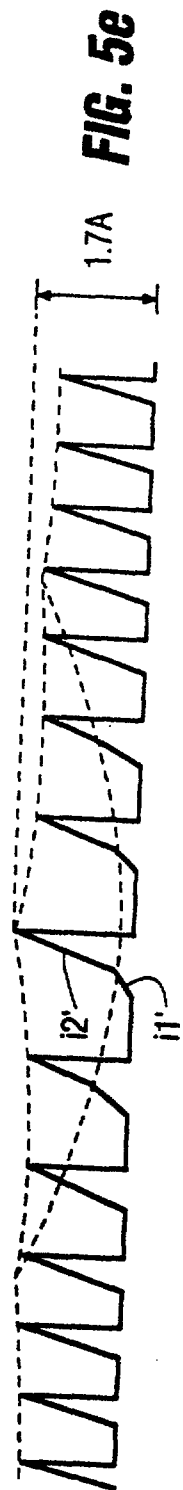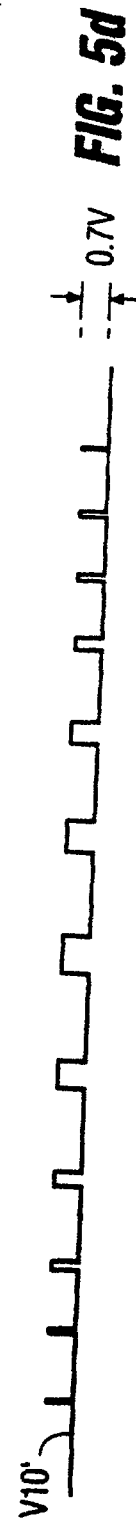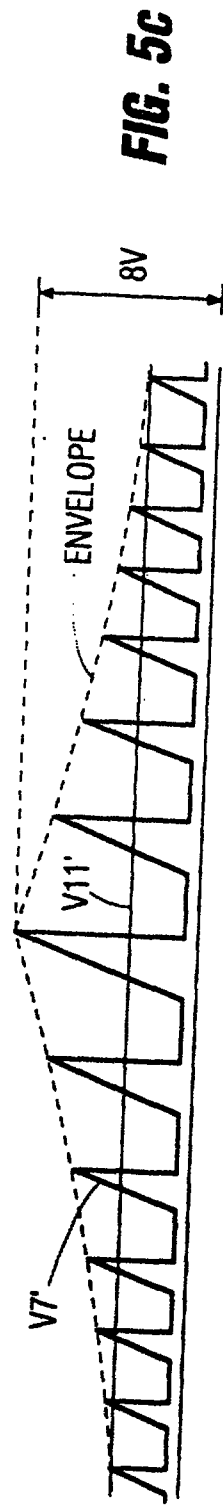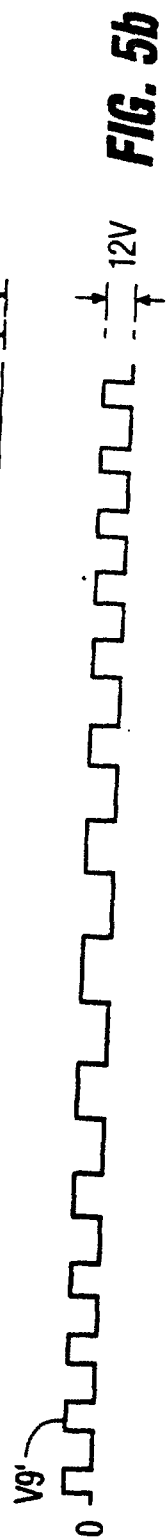

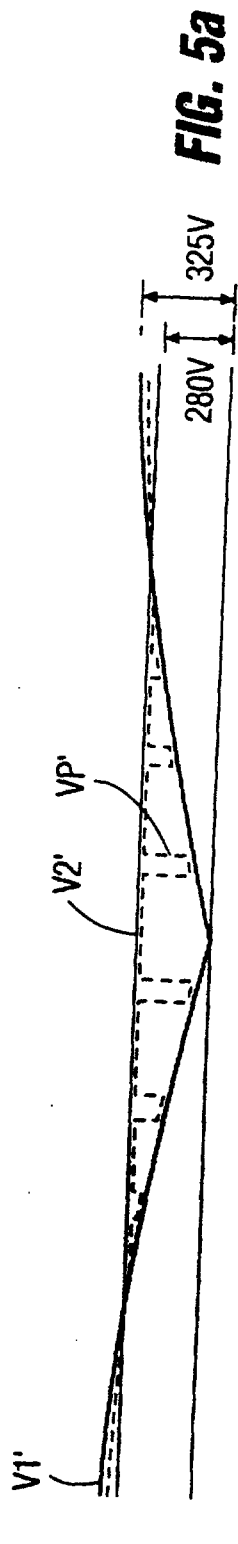

This Sheet Has Been Replaced



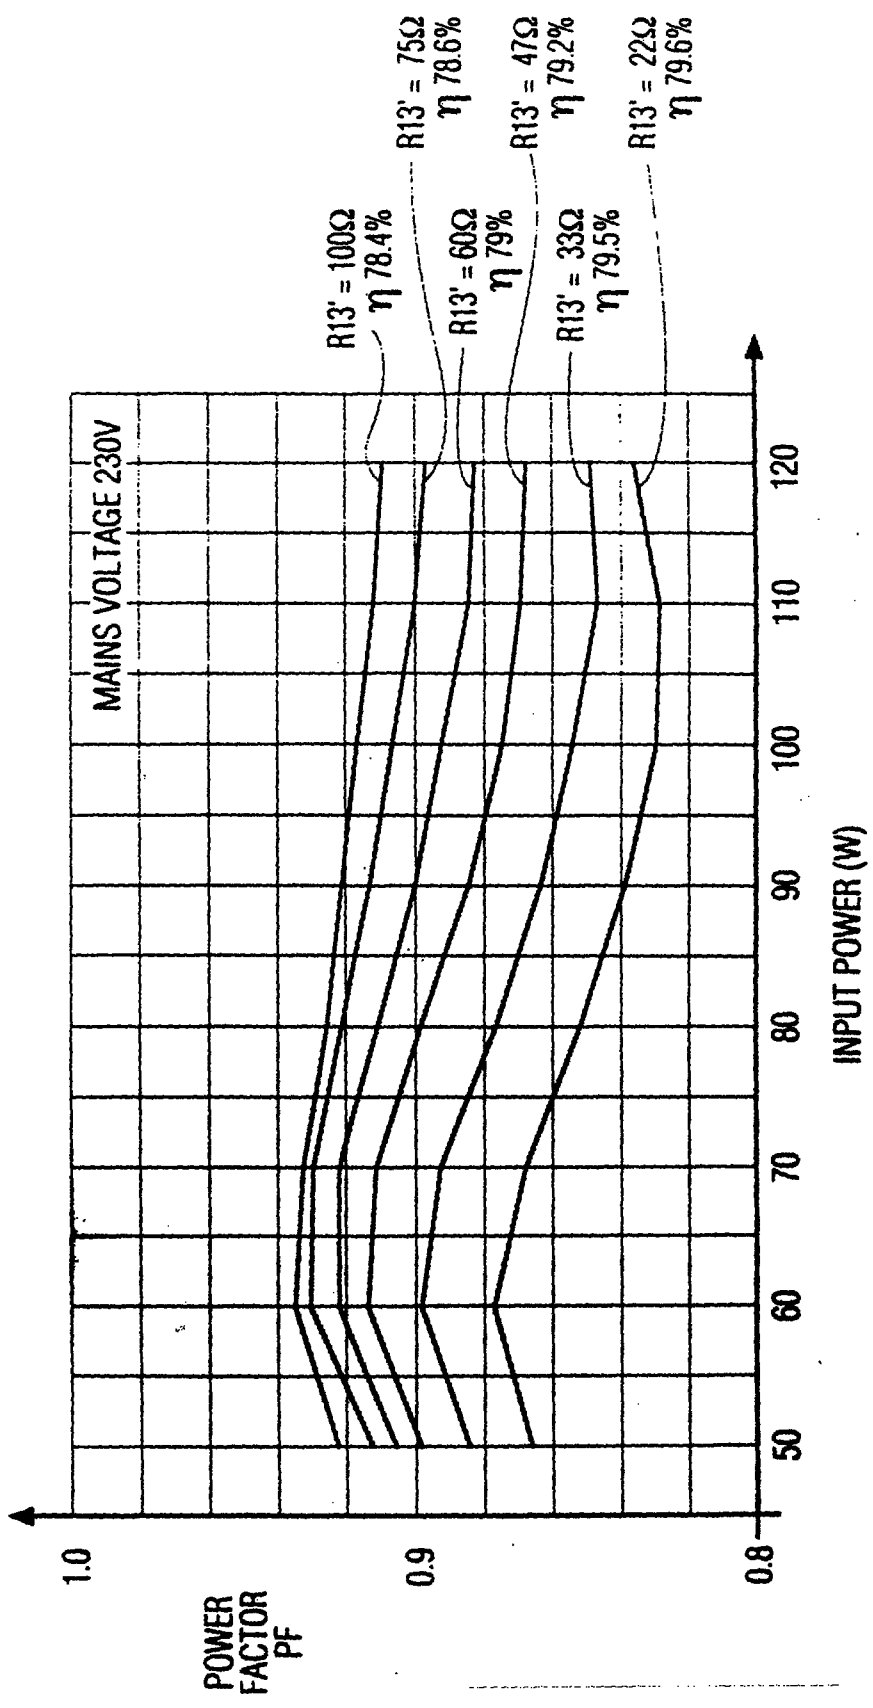


FIG. 6

This Sheet Has Been Replaced



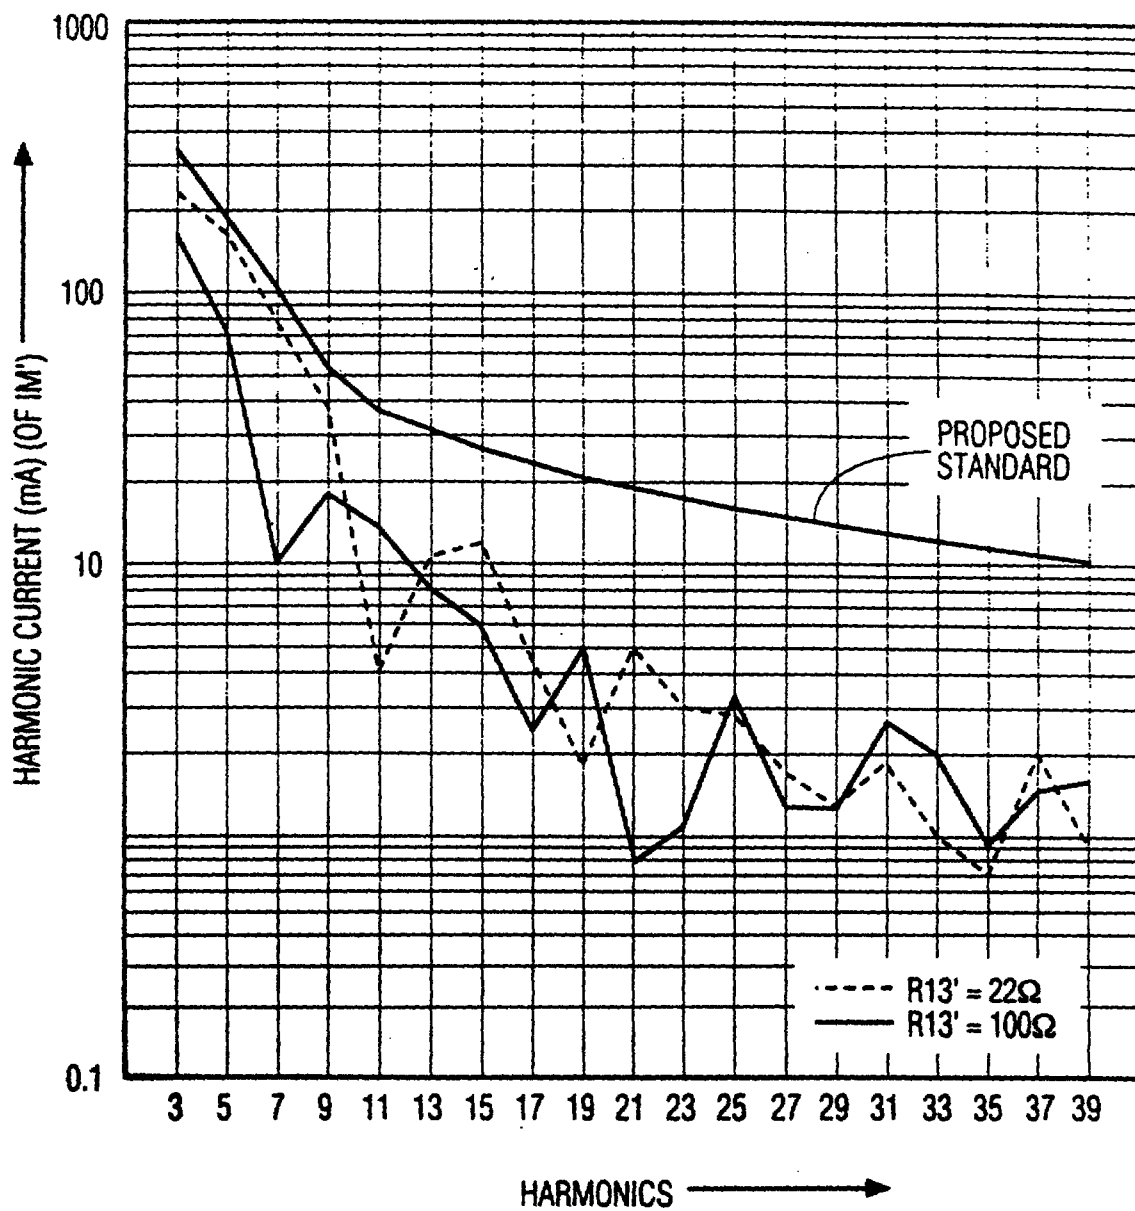


FIG. 7

This Sheet Has Been Replaced



✓	1	13
✓	2	14
✓	3	15
✓	4	16
✓	5	17
✓	6	18
✓	7	19
✓	8	20
✓	9	21
✓	10	22
✓	11	23
✓	12	24
✓	13	25
✓	14	26
✓	15	27
✓	16	28
✓	17	29
✓	18	30
✓	19	31
✓	20	32
✓	21	33
✓	22	34
✓	23	35
✓	24	36
✓	25	37
✓	26	38
✓	27	39
✓	28	40
✓	29	41
✓	30	42
✓	31	43
✓	32	44
✓	33	45
✓	34	46
✓	35	47
✓	36	48
✓	37	49
✓	38	50
✓	39	51
✓	40	52
✓	41	53
✓	42	54
✓	43	55
✓	44	56
✓	45	57
✓	46	58
✓	47	59
✓	48	60
✓	49	61
✓	50	62
✓	51	63
✓	52	64
✓	53	65
✓	54	66
✓	55	67
✓	56	68
✓	57	69
✓	58	70
✓	59	71
✓	60	72
✓	61	73
✓	62	74
✓	63	75
✓	64	76
✓	65	77
✓	66	78
✓	67	79
✓	68	80
✓	69	81
✓	70	82
✓	71	83
✓	72	84
✓	73	85
✓	74	86
✓	75	87
✓	76	88
✓	77	89
✓	78	90
✓	79	91
✓	80	92
✓	81	93
✓	82	94
✓	83	95
✓	84	96
✓	85	97
✓	86	98
✓	87	99
✓	88	100

3/2/97

SWITCH MODE POWER SUPPLY WITH REDUCED INPUT CURRENT DISTORTION

BACKGROUND OF THE INVENTION

5 The invention relates to a switch mode power supply (SMPS). In particular, the invention relates to a SMPS that derives a rectified input supply voltage from an AC, mains supply voltage to produce an output supply voltage.

Typically, such SMPS employs a full wave rectifier
10 bridge that rectifies a sinusoidal mains supply voltage and charges an input filter capacitor to produce the rectified input supply voltage. The filter capacitor has a sufficiently large value for reducing, in the input supply voltage, the magnitude of a ripple at the fundamental frequency and at the harmonics of the mains
15 supply voltage. In this way, ripple voltage is prevented from occurring in the output supply voltage.

The filter capacitor draws narrow pulses of input current having a high peak value from the mains supply voltage source. The current pulses occur only in the vicinity of the peaks
20 of the sinusoidal mains supply voltage. Therefore, the waveform of the input current contains undesirable low frequency harmonics of the mains supply voltage frequency. The result is an undesirable decrease in the power factor to about 0.65 and an undesirable increase in distortions of the waveform of the mains
25 supply voltage.

Recently, an interest has evolved for revising European Standard EN60 555-2 for the purpose of reducing the permissible low frequency harmonic content of the waveform of the input current. It may be desirable to reduce the low
30 frequency harmonic content of the waveform of the input current without significantly increasing a ripple voltage in the output supply voltage.

SUMMARY OF THE INVENTION

35 A switch mode power supply, embodying an aspect of the invention, includes a source of an AC, mains supply voltage. A first rectifier is coupled to the mains source for rectifying the mains supply voltage without filtering out a low frequency

This is the replacement sheet

Date: - 3 JUL 1997

component at a frequency related to that of the mains supply voltage to develop an unfiltered, rectified, first supply voltage. A first switching arrangement is responsive to a first switching signal and coupled to an inductance having applied thereto the first supply voltage for developing a first plurality of current pulses at a frequency that is substantially higher than that of the mains supply voltage. The first plurality of current pulses are coupled via a second rectifier to produce a first portion of a rectified output supply current. A third rectifier is coupled to the mains source and to a filter capacitor for rectifying the mains supply voltage to develop current pulses in the capacitor for producing a rectified, second supply voltage in the capacitor. A second switching arrangement is coupled to the second supply voltage and responsive to a second switching signal for developing in an inductance that is coupled to the capacitor a second plurality of current pulses at a frequency that is substantially higher than that of the mains supply voltage. The second plurality of current pulses are coupled via a rectifier to produce a second portion of the output supply current. A pulse-width is lengthened and a peak amplitude is decreased of a given current pulse in the capacitor.

BRIEF DESCRIPTION OF THE DRAWINGS

FIGURE 1 illustrates an SMPS, embodying an aspect of the invention, that utilizes a current super-position technique;

FIGURES 2a-2h illustrate waveforms useful for explaining the operation of the SMPS of FIGURE 1;

FIGURES 3a-3c illustrate additional waveforms useful for explaining the operation of the SMPS of FIGURE 1;

FIGURE 4 illustrates a second embodiment of the invention;

FIGURES 5a-5e illustrate waveforms useful for explaining the operation of the arrangement of FIGURE 4;

FIGURE 6 illustrates a graph providing the input power factor in the arrangement of FIGURE 4; and

FIGURE 7 illustrates a graph providing the harmonics content of the input current in the arrangement of FIGURE 4.

DETAILED DESCRIPTION OF THE DRAWINGS

FIGURE 1 illustrates an SMPS 100, embodying an aspect of the invention, that utilizes a technique, referred to herein as current super-position technique. SMPS 100 of FIGURE 1 is suitable for providing, for example, 120 watts power. A mains supply voltage source 107 that produces an AC voltage VM is coupled to a full-wave bridge rectifier 102 that produces an AC full-wave rectified input supply voltage V1 in a relatively small filter capacitor C1. AC voltage VM of source 107 is sinusoidal at, for example, a line frequency of 50 Hz. Because of the small capacitance of capacitor C1, low frequency harmonics of voltage V1 are not filtered out by capacitor C1. Voltage V1, having a waveform of an unfiltered, full wave rectified sinusoidal voltage, is coupled via a switching diode D1 to an end terminal W2a of a primary winding W1 of a flyback transformer T.

A switching signal V9, having a controllable frequency and duty cycle, is coupled via a resistor R3 to a resistor R14 and to a gate of an MOS switching transistor Q1 to turn on transistor Q1 only when signal V9 is at a HIGH level or 12 volts. The drain electrode of transistor Q1 is coupled to the other end terminal of winding W1. Signal V9 is developed at an output terminal of an integrated circuit (IC) 103 of the type TDA4605 operating as a pulse-width modulator. The frequency of signal V9 is selected to be within a range of 20-50 KHz.

In a given cycle of signal V9, after signal V9 attains the HIGH level, a pulse current i_{p1} flows through diode D1. An upramping current i_p that is equal to current i_{p1} in diode D1 is produced in winding W1, storing magnetic energy in transformer T. Immediately after signal V9 changes from the HIGH to a LOW level, transistor Q1 becomes non-conductive and a flyback operation occurs. The result is that flyback pulse currents are produced in secondary windings W2, W3, W4 and W5 of transformer T. The drain voltage of transistor Q1 is limited, during flyback, by means of a snubber circuit, not shown.

As a result of flyback current pulses, such as a current pulse i_{s4} in winding W4, that are produced from pulses i_p , DC output supply voltages V3, V4, V5 and V8 are produced in capacitors C3, C4, C5 and C8 via rectifying diodes D3, D4, D5 and

This is the replacement sheet

Date: 23 JUL 1997

D8, respectively. Voltage V4 energizes, for example, a horizontal deflection output stage 37 and voltage V5 energizes, for example, an audio stage of a television receiver.

Transformer T isolates, with respect to electrical shock hazard, source 107 and a "hot" ground conductor, H, from a "cold" ground conductor G. Voltages V3 and V8 are referenced to hot ground conductor H. Whereas, voltages V4 and V5 are referenced to cold ground conductor G.

In normal operation, a DC sense voltage V30 that is indicative of, for example, voltage V4 is produced in a circuit 30 by filtering and rectifying the flyback pulses in winding W3 and voltage dividing. A resistor 30a is adjustable for adjusting the output supply voltages by the adjustment of voltage V30. Sense voltage V30 is applied to a sense input terminal, pin 1, of IC 103. Voltage V30 is compared in IC 103 with a reference voltage 103a. An error voltage 103b is produced from a difference between voltage V30 and reference voltage 103a. Error voltage 103b is coupled to an input of a stop comparator 103c to control a pulse-width or a HIGH-to-LOW transition of signal V9 to regulate the levels of output voltages V4 and V5.

Voltage V1 is also coupled via a series arrangement of a resistor R13, embodying an inventive feature, and a rectifying diode D2 to a filter capacitor C2 for producing a supply voltage V2 in capacitor C2. Voltage V2 is a constant, DC voltage that is proportional to the peak voltage of voltage V1. Voltage V2 is coupled via an MOS switching transistor Q2 and a switching diode D6, when transistor Q2 is conductive, to junction terminal W2a. Terminal W2a is coupled between diode D1 of winding W1 and a secondary winding W2 of transformer T.

DC voltage V8 developed, during flyback, via winding W2 is larger by about 15V than voltage V2. Voltage V8 is coupled to the gate of transistor Q2 via a resistor R8 and a resistor R12, coupled in series, to turn on switching transistor Q2 when a transistor Q3 that is coupled to the gate of transistor Q2 is turned off. By being larger than voltage V2, voltage V8 is sufficient to turn on MOS transistor Q2. A protection diode D7 coupled between the source electrode and gate electrode of transistor Q2 limits gate-source voltage excursions of transistor Q2.

This is the replacement sheet

Date: 3 JUL 1997

Signal V9 of FIGURE 1 also controls the switching operation frequency of transistor Q2. To control the switching operation of transistor Q2, signal V9 of FIGURE 1 is coupled via a diode D9 to a ramp generator that is formed by a resistor R7 and a capacitor C7. A zener diode D10 limits the maximum voltage of a ramp signal V7 in capacitor C7 to 9.1 volt. When signal V9 is HIGH, diode D9 is reverse biased and capacitor C7 is charged by means of voltage V2 through resistor R7. Consequently, signal V7 in capacitor C7 increases linearly. When signal V9 becomes LOW, diode D9 conducts and capacitor C7 is immediately discharged through the low impedance output formed at pin 5 of IC 103.

FIGURES 2a-2h illustrate waveforms useful for explaining the operation of the circuit of FIGURE 1. Similar symbols and numerals in FIGURES 1 and 2a-2h indicate similar items or functions.

The pulse width of signal V9 of FIGURE 1 determines the peak level of signal V7 that is developed in capacitor C7. Because the voltage that is coupled via diode D1 to winding W1 has a full wave rectified sinusoid waveform, the feedback signal to IC 103 causes the pulse width of signal V9 to vary as a function of full wave rectified voltage V1. Consequently, the peaks or envelope of signal V7 also varies as a function of voltage V1, during the 10 millisecond period of voltage V1, as shown in FIGURE 2d. In FIGURE 2d, for example, the ratio between the period of signal V7 and that of voltage V1 of FIGURE 2a is exaggerated for better clarity.

Signal V7 of FIGURE 1 is applied to an inverting input terminal of a comparator formed by a transistor Q4 and a transistor Q5. A resistor R5 produces emitter currents in transistors Q4 and Q5. A collector resistor R4 of transistor Q4 develops an output signal V10 at an output terminal 13a of the comparator.

Output signal V10 is coupled to the base of transistor Q3 to control switching operation of transistor Q3. The collector of transistor Q3 is coupled to a load arrangement formed by resistors R8 and R12 and energized by supply voltage V8 to develop a switching signal V12 at the gate of transistor Q2.

Immediately after the transition to the HIGH level of signal V9, diode D1 becomes conductive and current i_{p1} is generated. As long as transistor Q2 remains turned off, current i_{p2} is not generated. Transistor Q2 remains nonconductive as long
5 as output signal V10 of the comparator is HIGH in a manner to turn on transistor Q3 and, thereby, to turn off transistor Q2. Each of primary current i_{p1} and signal V7 increases in an upramping manner after signal V9 becomes HIGH.

During a given switching period of signal V9, when
10 signal V7 of FIGURE 2d reaches a higher level than a threshold voltage V11 of the comparator, comparator output signal V10 of FIGURE 2e changes from the HIGH to the LOW level. When signal V10 attains the LOW level, transistor Q3 of FIGURE 1 is turned off and transistor Q2 is turned on by means of signal V12 of FIGURE
15 2f.

When transistor Q2 becomes conductive, diode D6 of FIGURE 1 becomes conductive causing diode D1 to become nonconductive. Therefore, input supply voltage V1 is decoupled from winding W1 and voltage V2 is coupled to winding W1 via
20 transistor Q2. Primary current i_{p2} of FIGURE 2g in diode D6 of FIGURE 1 causes current i_p to continue flowing without a gap of time from the time the pulse of current i_{p1} ceases, as shown in FIGURES 2g and 2h.

After a predetermined interval that is determined in
25 accordance with voltage V30 by IC 103 of FIGURE 1, signal V9 changes again to the LOW level that causes signal V7 to become LOW. Signal V9 is also coupled via a diode D13 to junction terminal 13a between resistor R4 and resistor R10. Diode D13 conduct when signal V9 is at the LOW level. Immediately after
30 signal V9 becomes LOW, signal V10 of Figure 2e is forced to be LOW because diode D13 of FIGURE 1 conducts. Therefore, transistors Q1 and Q3 are turned off. Transistor Q2 does not conduct current although signal V12 at the collector of transistor Q3 is HIGH because transistor Q1 is turned off. Advantageously,
35 because of the operation of diode D13, no current flows in resistors R8 and R12 when signal V9 is LOW. The resulting reduction in power dissipation is about 2,5 watts at 120 watts

input power. Diodes D9 and D13 are turned off when signal V9 becomes HIGH and a new cycle begins.

Primary current i_p that is determined by the superposition of currents i_{p1} and i_{p2} is shown in FIGURE 3a for a 100 watts input power. A resulting mains current i_M has a waveform that is shown in FIGURE 3b as a solid line. For comparison purposes, the broken line waveform in FIGURE 3b corresponds to mains current i_M'' of a conventional power supply that includes a large filter capacitance at the output of the bridge rectifier for the same input power rate of a 100 watts. In each half-period of voltage V_M , the peaks of the pulses of current i_{p1} vary predominantly in a sinusoidal manner at the fundamental mains frequency. Capacitor C2 is charged via resistor R13 only in the vicinity of the peaks of mains voltage V_M .

In accordance with an inventive feature, resistor R13 causes an increase in the conduction interval of the diodes of bridge rectifier 102; thereby, resistor R13 reduces the rate of change and peak amplitude of charging current i_3 , as illustrated in FIGURE 3b. Thus, advantageously, high harmonics content of current i_M such as at the 3rd, 5th, 7th, 9th and 11th harmonics is reduced. The peak value of the pulses of current i_3 is low, because the energy stored in capacitor C2 supplies only a portion of primary current i_p . About 65% of the power consumption is obtained by means of current i_{p1} and 35% by means of current i_{p2} .

Threshold voltage V_{11} controls the ratio between the pulse-width of the pulse of current i_{p2} and that of the pulse of current i_{p1} . Because of a ripple voltage contained in voltage V30 during a given period of full wave rectified voltage V1, each of the pulse-width of pulse-width modulated signal V9 and the peak of signal V7 is approximately at a maximum when voltage V1 is zero and at a minimum when voltage V1 is at a maximum. To establish threshold voltage V_{11} for the comparator formed by transistors Q4 and Q5, signal V7 is coupled via a diode D12 to a parallel arrangement of a resistor R9 and a capacitor C10. A voltage developed in capacitor C10 varies in accordance with the low frequency envelope of the peaks of signal V7; whereas, the high frequency component is filtered out. The voltage in capacitor

This is the replacement sheet

Date: 3 JUL 1997

C10 is coupled via a diode D11 to a capacitor C9 and to a base electrode of transistor Q5. Diode D11 and capacitor C9 operate as a minimum level detector for detecting the minimum value of the envelope of the peaks of signal V7. A forward voltage in diode
5 D12 is temperature compensated by the opposite forward voltage developed in diode D11. The envelope of the peaks of signal V7 varies as a function of voltage V1. Slice level or threshold voltage V11 that is developed in capacitor C9 is determined by the minimum pulse-width of signal V9 within a period of voltage V1.
10 Voltage V11 is applied to the noninverting input of the comparator formed by transistors Q4 and Q5.

For constant loading, the level of voltage V11 is relatively constant. Therefore, the pulse-width of each of the pulses of current i_{p1} is the same. Whereas, advantageously, the
15 pulse-width of the pulses of current i_{p2} varies from a maximum, when voltage V1 is zero, to a minimum, when voltage V1 is at a peak.

Increased loading, for example, causes, in each period of signal V9, an increase in the pulse-width of signal V9. Thus,
20 the minimum pulse-width of signal V9 also increases that tends to cause an increase in voltage V11. The increase in voltage V11 tends to delay the instant, during each pulse of signal V9, when signal V10 becomes LOW, and, therefore, when transistor Q2 becomes conductive. The result is an increase in the pulse-width
25 of the pulse of current i_{p1} . Since the pulse-width of signal V9 also increases, a ratio between the length of the conduction interval of transistor Q2 and that of transistor Q1 tends to vary less than if, for example, voltage V11 were a constant voltage. Therefore, advantageously, the ripple voltage of output voltage V4
30 is less affected by loading variations than if voltage V11 were constant. It follows that the ratio between current i_3 and i_{p1} varies less by loading. Therefore, the harmonic content of current i_M or the power factor is also less affected by loading.

At a predetermined increased loading condition, the
35 peak value of current i_2 is limited. A further increased loading causes also the peak value of current i_1 to be limited. An even further increased loading, such as a short circuit in the secondary side, results in a burst mode operation in IC 103.

This is the replacement sheet

Date: 3 JUL 1997

In each cycle of signal V9, when signal V9 of FIGURE 2c attains the HIGH level, capacitor C6 of FIGURE 1 at pin 2 of IC 103 is charged by a current that is equal to a sum of a constant current i_2 , developed via a resistor R2 from voltage V2, and a
5 current i_1 , having a full wave rectified sinusoid waveform, developed via a resistor R1 from voltage V1. When signal V9 of FIGURE 2c is at the LOW level, voltage V6 of FIGURE 2b is clamped to 1 volt, as determined by IC 103 of FIGURE 1. When signal V9 of FIGURE 2c attains the HIGH level, capacitor C6 of FIGURE 1
10 develops ramping voltage V6, as shown in FIGURE 2b. Because capacitor C6 is charged by means of current i_1 from full wave rectified voltage V1, current i_1 has a similar waveform as that of voltage V1. In IC 103, voltage V6 is coupled to an input of an over-load comparator 103d. When, under over-load condition,
15 voltage V6 is sufficiently large to trigger comparator 103d, a HIGH-to-LOW transition occurs in signal V9. Thus, voltage V6 determines the maximum pulse-width of signal V9 that can be produced under the over-load condition. It follows that voltage V6 determines the maximum power that can be provided by
20 SMPS 100.

The rate of change or peak level of voltage V6 varies during the period of voltage V1 such that when voltage V1 is at a minimum, the upper limit of the pulse-width of signal V9, before an over-load condition occurs, is larger than when voltage V1 is at
25 a maximum. In this way, for a given upper limit of the pulse width of signal V9, occurring at the peak of voltage V1, an even larger pulse-width of the pulse of signal V9 and, therefore, a larger regulation range is obtained remote from the peak of voltage V1.

30 In IC 103, voltage V6 is coupled to an input of stop comparator 103c. In normal operation, voltage V6, in addition to voltage V30, controls the pulse-width of signal V9. The result is that when voltage V1 is at its peak, voltage V6 causes the pulse-width of signal V9 to be smaller than when voltage V1 is smaller
35 than the peak. In this way, the pulse-width of signal V9 is modulated in a feed-forward manner via voltage V6. Advantageously, the feed-forward manner results in a reduction of the ripple voltage in output voltages V4, V5, V8 and V3.

This is the replacement sheet

Date: 4 3 JUL 1997

When SMPS 100 is used in a television receiver, a signal ON/OFF determines when the television receiver is required to operate in a standby mode of operation and when in normal operation mode. The magnitudes of the load coupled to winding W4 and energized by SMPS 100 is determined by on/off control signal ON/OFF, that is produced in, for example, a microprocessor, not shown. Signal ON/OFF is referenced to the cold ground conductor G.

Detection of the standby mode of operation, activated by signal ON/OFF, is performed by a detector 31 that produces an on/off control signal V13 referenced to hot ground conductor H. In the standby mode of operation, the magnitude of the load coupled to windings W4 and W5 is substantially smaller than in normal operation. Because of decreased load, an increase in sense voltage V30 tends to occur in the standby mode. Therefore, IC 103 decreases the pulse-width of signal V9. Also, the frequency of signal V9 increases to the resonance frequency of flyback transformer T, around 100 KHz.

Detector 31 is responsive to the pulses in winding W3 that are determined by signal V9 and detects the magnitude of the loads coupled to windings W4 and W5 in accordance with the frequency of the pulses in winding W3. The pulses in winding W3 are coupled, in detector 31, via a low pass filter that is formed by a resistor 32 and a capacitor 33, to a rectifier 34. Thus, rectifier 34 produces in a capacitor 35 a DC voltage representative of the length of the interval between transition edges of the pulses in winding W3.

In the standby mode of operation, winding W3 supplies an almost sinusoidal voltage at 100 KHz. This voltage is attenuated by the low pass filter formed by resistor 32 and capacitor 33. Therefore, the voltage in capacitor 35 becomes insufficiently small to turn-on an output transistor 36 of detector 31. The result is that signal V13 is at the HIGH level. On the other hand, in the normal mode of operation, the frequency is lower and transistor 36 is maintained continuously conductive and signal V13 is at the LOW level. In this way, frequency detector 31 produces signal V13 referenced to hot ground H that is indicative of standby/normal mode of operation.

This is the replacement sheet

Date: 3 JUL 1997

Signal V13 is coupled via a diode D14 to the base of transistor Q3. Signal V13 causes transistor Q3 to conduct regardless of the level of signal V9. Therefore, transistor Q2 is turned off, during standby, and current i_{p2} is zero. In this case,
5 DC current flows through resistors R8 and R12 and via transistor Q3 to ground. Resistor R12 that is a positive temperature coefficient resistor heats and increases considerably in value. Thus, the losses in resistor R8 are further decreased, during standby. The overall circuit dissipation is further reduced
10 because transistor Q2 is always turned off, during standby. Using this technique has two advantages. Firstly, standby input power is reduced from 14 watts to 10 watts. Secondly, during Standby, the harmonics are significantly reduced because there is only current i_{p1} current component.

15 During the standby mode of operation, voltages V3, V4 and V5 are also regulated. However, because of leakage inductance, the ratio between sense voltage V30 and output voltage V4 is such that voltage V4 tends to be larger, in standby, than in normal mode of operation. Such increase in voltage V4
20 that energizes output stage 37 may be undesirable because of increased component stress.

On/off control signal V13 is coupled via a series arrangement of a resistor 38 and a diode 39 to the sense input terminal, pin 1, of IC 103 for increasing the level of sense voltage
25 V30. As a result, the duty cycle of signal V9 decreases. Consequently, advantageously, voltage V4 is decreased relative to what it would have been without the effect of the signal that is coupled via diode 39. For example, the value of circuit components can be selected in such a way that voltage V4
30 becomes, in standby, even smaller than in normal mode of operation.

FIGURE 4 illustrates a second embodiment of the invention that is similar to that of FIGURE 1 with the differences noted below. FIGURES 5a-5e illustrate waveforms useful for
35 explaining the operation the circuit of FIGURE 4. Similar symbols and numerals in FIGURES 1, 2a-2h, 3a-3c, 4 and 5a-5e indicate similar items or functions except that the symbol prime (') is added in FIGURE 4 for the corresponding element. In SMPS 100'

This is the replacement sheet

Date: 7 3 JUL 1997

of FIGURE 4, transistor Q2' is a bipolar transistor. The base current for transistor Q2' is supplied via a half-wave rectifier diode D8' and a base resistor R8'. Signal V10' is derived from the collector of transistor Q5' and coupled to the base of transistor Q3' via an inverter stage formed by a transistor Q6'. The collector voltage of transistor Q6' is relatively large when turn on of transistor Q3 is required. Therefore, a base resistor 70' may be a relatively large resistor. Advantageously, because resistor 70' may be large, the circuit is less sensitive to tolerances in the level of signal V9' when signal V9' is at the LOW level and transistor Q3' is required to be turned off.

Increased loading causes a larger voltage drop across resistor R13'. Therefore, the base voltage of transistor Q2' also decreases when transistor Q2' is turned on. Advantageously, the base current also increases because of the decrease in the base voltage. The increase in the base current is desirable for maintaining transistor Q2' in saturation when its collector current increases. Signal V13' is coupled to the base of transistor Q6' to turn on transistor Q6' in the standby mode.

When a short circuit condition occurs in the load, not shown, the voltage across winding W3' is zero. Therefore, transistor 36' is turned off. The result is an increase in voltage V30' that tends to decrease the duty cycle of signal V9' so as to provide short circuit protection.

When loading of the power supply becomes smaller than a predetermined value, for example, 80 watts, a diode 200' that is coupled to the base of transistor Q5' clamps the base voltage of transistor Q5' to 4 volts. Thus, the base voltage of transistor Q5' cannot decrease below that level. Therefore, diode 200' establishes a maximum value for the conduction interval or maximum duty cycle of transistor Q2' at low loading. Thus, advantageously, the power factor that is determined by current i3' does not decrease when the loading further decreases. By providing upper limit to the duty cycle of transistor Q2', the value of resistor R13' can be smaller than if the maximum duty cycle of transistor Q2' could further increase when the load decreases. Therefore, advantageously, the power dissipation in resistor R13' can be made lower than if the clamping operation of diode 200'

This is the replacement sheet

3 JUL 1997

Date:

were not employed. Advantageously, the duty cycle upper limitation of transistor Q2' does not cause an increase in a ripple voltage at the output of the power supply because filter capacitors at the output of the power supply, are sufficiently large to reduce
5 ripple at low loading.

In FIGURE 6, a family of graphs shows the variation of the power factor for different values of resistor R13' of FIGURE 4, as a function of the input power to the power supply. The efficiency factor η at an input power of 100W for different values
10 of resistor R13' is also provided.

In FIGURE 7, a family of graphs shows the harmonics contents of input current IM' of FIGURE 4 when resistor R13' is equal to 22 Ohm and when it is equal to 100 Ohm. For comparison purposes, the maximum allowed harmonics content in what is
15 believed to be the proposed standard is also shown.

CLAIMS

1. A switch mode power supply, comprising:
 - a source (107) of an AC, mains supply voltage (VM);
 - a first rectifier (102) coupled to said mains source for
 - 5 rectifying said mains supply voltage without filtering out a low frequency component at a frequency (100 Hz) related to that of said mains supply voltage to develop an unfiltered, rectified, first supply voltage (V1);
 - first switching means (Q1) responsive to a first
 - 10 switching signal (V9) and coupled to an inductance (W1) having applied thereto said first supply voltage for developing a first plurality of current pulses (iP1) at a frequency that is substantially higher than that of said mains supply voltage, said first plurality of current pulses being coupled via a second
 - 15 rectifier (D4) to produce a first portion of a rectified output supply current (iS4);
 - a filter capacitor (C2);
 - a third rectifier (d2) coupled to said mains source and to said capacitor for rectifying said mains supply voltage to
 - 20 develop current pulses (i3) in said capacitor for producing a rectified, second supply voltage (V2) in said capacitor;
 - second switching means (Q2) coupled to said second supply voltage and responsive to a second switching signal (V12) for developing in an inductance (W1) that is coupled to said
 - 25 capacitor a second plurality of current pulses (iP2) at a frequency that is substantially higher than that of said mains supply voltage, said second plurality of current pulses being coupled via a rectifier (D4) to produce a second portion of said output supply current; and characterized by
 - 30 means (R13) coupled to said capacitor for lengthening a pulse-width and decreasing a peak amplitude of a given current pulse in said capacitor.
2. A power supply according to Claim 1 characterized
- 35 in that said pulse-width interval lengthening means (R13) comprises a resistor (R13) that is coupled in series with said capacitor (C2).



This is the replacement sheet

Date: 2 JUL 1997

3. A power supply according to Claim 2 characterized in that said first plurality of current pulses (iP1) are developed in a current path that bypasses said resistor (R13).

5 4. A power supply according to Claim 1 further characterized by, a pulse-width modulator (103) responsive to a feedback signal (V30) for pulse-width modulating current pulses (iP1,iP2) of one (iP1 or iP2) of said first and second pluralities of current pulses.

10

5. A power supply according to Claim 1 characterized in that said inductance (W1) comprises a winding of a flyback transformer (T).

15

6. A power supply according to Claim 1 characterized in that the absence of low frequency component filtering prevents said first plurality of current pulses (iP1) from causing a significant increase of said harmonic content in said mains input supply current (iM).

20

7. A power supply according to Claim 1 characterized in that said second plurality of current pulses (iP2) reduces a ripple component in an output (V4) of said power supply.

25

8. A power supply according to Claim 1 characterized in that said capacitor current pulses (i3) tend to increase a harmonic content in a mains input supply current (iM) and reduce a power factor and wherein said peak amplitude decreasing means (R13) decreases the tendency of said capacitor current pulses to increase said harmonic content in said mains input supply current and increases said power factor.

30

9. A power supply according to Claim 1 characterized in that each of said first (iP1) and second (iP2) pluralities of current pulses occur at least during a portion of said period of said mains supply voltage when said first supply voltage (VM=0) is at a substantially smaller magnitude than a peak magnitude thereof.

35



This is the replacement sheet

Date: 23 JUL 1997

10. A power supply according to Claim 1 characterized in that said capacitor current pulses (i3) occur at a low frequency (100 Hz) that is related to said frequency of said mains supply voltage and that is substantially lower than that (20 KHz) of said first plurality of current pulses (iP1).

11. A switch mode power supply, comprising:
a source (107) of an AC, mains supply voltage (VM)
and an AC, mains supply current (iM);
10 a filter capacitor (C2);
a first rectifier (D2) coupled to said mains source and to said capacitor for rectifying said mains supply voltage to develop current pulses (i3) in said capacitor at a frequency (100 Hz) that is related to said frequency of said mains supply voltage
15 (V2) for producing a second supply voltage at a terminal (between D2 and Q2) of said capacitor, said capacitor current pulses producing a distortion in said mains supply current that tends to decrease a power factor associated with said mains source; characterized by
20 means (R13) coupled to said capacitor for lengthening a pulse-width of a given current pulse and for decreasing a peak amplitude of said given current pulse so as to reduce the distortion and increase the power factor;
first switching means (Q1,D1) responsive to a first
25 switching signal (V9) for generating in an inductance (W1) that is coupled to said mains source (107), a first plurality of current pulses (iP1) at a substantially higher frequency (20 KHz) than said frequency of said mains supply voltage (50 Hz), said first plurality of current pulses (iP1) being coupled via a rectifier (D4) to
30 produce a first portion of a rectified output supply current (iS4), said first plurality of current pulses having magnitudes that vary during a period of said mains supply voltage in accordance therewith in a manner to increase said power factor; and
second switching means (Q2,D2) responsive to a second
35 switching signal for generating, in an inductance (W1) that is coupled to said terminal where said second supply voltage is developed, a second plurality of current pulses (iP2) at a substantially higher frequency than said frequency of said mains

This is the replacement sheet



Date: 3 JUL 1997

supply voltage, said second plurality of current pulses being coupled via a rectifier (D4) to produce a second portion of said rectified output supply current, in a manner to reduce a ripple component at an output of said power supply.

5

12. A power supply according to Claim 11 characterized in that a given current pulse of said second plurality of current pulses (iP2) occurs closely to a corresponding current pulse of said first plurality of current pulses (iP1).

10

13. A power supply according to Claim 12 characterized in that a ratio between magnitudes of first plurality of current pulses (iP1) and magnitudes of said second plurality of current pulses (iP2) varies, during said period (of VM).

15

14. A power supply according to Claim 11 characterized in that said first (iP1) and second (iP2) pluralities of current pulses are generated in a transformer (T) and transformer-coupled therethrough to a load circuit (37).

20

15. A power supply according to Claim 11 characterized in that said first (iP1) and second (iP2) pluralities of current pulses are generated in the same winding (W1) of said transformer.

25

16. A power supply according to Claim 11 characterized in that a ratio between a magnitude of said mains supply voltage (VM) and a magnitude of a current pulse of said first plurality of current pulses (iP1) that occurs when said mains supply voltage is at a peak value ($VM=325V$) is approximately the same as a ratio between a magnitude of said mains supply voltage and a current pulse of said first plurality of current pulses that occurs when said magnitude of said mains supply voltage is substantially smaller ($VM=0$) than said peak value.

30

17. A power supply according to Claim 11 further characterized by, means (Q4,Q5,Q3) responsive to a control signal (V7) that varies during said period of said mains supply voltage

35

This is the replacement sheet

3 JUL 1997

Date:



* C L N S *

(VM) for varying magnitudes of said second plurality of current pulses (iP2), during said period of said mains supply voltage, in a manner to reduce said ripple.

5 18. A power supply according to Claim 11 characterized in that a current path of said first plurality of current pulses (iP1) excludes said terminal (between D2 and Q2) where said second supply voltage (V2) is developed.

10 19. A power supply according to Claim 11 characterized in that said first switching means (Q1,D1) comprises a rectifier (D1) coupled to said mains source (107) for rectifying said mains supply voltage (VM) without filtering out low
15 frequency harmonic components of said rectified mains supply voltage from said rectified mains supply voltage (V1) such that variations of said rectified mains supply voltage during said period produce amplitude modulation in said first plurality of current pulses (iP1).

20 20. A power supply according to Claim 11 further characterized by, a pulse-width modulator (Q5,Q4,Q3,103) responsive to a feedback signal (V30) that is indicative of said ripple component for varying said magnitudes of second plurality of current pulses (iP2) , during said period, in a manner to reduce
25 said ripple component (of e.g. V4).

 21. A power supply according to Claim 11 further characterized by a pulse-width modulator (103) responsive to a feedback signal (V30) for pulse-width modulating said first
30 plurality of current pulses (iP1) to provide output supply regulation.

 22. A power supply according to Claim 11 further characterized by a pulse width modulator (103) responsive to a
35 feedback signal (V30) for varying magnitudes of said first plurality (iP1) and of said second plurality (iP2) of current pulses in the same direction in a manner to provide output supply regulation.



This is the replacement sheet

Date: 6 JUL 1997

23. A power supply according to Claim 11 characterized in that current pulses of said first plurality (iP1) of current pulses occur in one of a current interleaving manner and a
5 current superposition manner with respect to current pulses of said second plurality (iP2) of current pulses.

24. A switch mode power supply, comprising:
a source of an AC, mains supply voltage (107);
10 a filter capacitor (C2);
a first rectifier (D2) coupled to said mains source and to said capacitor for rectifying said mains supply voltage to develop current pulses (i3) in said capacitor for producing a rectified, first supply voltage (V2) in said capacitor;
15 means (R13) coupled to said capacitor for lengthening a pulse-width and decreasing a peak amplitude of a given current pulse in said capacitor; characterized by
first switching means (Q2) coupled to said first supply voltage and responsive to a first switching signal (V12) for
20 developing in an inductance (W1) that is coupled to said capacitor a first plurality of current pulses (iP2) at a frequency (20 KHz) that is substantially higher than that (50 Hz) of said mains supply voltage, said first plurality of current pulses being coupled via a rectifier (D4) to produce a first portion of a rectified output supply
25 current (iS4);
a second rectifier (102) coupled to said mains source for rectifying said mains supply voltage to develop a rectified, second supply voltage (V1); and
second switching means (Q1,D1) responsive to a second
30 switching signal (V9) and coupled to an inductance (W1) having applied thereto said second supply voltage for developing a second plurality of current pulses (iP1) at a frequency that is substantially higher than that of said mains supply voltage via a current path that bypasses said capacitor, said second plurality of
35 current pulses being coupled via a second rectifier (D4) to produce a second portion of said rectified output supply current.



* C L M S *

This is the replacement sheet

Date: 3 JUL 1997

SWITCH MODE POWER SUPPLY WITH REDUCED INPUT CURRENT
DISTORTION

ABSTRACT

A full wave rectified voltage (V1) is produced from an AC mains supply voltage (VM) without low-pass filtering. The supply voltage is applied to a winding (W1) of a flyback transformer (T) and to a switching transistor (Q1). A first plurality of current pulses (iP1) are generated in the winding at a frequency (20 KHz) that is higher than the frequency (50 HZ) of the mains supply voltage and at peak amplitudes that vary in accordance with the rectified voltage in a manner to increase a power factor. The rectified voltage is further rectified via a rectifier (D2) coupled in series with a resistor (R13) and a low-pass filter capacitor (C2). A voltage (V2) in the capacitor is coupled via a second switching transistor (Q2) to the winding to produce a second plurality of current pulses (iP2) to reduce a ripple component.

FIGURE 1.

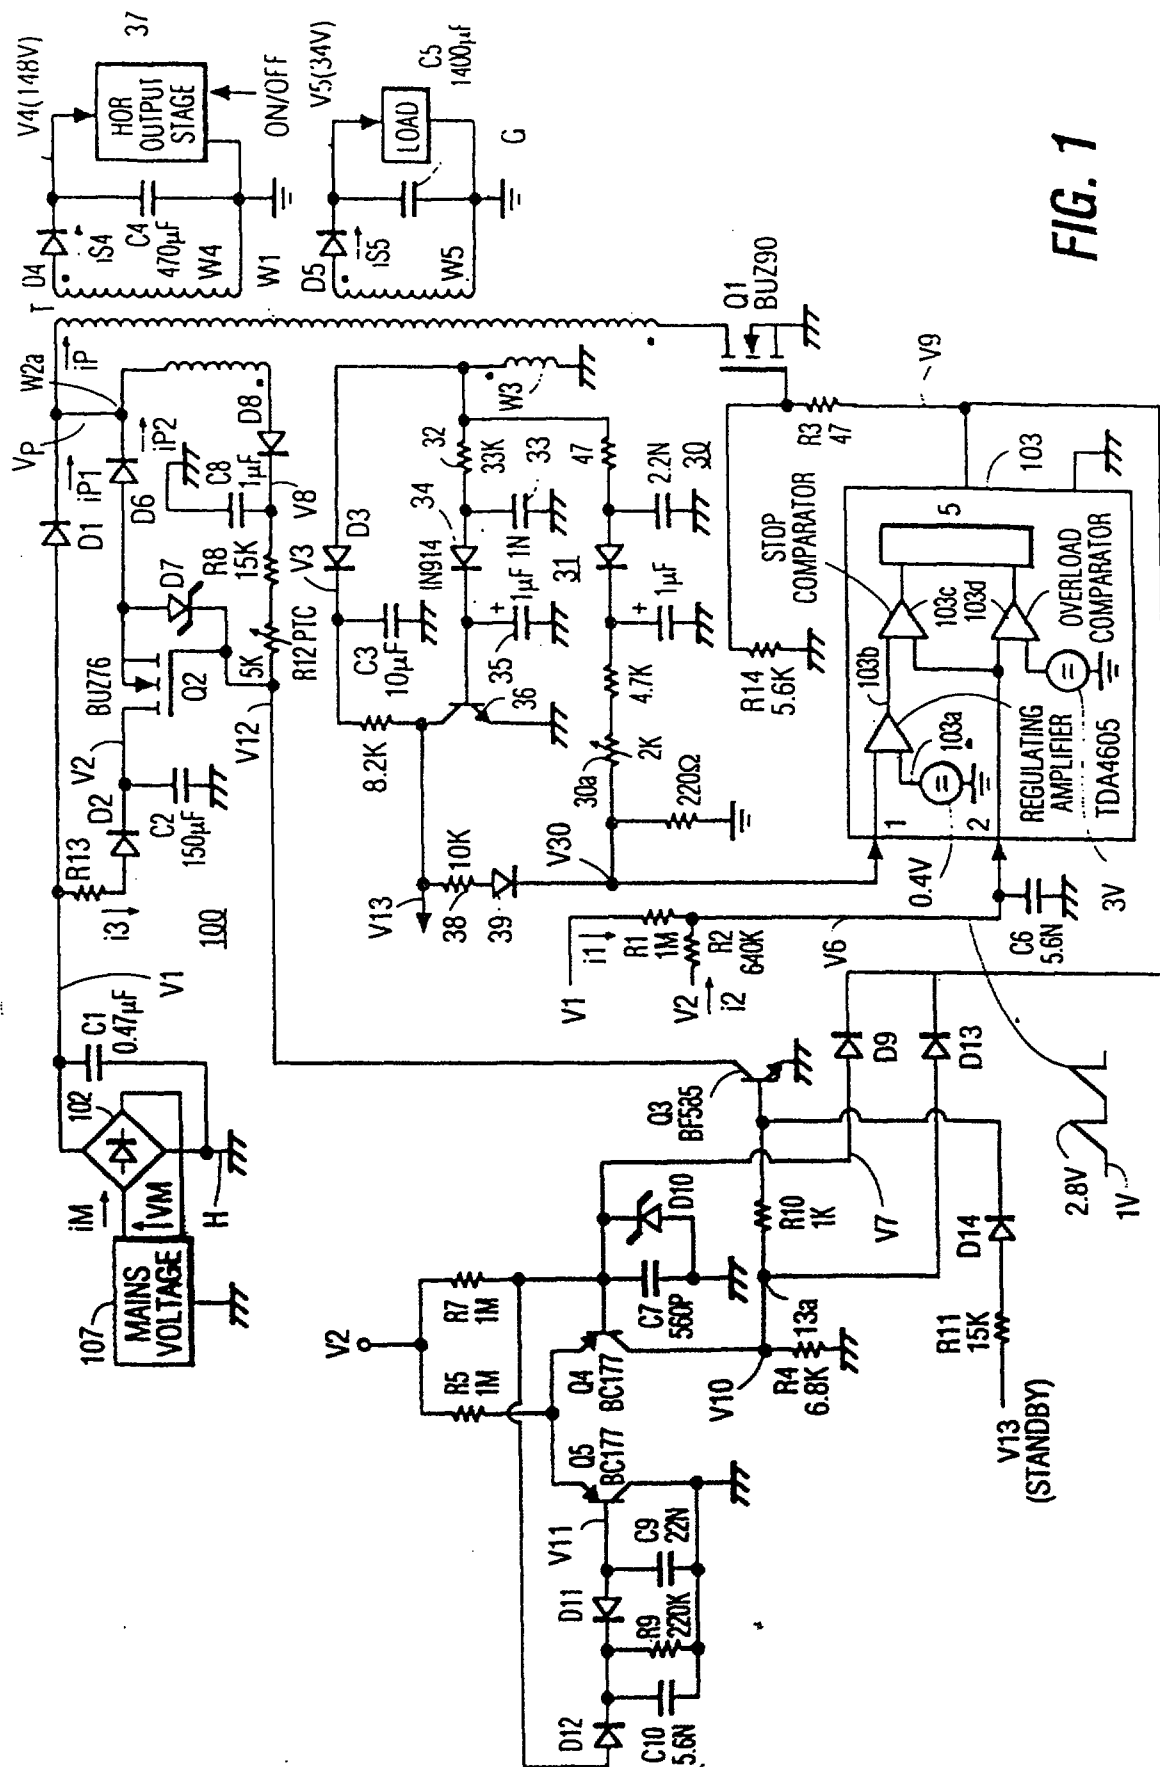


FIG. 1

This is the replacement sheet

Date: 3 JUL 1997

FIG. 2a

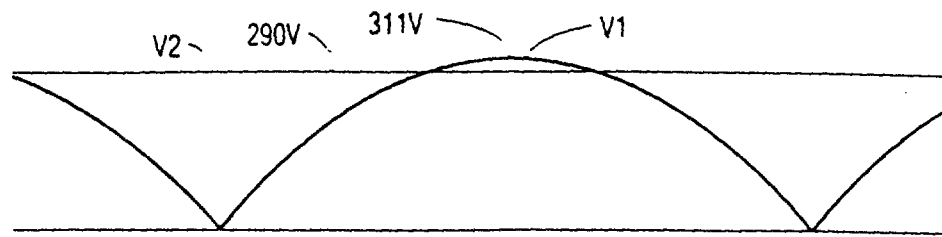


FIG. 2b




FIG. 2c




FIG. 2d

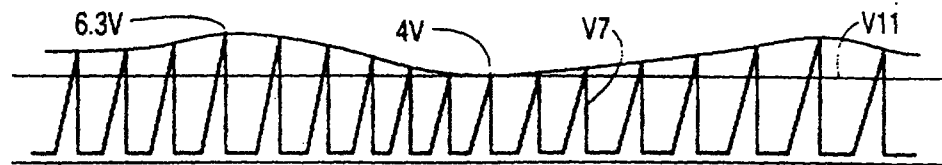


FIG. 2e



FIG. 2f

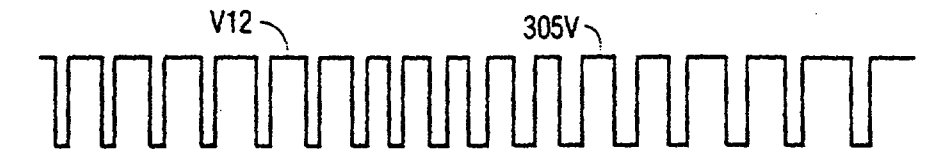


FIG. 2g


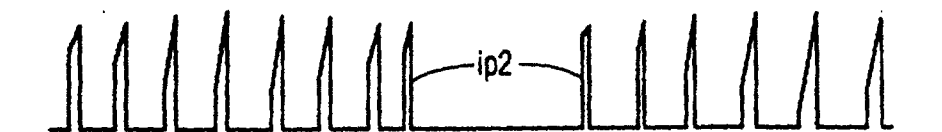


FIG. 2h

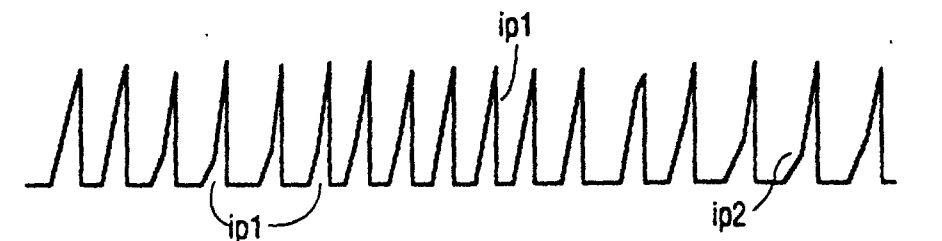

3/7

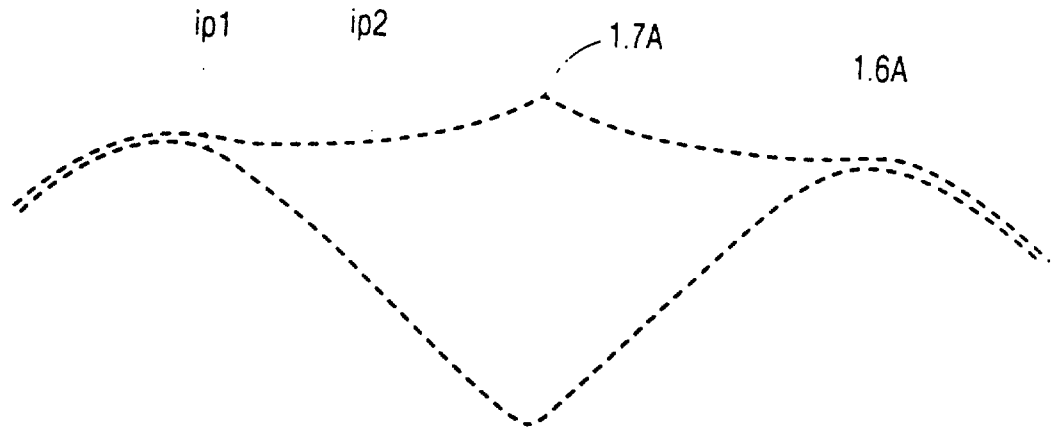


FIG. 3a

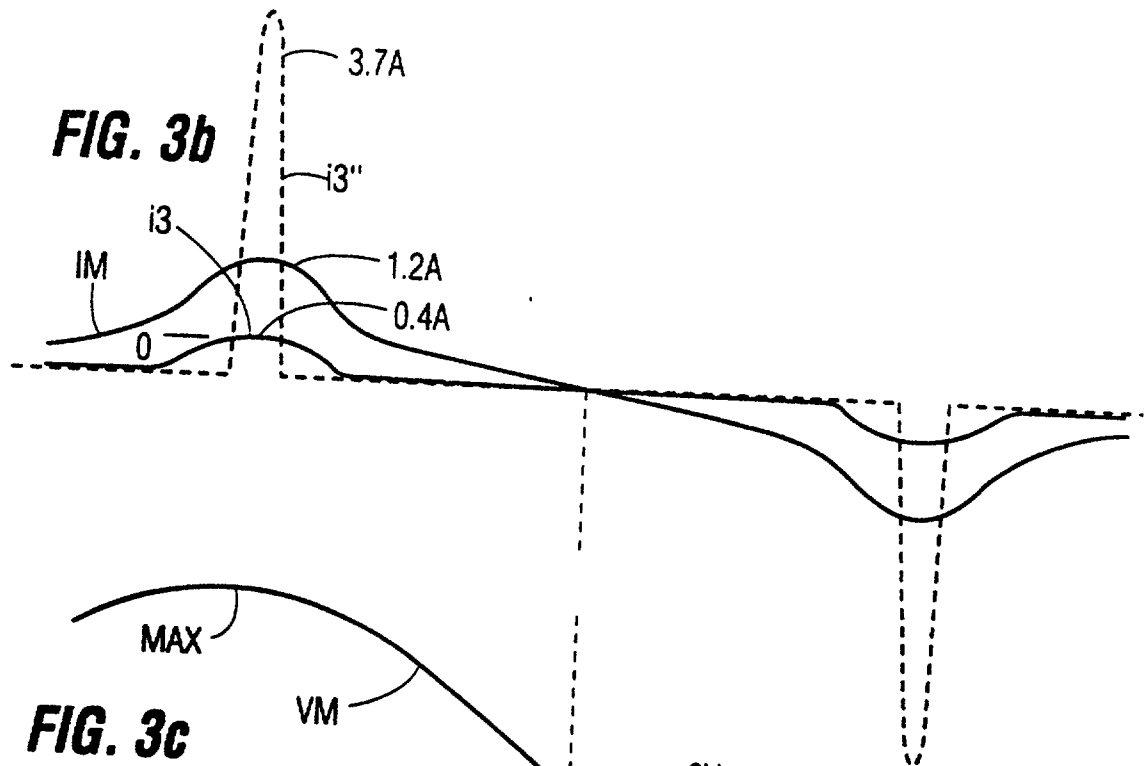


FIG. 3b

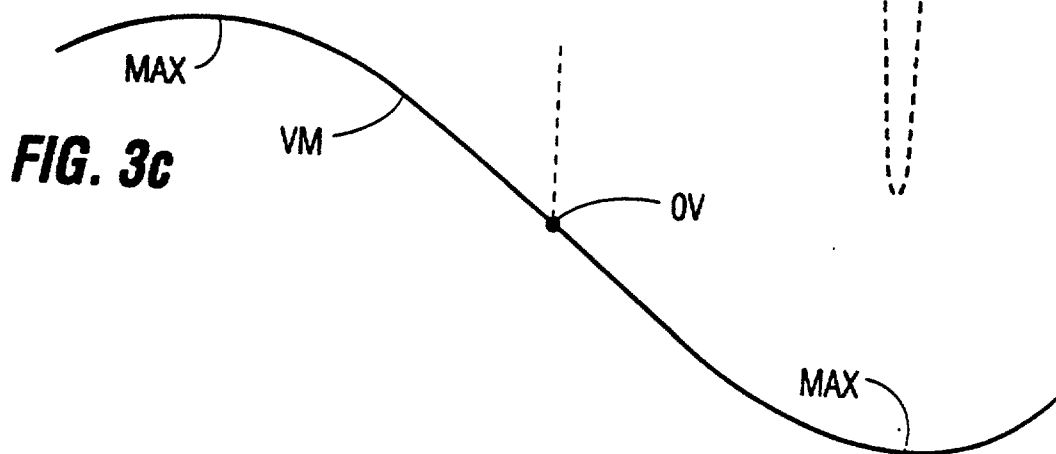


FIG. 3c

This is the replacement sheet

Date: 3 JUL 1997

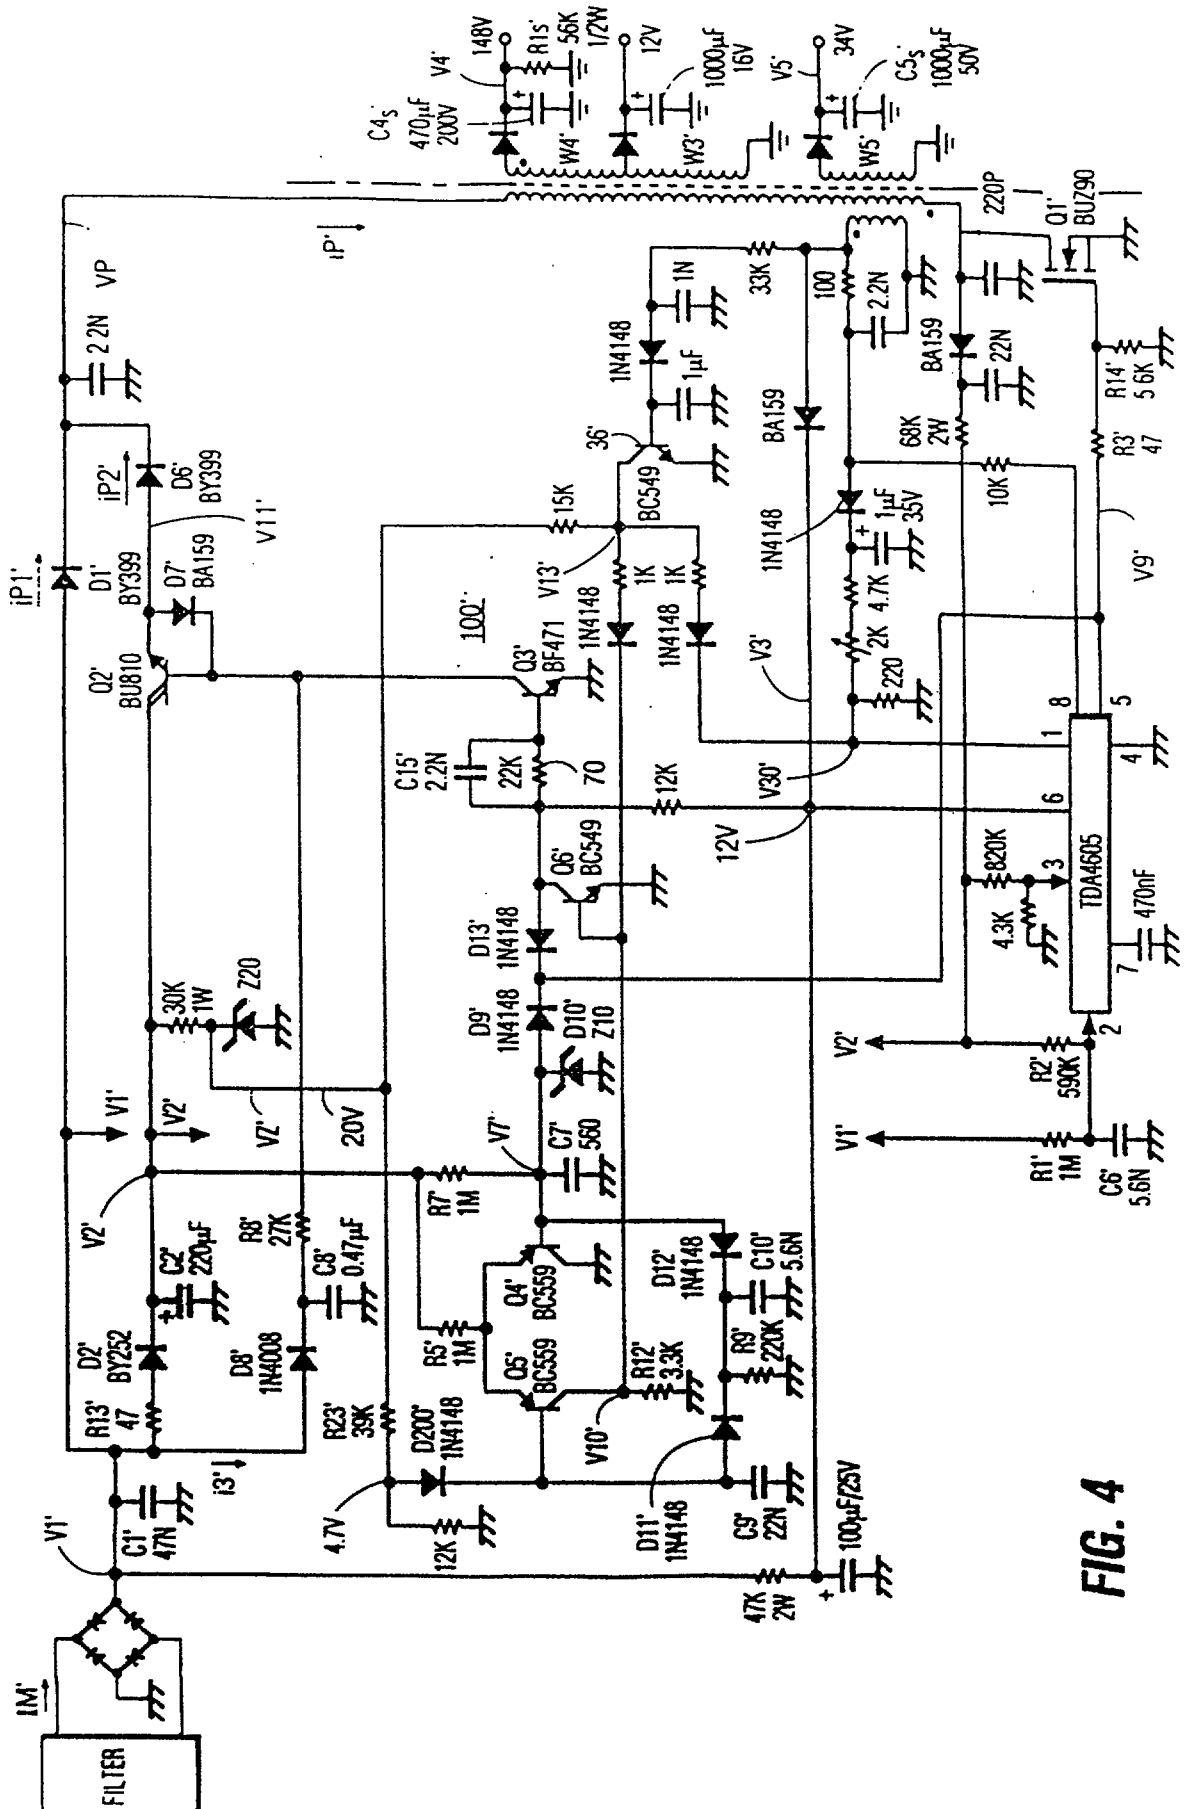
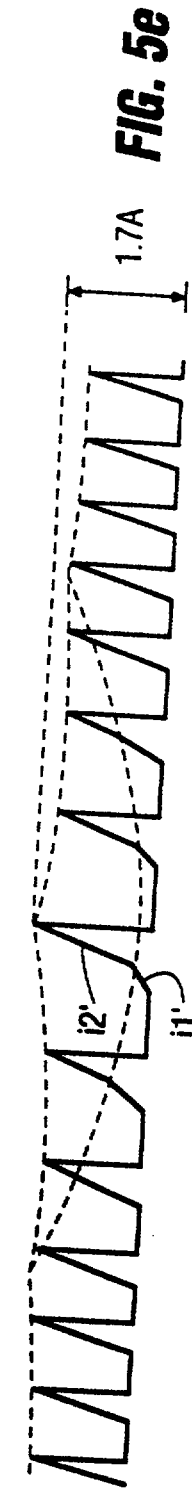
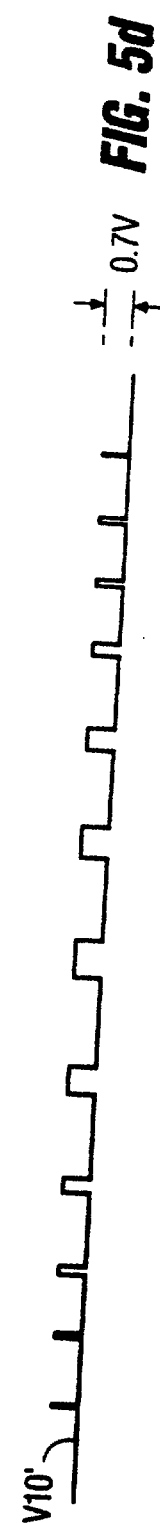
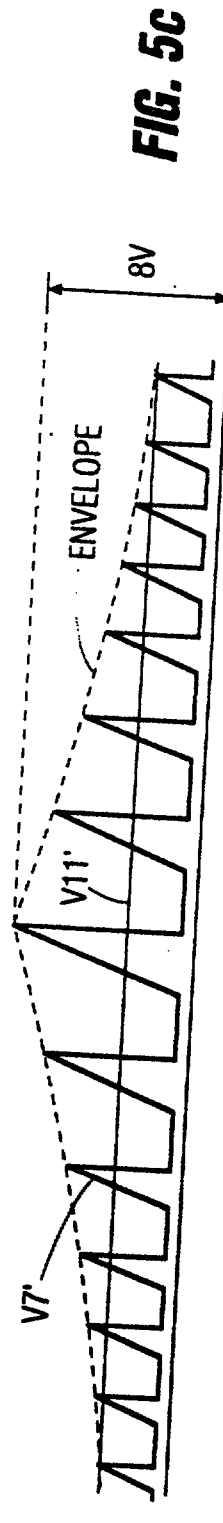
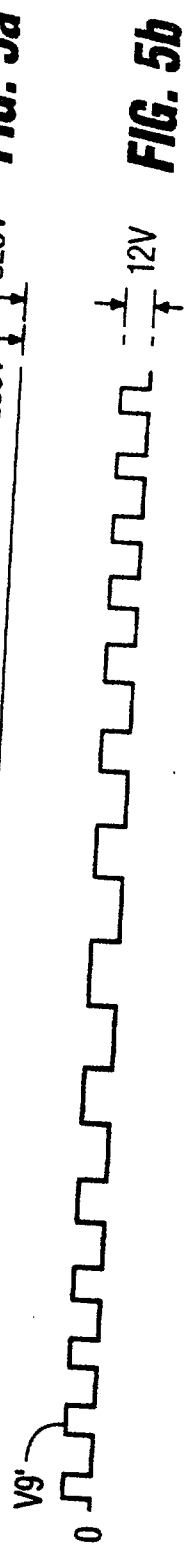
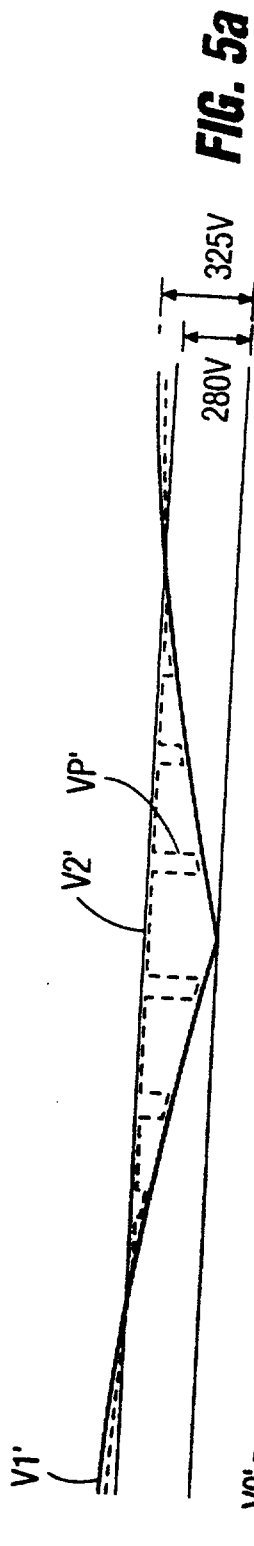
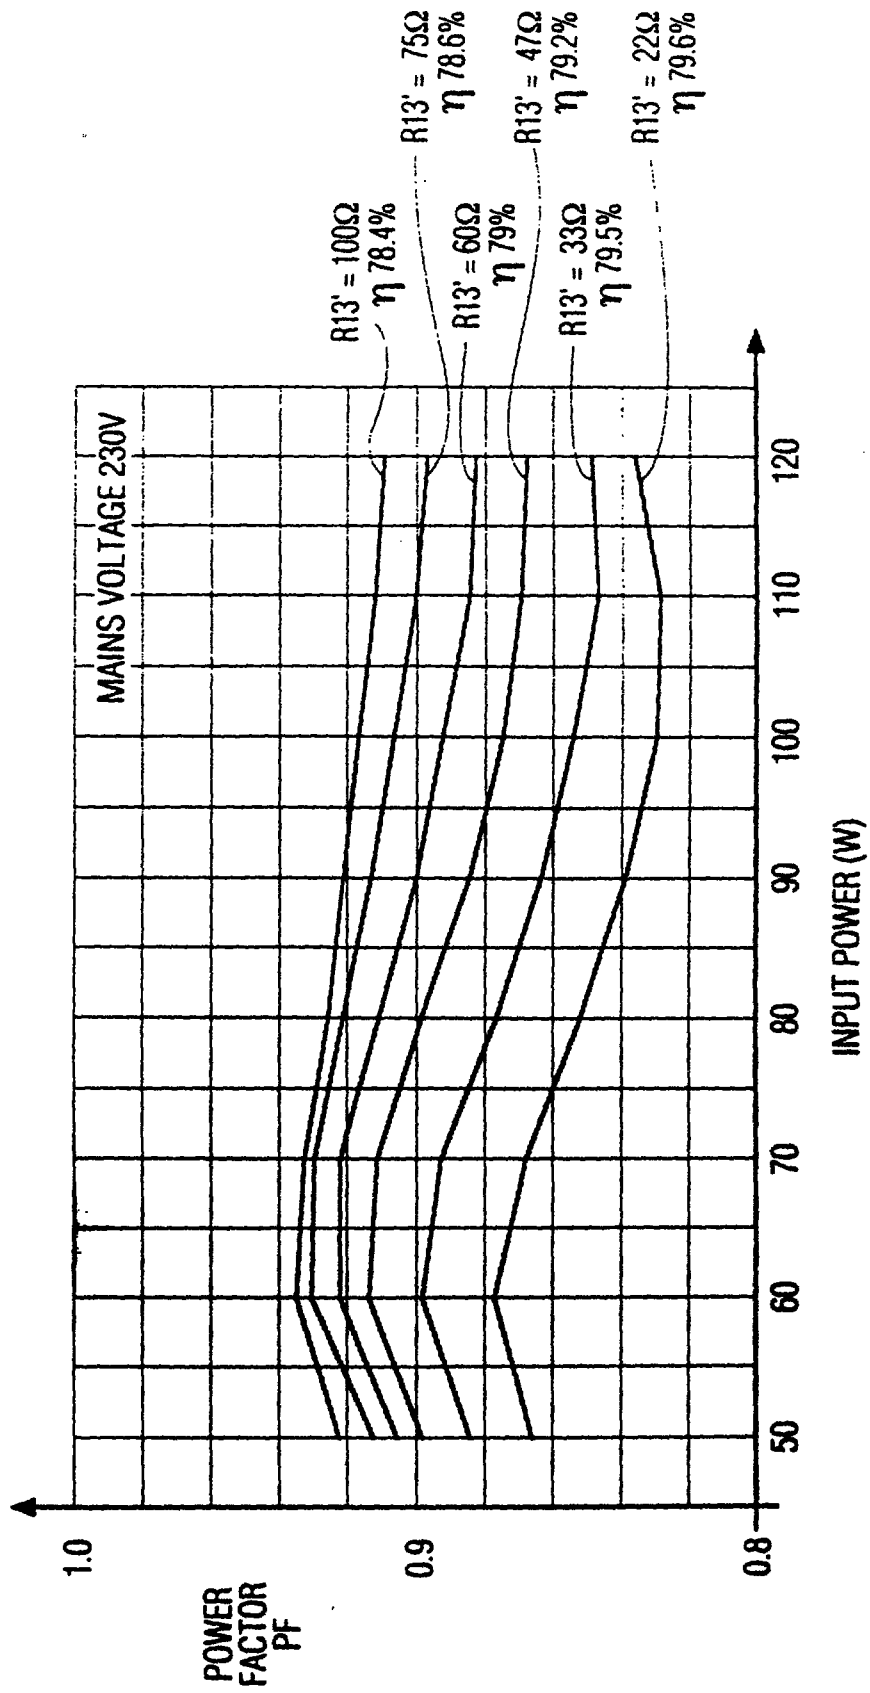


FIG. 4

This is the replacement sheet

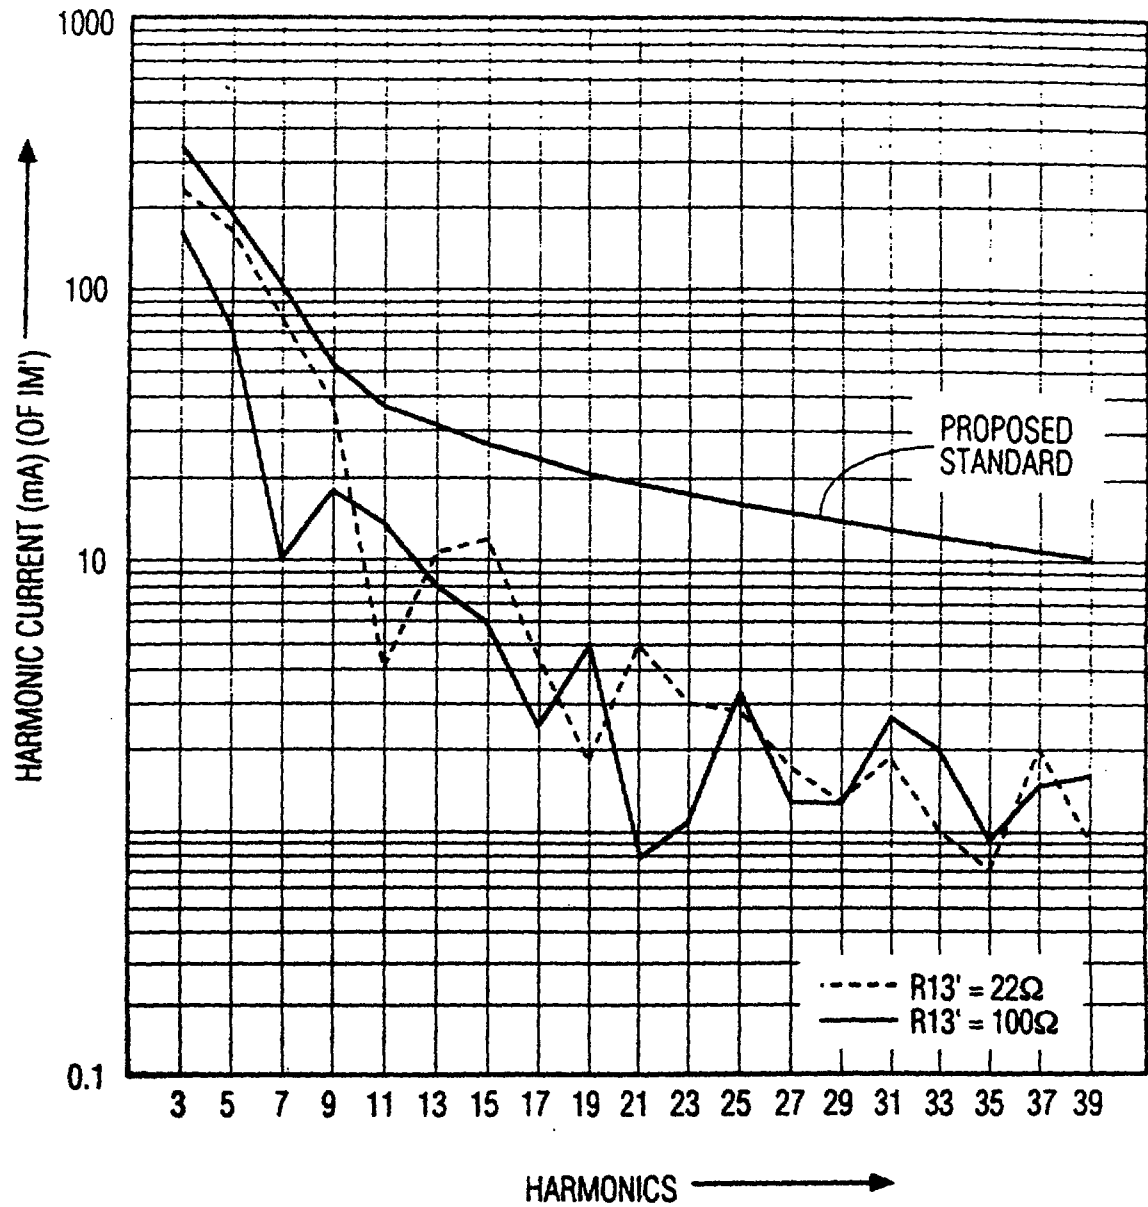
Date: 30 JUL 1997



**FIG. 6**

This is the replacement sheet

Date: - 3 JUL 1997

**FIG. 7**

This is the replacement sheet

Date: 3 JUL 1997