



- (51) **International Patent Classification:**
G01R 1/067 (2006.01) *G01R 1/073* (2006.01)
- (21) **International Application Number:**
PCT/KR2024/018415
- (22) **International Filing Date:**
20 November 2024 (20.11.2024)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
10-2023-0165183 24 November 2023 (24.11.2023) KR
10-2024-0020957 14 February 2024 (14.02.2024) KR
- (71) **Applicant:** **LEENO INDUSTRIAL INC.** [KR/KR]; 10, MieumSandan-ro 105beon-gil, Gangseo-gu, Busan 46748 (KR).
- (72) **Inventors:** **SHIN, Youngtaek**; 10, MieumSandan-ro 105beon-gil, Gangseo-gu, Busan 46748 (KR). **UHM,**

Heeil; 10, MieumSandan-ro 105beon-gil, Gangseo-gu, Busan 46748 (KR).


(74) **Agent:** **HUH, Sung-won** et al.; 10F., Daerim Bldg., 53 Seochojungang-ro, Seocho-gu, Seoul 06654 (KR).

(81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CV, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IQ, IR, IS, IT, JM, JO, JP, KE, KG, KH, KN, KP, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, MG, MK, MN, MU, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, CV, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SC, SD, SL, ST,

(54) **Title:** TEST PROBE AND TEST DEVICE

10

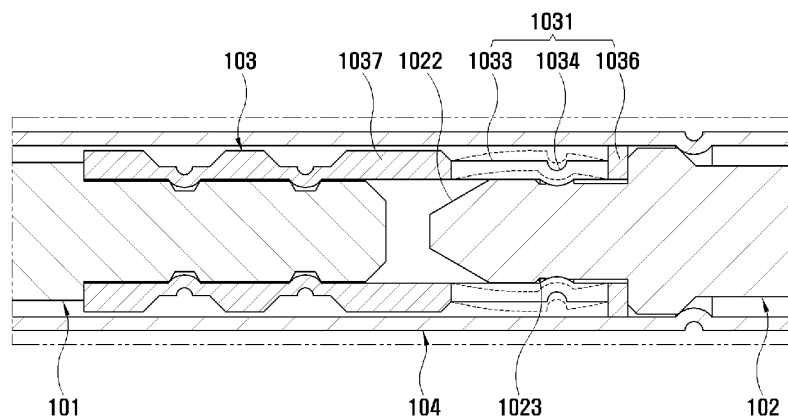

(57) **Abstract:** Disclosed is a test probe for testing the electrical characteristics of a subject-to-be-tested. The test probe includes a pin unit; and a terminal unit connected to the pin unit along a longitudinal direction. One of the pin unit and the terminal unit includes an engagement extending portion extending along the longitudinal direction, and including a plurality of cutting portions formed along the longitudinal direction to be elastically transformable in a radial direction, and a locking portion recessed in the radial direction. The other one of the pin unit and the terminal unit includes an engagement accommodating portion including an engagement portion engaging with the locking portion to prevent the engagement extending portion from separating in the longitudinal direction, and accommodating the engagement extending portion along the longitudinal direction.

[Continued on next page]

SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, ME, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*