



(51) International Patent Classification:
G02C 5/20 (2006.01) *G02C 5/14* (2006.01)
G02C 11/02 (2006.01)

(21) International Application Number:
PCT/IB2010/054676

(22) International Filing Date:
15 October 2010 (15.10.2010)

(25) Filing Language: Italian

(26) Publication Language: English

(30) Priority Data:
MI2009A001846 23 October 2009 (23.10.2009) IT

(71) Applicant (for all designated States except US): **PRADA SA** [LU/LU]; 23, Rue Aldringen, L-1118 Luxembourg (LU).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **BERTELLI, Patrizio** [IT/CH]; c/o PRADA SA, Via Magatti 6, CH-6900 Lugano (CH).

(74) Agents: **PIZZOLI, Antonio** et al.; Società Italiana Brevetti S.p.A., Via Carducci 8, I-20123 Milano MI (IT).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- with amended claims (Art. 19(1))

(54) Title: BAR FOR SPECTACLES AND SPECTACLES COMPRISING THIS BAR

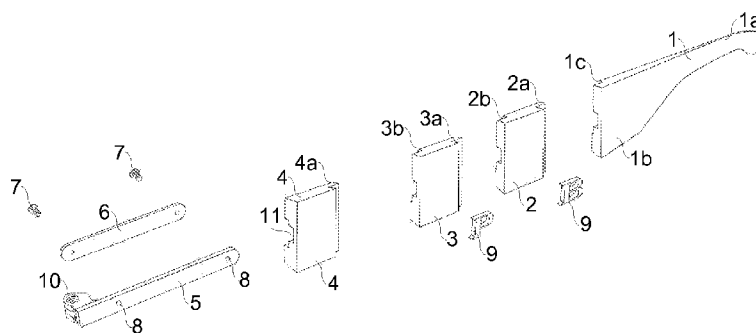


Fig.4

(57) Abstract: Bar for spectacles, which comprises an elongated member (1) having a rear end (1a) suitable for being arranged on the ear of a user and a front end (1b) suitable for being connected to the front portion of spectacles, wherein the front end (1b) of the elongated member (1) is prolonged by one or more additional members (2, 3, 4) by means of at least one longitudinal pin (5) which is inserted in a longitudinal hole made in the front end (1b) of the elongated member (1) and in the additional members (2, 3, 4). The present invention also relates to spectacles comprising said bar.