

METHOD AND APPARATUS FOR CONTROLLING BIAS LEVELS

The invention relates to magneto-optical information storage systems, and, in particular, to controlling magnetic bias of a bias coil in magneto-optical information storage systems.

In magneto-optical drives, a magnetic field of a minimum strength is required at the focal point of an objective lens in order to perform the operations of writing or erasing data. The magnetic field was created by passing constant current through bias coils of finite length, thus creating non-uniform magnetic fields. This non-uniformity leads to a problem. First, if a magnetic field was created allowing writing or erasing data at all positions of the focal point, excess power was dissipated. Second, if excess power was minimized, there would be positions of the focal point where the magnetic field was insufficient to allow writing or erasing data.

Furthermore, the bias coil was not the only source of magnetic fields at the focal point of the objective lens. Other sources existed, such as the focus actuator and the spindle motor. Because prior art systems used a constant current, sources which created uniform magnetic fields could be accounted for. However, non-uniform magnetic fields could not be accounted for accurately, leading to the same problems listed above.

Figure 1 is a general representation of a bias coil with an elongated storage medium.

Figure 2 is a general representation of a bias coil with a circular storage medium.

Figure 3 is a general plot of the strength of a magnetic field from a bias coil on the surface of a storage medium, according to the prior art.

Figure 4 is a general plot of the strength of a magnetic field from a bias coil on the surface of a storage medium, according to the prior art.

Figure 5 is a generalized representation of one embodiment of the invention.

Figure 6 is a generalized plot of the strength of a magnetic field from the invention on the surface of a storage medium and of minimum required magnetic field strength levels.

Figure 7 is a generalized representation of another embodiment of the invention.

Figure 8 is a generalized representation of a carriage assembly in a magneto-optical drive.

REPLACED SHEETS		SG
☐	Description : paged	to paged
☒	Claim(s) : paged10..	to paged14..
☐	Drawing(s) : paged	to paged
☒	Abstract : paged15..	to paged
DATE OF RECEIPT		

Figure 9 is a generalized representation of a spindle motor, spindle, and storage medium.

Figure 10 is a generalized representation of spool motors and a storage medium.

Figure 11 is a circuit diagram of another embodiment of the invention.

Figure 12 is a circuit diagram of a further embodiment of the invention.

The invention provides for controlling the strength of a magnetic field at the focal point of a lens. It provides a first controller for determining the position of the focal point relative to the storage medium, a magnetic source for providing a stray magnetic field at the focal point, a second controller for providing a digital signal related to the position and the stray magnetic field strength, a digital-to-analog converter responsive to the digital signal for providing a driver voltage related to the digital signal, a current driver responsive to the driver voltage for providing a bias current related to the driver voltage, and a bias coil responsive to the bias current for producing the magnetic field. The strength of the magnetic field at the focal point is related to the bias current.

In an aspect of the invention the storage medium defines a center, and the position of the focal point is determined relative to the center. The stray magnetic field strength is also related to the position. The storage medium rotates about the center at a circumferential velocity, and the stray magnetic field strength is related to the circumferential velocity.

In a further aspect of the invention there is a current sensor for measuring the bias current, and a feedback device for providing to the current driver a feedback voltage related to the bias current, wherein the bias current is further related to the feedback voltage.

There is disclosed an apparatus for controlling the strength of a magnetic field, comprising a first controller, a second controller, a digital-to-analog converter, a current driver, and a bias coil. The first controller determines the position of the focal point of a lens and passes it to the second controller, which provides a digital signal related to the position. The digital-to-analog converter converts the digital signal to a driver voltage and passes the driver voltage to a current driver, which provides to the bias coil a bias current related to the driver voltage. The bias coil produces a magnetic field having a strength related to the bias current. The second controller accounts for stray magnetic fields in creating the digital signal. The stray magnetic fields may be constant or may vary in strength based on position of the objective lens, circumferential velocity of a circular storage medium, or longitudinal velocity of an elongated storage medium. Furthermore, the apparatus may comprise a current

sensor for measuring the bias current, and a feedback device for providing to the current driver a feedback voltage related to the bias current.

There is also disclosed a method for controlling the strength of a magnetic field, comprising the steps of determining the position of a focal point of a lens, calculating a digital signal related to the position, generating a driver voltage related to the digital signal, generating a bias current related to the driver voltage, and producing a magnetic field having strength related to the bias current. The method accounts for stray magnetic fields in calculating the digital signal. The stray magnetic fields may be constant or may vary in strength based on position of the objective lens, circumferential velocity of the storage medium, or longitudinal velocity of the storage medium. Furthermore, the method may measure the bias current and provide to the current driver a feedback voltage related to the bias current.

Referring to exemplary Figure 1, there is shown a general representation of a bias coil 1 with an elongated storage medium 2. The bias coil 1 extends from one edge 3 of the storage medium 2 across the width of the storage medium 2. An objective lens (not shown) is disposed on the opposite side of the storage medium 2 from the bias coil 1. The objective lens is movable parallel to the bias coil 1 across the entire width of the storage medium 2.

Whenever possible in the following description, elements in different figures which are the same are represented by the same element numbers.

Referring to exemplary Figure 2, there is shown a general representation of a bias coil 1 with a circular storage medium 4. The bias coil 1 extends from the center 5 of the storage medium 4 radially to the outer edge 6 of the storage medium 4. An objective lens (not shown) is disposed on the opposite side of the storage medium 4. The objective lens is movable parallel to the bias coil 1 from the center 5 to the outer edge 6 of the storage medium 4.

The bias coil 1 creates a magnetic field (not shown) on the surface of the storage media 2, 4 beneath the bias coil 1. Because the bias coil 1 is of finite length, the strength of the magnetic field (not shown) is not uniform across the length of the bias coil 1.

Referring to exemplary Figure 3, there is shown a generalized plot of the strength of the magnetic field created by the bias coil 1 in prior art systems. The strength of the magnetic field is plotted along the vertical axis, and the position of the focal point of the objective lens is plotted along the horizontal axis as a distance from a reference point. The reference point may be either the edge 3 of the elongated storage medium 2, or the center 5 of the circular storage medium 4. Line 7 represents the strength of the magnetic field as a function of the distance from the

reference point, for a constant current. The magnetic field is strongest at point 8, which corresponds either to the point halfway across the width of the elongated storage medium 2 or the midpoint between the center 5 and the outer edge 6 of the circular storage medium 4. The magnetic field is relatively weaker at points 9, which correspond to the points at the ends of the bias coil 1. The area 50 below line 7 represents the power required to maintain the magnetic field at the strength represented by line 7.

Referring to exemplary Figure 4, there is shown a generalized plot of the strength of the magnetic field created by the bias coil 1 in prior art systems, as plotted in exemplary Figure 3. In magneto-optical drives, a minimum strength of the magnetic field is required for writing or erasing data. One choice for the minimum strength is represented by line 10. Portions 11 of line 7 are below line 10. These portions 11 represent areas on the storage medium 2, 4 at which the strength of the magnetic field is insufficient to write or erase data.

Another choice for the minimum strength of the magnetic field is represented by line 12. Line 7 is above line 12 across the entire plot, representing that the strength of the magnetic field is sufficient to write or erase data at all points on the surface of the storage medium 2, 4. However, the area 13 which is above line 12 and below line 7 represents excess power consumption by the drive. Therefore, prior art systems either do not allow writing or erasing of data at all points on the surface of the storage medium 2, 4, or use excess power for points near the center of the bias coil 1.

Referring to exemplary Figure 5, there is shown a generalized representation of one embodiment of the invention. A first controller 14 measures the position of the focal point of the objective lens relative to a reference point. The reference point may be the edge 3 of an elongated storage medium 2, or the center 5 of a circular storage medium 4. The first controller 14 passes the position to a second controller 15. The second controller 15 creates a digital voltage signal relative to the position. The second controller 15 then passes the digital voltage signal to a digital-to-analog converter 16. The digital-to-analog converter 16 creates an analog driver voltage relative to the digital voltage signal. The digital-to-analog converter 16 then passes the analog driver voltage to a current driver 17. The current driver 17 creates a bias current relative to the analog driver voltage. The current driver 17 then passes the bias current to a bias coil 18. The bias coil 18 converts the bias current into a magnetic field. The strength of the magnetic field is related to the level of the bias current.

The invention thus provides a method for controlling the strength of a magnetic field at the focal point of a lens, which is performed by determining a position of the focal point relative to the storage medium, providing a stray magnetic field at the focal point, calculating a digital signal related to the position and the stray magnetic field strength, generating a driver voltage related to the digital signal, generating a bias current related to the driver voltage, and producing the magnetic field, wherein the strength of the magnetic field at the focal point is related to the bias current. Optionally the bias current can be measured, followed by provision to the current driver of a feedback voltage related to the bias current, wherein the bias current is further related to the feedback voltage.

Referring to exemplary Figure 6, there are shown four plots which represent levels of signals created according to the invention. Plot (1) shows a line 19 representing the magnitude of the digital voltage signal as a function of the distance between the focal point of the objective lens and a reference point. Line 19 is plotted across the entire length of the bias coil 1, 18. Line 19 shows generally that the magnitude of the digital voltage signal decreases as the focal point nears the center of the bias coil 1, 18, and increases as the focal point nears the edges of the bias coil 1, 18.

Plot (2) shows a line 20 representing the magnitude of the analog driver voltage as a function of the distance between the focal point of the objective lens and a reference point. Line 20 is plotted across the entire length of the bias coil 1, 18. Line 20 shows generally that the magnitude of the analog driver voltage decreases as the focal point nears the center of the bias coil 1, 18, and increases as the focal point nears the edges of the bias coil 1, 18.

Plot (3) shows a line 21 representing the magnitude of the bias current as a function of the distance between the focal point of the objective lens and a reference point. Line 21 is plotted across the entire length of the bias coil 1, 18. Line 21 shows generally that the magnitude of the bias current decreases as the focal point nears the center of the bias coil 1, 18, and increases as the focal point nears the edges of the bias coil 1, 18.

Plot (4) shows a line 22 representing the strength of the magnetic field created by the bias coil 1, 18, as a function of the distance between the focal point of the objective lens and a reference point. Line 22 is plotted across the entire length of the bias coil 1, 18. Line 22 shows generally that the strength of the magnetic field is independent of the position of the focal point.

Plot (4) also shows a line 23 representing the minimum strength of the magnetic field required for writing or erasing data. Line 22 is above line 23 at all

points in Plot (4), representing that the strength of the magnetic field is sufficient to write or erase data at all points on the surface of the storage medium 2, 4. Additionally, the area 24 between line 22 and line 23 representing excess power is minimized. The area 24 needs only to be large enough to handle variations in environmental conditions, media characteristics, and other factors affecting the minimum required strength of the magnetic field.

Referring to exemplary Figure 7, there is shown another embodiment of the invention. The first controller 14, the second controller 15, and the digital-to-analog converter 16 function the same as in the previously-described embodiment. A current driver 25 receives as a first input the analog driver voltage. The current driver 25 receives as a second input a feedback driver voltage from a current sensor 26. The current driver 25 creates a bias current related to the analog driver voltage and the feedback driver voltage, and passes the bias current to a bias coil 27. The bias coil 27 creates a magnetic field whose strength is related to the bias current.

The current sensor 26 measures the bias current. The current sensor 26 compares the bias current to a desired minimum bias current which provides a magnetic field with the minimum required strength. Based on this comparison, the current sensor 26 creates the feedback driver voltage related to this comparison.

The second controller 15 provides the digital voltage signal for the invention. This may be accomplished by direct calculation during operation, by a lookup table created prior to operation, or by any suitable means known in the art. The calculation or lookup table may account not only for the magnetic field created by the bias coil 1, 18, 27, but also for magnetic fields created by other sources. Such magnetic fields are called stray magnetic fields.

Stray magnetic fields may be classified into four types. First, some stray magnetic fields have constant strength at the focal point of the objective lens. Referring generally to exemplary Figure 8, in a magneto-optical drive (not shown) a carriage assembly 28 may contain both an objective lens 29 and a focus actuator 30. The focus actuator 30 creates a stray magnetic field which has constant strength at the focal point of the objective lens 29. The strength of the stray magnetic field may be on the order of 30 oersteds.

Second, some stray magnetic fields have strength dependent on the distance from a reference point. Referring to exemplary Figure 9, the circular storage medium 4 is clamped to a spindle 31. The spindle 31 is rotated by a spindle motor 32. The spindle motor 32 creates a stray magnetic field at the focal point of the objective lens 29. As the objective lens 29 moves radially outward relative to the

storage medium 4, the strength of the stray magnetic field at the focal point of the objective lens 29 decreases.

Third, some stray magnetic fields have strength dependent on the rotational speed of the circular storage medium 4. Referring to exemplary Figure 9, as the spindle motor 32 rotates the spindle 31 faster, the circular storage medium 4 rotates faster. At a given distance, the spindle motor 32 creates a stronger stray magnetic field at the focal point of the objective lens 29 when the circular storage medium 4 is rotating faster.

Fourth, some stray magnetic fields have strength dependent on the longitudinal speed of the elongated storage medium 2. Referring to exemplary Figure 10, the elongated storage medium 2 is taken up at each end on spools 33. The spools 33 are rotated by spool motors 34, each of which creates a stray magnetic field at the focal point of the objective lens 29. When the spool motors 34 rotate the spools 33 faster, the longitudinal speed of the storage medium 2 increases. The strength of the stray magnetic field at the focal point of the objective lens 29 also increases.

The calculation or lookup table may account for each of these types of stray magnetic fields when determining a digital voltage signal for a magnetic field strength. As an example, a typical magneto-optical drive may require a minimum magnetic field strength of 300 oersteds at the focal point of the objective lens 29. The focus actuator 30 may have a stray magnetic field strength on the order of 30 oersteds. The polarity of the magnetic field differs between writing and erasing. Therefore, in one operation, the stray magnetic field is additive and in the other operation the stray magnetic field is negative. Thus, the second controller 15 will be directed to create a digital voltage signal corresponding to, in one operation, 270 oersteds and, in the other operation, 330 oersteds.

Referring to exemplary Figure 11, there is shown a circuit diagram of one embodiment of the invention. A voltage source 35 applies a voltage to a resistor 37. A switch 36 is located between the voltage source 35 and the resistor 37. When the switch 36 is closed, the current flowing through the resistor 37 flows into a power amplifier 38. The power amplifier 38 amplifies the current and outputs the current to a bias coil 39. The reference voltage of the power amplifier 38 is less than the voltage provided by the voltage source 35.

A ground 40 is connected to a resistor 41. A switch 42 is located on the opposite side of the resistor 41 as the ground 40, between the resistor 41 and the power amplifier 38. When the switch 42 is closed, current flows from the power amplifier 38 through the switch 42 and into the resistor 41. The reference voltage of

the power amplifier 38 is greater than the voltage from the ground 40. Exactly one of the switches 36, 42 is closed at any time. Therefore, when the switch 42 is closed, the bias coil 39 creates a magnetic field with the opposite polarity as the magnetic field created when the switch 36 is closed.

In prior systems, the current flowing into the power amplifier 38 is the same magnitude when the switch 36 is closed as the current flowing from the power amplifier 38 when the switch 42 is closed. However, some stray magnetic fields have both constant magnitude and constant polarity. In some embodiments, a magnetic field strength from the bias coil 39 having a magnitude of 300 oersteds is required for both writing and erasing data. A stray field magnetic field strength of approximately 30 oersteds is typical. Therefore, in order to ensure a minimum field strength of 300 oersteds, the current through the power amplifier 38 must be sufficient to provide a bias field strength of 330 oersteds. In one operation, the resulting magnetic field strength will be 300 oersteds and, in the other operation, the resulting magnetic field strength will be 360 oersteds. A resulting magnetic field strength of 360 oersteds is excessive, and consumes excess power.

According to the invention, the current through the power amplifier 38 differs depending on whether the stray field is additive or negative with respect to the magnetic field created by the bias coil. In one embodiment, the resistors 37, 41 have different resistance. In another embodiment, the reference voltage of the power amplifier 38 is not halfway between the voltage supplied by the voltage source 35 and the ground 40. Either of these embodiments minimize excess power consumption by making the resulting magnetic field strength equal to the minimum magnetic field strength, within tolerances, for either writing or erasing data.

Referring to exemplary Figure 12, there is shown a circuit diagram of another embodiment of the invention. A voltage source 35 is connected to a resistor 43, which is connected to a power amplifier 38 by a line 47. The current flowing from the voltage source 35-resistor 43 combination is amplified by the power amplifier 38 and flows through a bias coil 39, which creates a bias magnetic field. The reference voltage of the power amplifier 38 is less than the voltage supplied by the voltage source.

A ground 40 is connected to a switch 44, which in turn is connected to a resistor 45. At a point 46 on the side of the resistor 45 remote from the switch 44, connection is made to line 47. When the switch 44 is open, a positive current flows into the power amplifier 38, and a positive magnetic field is created by the bias coil 39. When the switch 44 is closed, a negative current flows into the power amplifier 38, and a negative magnetic field is created by the bias coil 39.

In prior art systems, the resistance of the resistor 43 was twice the resistance of resistor 45, and the reference voltage of the power amplifier 38 was halfway between the voltage of the voltage source 35 and the ground 40. Because of this, the bias magnetic field strength has the same magnitude but opposite polarity when the switch 44 is closed as when it is open. However, because of the constancy of the stray field, the resulting magnetic field strength for one operation differs from the resulting magnetic field strength for the other operation by the amount of twice the stray field magnetic field strength.

To compensate for the stray field, one of three approaches may be taken. First, the reference voltage of the power amplifier 38 may be changed so that it is not halfway between the voltage of the voltage source 35 and the ground 40. Second, the voltage of the voltage source 35 may be changed so that the reference voltage of the power amplifier 38 is not halfway between the voltage of the voltage source 35 and the ground 40. Finally, the resistances of the resistors 43, 45 may be changed so that the resistance of resistor 43 is not twice the resistance of resistor 45; the resistance of resistor 43 can be different from the resistance of resistor 45. The voltage difference between the reference voltage of the power amplifier 38 and the voltage of the voltage source 35 can equal or differ from the voltage difference between the reference voltage and the ground.

In any of the embodiments discussed with respect to exemplary Figures 11 and 12, the ground 40 may be replaced by a second voltage source. The reference voltage of the power amplifier 38 must be greater than the voltage output of the second voltage source.

It will be obvious to one skilled in the art that modifications to the above description of the invention may be made without departing from the spirit and scope of the invention. The scope of the invention, therefore, is indicated by the appended claims rather than the above description.

**Claims.**

1. An apparatus for controlling a magnitude of a magnetic field at a focal point of a lens (29), comprising:
 - a voltage source (35) having a voltage output;
 - a first resistor (37) electrically connected to said voltage source (35), said first resistor (37) having a first resistance;
 - a ground (40);
 - a second resistor (41) electrically connected to said ground (40), said second resistor (41) having a second resistance;
 - a power amplifier (38) having an input connected to said first resistor (37) and said second resistor (41) and an output, said power amplifier (38) having a reference voltage less than said first voltage output, said reference voltage being positive with respect to said ground (40);
 - a first switch (36) having a first open position and a first closed position, for selectively connecting said voltage source (35) to said power amplifier (38);
 - a second switch (42) having a second open position and a second closed position, for selectively connecting said ground (40) to said power amplifier (38), wherein said second switch (42) is in said second closed position when said first switch (36) is in said first open position and said second switch (42) is in said second open position when said first switch (36) is in said first closed position;
 - a bias coil electrically connected to said output of said power amplifier (38), for creating a first bias magnetic field when said first switch (36) is in said first closed position and a second bias magnetic field when said second switch (42) is in said second closed position, said first bias magnetic field having a first bias magnetic field polarity and a first bias magnetic field magnitude relative to said first voltage output and said first resistance, said second bias magnetic field having a second bias magnetic field polarity and a second bias magnetic field magnitude relative to said ground (40) and said second resistance, said first bias magnetic field polarity being opposite from said second bias magnetic field polarity, said bias magnetic field magnitude of one of said first and second bias magnetic fields exceeding said bias magnetic field of another of said first and second bias magnetic fields by a bias magnetic field difference; and
 - a magnetic source for creating a stray magnetic field having a stray magnetic field polarity and a stray magnetic field magnitude, wherein said stray magnetic field magnitude is substantially equally to one-half of said bias magnetic





field difference, and said stray magnetic field polarity is opposite from said bias magnetic field polarity of said one of said first and second bias magnetic fields.

2. An apparatus for controlling a magnitude of a magnetic field at a focal point of a lens (29), comprising:
- a first voltage source (35) having a first voltage output;
 - a first resistor (37) electrically connected to said first voltage source (35), said first resistor (37) having a first resistance;
 - a ground (40);
 - a second resistor (41) electrically connected to said ground (40), said second resistor (41) having a second resistance;
 - a power amplifier (38) having an input connected to said first resistor (37) and said second resistor (41) and an output, said power amplifier (38) having a reference voltage less than said first voltage output, said reference voltage being positive with respect to said ground (40);
 - a switch having an open position and a closed position, for selectively connecting said ground (40) to said power amplifier (38);
 - a bias coil electrically connected to said output of said power amplifier (38), for creating a first bias magnetic field when said switch is in said open position and a second bias magnetic field when said switch is in said closed position, said first bias magnetic field having a first bias magnetic field polarity and a first bias magnetic field magnitude relative to said first voltage output and said first resistance, said second bias magnetic field having a second bias magnetic field polarity and a second bias magnetic field magnitude relative to said ground (40), said first voltage output, said first resistance and said second resistance, said first bias magnetic field polarity being opposite from said second bias magnetic field polarity, said bias magnetic field magnitude of one of said first and second bias magnetic fields exceeding said bias magnetic field of another of said first and second bias magnetic fields by a bias magnetic field difference; and
 - a magnetic source for creating a stray magnetic field having a stray magnetic field polarity and a stray magnetic field magnitude, wherein said stray magnetic field magnitude is substantially equally to one-half of said bias magnetic field difference, and said stray magnetic field polarity is opposite from said bias magnetic field polarity of said one of said first and second bias magnetic fields.

This Sheet Has Been Replaced





3. An apparatus for controlling a magnitude of a magnetic field at a focal point of a lens (29), comprising:
- a first voltage source (35) having a first voltage output;
 - a first resistor (37) electrically connected to said first voltage source (35), said first resistor (37) having a first resistance;
 - a second voltage source having a second voltage output;
 - a second resistor (41) electrically connected to said second voltage source, said second resistor (41) having a second resistance;
 - a power amplifier (38) having an input connected to said first resistor (37) and said second resistor (41) and an output, said power amplifier (38) having a reference voltage less than said first voltage output, said reference voltage exceeding said second voltage output;
 - a first switch (36) having a first open position and a first closed position, for selectively connecting said first voltage source (35) to said power amplifier (38);
 - a second switch (42) having a second open position and a second closed position, for selectively connecting said second voltage source to said power amplifier (38), wherein said second switch (42) is in said second closed position when said first switch (36) is in said first open position and said second switch (42) is in said second open position when said first switch (36) is in said first closed position;
 - a bias coil electrically connected to said output of said power amplifier (38), for creating a first bias magnetic field when said first switch (36) is in said first closed position and a second bias magnetic field when said second switch (42) is in said second closed position, said first bias magnetic field having a first bias magnetic field polarity and a first bias magnetic field magnitude relative to said first voltage output and said first resistance, said second bias magnetic field having a second bias magnetic field polarity and a second bias magnetic field magnitude relative to said first voltage source (35), said second voltage source, said first resistance and said second resistance, said first bias magnetic field polarity being opposite from said second bias magnetic field polarity, said bias magnetic field magnitude of one of said first and second bias magnetic fields exceeding said bias magnetic field of another of said first and second bias magnetic fields by a bias magnetic field difference; and
 - a magnetic source for creating a stray magnetic field having a stray magnetic field polarity and a stray magnetic field magnitude, wherein said stray magnetic





field magnitude is substantially equally to one-half of said bias magnetic field difference, and said stray magnetic field polarity is opposite from said bias magnetic field polarity of said one of said first and second bias magnetic fields.

4. An apparatus for controlling a magnitude of a magnetic field at a focal point of a lens (29), comprising:
- a first voltage source (35) having a first voltage output;
 - a first resistor (37) electrically connected to said first voltage source (35), said first resistor (37) having a first resistance;
 - a second voltage source having a second voltage output;
 - a second resistor (41) electrically connected to said second voltage source, said second resistor (41) having a second resistance;
 - a power amplifier (38) having an input connected to said first resistor (37) and said second resistor (41) and an output, said power amplifier (38) having a reference voltage less than said first voltage output, said reference voltage exceeding said second voltage output;
 - a switch having an open position and a closed position, for selectively connecting said second voltage source to said power amplifier (38);
 - a bias coil electrically connected to said output of said power amplifier (38), for creating a first bias magnetic field when said switch is in said open position and a second bias magnetic field when said switch is in said closed position, said first bias magnetic field having a first bias magnetic field polarity and a first bias magnetic field magnitude relative to said first voltage output and said first resistance, said second bias magnetic field having a second bias magnetic field polarity and a second bias magnetic field magnitude relative to said first voltage output, said second voltage output, said first resistance and said second resistance, said first bias magnetic field polarity being opposite from said second bias magnetic field polarity, said bias magnetic field magnitude of one of said first and second bias magnetic fields exceeding said bias magnetic field of another of said first and second bias magnetic fields by a bias magnetic field difference; and
 - a magnetic source for creating a stray magnetic field having a stray magnetic field polarity and a stray magnetic field magnitude, wherein said stray magnetic field magnitude is substantially equally to one-half of said bias magnetic field difference, and said stray magnetic field polarity is opposite from said





bias magnetic field polarity of said one of said first and second bias magnetic fields.

This Sheet Has Been Replaced



METHOD AND APPARATUS FOR CONTROLLING BIAS LEVELS**Abstract**

An apparatus for controlling the strength of a magnetic field, comprises a first controller (14), a second controller (15), a digital-to-analog converter (16), a current driver (17), and a bias coil (18). The first controller (14) determines the position of the focal point of a lens (29) and passes it to the second controller (15), which provides a digital signal related to the position. The digital-to-analog converter (16) converts the digital signal to a driver voltage and passes the driver voltage to a current driver (17), which provides to the bias coil (18) a bias current related to the driver voltage. The bias coil (18) produces a magnetic field having a strength related to the bias current. The second controller (15) accounts for stray magnetic fields in creating the digital signal. The stray magnetic fields may be constant or may vary in strength based on position of the objective lens (29), circumferential velocity of the storage medium (2, 4), or longitudinal velocity of the storage medium (2, 4). Furthermore, the apparatus may comprise a current sensor (26) for measuring the bias current, and a feedback device for providing to the current driver (17) a feedback voltage related to the bias current.

FIGURE 2

This Sheet Has Been Replaced



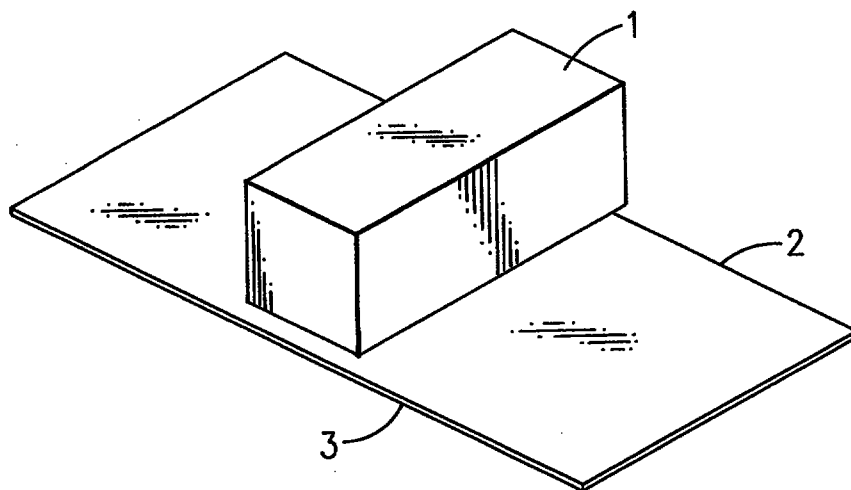


FIG.1

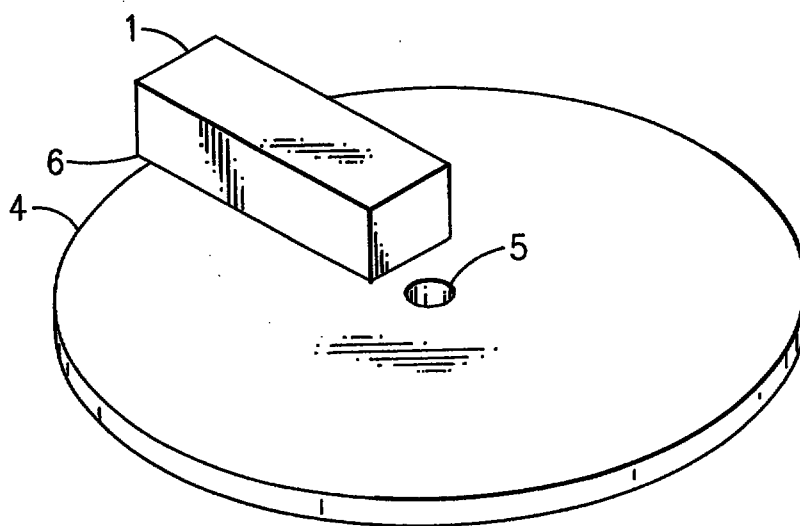


FIG.2

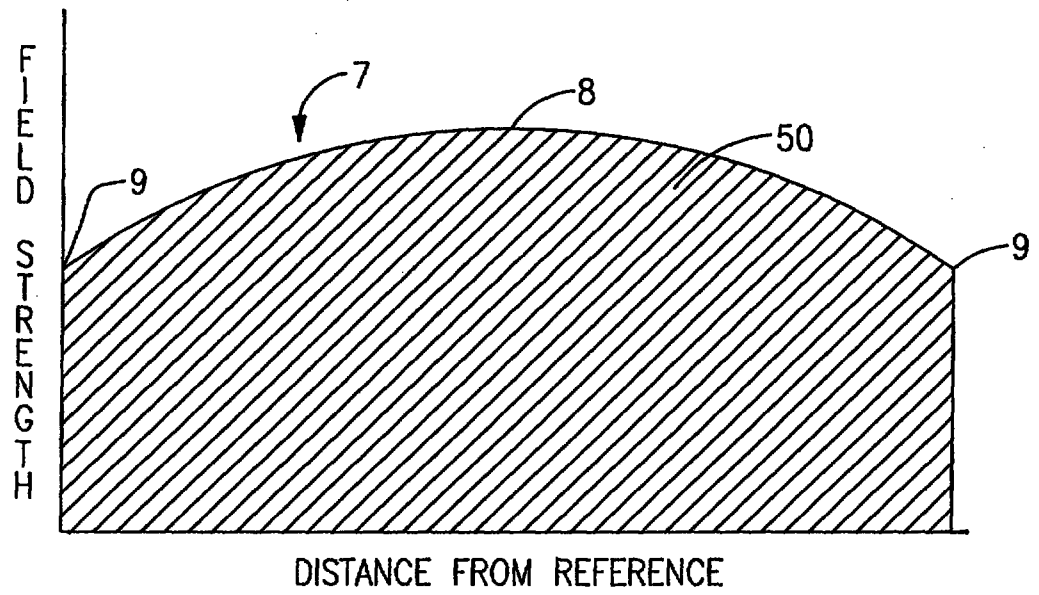


FIG.3

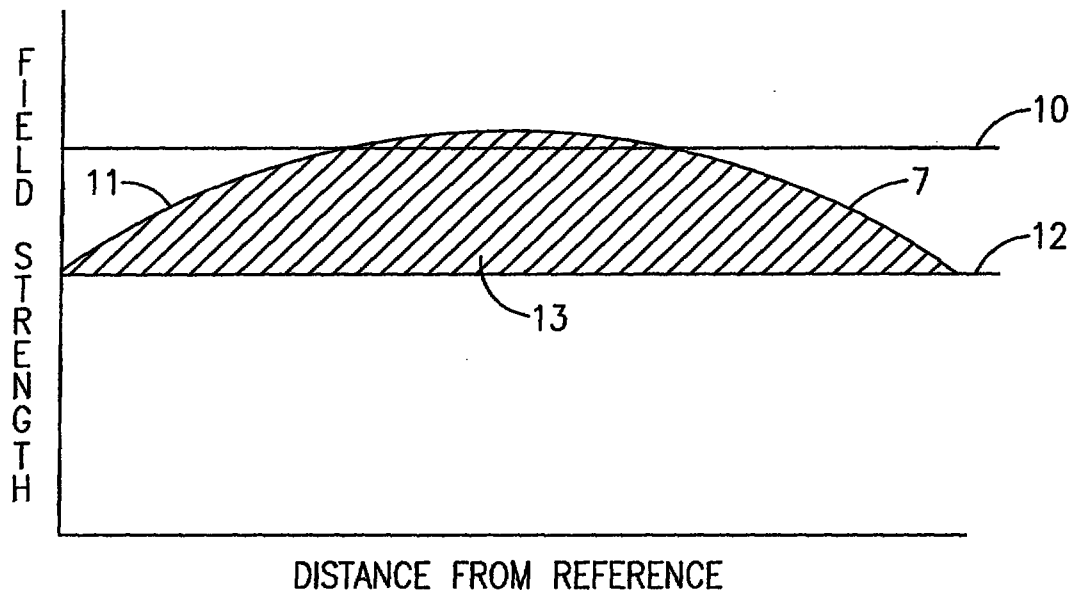
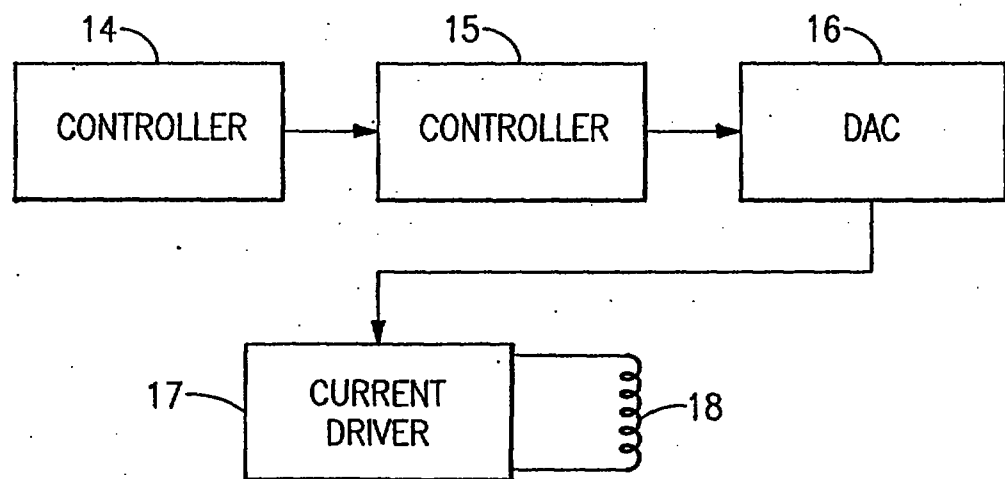


FIG.4

FIG.5

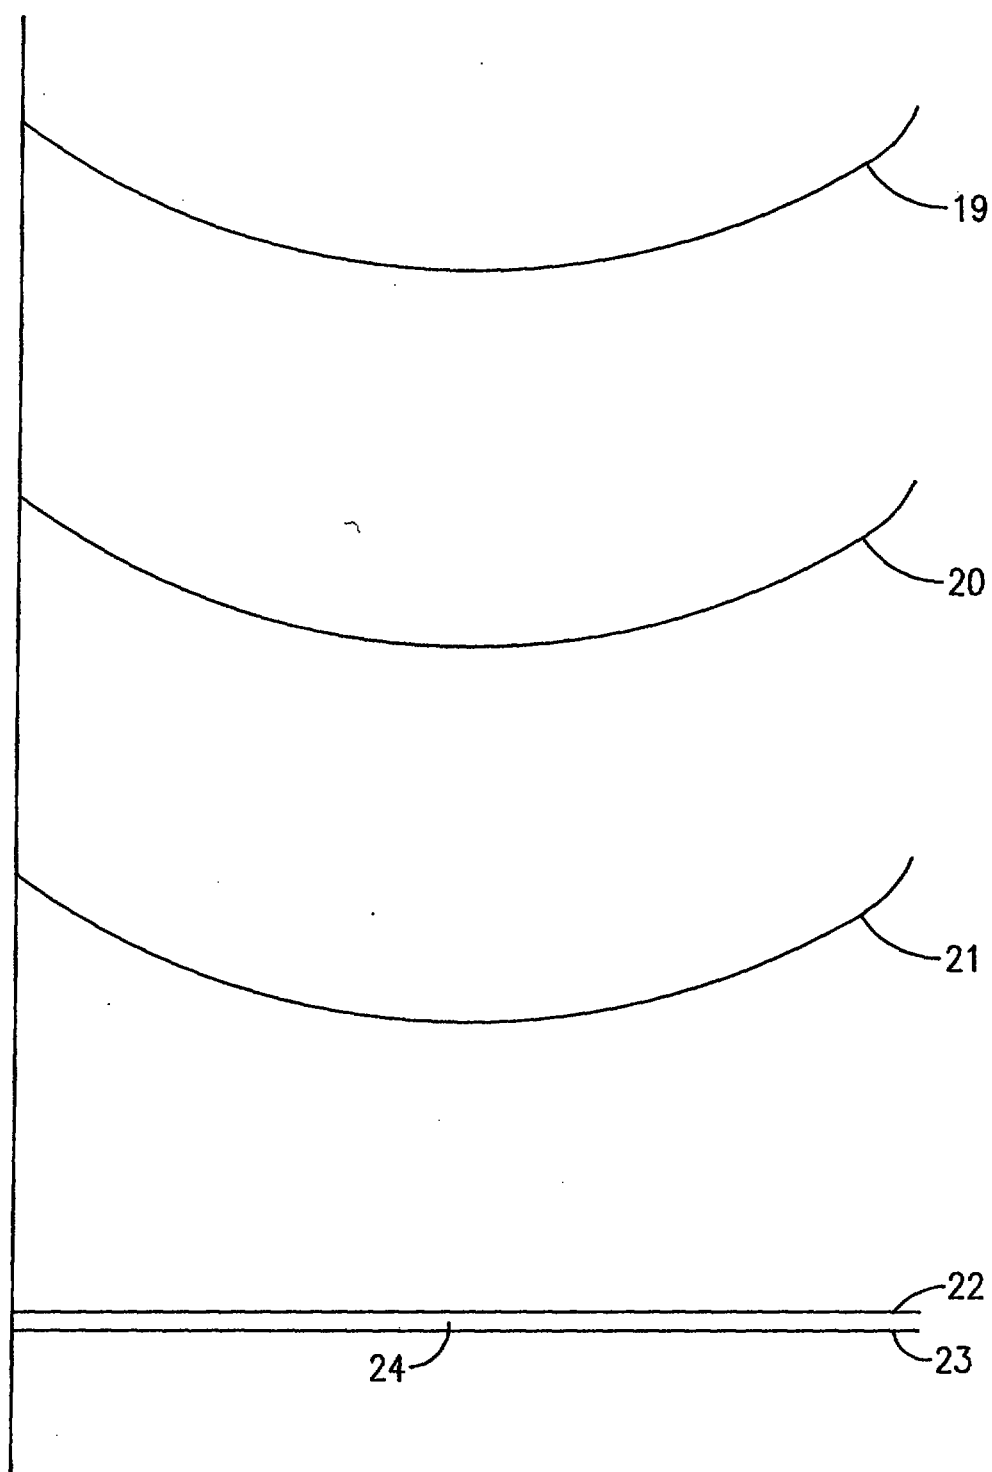
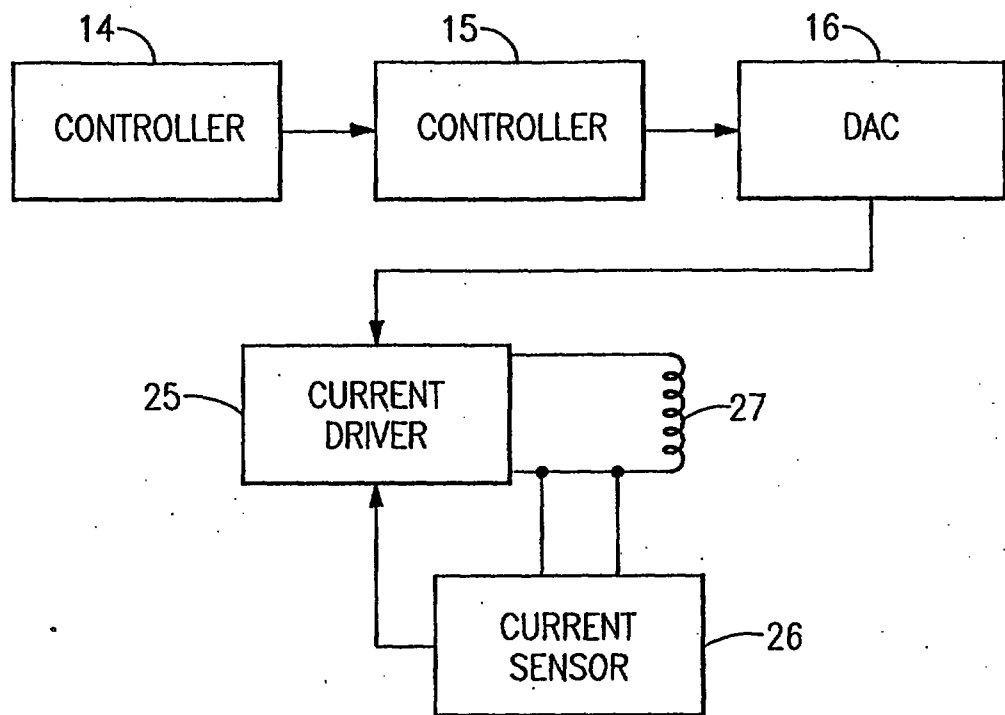
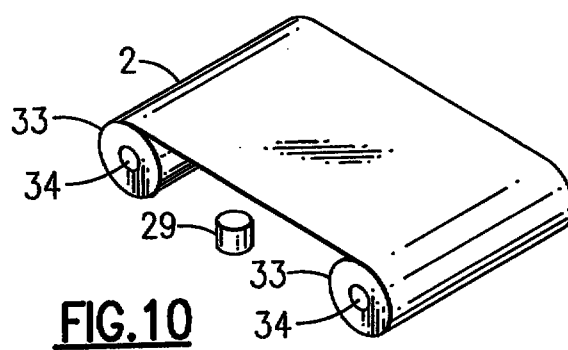
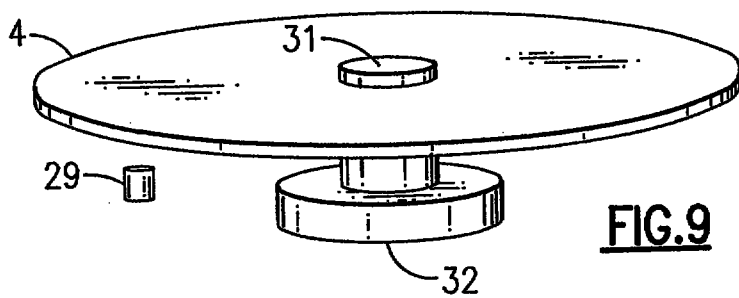
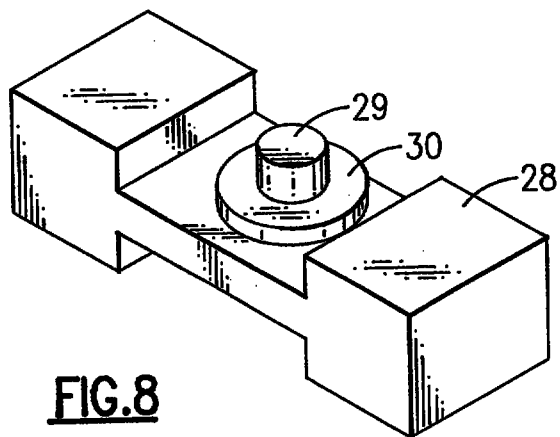
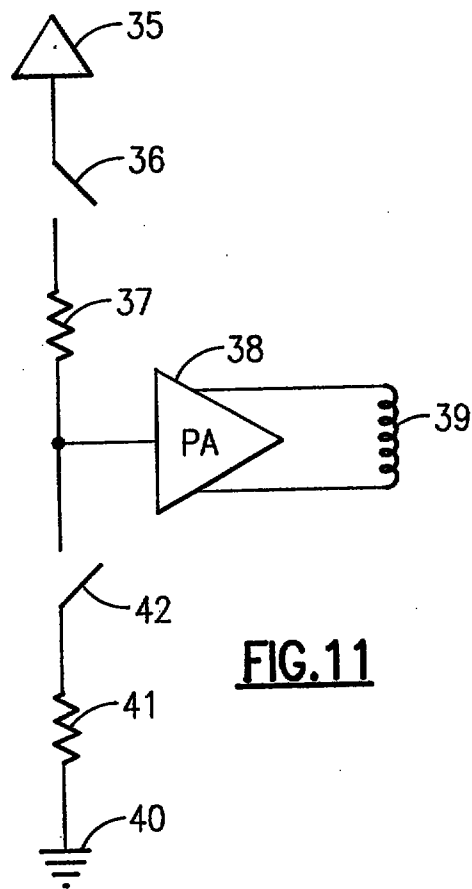
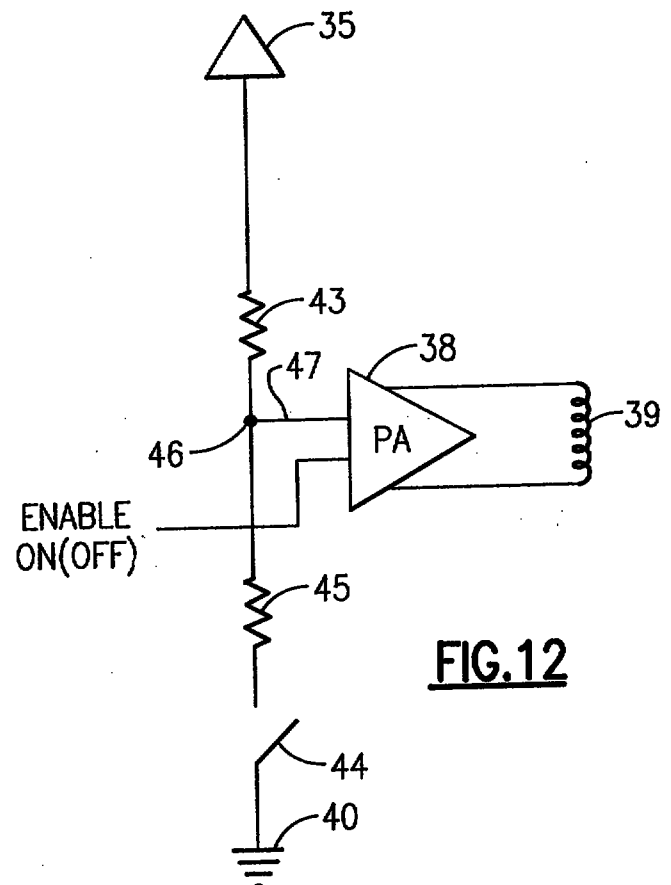


FIG.6


**FIG.7**



**FIG. 11****FIG. 12**

**Claims**

1. An apparatus for controlling a magnitude of a magnetic field at a focal point of a lens comprising:
 - a voltage source having a voltage output;
 - a first resistor electrically connected to said voltage source, said first resistor having a first resistance;
 - a ground;
 - a second resistor electrically connected to said ground, said second resistor having a second resistance;
 - a power amplifier having an input connected to said first resistor and said second resistor and an output, said power amplifier having a reference voltage less than said first voltage output, said reference voltage being positive with respect to said ground;
 - a first switch having a first open position and a first closed position, for selectively connecting said voltage source to said power amplifier;
 - a second switch having a second open position and a second closed position, for selectively connecting said ground to said power amplifier, wherein said second switch is in said second closed position when said first switch is in said first open position and said second switch is in said second open position when said first switch is in said first closed position;
 - a bias coil electrically connected to said output of said power amplifier, for creating a first bias magnetic field when said first switch is in said first closed position and a second bias magnetic field when said second switch is in said second closed position, said first bias magnetic field having a first bias magnetic field polarity and a first bias magnetic field magnitude relative to said first voltage output and said first resistance, said second bias magnetic field having a second bias magnetic field polarity and a second bias magnetic field magnitude relative to said ground and said second resistance, said first bias magnetic field polarity being opposite from said second bias magnetic field polarity, said bias magnetic field magnitude of one of said first and second bias magnetic fields exceeding said bias

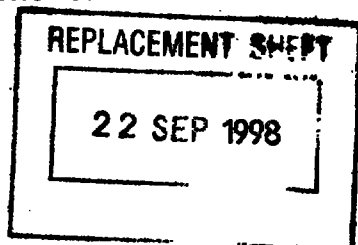



magnetic field of another of said first and second bias magnetic fields by a bias magnetic field difference; and

a magnetic source for creating a stray magnetic field having a stray magnetic field polarity and a stray magnetic field magnitude, wherein said stray magnetic field magnitude is substantially equally to one-half of said bias magnetic field difference, and said stray magnetic field polarity is opposite from said bias magnetic field polarity of said one of said first and second bias magnetic fields.

2. An apparatus for controlling a magnitude of a magnetic field at a focal point of a lens, comprising:

a first voltage source having a first voltage output;

a first resistor electrically connected to said first voltage source, said first resistor having a first resistance;

a ground;

a second resistor electrically connected to said ground, said second resistor having a second resistance;

a power amplifier having an input connected to said first resistor and said second resistor and an output, said power amplifier having a reference voltage less than said first voltage output, said reference voltage being positive with respect to said ground ;

a switch having an open position and a closed position, for selectively connecting said ground to said power amplifier;

a bias coil electrically connected to said output of said power amplifier, for creating a first bias magnetic field when said switch is in said open position and a second bias magnetic field when said switch is in said closed position, said first bias magnetic field having a first bias magnetic field polarity and a first bias magnetic field magnitude relative to said first voltage output and said first resistance, said second bias magnetic field having a second bias magnetic field polarity and a second bias magnetic field magnitude relative to said ground, said first voltage output, said first

REPLACEMENT SHEET

22 SEP 1998



resistance and said second resistance, said first bias magnetic field polarity being opposite from said second bias magnetic field polarity, said bias magnetic field magnitude of one of said first and second bias magnetic fields exceeding said bias magnetic field of another of said first and second bias magnetic fields by a bias magnetic field difference; and

a magnetic source for creating a stray magnetic field having a stray magnetic field polarity and a stray magnetic field magnitude, wherein said stray magnetic field magnitude is substantially equally to one-half of said bias magnetic field difference, and said stray magnetic field polarity is opposite from said bias magnetic field polarity of said one of said first and second bias magnetic fields.

3. An apparatus for controlling a magnitude of a magnetic field at a focal point of a lens, comprising:

a first voltage source having a first voltage output;

a first resistor electrically connected to said first voltage source, said first resistor having a first resistance;


a second voltage source having a second voltage output;

a second resistor electrically connected to said second voltage source, said second resistor having a second resistance;

a power amplifier having an input connected to said first resistor and said second resistor and an output, said power amplifier having a reference voltage less than said first voltage output, said reference voltage exceeding said second voltage output;

a first switch having a first open position and a first closed position, for selectively connecting said first voltage source to said power amplifier;

a second switch having a second open position and a second closed position, for selectively connecting said second voltage source to said power amplifier, wherein said second switch is in said second closed position when said first switch is in said first open position and said second switch is in said second open position when said first switch is in said first closed position;

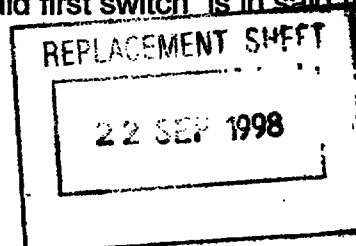



a bias coil electrically connected to said output of said power amplifier, for creating a first bias magnetic field when said first switch is in said first closed position and a second bias magnetic field when said second switch is in said second closed position, said first bias magnetic field having a first bias magnetic field polarity and a first bias magnetic field magnitude relative to said first voltage output and said first resistance, said second bias magnetic field having a second bias magnetic field polarity and a second bias magnetic field magnitude relative to said first voltage source, said second voltage source, said first resistance and said second resistance, said first bias magnetic field polarity being opposite from said second bias magnetic field polarity, said bias magnetic field magnitude of one of said first and second bias magnetic fields exceeding said bias magnetic field of another of said first and second bias magnetic fields by a bias magnetic field difference; and

a magnetic source for creating a stray magnetic field having a stray magnetic field polarity and a stray magnetic field magnitude, wherein said stray magnetic field magnitude is substantially equally to one-half of said bias magnetic field difference, and said stray magnetic field polarity is opposite from said bias magnetic field polarity of said one of said first and second bias magnetic fields.

4. An apparatus for controlling a magnitude of a magnetic field at a focal point of a lens, comprising:


a first voltage source having a first voltage output;

a first resistor electrically connected to said first voltage source, said first resistor having a first resistance;

a second voltage source having a second voltage output;

a second resistor electrically connected to said second voltage source, said second resistor having a second resistance;

a power amplifier having an input connected to said first resistor and said second resistor and an output, said power amplifier having a reference

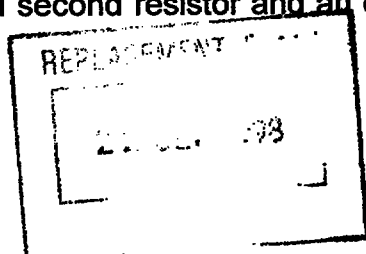




voltage less than said first voltage output, said reference voltage exceeding said second voltage output;

a switch having an open position and a closed position, for selectively connecting said second voltage source to said power amplifier;

a bias coil electrically connected to said output of said power amplifier, for creating a first bias magnetic field when said switch is in said open position and a second bias magnetic field when said switch is in said closed position, said first bias magnetic field having a first bias magnetic field polarity and a first bias magnetic field magnitude relative to said first voltage output and said first resistance, said second bias magnetic field having a second bias magnetic field polarity and a second bias magnetic field magnitude relative to said first voltage output, said second voltage output, said first resistance and said second resistance, said first bias magnetic field polarity being opposite from said second bias magnetic field polarity, said bias magnetic field magnitude of one of said first and second bias magnetic fields exceeding said bias magnetic field of another of said first and second bias magnetic fields by a bias magnetic field difference; and

a magnetic source for creating a stray magnetic field having a stray magnetic field polarity and a stray magnetic field magnitude, wherein said stray magnetic field magnitude is substantially equally to one-half of said bias magnetic field difference, and said stray magnetic field polarity is opposite from said bias magnetic field polarity of said one of said first and second bias magnetic fields.

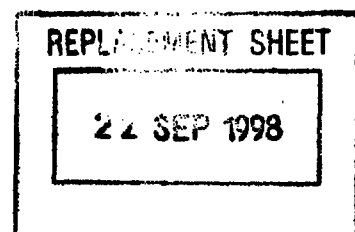

METHOD AND APPARATUS FOR CONTROLLING BIAS LEVELS

Abstract

An apparatus for controlling the strength of a magnetic field, comprises a first controller, a second controller, a digital-to-analog converter, a current driver, and a bias coil. The first controller determines the position of the focus point of a lens and passes it to the second controller, which provides a digital signal related to the position. The digital-to-analog converter converts the digital signal to a driver voltage and passes the driver voltage to a current driver, which provides to the bias coil a bias current related to the driver voltage. The bias coil produces a magnetic field having a strength related to the bias current. The second controller accounts for stray magnetic fields in creating the digital signal. The stray magnetic fields may be constant or may vary in strength based on position of the objective lens, circumferential velocity of the storage medium, or longitudinal velocity of the storage medium. Furthermore, the apparatus may comprise a current sensor for measuring the bias current, and a feedback device for providing to the current driver a feedback voltage related to the bias current.

Figure 2

