

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
13 February 2003 (13.02.2003)

PCT

(10) International Publication Number
WO 03/011398 A1(51) International Patent Classification⁷: A62D 3/00,
B09B 3/00, E21B 43/00, 47/06[CA/CA]; 49 MacEwan Park Close, N.W., Calgary, Alberta
T3K3Z6 (CA).

(21) International Application Number: PCT/US01/30969

(74) Agents: FARAH, David, A. et al.; Sheldon & Mak, 225
South Lake Avenue, 9th Floor, Pasadena, CA 91101 (US).

(22) International Filing Date: 2 October 2001 (02.10.2001)

(25) Filing Language: English

(81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NO, NZ, PH, PL, PT, RO, RU, SD, SE, SG, SI,
SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU,
ZA, ZW.

(26) Publication Language: English

(30) Priority Data:
09/917,417 27 July 2001 (27.07.2001) US(71) Applicants (for all designated States except US): TER-
RALOG TECHNOLOGIES USA, INC. [US/US]; 332
East Foothill Boulevard, Arcadia, CA 91006 (US). TER-
RALOG TECHNOLOGIES INC. [CA/CA]; 1131 Kens-
ington Road, N.W., Suite 300, Calgary, Alberta T2N3P4
(CA).(84) Designated States (regional): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,
IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF,
CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD,
TG).

(72) Inventors; and


(75) Inventors/Applicants (for US only): BRUNO, Michael,
S. [US/US]; 1105 Starlit Lane, Monrovia, CA 91016 (US).
DUSSEAUT, Maurice, B. [CA/CA]; P.O. Box 157, Os-
oyoos, British Columbia V0H 1V0 (CA). BILAK, Roman

Published:

— with international search report

[Continued on next page]

(54) Title: METHOD FOR BIOSOLID DISPOSAL AND METHANE GENERATION

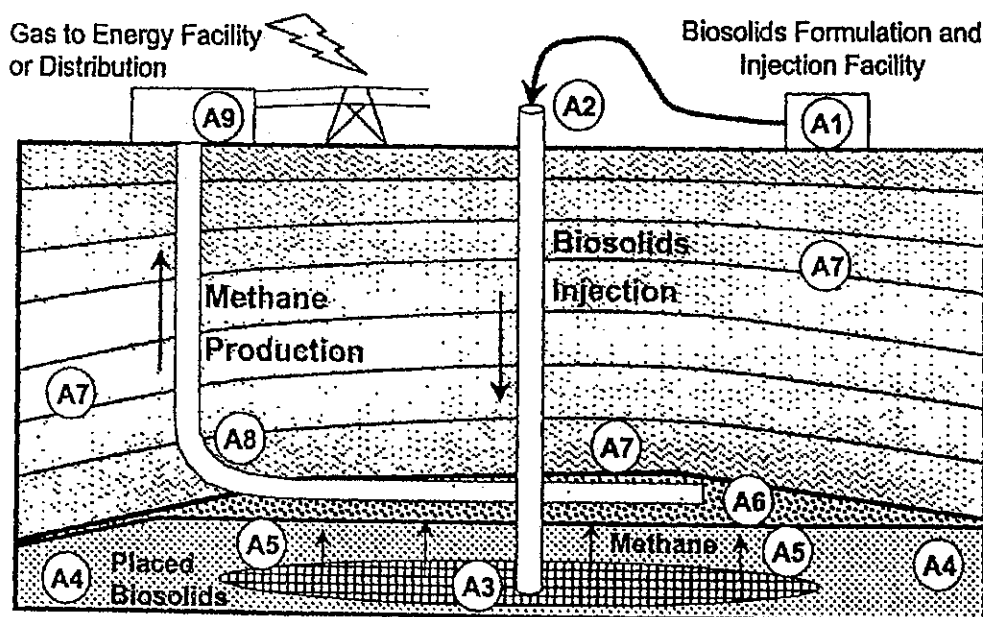

(57) Abstract: A method for the disposal of biosolids (A3), such as municipal sewage waste, comprising injecting the biosolids (A3) into a subsurface injection formation (A4). The method can include recovering methane generated from the degradation of the biosolids (A3).

WO 03/011398 A1

WO 03/011398 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

METHOD FOR BIOSOLID DISPOSAL AND METHANE GENERATION

CROSS-REFERENCE TO RELATED APPLICATION

This application claims priority from United States patent application 09/917,417 titled "Method For Biosolid Disposal And Methane Generation," filed July 27, 2001; the contents of each of which are hereby incorporated herein by reference in their entirety.

BACKGROUND

Over 10 million tons of biosolids from municipal sewage sludge are generated each year in the United States alone. The prevailing methods for the disposal of biosolids include the application of the biosolids to surface land application, such as to crop land, range land or forests, composting and landfill disposal. Each of these methods is associated with disadvantages.

For example, one disadvantage of the application of biosolids to surface lands is the resistance of persons living in the area of the application because of concerns about nuisances such as odor and wind-blown dust from the site of application. Biosolids application to surface land and landfills also creates risks for contamination of potable surface water and groundwater.

Further disadvantageously, weather conditions can delay the application of biosolids to surface land, and trucking biosolids to the application site creates pollution and nuisances. Additionally, the capacity for the disposal of biosolids by application to surface lands and landfills is limited and the associated costs are generally high. Also, greenhouse gasses, such as methane and carbon dioxide, are generated by the decomposition of the biosolids and these gases are released into the atmosphere at the sites of surface land application and most landfills.

Therefore, there is a need for an additional method for the disposal of biosolids that provides less risk for environmental contamination. Additionally, there is a need for a additional method for the disposal of biosolids that is less expensive. Further, there is a need for an additional method for the disposal of biosolids that does not permit the release of carbon dioxide and other green house gases into the atmosphere. Also, there is a need for an additional method for the disposal of biosolids that can produce usable byproducts from biosolids.

SUMMARY

A first aspect of the invention provides a method for the disposal of biosolids, the method comprising: a) providing a supply of biosolids; b) creating a slurry of the biosolids suitable for injecting; c) selecting an injection formation that is separated from a ground surface by one or more pairs of alternating layers of high permeability and low permeability; d) injecting the biosolids slurry into the injection formation; e) allowing the injected biosolids slurry to degrade; and f) monitoring pressure in the one or more than one of the alternating layers of high permeability and low permeability above the injection formation during a time selected from the group consisting of before biosolids injection, during biosolids injection, after biosolids injection and a combination of before biosolids injection, during biosolids injection and after biosolids injection.

A second aspect of the invention provides a method for the disposal of biosolids, the method comprising: a) providing a supply of biosolids; b) creating a slurry of the biosolids suitable for injecting; c) selecting an injection formation below a ground surface comprising a natural gas formation in a gas accumulation zone; d) injecting the biosolids slurry into the injection formation at a pressure sufficient to create and maintain fractures within the selected injection formation; and e) allowing degradation of the injected biosolids slurry.

A third aspect of the invention provides a method for the disposal of biosolids, the method comprising: a) providing a supply of biosolids; b) creating a slurry of the biosolids suitable for injecting; c) selecting an injection formation below a ground surface; d) injecting the biosolids slurry into the injection formation at a pressure sufficient to create and maintain fractures within the selected injection formation; e) allowing degradation of the injected biosolids slurry, thereby generating a gas selected from the group consisting of carbon dioxide, sulfur dioxide, hydrogen sulfide and combinations of the preceding; and f) decreasing the rate of the generated carbon dioxide, sulfur dioxide, hydrogen sulfide or combination of the preceding by performing an action selected from the group consisting of blending at least one waste stream with the provided biosolids, inoculating the biosolids with at least one species of bacteria, changing the temperature of the biosolids, changing the salinity of the biosolids, adding at least one chemical to the biosolids and a combination of the preceding.

2a

According to one embodiment of the present invention, there may be provided a method for the disposal of biosolids. The method can comprise, first, providing a supply of biosolids. Then, a slurry of the biosolids suitable for injecting can be created and an injection formation below a ground surface may be selected. Next, the biosolids slurry can be injected into the injection formation at a pressure sufficient to create and maintain fractures within the selected injection formation. Then, the injected biosolids slurry can be allowed to degrade.

In a preferred embodiment, the supply of biosolids can be derived from at least one source selected from the group consisting of municipal sewage waste, waste water treatment waste, animal waste, non-human-non-animal industrial waste and a combination of the preceding. In another preferred embodiment, the injection formation may be at least about 100 meters below the ground surface. In a particularly preferred embodiment, the injection formation may be from between about 500 and about 3,000 meters below the ground surface.

In a preferred embodiment, the injection formation may have a temperature and the temperature of the injection formation can be greater than about 25°C. In another preferred embodiment, the injection formation may have a porosity greater than about 15%. In a particularly preferred embodiment, the injection formation can be separated from the ground surface by one or more pairs of alternating layers of high permeability and low permeability.

In a preferred embodiment, the method further may comprise monitoring pressure in the one or more than one of the alternating layers of high permeability and low permeability above the injection formation during a time selected from the group consisting of before biosolids injection, during biosolids injection, after biosolids injection and a combination of before biosolids injection, during biosolids injection and after biosolids injection. In a preferred embodiment, at least one low permeability layer of the one or more alternating layers of high permeability and low permeability can comprise shale. In a particularly preferred embodiment, the one or more pairs of alternating layers of high permeability and low permeability may be at least three pairs of alternating layers of high permeability and low permeability.

In a preferred embodiment, the injection formation can comprise a natural gas formation in a gas accumulation zone. In another preferred embodiment, the degeneration of the biosolids can generate a gas selected from the group consisting of carbon dioxide, sulfur dioxide, hydrogen sulfide and combinations of the preceding. In a particularly preferred

embodiment, the method further may comprise decreasing the rate of the generated carbon dioxide, sulfur dioxide, hydrogen sulfide or combination of the preceding by performing an action selected from the group consisting of blending at least one waste stream with the provided biosolids, inoculating the biosolids with at least one species of bacteria, changing the temperature of the biosolids, changing the salinity of the biosolids, adding at least one chemical to the biosolids and a combination of the preceding.

In a preferred embodiment, the method may further comprise creating fractures within the injection formation before injecting the biosolids into the injection formation. In another preferred embodiment, the method can further comprise transporting the selected biosolids to an injection site by pipe before injecting the biosolids. In a particularly preferred embodiment, the method can further comprise monitoring pressure in the injection formation at a time selected from the group consisting of before injecting the biosolids into the injection formation, during the injection of the biosolids into the injection formation, after injecting the biosolids into the injection formation and a combination of the preceding.

In a preferred embodiment, the method can further comprise increasing the rate of degradation of the biosolids by performing an action selected from the group consisting of blending at least one waste stream with the provided biosolids, inoculating the biosolids with at least one species of bacteria, changing the temperature of the biosolids, changing the salinity of the biosolids, adding at least one chemical to the biosolids and a combination of the preceding. In another preferred embodiment, the chemical added to the biosolids can be potassium. In a particularly preferred embodiment, the method may further comprise allowing methane to be generated by the degradation of the injected biosolids and recovering methane generated by the degradation of the injected biosolids, after injecting the biosolids into the injection formation. In a particularly preferred embodiment, the rate of methane generation can be increased by performing an action selected from the group consisting of blending at least one waste stream with the provided biosolids, inoculating the biosolids with at least one species of bacteria, changing the temperature of the biosolids, changing the salinity of the biosolids, adding at least one chemical to the biosolids and a combination of the preceding. In another preferred embodiment, the chemical added to the biosolids is potassium.

In a preferred embodiment, the degradation of the biosolids can generate a gas selected from the group consisting of carbon dioxide, sulfur dioxide, hydrogen sulfide and combinations of the preceding, and where the method may further comprise decreasing the rate

of the generated carbon dioxide, sulfur dioxide, hydrogen sulfide or combination of the preceding by performing an action selected from the group consisting of blending at least one waste stream with the provided biosolids, inoculating the biosolids with at least one species of bacteria, changing the temperature of the biosolids, changing the salinity of the biosolids, adding at least one chemical to the biosolids and a combination of the preceding. In another preferred embodiment, the chemical can be added to the biosolids is potassium.

According to another embodiment of the present invention, there can be provided a method for the disposal of biosolids. The method may comprise, first, providing a supply of biosolids. Then, a slurry of the biosolids suitable for injecting can be created and an injection formation may be selected that may be separated from a ground surface by one or more pairs of alternating layers of high permeability and low permeability. Next, the biosolids slurry can be injected into the injection formation and allowed to degrade. Then, pressure in the one or more than one of the alternating layers of high permeability and low permeability above the injection formation can be monitored during a time selected from the group consisting of before biosolids injection, during biosolids injection, after biosolids injection and a combination of before biosolids injection, during biosolids injection and after biosolids injection.

In a preferred embodiment, the supply of biosolids can be derived from at least one source selected from the group consisting of municipal sewage waste, waste water treatment waste, animal waste, non-human-non-animal industrial waste and a combination of the preceding. In another preferred embodiment, the injection formation can be at least about 100 m below the ground surface. In a particularly preferred embodiment, the injection formation may be from between about 500 and about 3,000 meters below the ground surface. In another preferred embodiment, the injection formation may have a temperature and the temperature of the injection formation can be greater than about 25°C.

In a preferred embodiment, the injection formation may have a porosity greater than about 15%. In another preferred embodiment, at least one low permeability layer of the one or more alternating layers of high permeability and low permeability can comprise shale. In a particularly preferred embodiment, the one or more of alternating layers of high permeability and low permeability may be at least three pairs of alternating layers of high permeability and low permeability.

In a preferred embodiment, the injection formation can comprise a natural gas formation in a gas accumulation zone. In another preferred embodiment, the biosolids slurry

can be injected into the injection formation at a pressure sufficient to create and maintain fractures within the selected injection formation. In a particularly preferred embodiment, allowing degradation of the biosolids can generate a gas selected from the group consisting of carbon dioxide, sulfur dioxide, hydrogen sulfide and combinations of the preceding

In a preferred embodiment, the method can further comprise decreasing the rate of the generated carbon dioxide, sulfur dioxide, hydrogen sulfide or combination of the preceding by performing an action selected from the group consisting of blending at least one waste stream with the provided biosolids, inoculating the biosolids with at least one species of bacteria, changing the temperature of the biosolids, changing the salinity of the biosolids, adding at least one chemical to the biosolids and a combination of the preceding. In another preferred embodiment, the method can further comprise creating fractures within the injection formation before injecting the biosolids into the injection formation. In a particularly preferred embodiment, the method can further comprise transporting the selected biosolids to an injection site by pipe before injecting the biosolids.

In a preferred embodiment, the method may further comprise monitoring pressure in the injection formation at a time selected from the group consisting of before injecting the biosolids into the injection formation, during the injection of the biosolids into the injection formation, after injecting the biosolids into the injection formation and a combination of the preceding. In another preferred embodiment, the method can further comprise increasing the rate of degradation of the biosolids by performing an action selected from the group consisting of blending at least one waste stream with the provided biosolids, inoculating the biosolids with at least one species of bacteria, changing the temperature of the biosolids, changing the salinity of the biosolids, adding at least one chemical to the biosolids and a combination of the preceding. In a particularly preferred embodiment, the chemical added to the biosolids can be potassium.

In a preferred embodiment, the method can further comprise allowing methane to be generated by the degradation of the injected biosolids and recovering methane generated by the degradation of the injected biosolids, after injecting the biosolids into the injection formation. In another preferred embodiment, the method can further comprise increasing the rate of methane generation by performing an action selected from the group consisting of blending at least one waste stream with the provided biosolids, inoculating the biosolids with at least one species of bacteria, changing the temperature of the biosolids, changing the

salinity of the biosolids, adding at least one chemical to the biosolids and a combination of the preceding. In a particularly preferred embodiment, the chemical added to the biosolids can be potassium.

In a preferred embodiment, the degradation of the biosolids can generate a gas selected from the group consisting of carbon dioxide, sulfur dioxide, hydrogen sulfide and combinations of the preceding, and where the method may further comprise decreasing the rate of the generated carbon dioxide, sulfur dioxide, hydrogen sulfide or combination of the preceding by performing an action selected from the group consisting of blending at least one waste stream with the provided biosolids, inoculating the biosolids with at least one species of bacteria, changing the temperature of the biosolids, changing the salinity of the biosolids, adding at least one chemical to the biosolids and a combination of the preceding. In another preferred embodiment, the chemical added to the biosolids can be potassium.

FIGURES

The features, aspects and advantages of the present invention will become better understood with regard to the following description, appended claims and accompanying figure where:

Figure 1 is a schematic diagram of one embodiment of the method for the disposal of biosolids according to the present invention.

DESCRIPTION

In one embodiment, the present invention is a method for the disposal of solids, such as biosolids, comprising injecting the biosolids into deep underground formations. The injected biosolids are then allowed to undergo biodegradation, using the natural geothermal heat in the deep subsurface. Biodegradation produces carbon dioxide, sulfur dioxide, hydrogen sulfide, methane and other gases. The generated carbon dioxide is absorbed by formation waters because it is highly soluble in water, and more soluble than methane. The residue from the biodegradation is a carbon-rich solid material that becomes permanently sequestered in the underground formation.

In a preferred embodiment, methane generated by the degrading biosolids is removed for conversion into usable energy, or storage for subsequent use. In another preferred embodiment, the rate of biodegradation is increased or the rate of methane production is increased or the rate of carbon dioxide or other undesirable degradation products is decreased by altering environmental conditions in the formation or by adding

substances or bacteria, or by adjusting the biochemical properties of the biosolids slurry that is injected into the formation. The present method provides significant cost savings and environmental benefits over current technologies for the disposal of biosolids.

As used in this disclosure, the term "biosolids" is defined as solid particles of matter that are dominantly comprised of organic material by weight.

The method of the present invention will now be discussed in greater detail. First, a suitable supply of biosolids is provided. In a preferred embodiment, the biosolids have sufficient concentration of biodegradable organic matter to generate exploitable quantities of methane. It is not necessary that all the wastes be biodegradable or even organic as other solid components of the injected biosolids slurry will become permanently entombed in the injection formation.

In a preferred embodiment, the biosolids disposed of by the present method will be derived from municipal sewage or waste water treatment wastes, such as produced by a major metropolitan area. Municipal sewage wastes comprise human biowastes, household scraps, sanitary paper products and other biological components, as well as mineral matter and small amounts of chemical products, such as solvents, acids, alkalies and heavy metals, introduced into the waste stream through the municipal sewer system such as solvents, acids, alkalies and heavy metals.

Another suitable source of the biosolids is animal wastes from sites where the animals are raised or housed. The animal wastes can be mixed with other organic materials such as sawdust or straw, or it may be mixed with mineral wastes. Still other suitable sources of biosolids are pulp and paper mill sludges, waste oil products including greases and waxes, and wastes which are rich in organic debris dredged from harbors or estuaries.

After providing a suitable supply of biosolids, a suitable underground formation, designated the "injection formation" in this disclosure, is selected below a suitable ground surface injection site. Preferably, the formation is a high porosity, high permeability sand formation, significantly below usable groundwater, if present. In a particularly preferred embodiment, the porosity is greater than about 15%. In a particularly preferred embodiment, the injection formation is below any groundwater which could be removed for human use and below multiple, thick and clearly defined layers of alternating low permeability, fluid flow barriers and high permeability fluid absorption zones. The high permeability layers will preferably be sand of high porosity. The low permeability layers

will preferably comprise shales and other rocks containing clay minerals that have absorptive capacity. In a preferred embodiment, there should be at least two alternating layers of high permeability and low permeability separating any usable groundwater, if present, and the deeper injection formation. In a particularly preferred embodiment, there should be at least five alternating layers of high permeability and low permeability separating any usable groundwater, if present, and the deeper injection formation.

The total available storage volume of an injection formation can be calculated based on the approximate average thickness and area of the injection formation, the average porosity of the injection formation and the mechanical compressibility of the injection formation, as will be understood by those with skill in the art with reference to this disclosure.

In another preferred embodiment, the injection formation will be at least about 100 m below the ground surface. This depth is generally deep enough to insure that the injected biosolids will be sequestered, even without thick and clearly defined layers of alternating low permeability, fluid flow barriers and high permeability fluid absorption zones. specific, and deep enough to ensure that the injected biosolids will not pose a potential threat to the environment or to water supplies, and near enough to the surface to allow biosolids injection in a cost-effective manner. In a particularly preferred embodiment, the injection formation is between about 500 m and about 3000 m below the ground surface.

The injection site typically requires less than 10,000 m² of surface land, unlike the larger areas required for surface landfills. Further, use of the surface land itself according the present method is only temporary, and after the disposal activity is complete, the surface land can be returned to other uses.

The injection site and injection formation for use in the present method should be selected to additionally protect ground and ocean waters by properly selecting an appropriate geological interval which does not outcrop or interact with near surface formations. Geochemical analysis of formation fluids can be used to verify that particular injection formations contain only ancient fluids and are not in communication with shallower water sources.

It is also preferred that the selected injection formation has pre-existing natural gas because this implies that the injection formation is overlain by a suitable methane accumulation zone and is capped by an unfractured layer of relatively low permeability so as

to inhibit further upward methane movement. This configuration allows for accumulation of gases generated by degradation of the biosolids and removal of the gases for use as a fuel.

It is further preferred that injection sites selected for use with the present method have existing gas collection and measurement infrastructure, and long histories of contained injection operations. For example, preferred injection formations include oil and gas trapping anticlines which over geologic time have proven to be completely isolated.

The overlying low permeability layers, when present, above the preferred injection formation provide a permeability barrier to upward migration, as can be evidenced by historical oil/water accumulations, where the oil migrates upward until it is impeded by a permeability barrier. The at least one additional overlying high permeability layer acts as a fluid flow sink in the unlikely event of a well casing cement failure or a breach of a low permeability layer.

For example, if the well casing cement fails or a low permeability layer is breached and fluid migrates above the low permeability layer, the high permeability layer immediately above absorbs the excess pressure and migrating fluid. Pressure will then decline slightly in the injection formation and increase in the overlying layer. These pressure changes and fluid migration can be identified by monitors located in both zones, and periodic wellbore tracer surveys. Further groundward migration of the waste material will not occur unless the second higher high permeability layer also becomes highly pressurized. For material to migrate upwards from the injection formation, the process of breach and absorption in the layers above the injection formation would have to be repeated for each set of high permeability and low permeability layers above the injection formation.

As an example, a suitable underground formation for injection of biosolids according to the present invention would be a 100 m thick, unconsolidated sandstone formation lying between 1000 m and 3000 m below the ground surface, where the sands are poorly sorted and range in texture from very fine to coarse grained. An approximately 300 m thickness low permeability formation material would be present in the 1,000 m interval immediately above the injection formation, which are interbedded with high permeability formations providing additional geologic barriers and safety zones and which could be easily monitored.

The injection formation would have been used as a gas storage field for at least ten years, the geology of the area would be well characterized and injectivity into the

injection formation would have been established. A nearby well would preferably be present which could be used as an observation well for monitoring purposes. Further preferably, there would be no groundwater extraction wells in the area and groundwater would be regularly and extensively monitored.

In another preferred embodiment, the present invention includes creating and maintaining fractures within the selected injection formation by the injection of waste slurry under high pressure, such as parting pressure, as will be understood by those with skill in the art with reference to this disclosure.

After selection of a suitable injection formation and injection site, the injection equipment and associated facilities are located in an area adjacent to the injection site. Injection equipment preferably occupies a surface area of 10,000 m² or less, with no additional surface construction or road work required. All slurry equipment and tanks are preferably fully enclosed.

The preferred biosolids slurry formation and injection apparatuses should be environmentally secure in the handling of waste material. Further preferably, they should be able to screen waste streams on a continuous basis to avoid introduction of any oversize material into the wellbore that could lead to blockage, as well as to monitor and register injection parameters such as rate, total volumes, pressure, density and temperature in real-time. Additionally preferably, they should include variable speed controls linked to the monitoring systems that permit the control and optimization of the slurry-forming components so as to maintain consistent slurry quality and delivery rate of a biosolids slurry with the best physical attributes feasible.

Suitable cased and perforated wells are prepared or existing wells modified and extended into the injection formation, and into the methane accumulation zone if desired. All wells used in the present method are designed to seal against fluid and gas migration and are periodically tested to ensure that migration is not taking place. The capacity for each well is preferably in the range of 500 to 2000 m³ per day of biosolids slurry. By selecting multiple deep injection targets, and alternating between multiple wells and intervals, a single site can provide large-scale biosolids management capacity for many years.

In a preferred embodiment, each well used in the present invention has several layers of protection. An outer steel casing (called the surface casing) extends from the surface to the lowermost depth of any usable groundwater. This steel casing is surrounded

by cement. One or more additional steel casing strings (called the production casing) extends from the surface to the depth of the selected injection formation. This casing is also surrounded by cement.

The biosolids to be disposed are pumped down a steel tubing past a packer located at an appropriate depth, for example, a depth of about 1,500 m to 2,000 m. Outside the tubing is an annular region filled with fluid. The pressure of this fluid will be constantly monitored to immediately detect any leak in the tubing. If material injected down the tubing does leak into the annular region, the material is still contained within an outer steel casing, which is in turn surrounded by a cement sheath.

After selection of a suitable injection formation and preparation of the injection site, the biosolids are transported to the injection site. The transport can be by road based transport. In a preferred embodiment, however, the biosolids are transported by pipe from the source directly to the injection site, which is located as close to the source of material as practical.

Next, an aqueous slurry is prepared of the biosolids to be injected into the selected injection formation. Creation of this slurry is particularly preferred to allow the injection of the biosolids. In summary, the biosolids are sized, screened and mixed with water to produce an aqueous biosolids slurry that is a consistent mix with no oversized particles, and is suitable for injection into a perforated cased wellbore and injection formation.

In a preferred embodiment, a biosolids slurry is designed to generate methane efficiently under the conditions present in the selected injection formation. This is accomplished by measuring the chemical and biological properties of the available biosolids stream, the physical conditions in the target stratum, and adjusting the physical and chemical properties of the slurry to achieve efficient methane generation.

After the biosolids are injected into the injection formation and locked in by the natural stresses present in the injection formation and the low permeability zones immediately above the injection formation, the injected material is allowed to undergo degradation under anaerobic conditions. Given a solids mixture undergoing anaerobic digestion, an estimate of degradation can be obtained from first order kinetics:

$$W = W_0 e^{-kt}$$

(1)

where W = mass of volatile injected solids that have not degraded after time t , W_0 = mass of solids deposited, k = decay coefficient, and t = time. In general the value of k will depend on a variety of factors including pH, temperature, salinity, mixing amount, and to some extent the concentration of solids. Typical values for the exponent k are on the order of 10^{-3} , yielding a value for W of between 40-60% degradation per year. For continuous injection, the amount of material remaining after some time t is determined by integration of equation

1. The mass of gas produced will in general be equal to the amount of volatile injected solids degraded and is typically composed mainly of methane (50-60%), carbon dioxide (30-40%), nitrogen, and hydrogen.

In addition to the mechanical protection provided by the injection well design, and the natural protection provided by the selection of an appropriate injection formation with multiple overlying barrier and buffer zones, the present method preferably includes a continuous real-time recording and display of pressure response in the injection zone, in the first overlying high permeability zone, as well as in the wellbore annulus, to ensure containment of biosolids in the injection formation. Any breach or deviation from anticipated injection behavior will be noted while material is still far below the groundwater, allowing immediate remedial action. Additional process monitoring can include several types such as pressure recording and analysis, temperature recordings, surface deformation measurements and analysis, and microseismic monitoring, such as monitoring pressure in one or more than one of the alternating layers of high permeability and low permeability above the injection formation during a time selected from the group consisting of before biosolids injection, during biosolids injection, after biosolids injection and a combination of before biosolids injection, during biosolids injection and after biosolids injection, as will be understood by those with skill in the art with reference to this disclosure. The monitoring is preferably performed at several depths below the groundwater base.

Preferably, fluid injection into the injection formation is episodic in order to facilitate the monitoring of formation behavior. Bottom-hole pressure in the injection formation is preferably monitored continuously during daily injection and nightly shut-in. This pressure information is analyzed to evaluate changing formation flow and mechanical properties and injectivity, and to determine formation parting pressure and material containment, as will be understood by those with skill in the art with reference to this disclosure. Additional biosolids will not be injected if pressure in the injection formation

remains abnormally high. As will be understood by those with skill in the art, in order for fluid to migrate out of the injection formation, a breach must occur and the pressure in the injection formation must be higher than the pressure in an adjacent formation. In addition to the continuous pressure monitoring and analysis, the present method preferably includes shutting down the injection well periodically to perform extensive well tests, tracer surveys and injection formation tests to evaluate well integrity and hydraulic isolation in the near wellbore area.

In another preferred embodiment, the present method includes recovering the methane generated from the degradation of the injected biosolids. The methane can then be used as a clean fuel. Alternatively, the methane produced can be left underground as a stored supply of future energy. Recovery of the methane is preferably done by injecting the biosolids into an appropriate geologic formation with a trapping mechanism. Preferably, the biosolids are injected downdip below the water-oil or water-gas contact in a geologic formation. The generated methane and carbon dioxide will then migrate upwards due to gravity segregation.

Methane and carbon dioxide produced by the degradation of biosolids according to the present invention will percolate through formation water where much of the carbon dioxide will be sequestered underground by dissolution in the saline formation water, and where the high quality methane will accumulate in the gas trap. The difference in sequestration is due to the much higher solubility of carbon dioxide in water relative to methane (a ratio of at least 10:1) at temperature and pressure conditions typical for deep geologic formations. Methane, in particular, is a potent greenhouse gas. By injecting biosolids into the deep subsurface, gas release to the atmosphere is eliminated and carbon is permanently sequestered in deep saline formations.

Recovered methane from deep injection formations used according to the present invention is of higher quality than that generated in surface digesters or from surface landfills for two reasons. First, by percolating through formation waters in the injection formation, the carbon dioxide component of the generated gases will be significantly absorbed due to the much higher solubility of carbon dioxide relative to methane. Second, the methane generated according to the present invention is at higher pressure than methane generated by surface landfills and requires less compression for storage or use.

As can be appreciated, once the injection formation is filled and the methane extracted, if desired, the equipment used for injection of biosolids and recovery of methane can be removed and the site abandoned. This returns the surface land to the condition it was in previously and leaves the site unimpaired.

In a preferred embodiment, the present method includes increasing the rate of biodegradation of the injected biosolids. This is done by altering environmental conditions in the injection formation or by adding substances or bacteria, or by adjusting the biochemical properties of the biosolids slurry that is injected into the formation, or by a combination of these actions, to optimize the biodegradation process. In another preferred embodiment, the present method includes decreasing the rate of production of undesirable products such as carbon dioxide, sulfur dioxide and hydrogen sulfide.

For example, the rate of biodegradation can be increased by adjusting the temperature and salinity of the aqueous slurry so that the resulting physical properties of the biosolids in the subsurface provides an optimum environment for biodegradation, given the species of bacteria present in the biosolids and native to the injection formation. In another preferred embodiment, biodegradation rates can be increased by adding appropriate natural or genetically engineered bacteria to the biosolids prior to injection, or after injection. The inoculation can be used to increase the decomposition rate of the biosolids into methane under the specific temperature and pressure conditions at the injection formation depth, or to inhibit the production of undesirable decomposition products, such as carbon dioxide, sulfur dioxide and hydrogen sulfide. Further, nutrients and other chemical or organic agents, such as those that alter acidity, pH, or oxidation potential, Eh, can be added to the biosolids slurry for the same purposes.

For example, bacteria that are relied upon to promote biodegradation of the injected biosolids can have high potassium requirements. Extrinsic potassium, such as soluble salt potassium chloride (KCl), can be added to an injected biosolids slurry to promote bacterial growth.

In general, it is preferred that chemicals added to the injected biosolids slurry be only weakly soluble in water or insoluble so that any added chemical is not removed during the water expulsion that accompanies compaction of the injected material in the formation. A suitable source of potassium for addition to the biosolids slurry, therefore,

would be finely ground potash feldspar which contains potassium that is slowly liberated *in situ* under the influence of aqueous exposure, high temperatures and bacterial action.

For example, biodegradation in an injection formation can be limited by the supply of phosphorous present in one injected biosolids slurry. In order to improve biodegradation, a second waste stream rich in phosphorous can be blended with the first waste stream or injected separately, either simultaneously or alternating with the first biosolids slurry. For example, a waste source rich in phosphorous can come from a chemical plant or from phosphorus-rich gypsum wastes ("phospho-gyp").

In another example, some waste streams contain sterile biosolids due to their alkalinity, such as waste streams from paper production facilities. In order to promote bacterial degradation of the wastes, a second waste stream which is acidic can be blended with the first stream to adjust the pH of the streams to promote bacterial degradation of the injected slurry.

In yet another example, natural or genetically engineered bacteria can be added to an injected biosolids slurry to improve degradation. In a preferred embodiment, the bacteria added are anaerobic species because of the low concentration of oxygen in the injection formations used in the present invention. In a particularly preferred embodiment, the bacteria are methanogenic.

Additionally, a plurality of biosolids having different compositions can be blended together to maximize biosolid degradation in the injection formation, or to maximize the rate and quantity of methane generation, or to decrease the rate and quantity of generation of less desirable decomposition products such as carbon dioxide, sulfur dioxide or hydrogen sulfide. For example, a source of animal waste that is rich in organic material can be blended with a source of waste materia such as a pulp residue, sawdust from a plywood mill, thermally treated wastes, or other waste that is less rich in organic material, and that is also sterile. The two waste streams are blended in the optimum proportions, as will be understood by those with skill in the art, with reference to knowledge of the *in situ* conditions at the injection formation and with reference to this disclosure.

The temperature in the injection formations used in the present invention can vary from 25°C (e.g. 1 km deep injection formation in Montana, US) to 100°C (3 km deep injection formation in West-Central California, US). However, suitable thermophilic bacteria can be used with injection formations having considerably higher temperatures. Pressure also

varies at the injection formation depths anticipated by the present invention, such as from about 10 MPa at a depth of 1 km depth to about 40 MPa at depths of between about 3 to 4 km. Therefore, bacteria added to the biosolids slurry must be chosen to be suitable to the temperature and pressures that will be encountered in a specific injection formation.

The method for the disposal of biosolids, according to the present invention, therefore, has several advantages over the currently used techniques. First, the present method reduces the potential and real impact on surface waters and groundwater that can be associated with surface application of biosolids, because the biosolids are injected significantly below any usable source of groundwater. Second, the present method requires significantly less surface land area than land application for disposal of an equivalent volume of biosolids. Third, the present method does not permanently alter the surface land after the disposal at the site is completed. Fourth, because the biosolids can be pumped to local sites for disposal, the present method significantly reduces or eliminates truck traffic to distant disposal sites and, therefore, reduces the noise and environmental contamination associated with heavy truck traffic.

Fifth, the present method reduces the amount of methane and carbon dioxide released into the atmosphere as compared to surface application of biosolids. Sixth, methane produced by the degradation of biosolids according to the present method can be collected for use as an energy source. Seventh, biosolids disposal according to the present method can reduce the cost of biosolids management significantly compared with conventional surface application methods due to the reduced or eliminated need for trucking the biosolids to a distance site for disposal.

Referring now to Figure 1, there is shown a schematic diagram of one embodiment of the method for the disposal of biosolids according to the present invention. A1 represents the surface facilities (storage, sizing, screening, mixing, blending, process monitoring and pumping equipment) for the formulation of suitable biosolids slurry mixtures for injection into a injection formation.

A2 represents the injection well (or one injection well in an array of injection wells) that is cased and cemented in such a manner so as to withstand the injection pressures implemented over the life of the facility.

A3 represents the injected biosolids slurry that has been placed and has rapidly, through excess water expulsion, become solidified by the great weight of the

overburden rocks. After all the methane possible has been generated by the biodegradation process, A3 becomes a dense and relatively low permeability stratum that is rich in carbon and other organic molecules that were not biodegradable at the conditions in the injection formation. The sequestered carbon and other organic molecules will not enter the atmosphere creating greenhouse effects.

A4 represents the injection formation into which the biosolids slurry, A3, was injected. A4 is of sufficient porosity and permeability as to accommodate the excess slurry fluids without long-term pressure build-up or interaction with shallow, usable groundwaters. In general, the stratum A4 will be chosen as a laterally continuous stratum of sufficient pore volume and flow path connectivity with adjacent strata to take all the water expelled from the biosolids slurry during the compaction process.

A5 represents the evolution and upward movement path of the methane generated by the biodegradation process. Such movement occurs naturally because the methane is of a specific gravity that is far less than that of any interstitial water, and therefore tends to rise through the porous medium, displacing liquid from the pores.

A6 represents the porous and permeable strata where the methane collects through the upward migration and pore liquid displacement process, and from which strata the generated methane can be extracted for use. This zone, A6, is a "trap" for the evolved methane because of a suitable geological structure, which can be in the form of structural closure with folded beds that form an inverted bowl, as shown, or can be in the form of a change of rock type, not shown, in a combination of the two, or in some other suitable disposition of permeable and low-permeability strata.

A7 represents the rocks overlying the injection formation that are of sufficiently low permeability that gas cannot flow upward through the pore space. Also, the overlying rocks A7 are non-fractured, or are minimally fractured so that the methane cannot escape to strata of higher elevation.

A8 represents one or more conventional gas wells that extract the methane from the accumulation site A6. The gas wells, A8, either exist at the site before the disposal operation begins or are specifically installed as cased, cemented wells, perforated so that the gas can flow into the wellbore. Depending on the configuration of the strata, the methane extraction wells A8 may be vertical, horizontal or inclined.

A9 represents a surface facility for power generation that can use the extracted methane as a clean energy source. Alternately, the extracted methane can be shipped directly to consumers for home use or industrial users for other purposes.

Although the present invention has been discussed in considerable detail with reference to certain preferred embodiments, other embodiments are possible. For example, the method of the present invention can be applied to the disposal of solids other than biosolids. Therefore, the scope of the appended claims should not be limited to the description of preferred embodiments contained in this disclosure.

CLAIMS:

1. A method for the disposal of biosolids, the method comprising:
 - a) providing a supply of biosolids;
 - b) creating a slurry of the biosolids suitable for injecting;
 - c) selecting an injection formation that is separated from a ground surface by one or more pairs of alternating layers of high permeability and low permeability;
 - d) injecting the biosolids slurry into the injection formation;
 - e) allowing the injected biosolids slurry to degrade; and
 - f) monitoring pressure in the one or more than one of the alternating layers of high permeability and low permeability above the injection formation during a time selected from the group consisting of before biosolids injection, during biosolids injection, after biosolids injection and a combination of before biosolids injection, during biosolids injection and after biosolids injection.
2. The method of claim 1, where the injection formation comprises a natural gas formation in a gas accumulation zone.
3. A method for the disposal of biosolids, the method comprising:
 - a) providing a supply of biosolids;
 - b) creating a slurry of the biosolids suitable for injecting;
 - c) selecting an injection formation below a ground surface comprising a natural gas formation in a gas accumulation zone;
 - d) injecting the biosolids slurry into the injection formation at a pressure sufficient to create and maintain fractures within the selected injection formation; and
 - e) allowing degradation of the injected biosolids slurry.
4. The method of claim 1 or 3, where allowing degradation of the injected biosolids slurry, generates a gas selected from the group consisting of carbon dioxide, sulfur dioxide, hydrogen sulfide and combinations of the preceding.
5. The method of claim 4, further comprising decreasing the rate of the generated carbon dioxide, sulfur dioxide, hydrogen sulfide or combination of the preceding by performing an action selected from the group consisting of blending at least one waste stream with the provided biosolids, inoculating the biosolids with at least one species of

bacteria, changing the temperature of the biosolids, changing the salinity of the biosolids, adding at least one chemical to the biosolids and a combination of the preceding.

6. A method for the disposal of biosolids, the method comprising:

- a) providing a supply of biosolids;
- b) creating a slurry of the biosolids suitable for injecting;
- c) selecting an injection formation below a ground surface;
- d) injecting the biosolids slurry into the injection formation at a pressure sufficient to create and maintain fractures within the selected injection formation;
- e) allowing degradation of the injected biosolids slurry, thereby generating a gas selected from the group consisting of carbon dioxide, sulfur dioxide, hydrogen sulfide and combinations of the preceding; and
- f) decreasing the rate of the generated carbon dioxide, sulfur dioxide, hydrogen sulfide or combination of the preceding by performing an action selected from the group consisting of blending at least one waste stream with the provided biosolids, inoculating the biosolids with at least one species of bacteria, changing the temperature of the biosolids, changing the salinity of the biosolids, adding at least one chemical to the biosolids and a combination of the preceding.

7. The method of claim 3 or 6, where the injection formation is separated from the ground surface by one or more pairs of alternating layers of high permeability and low permeability.

8. The method of claim 7, further comprising monitoring pressure in the one or more than one of the alternating layers of high permeability and low permeability above the injection formation during a time selected from the group consisting of before biosolids injection, during biosolids injection, after biosolids injection and a combination of before biosolids injection, during biosolids injection and after biosolids injection.

9. The method of claim 6, where the injection formation comprises a natural gas formation in a gas accumulation zone.

10. The method of any of claims 1-9, where the supply of biosolids is derived from at least one source selected from the group consisting of municipal sewage waste,

waste water treatment waste, animal waste, non-human-non-animal industrial waste and a combination of the preceding.

11. The method of any of claims 1-9, where the injection formation is at least about 100 meters below the ground surface.

12. The method of any of claims 1-9, where the injection formation is from between about 500 and about 3,000 meters below the ground surface.

13. The method of any of claims 1-9, where the injection formation has a temperature and the temperature of the injection formation is greater than about 25°C.

14. The method of any of claims 1-9, where the injection formation has a porosity greater than about 15%.

15. The method of claims 1 or 7, where at least one low permeability layer of the one or more alternating layers of high permeability and low permeability comprises shale.

16. The method of claims 1 or 7, where the one or more pairs of alternating layers of high permeability and low permeability is at least three pairs of alternating layers of high permeability and low permeability.

17. The method of any of claims 1-9, further comprising creating fractures within the injection formation before injecting the biosolids into the injection formation.

18. The method of any of claims 1-9, further comprising transporting the selected biosolids to an injection site by pipe before injecting the biosolids.

19. The method of any of claims 1-9, further comprising monitoring pressure in the injection formation at a time selected from the group consisting of before injecting the biosolids into the injection formation, during the injection of the biosolids into the injection formation, after injecting the biosolids into the injection formation and a combination of the preceding.

20. The method of any of claims 1-9, further comprising increasing the rate of degradation of the biosolids by performing an action selected from the group consisting of blending at least one waste stream with the provided biosolids, inoculating the biosolids with at least one species of bacteria, changing the temperature of the biosolids, changing the

salinity of the biosolids, adding at least one chemical to the biosolids and a combination of the preceding.

21. The method of any of claims 1-9, further comprising allowing methane to be generated by the degradation of the injected biosolids and recovering methane generated by the degradation of the injected biosolids, after injecting the biosolids into the injection formation.

22. The method of claim 21, further comprising increasing the rate of methane generation by performing an action selected from the group consisting of blending at least one waste stream with the provided biosolids, inoculating the biosolids with at least one species of bacteria, changing the temperature of the biosolids, changing the salinity of the biosolids, adding at least one chemical to the biosolids and a combination of the preceding.

23. The method of any one of the previous claims, where the chemical added to the biosolids is potassium.