

ARRANGEMENT AND METHOD IN A TELECOMMUNICATION SYSTEM FOR OPTICAL VOLTAGE MULTIPLICATION IN AN INTEGRATED CIRCUIT**TECHNICAL SCOPE.**

The present invention relates to an arrangement for performing voltage conversion in an integrated circuit comprising a plurality of different circuit components, one or more of which requires a voltage which differs from the supply voltage of the
5 integrated circuit.

The invention also relates to a process for performing voltage conversion in an integrated circuit according to the aforementioned.

10 PRIOR ART

More or less comprehensive integrated circuits are an important constituent element in the sphere of telecommunications. In the sphere of radio communications, in particular, it is desirable, wherever possible, to use low supply voltages for this type of circuit in order thereby to reduce the power consumption in the circuit.

15

Certain types of Application Specific Integrated Circuits (ASIC's) contain components requiring second voltages, in some cases higher than the circuit supply voltage. The problem arises, inter alia, in LSI circuits which handle low-level radio signals. In the case of voltage-controlled oscillators (VCO's), for example, a higher
20 voltage is usually required for varactors incorporated in the circuit than that used in other parts of the circuit. In order that the supply voltage to the circuit does not have to be increased unnecessarily, a system is frequently used by means of which voltage conversion from a lower to a higher voltage is performed in the circuit by means of a voltage multiplier.

25

A common system for bringing about the said voltage multiplication is to use circuitry with capacitors integrated in the circuit or outside it. The said system is known, inter alia, from US-A-4 796 174, US-A-4 922 403 and US-A-4 982 317. A disadvantage to this known system is that the circuitry results in transients which are
30 transmitted to other circuit elements and give rise to problems of interference in the latter.

DESCRIPTION OF THE INVENTION

The present invention is intended to solve the problem of achieving high voltages for selected components in integrated circuits, such as varactors, field-effect transistors and HF switching diodes. The invention is preferably used in LSI and VLSI circuits
5 and means that high voltages can be achieved without the need to increase the circuit's supply voltage.

This is achieved in that an arrangement for performing optical voltage conversion is integrated into the integrated circuit. The arrangement comprises a first circuit,
10 which converts the voltage to be transformed into an optical signal. The said optical signal is detected by a number of photosensitive elements in a second circuit in the arrangement, whereupon the detected optical signal is converted to a voltage at the output of the second circuit. The voltage which is obtained at the output of the second circuit may have a higher level than the voltage entering the first circuit and
15 the supply voltage to the integrated circuit. The light transmission between the first and second circuit of the arrangement is well screened so that the power losses in the circuit remain small. The ratio between input and output voltage from the circuit is influenced by the number of photosensitive elements in the second circuit.

20 The present invention also relates to a process for performing voltage conversion in an integrated circuit. In the process according to the invention a first voltage is converted into an optical signal. The latter may be incident to a second circuit and converted to a voltage, the level of which differs from that of the incident feed voltage and varies as a function of the detected light intensity.

25 An advantage of the solution according to the invention compared to the known system is that the voltage conversion can be performed for certain components in the integrated circuit without interfering with the rest of the circuit.

30 DESCRIPTION OF FIGURES

Figure 1 shows a voltage multiplier for integration on a substrate in accordance with the invention.

Figure 2 shows a radio circuit in which the multiplier according to the invention can

be appropriately used.

PREFERRED EMBODIMENT

5 The invention will be explained below with reference to Figure 1, which shows a preferred embodiment of an optical voltage multiplier for integration in an LSI or VLSI circuit.

10 The voltage multiplier 1 comprises a primary side with a first circuit and a secondary side with a second circuit, which are electrically isolated from one another. The multiplier is preferably arranged closely connected to a component in the integrated circuit which requires a different voltage from the other components, that is a voltage which differs from the supply voltage; the required voltage may, for example, be higher than the supply voltage.

15 A first input voltage u_{in} , which does not exceed the supply voltage of the integrated circuit, is fed to the input of the first circuit on the primary side of the arrangement. In this circuit the said input voltage u_{in} is converted into an optical signal, the light intensity of which corresponds to the current through the resistor R_{in} . In the embodiment shown this conversion occurs in a light-emitting diode (LED) 2. The first and second circuit are jointly screened so that the optical signal from the first circuit cannot be diffused outside the said screening but can only be emitted to the second circuit.

25 The second circuit comprises a photovoltaic converter, which converts a received optical signal into a voltage. In the embodiment shown in the figure, the said photovoltaic converter is formed by a plurality of photodiodes 3a, 3b, 3c, which function by photovoltaic effect. The output voltage u_{out} obtained at the output from the second circuit varies as a function both of the total number of photodiodes and of the incident light and hence of the input voltage u_{in} at the input of the first circuit.

30 The ratio between the input and output voltages u_{in} , u_{out} is controlled by the resistors R_{in} , R_{out} shown in the figure, connected to both primary and secondary side of the arrangement. The current flowing in the said resistors is divided between the resistor

R_{in} connected to the first circuit and the resistor R_{out} connected to the second circuit. Since the output voltage u_{out} at the output from the second circuit is higher than the input voltage u_{in} at the input to the first circuit, the current intensity in the resistor R_{in} connected to the first circuit is higher than the current intensity in the resistor R_{out} connected to the second circuit, seeing that no additional power is supplied during transformation. On the contrary, transformation naturally results in certain power losses, although where necessary these can be kept quite low. Voltage multiplication to a higher voltage level is therefore only possible in those circuits in which only very small currents are required.

10

By installing an arrangement for optical voltage multiplication in accordance with the invention, that is, for example, an optical coupler in an application-specific integrated circuit (ASIC), any additional voltage sources can be dispensed with.

15 Figure 2 shows a part of an application-specific integrated circuit for use in a radio circuit. The arrangement according to the invention is preferably used in integrated circuits with resonant circuits, as shown in the figures, since the integrated multiplier 1 according to the invention results in an advantageous multiplication of a certain voltage without transients occurring in the multiplication, thereby causing noise.

20 Figure 2 shows an optical voltage multiplier incorporated in an application-specific integrated circuit, in accordance with the invention. The voltage multiplier 1 may, for example, be incorporated in a phase locked loop (PLL circuit) 4 and used to transform the voltage to a higher level for supplying components around an oscillator part 10 of the circuit. A varactor 7, which is incorporated in a frequency-

25 determining circuit 6, which is connected to the said oscillator part 10, constitutes one of the said components. The said frequency-determining circuit 6, or resonant circuit, also comprises a capacitor 8 and a coil 9. The varactor 7 requires a higher supply voltage than the other parts of the integrated circuit 4 and the voltage must therefore be transformed in order to be able to control the varactor 7. On the so-called primary side of the voltage multiplier 1, an input voltage u_{in} , varying as a function of the +5V supply voltage, is converted to an optical signal in a light-emitting diode 2. The said optical signal is transmitted to the secondary side, it being possible to obtain a higher voltage by converting the optical signal to an

30

electrical signal in one or more photodiodes 3a, 3b, 3c. Where necessary, the polarity of this voltage can also be reversed by connecting photodiodes 3a, 3b, 3c with reversed polarity.

- 5 The invention naturally also relates to an integrated circuit with a plurality of optical voltage multipliers, each of these being connected to any component requiring a higher voltage than the supply voltage, or a different polarity, but conversely only requiring a low current.

CLAIMS

1. Arrangement (1) in an integrated circuit for performing voltage multiplication in the integrated circuit, which comprises a plurality of different circuit components, one or more of which requires a voltage which exceeds a supply voltage for the integrated circuit, but the current consumption of which is low, characterised in that
 - 5 - a first circuit is designed to convert a first voltage (u_{in}) into an optical signal, which is emitted from at least one element (2) in the circuit,
 - a second circuit comprises one or more photosensitive elements (3a, 3b, 3c), which are designed to receive the optical signal and convert this to a second voltage (u_{out}), which can be electrically isolated from the first voltage (u_{in}) and differs
 - 10 therefrom,
 - the said photosensitive element (3a, 3b, 3c) is designed to influence the voltage ratio, and
 - the first and second circuit constitute a part of the integrated circuit and are arranged connected to a circuit component which requires a voltage other than the
 - 15 supply voltage of the integrated circuit.
2. Arrangement according to claim 1, characterised in that the second circuit is functionally connected to at least one varactor (7).
- 20 3. Arrangement according to claim 1, characterised in that the second circuit is functionally connected to at least one PIN diode switch.
4. Arrangement according to claim 1, characterised in that the second circuit is functionally connected to at least one field-effect transistor.
- 25 5. Arrangement according to any of the preceding claims, characterised in that it is incorporated in an integrated circuit of LSI type.
6. Arrangement according to any of the preceding claims, characterised in that it
- 30 is incorporated in an integrated circuit of VLSI type.



7. Arrangement according to any of the preceding claims, characterised in that the first circuit comprises at least one light-emitting diode (2), that the second circuit comprises at least one photodiode (3) of photovoltaic effect and that the said diodes are screened so that essentially all light from the light-emitting diode is incident upon the photodiode (3).

8. Process for performing voltage multiplication in an integrated circuit, which comprises a plurality of different circuit components, one or more of which requires a voltage which differs in magnitude from a supply voltage for the integrated circuit or requires a different polarity to the latter, but the current consumption of which is low, characterised in that

- a first voltage for a first signal with a first current intensity is converted into an optical signal,
- the optical signal is fed to a photovoltaic converter, which converts the light received into a second voltage, which is electrically isolated from the first voltage.



FIG. 1



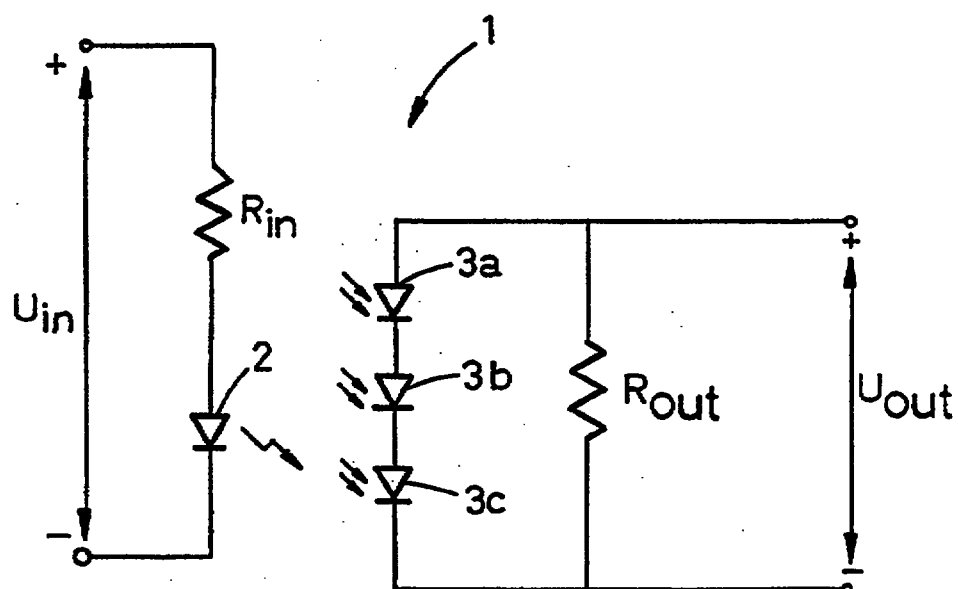


FIG. 2

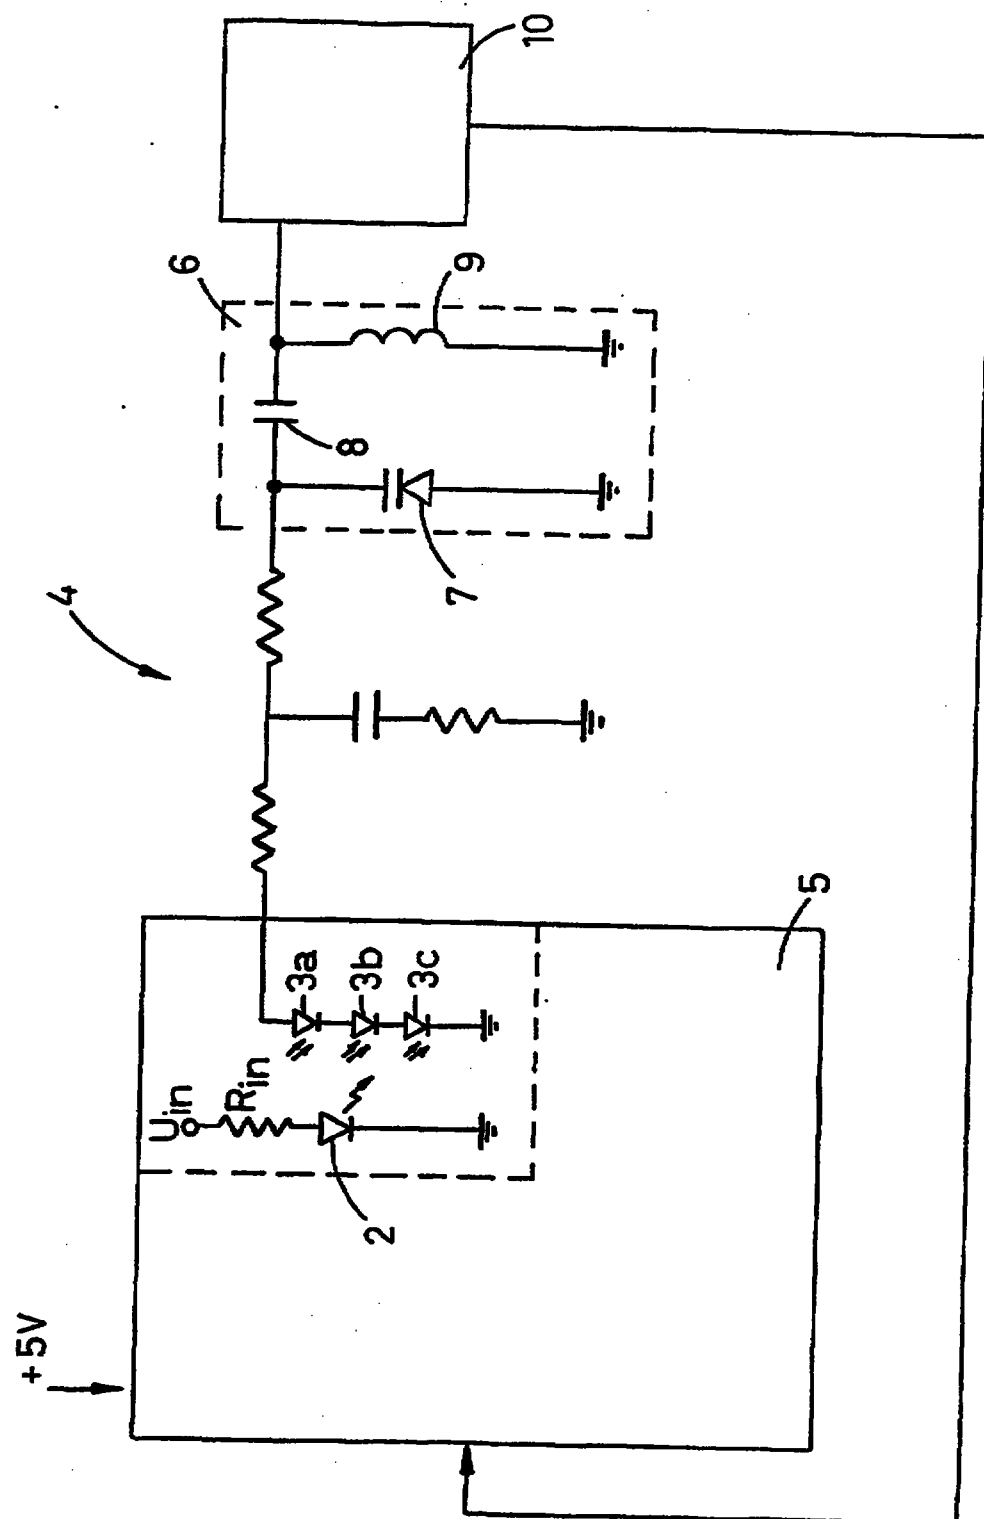

**PCT**WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification⁶:
H01L 27/142, 31/12, H02M 11/00

A1

(11) International Publication Number:

WO 96/27211

(43) International Publication Date: 6 September 1996 (06.09.96)

(21) International Application Number: PCT/SE96/00242

(22) International Filing Date: 22 February 1996 (22.02.96)

(30) Priority Data:
9500737-3 28 February 1995 (28.02.95) SE(71) Applicant (for all designated States except US): TELEFON-
AKTIEBOLAGET LM ERICSSON (publ) [SE/SE]; S-126
25 Stockholm (SE).

(72) Inventor; and

(75) Inventor/Applicant (for US only): KOTTISALU, Evald
[SE/SE]; Skansbergsvägen 27, S-141 70 Huddinge (SE).(74) Agents: WILLQUIST, Bo et al.; Albihn Willquist AB, S:t
Larsgatan 23, S-582 24 Linköping (SE).(81) Designated States: AL, AM, AT, AU, AZ, BB, BG, BR, BY,
CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS,
JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD,
MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD,
SE, (SG) SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN,
ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent
(AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent
(AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC,
NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA,
GN, ML, MR, NE, SN, TD, TG).**Published***With international search report.**Before the expiration of the time limit for amending the
claims and to be republished in the event of the receipt of
amendments.**In English translation (filed in Swedish).*

(54) Title: ARRANGEMENT AND METHOD IN A TELECOMMUNICATION SYSTEM FOR OPTICAL VOLTAGE MULTIPLICATION IN AN INTEGRATED CIRCUIT

(57) Abstract

The present invention relates to an arrangement (1) for performing optical voltage multiplication, which is integrated into an integrated circuit. The arrangement (1) comprises a first circuit which converts the voltage (U_{in}) to be transformed into an optical signal, which is emitted from at least one element (2) in the circuit. The said optical signal is detected in a second circuit in the arrangement, which comprises one or more photosensitive elements (3a, 3b, 3c), which are designed to receive and convert the optical signal to a voltage (U_{out}), at the output of the second circuit. The voltage (U_{out}) which is obtained at the output of the second circuit may have a different level and polarity to that of the voltage (U_{in}) entering the first circuit or the supply voltage to the integrated circuit. The light transmission between the first and second circuit of the arrangement is well screened so that power losses in the circuit remain small. The ratio between input and output voltage from the circuit is influenced by the number of photosensitive elements (3a, 3b, 3c). The present invention also relates to a process for performing voltage multiplication in an integrated circuit of the above-mentioned type.

