

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau

(43) International Publication Date
05 May 2022 (05.05.2022)



(10) International Publication Number
WO 2022/089706 A1

(51) International Patent Classification:

F01N 3/04 (2006.01) *F04D 29/44* (2006.01)
B01D 53/00 (2006.01) *B63H 21/32* (2006.01)

(21) International Application Number:

PCT/DK2021/050321

(22) International Filing Date:

29 October 2021 (29.10.2021)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

PA202001229 30 October 2020 (30.10.2020) DK
PA202100569 28 May 2021 (28.05.2021) DK

(71) Applicant: MAERSK A/S [DK/DK]; Esplanaden 50, 1263
Copenhagen K (DK).

(72) Inventors: **KAHLE, Jorn**; c/o A.P. Møller - Mærsk A/
S, Esplanaden 50, DK-1263 Copenhagen (DK). **AUSTIN-
FRASER, Toby**; c/o A.P. Møller - Mærsk A/S, Esplanaden
50, DK-1263 Copenhagen (DK).

(74) Agent: **EIP**; Fairfax House, 15 Fulwood Place, London
Greater London WC1V 6HU (GB).

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IR, IS, IT, JO, JP, KE, KG, KH, KN,
KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO,
NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW,
SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(54) Title: SCRUBBER OUTLET ASSEMBLY

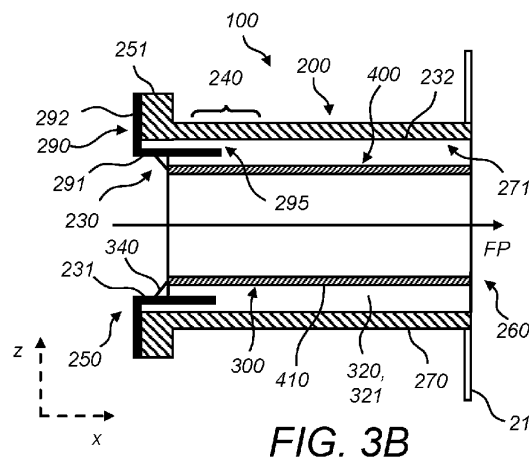


FIG. 3B

(57) Abstract: Disclosed is a scrubber outlet assembly (100), the scrubber outlet assembly (100) comprising a pipe (200) having an inner surface, wherein the inner surface (230) has a first portion (231) made from a first electrically conductive material, a second portion (232) made from a second electrically conductive material dissimilar to the first electrically conductive material, and a region (240) comprising at least a part of the first portion (231) and at least a part of the second portion (232). The scrubber outlet assembly (100) comprises a barrier (300) located inwardly of the inner surface of the pipe (200). The scrubber outlet assembly (100) defines a flow path through the pipe (200) along which washwater is flowable from a scrubber (10) in use, and the barrier (300) fluidically isolates the region (240) from the flow path.

[Continued on next page]

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))