(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
17 May 2001 (17.05.2001)

PCT

(10) International Publication Number
WO 01/35638 A1

(51) International Patent Classification[7]: H04N 5/235, 3/15

(21) International Application Number: PCT/JP00/07279

(22) International Filing Date: 19 October 2000 (19.10.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

11-316650	8 November 1999 (08.11.1999)	JP
11-319605	10 November 1999 (10.11.1999)	JP
2000-15981	25 January 2000 (25.01.2000)	JP

(71) Applicant: CASIO COMPUTER CO., LTD. [JP/JP]; 6-2, Hon-machi 1-chome, Shibuya-ku, Tokyo 151-8543 (JP).

(72) Inventors: NAKAMURA, Yoshiaki; 9-7-1-5-402, Kabe-machi, Ome-shi, Tokyo 198-0036 (JP). KOSHIZUKA, Yasuo; 1448-1-221, Kumagawa, Fussa-shi, Tokyo 197-0003 (JP).

(74) Agents: SUZUYE, Takehiko et al.; c/o Suzuye & Suzuye, 7-2, Kasumigaseki 3-chome, Chiyoda-ku, Tokyo 100-0013 (JP).


(81) Designated States *(national)*: AU, CA, CN, IN, KR, NO, SG.

(84) Designated States *(regional)*: Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, ES, FI, FR, GB, IT, NL, SE).

Published:
— *With international search report.*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: PHOTOSENSOR SYSTEM AND DRIVE CONTROL METHOD THEREOF

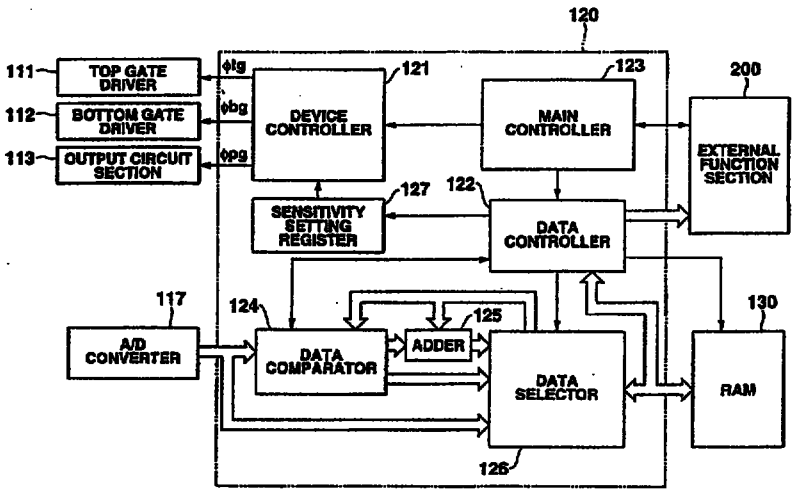

(57) Abstract: A photosensor system having a photosensor array constituted by two-dimensionally arraying a plurality of photosensors includes a driver circuit for supplying a drive signal to the photosensors, and a controller for controlling reading operation of a subject image and sensitivity setting. Before the start of normal reading operation of a subject image, pre-reading operation of changing the image reading sensitivity at a plurality of stages for respective rows is executed. A row in an optimal image reading state is easily determined based on the dynamic range distribution of the lightness data of read image data or a dynamic range distribution from which an abnormal value deviating from the main change trend of lightness data is removed, and the linearly differentiated value of the dynamic range. An image reading sensitivity set for this row is set as an optimal sensitivity. This can simplify sensitivity setting processing and shorten the required time.

WO 01/35638 A1