

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
8 June 2006 (08.06.2006)

PCT

(10) International Publication Number
WO 2006/060287 A1

(51) International Patent Classification:

A62C 37/08 (2006.01) B05B 1/26 (2006.01)
A62C 37/14 (2006.01)

(21) International Application Number:

PCT/US2005/042816

(22) International Filing Date:

29 November 2005 (29.11.2005)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

11/000,128 1 December 2004 (01.12.2004) US

(71) Applicant (for all designated States except US): **TYCO FIRE PRODUCTS LP** [US/US]; 1467 Elmwood Avenue, Cranston, RI 02910 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **ROGERS, Kenneth W.** [US/US]; 986 Williamson Road, Horsham, PA 19044 (US). **FESSEDEN, Mark E.** [US/US]; 98 Overhill

Road, Warwick, RI 02818 (US). **SILVA, JR., Manuel R.** [US/US]; 38 Canonchet Trail, Cranston, RI 02921 (US).


(74) Agents: **LAUB, David W.** et al.; **HELLER EHRMAN LLP**, 1717 Rhode Island Avenue, N.w., Washington, DC 20036-3001 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,

[Continued on next page]

(54) Title: RESIDENTIAL FIRE SPRINKLER

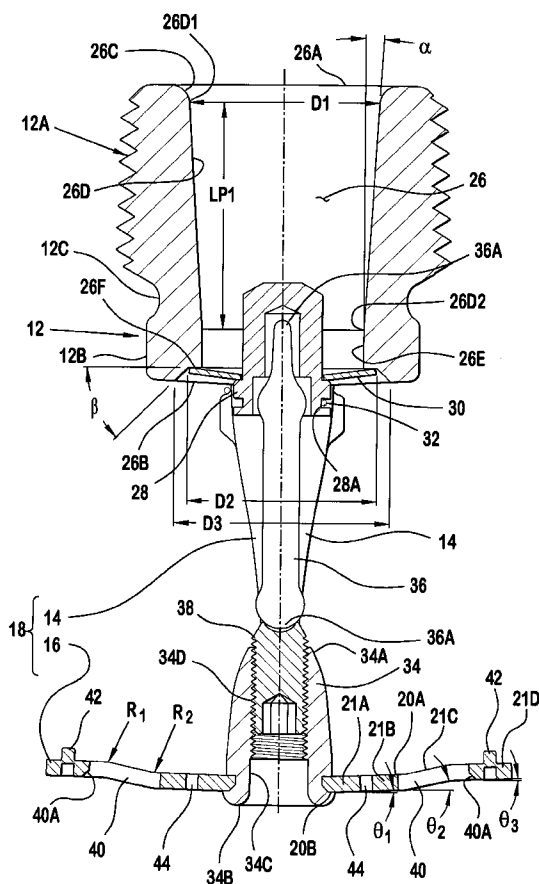

(57) Abstract: A pendent type residential fire sprinkler is described. The residential fire sprinkler has a body (12) with a K-factor of at least 6, a passage (26) coupled to a deflector assembly (18) that distributes fluid flowing through the passage (26) over a coverage area to perform in accordance with Underwriters Laboratory Standard 1626 (Oct 2003) for listing by Underwriters Laboratory Incorporated so that the body and a heat responsive trigger (36) disposed between the passage (26) and the deflector assembly (18) of the sprinkler can be installed in accordance with the 2002 Edition of National Fire Protection Association Standards 13, 13D, and 13R. Various aspects of the residential fire sprinkler, including a method of protecting a residential dwelling unit are described.

WO 2006/060287 A1



FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT,
RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA,
GN, GQ, GW, ML, MR, NE, SN, TD, TG).

— *before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments*

Published:

— *with international search report*

*For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.*