



- (51) International Patent Classification:
E02B 17/06 (2006.01) *E02B 17/08* (2006.01)
B66C 1/44 (2006.01)
- (21) International Application Number:
PCT/GB2015/053120
- (22) International Filing Date:
20 October 2015 (20.10.2015)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
1418635.7 20 October 2014 (20.10.2014) GB
- (71) Applicant: **CEDECO CONTRACTORS LIMITED**
[GB/GB]; 4 D Auchingramont Road, Hamilton ML3 6JT (GB).
- (72) Inventor: **STEVEN, Iain**; c/o Wm Duncan & Co, 4 D Auchingramont Road, Hamilton ML3 6JT (GB).

(74) Agent: **CREATION IP LIMITED**; Hillington Park Innovation Centre, 1 Ainslie Road, Glasgow Strathclyde G52 4RU (GB).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,

[Continued on next page]

(54) Title: ENGAGING APPARATUS

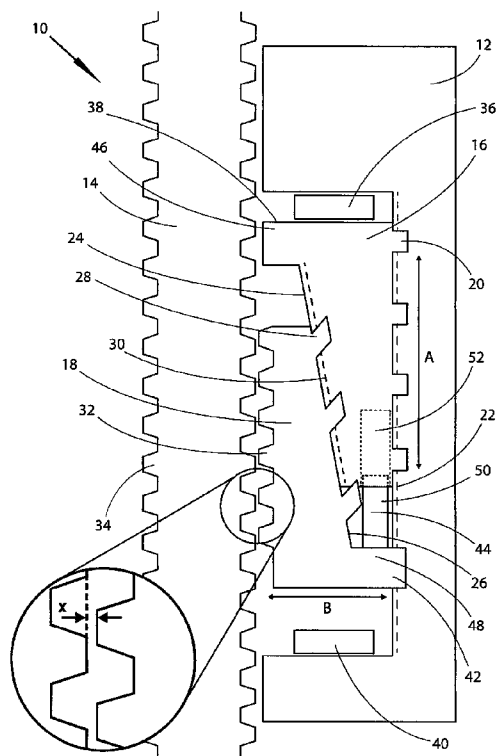


Figure 1

(57) Abstract: The present invention relates to an apparatus for engaging a first body with a second body, for example, for locking an oil rig platform to a rig leg. The apparatus comprises a driving portion, for example in the form of a driving wedge, which is moveably attachable to the first body, and an engaging portion, for example in the form of an engaging wedge, which is moveably attached to the driving portion. The driving portion is adapted to move in a first direction with respect to the second body and the engaging portion defines an engaging profile adapted to engage a complementary profile on the second body. Movement of the driving portion results in movement of the engaging portion. The apparatus also comprises an adjustment device connecting the driving portion to the engaging portion and adapted to move the engaging portion independently of the driving portion.



SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG). **Published:**

— *with international search report (Art. 21(3))*