

Automatic setting of gain in control loops ✓

The invention relates to a method and arrangement for automatically setting the gain in control loops, as used in CD or DVD players for example, in order to focus the scanning or recording light or laser beam on the optical recording medium, or to follow the information track.

In order to set the gain in a control loop, it is already known practice to superimpose a sinusoidal signal on the reference variable and to compare the controlled variable and the control difference with one another in order to obtain, from this comparison, a criterion for setting the control gain, cf. DE-A 36 35 859. For this purpose, it is preferably the amplitudes of the controlled variable and of the control difference that are compared with one another. In addition, mention is made of measuring a phase margin and using this measurement to derive a criterion for setting the control gain. In comparing the amplitudes, synchronous rectifiers are used to filter out those oscillation components of the control difference and of the controlled variable whose frequency is equal to the input frequency. Using a control unit, the gain of the controller is then changed until a comparator establishes that the filtered-out oscillation components of the controlled variable and of the control difference are of equal magnitude. The known method is therefore an iterative method which takes up a lot of time or is slow on account of the step-by-step tuning. Evaluating the phase information requires a high degree of complexity and is likewise slow, as a result of step-by-step tuning. Reducing the number of comparison steps inevitably leads to greater inaccuracy. When comparing the amplitudes of the controlled variable and of the control difference, care should also be taken to ensure that the control gain is not set exactly, since oscillation components are not in phase with the input frequency of the controlled variable and the control

difference. Furthermore, using a frequency which is different from the critical frequency presupposes that the loop gain at this frequency is known.

5 The object of the invention is to provide a method and arrangement for automatically setting the gain in control loops, which are characterized by a rapid yet reliable setting and/or tuning procedure.

10 This object is achieved by the features specified in main claims. Advantageous designs and developments are specified in subclaims.

One aspect of the invention is the acceleration of the tuning procedure when automatically setting the gain. To this end, the final tuning value is set by a single measurement and subsequent calculation. There is
15 no longer any need for a successive approximation to the tuning value, which means that tuning is considerably faster. In only one method step, an existing gain factor is measured whilst a tuning signal is input, a change which is to be carried out to obtain the desired value is
20 calculated and the desired value of the gain is set. The tuning signal or tuning frequency used is preferably a sinusoidal noise frequency which is equal to the frequency at which the absolute-value curve for the gain of the open loop intersects the 0-dB line. The sinusoidal
25 noise frequency is added, for example, to the controlled variable of the control loop. The value of the existing gain which is formed or the existing gain factor which is formed is, for example, the quotient of the amplitudes of controlled variable and control difference. To avoid the
30 disadvantages arising from the phase margin between the controlled variable and the control difference, the amplitudes of controlled variable and control difference are formed from a signal for the controlled variable and the control difference, respectively, which signal has
35 been subjected to band-pass filtering, squaring, low-pass filtering and square-root extraction. Using a band-pass filter, the tuning frequency is filtered out of the control or control difference signal. Squaring the

signals is provided in order to produce a signal which is independent of the sign, and a low-pass filter is used to form an average of the squared tuning frequency, from which the amplitude is determined by means of multiplication and root function calculation. The amplitude signals formed in this way, for example, of controlled variable and control difference represent an existing gain factor stated as a quotient of the amplitudes of controlled variable and control difference. The desired gain equal, for example, to 1 or 0 dB is then set using the reciprocal value of the measured gain factor. For this purpose, a gain setting means formed by a multiplier, for example, is provided in the control loop. This is used to set the gain to a desired value in only one method step. As the absolute-value curve for the gain is approximately linear in the range of the tuning frequency, gain factors which differ from the value 1 may also be set with a high degree of accuracy. The reason for this is that the frequency-dependent rise in the gain is determined from the quotient of the amplitudes of the controlled variable and control difference. As this is a measured existing gain, the tuning procedure has a high level of reliability in comparison with solutions which alter the gain using, for example, tables which are determined with the aid of a model.

However, in addition to the above embodiment, which uses the controlled variable and the control difference to measure the gain, it is also possible to implement other embodiments, which use other connection points in the control loop to measure the gain. In this case, it is then also necessary to take into consideration the particular features arising from the selection of connection points for gain measurements. If the input noise signal and the control difference are used for measuring gain, for example, such a measurement will have an offset of 6 dB, but will not differ, in principle, from the solution indicated here. The offset of 6 dB should then be taken into account in assessing

the measured gain value. From this aspect, the inventive method for automatically setting a gain in a control loop is relatively independent of the choice of connection points for gain measurement.

5 In order to ensure that the existing gain factor was determined in the linear range of the gain characteristic curve, an additional check is made to establish whether the quotient of the amplitudes of controlled variable and control difference has a value of
10 less than 1. If this does not apply, a further aspect of the invention provides for the gain to be set at a lower value, before the measurement is even carried out, using a factor of less than 1, preferably 0.75.

15 The invention is explained in greater detail below with the aid of drawings and an exemplary embodiment. In the drawings:

- Fig. 1 shows a schematic sketch for automatically setting a gain,
20 Fig. 2 shows a schematic sketch for automatically setting a gain using tuning signal measurement,
Fig. 3 shows a schematic sketch for automatically setting a gain using control-loop signal measurement,
25 Fig. 4 shows a schematic sketch for measurement signal formation,
Fig. 5 shows a schematic sketch of an embodiment for measurement signal formation,
Fig. 6 shows a block diagram of a noise signal generator,
30 Fig. 7 shows a block diagram of a band-pass filter,
Fig. 8 shows a block diagram of a low-pass filter,
Fig. 9 shows an amplitude/time graph of a noise frequency,
35 Fig. 10 shows an amplitude/time graph of a noise frequency with a superimposed control difference,
Fig. 11 shows an amplitude/time graph of a noise frequency which has been subjected to band-pass

filtering and has a superimposed control difference,

Fig. 12 shows an amplitude/time graph of a noise frequency which has been subjected to band-pass filtering and squaring, and

Fig. 13 shows an amplitude/time graph of a noise frequency which has been subjected to band-pass filtering, squaring and low-pass filtering.

Reference symbols are used concordantly in the figures. Fig. 1 shows the schematic sketch for automatically setting a gain in only one method step. In a control loop comprising a control amplifier CT and a controlled system RS, a tuning signal generator G is used to input a tuning signal d into the control loop, and whilst the tuning signal d is input, or after it has been input, a gain setting means GA is used to set the gain automatically in only one method step. In the exemplary embodiment illustrated in Fig. 1, inputting of the tuning signal d is provided between the output of the controlled system RS and the input of the control amplifier CT. Or in other words: the tuning signal d is input at a summation point which is supplied with the controlled variable x and whose output provides the control difference xd . In principle, however, a tuning signal d may be input at any point in the control loop. However, the point at which the tuning signal d is input must be taken into account when calculating a gain factor which is to be set using the gain setting means GA. When determining the existing gain factor by comparing the tuning signal d with the control difference xd , an offset of 6 dB should be taken into account, for example. Using the gain setting means GA, an existing gain factor for the control loop is measured and a change in the gain which is to be carried out is calculated, and this is then used to set the gain in the control loop automatically. In general, a gain or a gain factor may be specified as the ratio of a reference signal to a

measurement signal. It is already known practice to compare the amplitudes or the phases of the tuning signal and of the measurement signal with one another, and to change the gain in the control loop until a specified
5 amplitude or phase ratio is achieved. According to known methods, the gain in the control loop was changed step by step in order to approach the desired ratio in this manner. For automatically setting the gain in a control loop, therefore, a number of method steps were required.
10 Setting the gain in only one method step is made possible by the fact that an existing gain factor is measured and a change which is to be carried out in order to achieve a desired value of the gain is calculated. The calculated value then represents the value used to set the gain. The
15 measurement signal used is a signal from the control loop, the said signal representing the existing gain factor. The signal representing the existing gain factor is preferably the amplitude of a measurement signal whilst the tuning signal d is input. In order to
20 calculate the existing gain factor, the measurement signal, which represents a gain factor whilst the tuning signal d is input into the control loop which is not yet tuned, is put into a ratio with a reference signal. The reference signal is formed by the tuning signal d , which
25 is known on account of the known parameters of the tuning signal d . A quotient formed from the measurement signal and the reference signal then represents the existing gain factor. The quotient representing the existing gain factor is preferably formed using a microprocessor
30 provided in the gain setting means GA. Since the tuning signal d provided is, for example, a tuning frequency formed by a sinusoidal noise frequency whose frequency is just at the frequency at which the absolute-value curve for the gain of the open loop intersects the 0-dB line,
35 the gain change to be carried out in the control loop must take into account the existing gain factor. For example, in order to set a gain of 1, the gain in the control loop is multiplied by the reciprocal value of the

quotient representing the existing gain factor. Consequently, automatic setting of the gain in the control loop is achieved using only one method step. Since the change in the gain in the control loop which is
5 to be carried out in order to set a gain of 1 is known, gain values which are different from the value 1 may also be set. This is possible, in particular, by virtue of the fact that the absolute-value curve for the gain in the region of the tuning frequency is approximately linear.
10 The final tuning value is determined by a single measurement and subsequent calculation. No successive approximation is required, which means that tuning is significantly faster.

In the embodiment shown in Fig. 1, it has been
15 assumed that the tuning signal d is essentially constant. Under this requirement, the existing gain factor is determined using only one measurement signal, since the tuning signal d can be assumed to be known, and the tuning signal d is a sinusoidal noise frequency whose
20 frequency is equal to or is approximately the frequency at which the absolute-value curve for the gain of the open loop intersects the 0-dB line.

However, it is also possible, as shown in Fig. 2, for the tuning signal d used as reference signal to be
25 included in the measuring procedure. The controlled system RS shown in Fig. 1 is formed by an actuator ACT and a detector DET in Fig. 2. The microprocessor provided in the gain setting means GA determines the instant at which the tuning signal d is input into the control loop.
30 For this purpose, the tuning signal generator G is connected to the gain setting means GA. In a control loop as used, for example, in CD or DVD players in order to focus the scanning light or laser beam on the disc surface and to follow the information track, the actuator
35 ACT and the detector DET are formed by a pick-up. The means for tracking or for focusing the light beam are the actuator with its objective lens, and the photodiodes which are used to evaluate the light reflected from the

recording medium from the detector DET. Furthermore, the detector DET usually has a preamplifier. Owing to manufacturing tolerances both in the production of the actuator ACT and the detector DET, and on account of the different properties of recording media to be scanned, it should be assumed that the control-loop parameters vary for manufacturing reasons. This means that, although the parameters of the tuning signal d are known, the gain of the tuning signal d can no longer be determined in advance or be regarded as being known. Including the tuning signal d , used as reference signal, in the measuring procedure nevertheless enables automatic setting of the gain in one method step. The principle of an embodiment of this type is illustrated in Fig. 3. The essential aspect of this embodiment is that the gain setting means GA measures measurement signals upstream and downstream of the point at which the tuning signal d is input. The schematic sketch shown in Fig. 3 is already geared towards a subsequent exemplary embodiment; however, the invention is not limited to the measurement signals being tapped off immediately upstream and downstream of the point at which the tuning signal d is input.

A preferred embodiment for measurement signal formation is illustrated in Fig. 4. As shown in Fig. 4, the tuning signal d is input at a point in the control loop which usually corresponds to the reference variable. It is also possible to superimpose a reference variable, which is not shown, on the tuning signal d . In the said control loops, however, the reference variable is generally selected to be 0. As shown in the schematic sketch for measurement signal formation shown in Fig. 4, the signals for a controlled variable x and a control difference x_d are each supplied to a band-pass filter BPF1, BPF2. The band-pass filters BPF1, BPF2 are each connected to a squaring element Q1, Q2 downstream of which is connected a low-pass filter LPF1, LPF2. The band-pass filters BPF1, BPF2 are used to filter out the

tuning signal d , which is formed by a sinusoidal noise frequency and is equal to the frequency at which the absolute-value curve for the open loop intersects the 0-dB line, from the control signal x and from the control difference xd . The squaring elements $Q1$ and $Q2$ produce a signal which is independent of the sign, and the subsequent integrators or low-pass filters $LPF1$, $LPF2$ form the average of the squared noise frequency. An output signal $A1$ from the first low-pass filter $LPF1$ and an output signal $A2$ from the second low-pass filter $LPF2$ are then supplied to a microprocessor which calculates amplitude absolute values of the control signal and of the control difference signal. To this end, the microprocessor multiplies each of the output signals $A1$, $A2$ by itself and then calculates the root function. The quotient of the amplitudes of controlled variable x and control difference xd then represents the existing gain value for the control loop. If the quotient or the existing gain for the control loop differs from 1, this means, for the control loop, that the tuning frequency or the sinusoidal noise frequency is amplified or attenuated at the present setting according to the existing gain value. As the tuning frequency selected was a sinusoidal noise frequency equal to the frequency at which the absolute-value curve for the open loop intersects the 0-dB line, it is generally desired that tuning be carried out to a gain value of 1 or to 0 dB. This desired gain is set automatically in that a gain setting means GA is used to multiply the existing gain of the control loop by the reciprocal value of the quotient of the amplitudes of controlled variable x and control difference xd . For this purpose, the control amplifier CT in the control loop preferably has a multiplier which is set to the reciprocal value of the value measured as the existing gain. This means that only a single method step is required for automatically setting the gain in the control loop. Determining the gain value which is to be set or the existing gain value from the quotient of the

amplitudes of controlled variable x and control difference x_d is made possible by virtue of the fact that the absolute-value curve for the gain in the region of the tuning frequency is approximately linear.

5 Taking into account the above principle, the method is likewise used in order to set, automatically, gain values which differ from a gain of 1. With an existing gain value which differs from 1, the quotient of the amplitudes of controlled variable x and control
10 difference x_d is then multiplied by the desired gain value in addition to multiplication by the reciprocal value of this quotient.

Should the increase in the gain of the control loop be known, the tuning signal d used may also be a
15 sinusoidal noise frequency which has a frequency other than the frequency at which the absolute-value curve for the gain of the open loop intersects the 0-dB line. The band-pass filters BPF1, BPF2 and, if appropriate, also the low-pass filters LPF1, LPF2 should then be designed
20 in accordance with this frequency. Using the existing gain value measured according to the invention, the frequency at which this gain value was determined and the increase in the gain, which is assumed to be known, the frequency at which the gain has the value 1 or intersects
25 the 0-dB line is then determined.

As can already be seen in the schematic sketch for measurement signal formation shown in Fig. 4, corresponding modules are used for forming the output signals A_1 , A_2 . The embodiment of a circuit arrangement
30 for measurement signal formation is therefore provided as shown in a schematic sketch illustrated in Fig. 5. As shown in Fig. 5, a controlled variable x , provided by a detector DET, and a control difference x_d , occurring upstream of the control amplifier CT, are supplied one
35 after the other to the gain setting means GA which advantageously has only a band-pass filter, a squaring element and a low-pass filter. The tuning signal d produced using the tuning signal generator G is then

input into the control loop whilst the amplitude of the controlled variable x is measured and whilst the amplitude of the control difference xd is measured. The tuning signal generator G is preferably an oscillator
 5 having a selectable frequency and a constant amplitude.

Fig. 6 shows an exemplary embodiment of a tuning signal generator G . This is a digital embodiment comprising a trigger T to which a first register $R1$ and a first multiplier $C1$ are connected. The first register $R1$
 10 is connected upstream of a second multiplier $C2$ whose output is connected to an adder $A1$ which also receives the output signal from the first multiplier $C1$. One input of the single second adder $A2$ is connected to the output of the first adder $A1$, and the output of the second adder
 15 $A2$ is connected to the input of a second register $R2$. The second register $R2$ has a first output connected to a third multiplier $C3$, and the second output of the second register is connected to a third register $R3$. The output of the third register $R3$ is connected to a multiplier $C4$
 20 whose output is connected to one input of a third adder $A3$, whilst the output of the third multiplier $C3$ is connected to the other input of the adder $A3$ via a squaring element x^2 . The output of the adder $A3$ is connected to one input of the adder $A2$, and the common
 25 connection point of the adder $A2$ and the second register $R2$ is connected to a fifth multiplier whose output provides a frequency signal F , whose frequency can be selected by setting the parameters of the multipliers and has a constant amplitude.

30 The band-pass filter used is preferably a structure as shown in Fig. 7, in which an input EBPF of the band-pass filter is connected to a fourth register $R4$ and a sixth multiplier $C6$. The output of the sixth multiplier $C6$ is connected to a fourth adder $A4$, and the
 35 other input of the adder $A4$ is connected to the output of a seventh multiplier, which is connected to the fourth register $R4$. The output of the fourth adder is connected to one input of a fifth adder $A5$ via an eighth multiplier

C8. The output of the fifth adder A5 forms both an output ABPF of the band-pass filter as well as a connection point for a feedback path formed by a fifth register R5 and a ninth multiplier C9 which is connected to the input of the fifth adder A5.

The structure of a digital low-pass filter is shown in Fig. 8. An input ETPF of the low-pass filter is formed by a tenth multiplier C10 whose output is connected to a sixth adder A6. The output of the sixth adder A6 is fed back to the second input of the adder A6 via a sixth register R6 and an eleventh multiplier C11, and the output of the sixth adder forms an output ATPF of the low-pass filter via a twelfth multiplier C12. The characteristics of the band-pass filter and of the low-pass filter are set using appropriate coefficients. These coefficients are the corresponding setting values of the multipliers.

Figures 9 to 13 show appropriate amplitude/time graphs for illustrating amplitude signal formation.

Fig. 9 shows a sinusoidal noise frequency which is used as the tuning signal d and is preferably equal to the frequency at which the absolute-value curve for the gain of the open loop intersects the 0-dB line. Inputting the tuning signal d into a control loop leads to a control difference x_d which has, for example, a curve as shown in Fig. 10.

It can be seen in Fig. 10 that the amplitude and phase angle of a tuning signal d , as shown in Fig. 9, are influenced in the control loop. This applies both to the control difference x_d and to the controlled variable x . The tuning signal d influenced by the existing gain or the existing characteristics of the control loop is subjected to band-pass filtering in order to filter out the frequency of the tuning signal d from the control signal x or from the control difference x_d .

The output of the band-pass filter provides a signal, as shown in Fig. 11, whose amplitude is levelled out and which has the frequency of the tuning signal d .

If the existing gain value for the control loop differs from 1, the phase of the signal shown in Fig. 11 is shifted with respect to the tuning signal d . The signal shown in Fig. 11, whose amplitude is already levelled out, is then squared, so that a signal which is independent of the sign is provided at the output of the squaring element, as shown in Fig. 12. On account of having been multiplied by itself, this signal has twice the frequency of the signal shown in Fig. 11.

10 The low-pass filter for the signal shown in Fig. 12 then produces an amplitude signal which is shown in Fig. 13 and corresponds to the amplitude of the controlled variable x and the control difference x_d . The quotient of the thus formed amplitude signals of control
15 signal and control difference signal then corresponds to the existing gain of the control loop for the input tuning signal d . As already explained above, a desired gain value is then set automatically in the control loop using only one method step.

20 The invention is not limited to the exemplary embodiment indicated here, in which the control signal and the control difference signal were used for measuring the existing gain of the control loop. When selecting connection points, which are different from the exemplary
25 embodiment, for determining an existing gain of the control loop, appropriate consideration should be given to their effect on the measured gain factor.

Patent Claims

1. Method for automatically setting a gain in a control loop using a tuning signal, characterized in that, in one method step, an existing gain is measured whilst a tuning signal (d) is input, a gain change which is to be carried out in the control loop is calculated from a measured value for the gain, and the calculated gain change is used to set the gain automatically.
2. Method according to Claim 1, characterized in that the existing gain is measured whilst a tuning frequency having a constant amplitude is input, the said tuning frequency being used as a tuning signal (d).
3. Method according to Claim 2, characterized in that the tuning frequency used is a sinusoidal noise frequency which is equal to a frequency at which the absolute-value curve for the gain of the open control loop intersects the zero-dB line.
4. Method according to one of Claims 1 to 3, characterized in that the tuning signal (d) is input into the control loop by being added to a controlled variable (x) of the control loop.
5. Method according to Claim 1, characterized in that the existing gain is measured as a quotient of amplitude values (A1, A2) of a controlled variable (x) and of a control difference (xd).
6. Method according to Claim 5, characterized in that a dividend of the quotient is formed from an amplitude value (A2) of the controlled variable (x), and a divisor of the quotient is formed from an amplitude value (A1) of the control difference (xd).



* C L M S *

7. Method according to one of Claims 5 and 6, characterized in that the amplitude values (A_1 , A_2) of controlled variable (x) and control difference (x_d) are formed from a signal for the controlled variable (x) and the control difference (x_d), respectively, which signal has been subjected to band-pass filtering, squaring, low-pass filtering and square-root extraction.

8. Method according to Claim 1, characterized in that, in order to calculate the gain change which is to be carried out for automatically setting the gain, a reciprocal value of the measured gain is used.

9. Method according to Claim 1, characterized in that a gain of one or zero dB for the tuning signal (d) in the control loop is set automatically by multiplying the gain in the control loop by a reciprocal of the measured gain.

10. Method according to Claim 1, characterized in that a gain which is different from a gain of one or zero dB for the tuning signal (d) in the control loop is set automatically by multiplying the gain in the control loop by a reciprocal of the measured gain, and multiplying by the gain which is different from one or zero dB.

11. Method according to Claim 1, characterized in that a first gain is measured whilst a first tuning signal (d) is input and a second gain is measured whilst a second tuning signal (d) is input, a gain change for setting a gain for a frequency which is different from the frequencies of the tuning signals (d) is calculated, and the calculated gain change is used to set the gain automatically.

35

12. Arrangement for automatically setting a gain in a control loop using a tuning signal, characterized in that



- a tuning signal generator (G) for producing a tuning signal (d) to be input into the control loop,
 - a circuit arrangement for measuring an existing gain whilst the tuning signal (d) is input,
 - 5 - a processor for calculating a gain change from the measured existing gain, and
 - a gain setting means (GA) for setting the gain are provided.
- 10 13. Arrangement according to Claim 12, characterized in that
- the tuning signal generator (G) is a two-terminal recursive digital filter with stable limits which serves for producing a tuning signal (d) having a selectable
 - 15 frequency at a constant amplitude.
14. Arrangement according to Claim 12, characterized in that the circuit arrangement for measuring an existing gain whilst the tuning signal (d) is input contains
- 20 - a band-pass filter (BPF1, BPF2),
- an absolute-value generator (Q1, Q2) and
- a low-pass filter (LPF1, LPF2).
15. Arrangement according to Claim 12, characterized
- 25 in that the processor for calculating a gain change from the measured existing gain is a processor for forming the reciprocal of a quotient of amplitude values (A1, A2) of a controlled variable (x) and of a control difference (xd).
- 30
16. Arrangement according to Claim 12, characterized in that the gain setting means (GA) is a multiplier added to the control loop.



* C L M S *

AUTOMATIC SETTING OF GAIN IN CONTROL LOOPS

Abstract

5 The invention relates to a method and arrangement
for automatically setting the gain in control loops.

 The object of the invention is to provide a
method and arrangement for automatically setting the gain
in control loops, which are characterized by a rapid yet
10 reliable setting and/or tuning procedure.

 According to the invention, in one method step,
amplitude values of controlled variable and control
difference are formed from a signal for the controlled
variable and the control difference, respectively, which
15 signal has been subjected to band-pass filtering,
squaring, low-pass filtering and square-root extraction,
and a quotient of the amplitude values is determined
which represents the existing gain and is used for
calculating a gain change which is to be carried out
20 using a gain setting means.

 A field of application for the invention is
control loops, as used in CD or DVD players for example,
in order to focus the scanning or recording light or
laser beam on the optical recording medium, or to follow
25 the information track.

Fig. 1

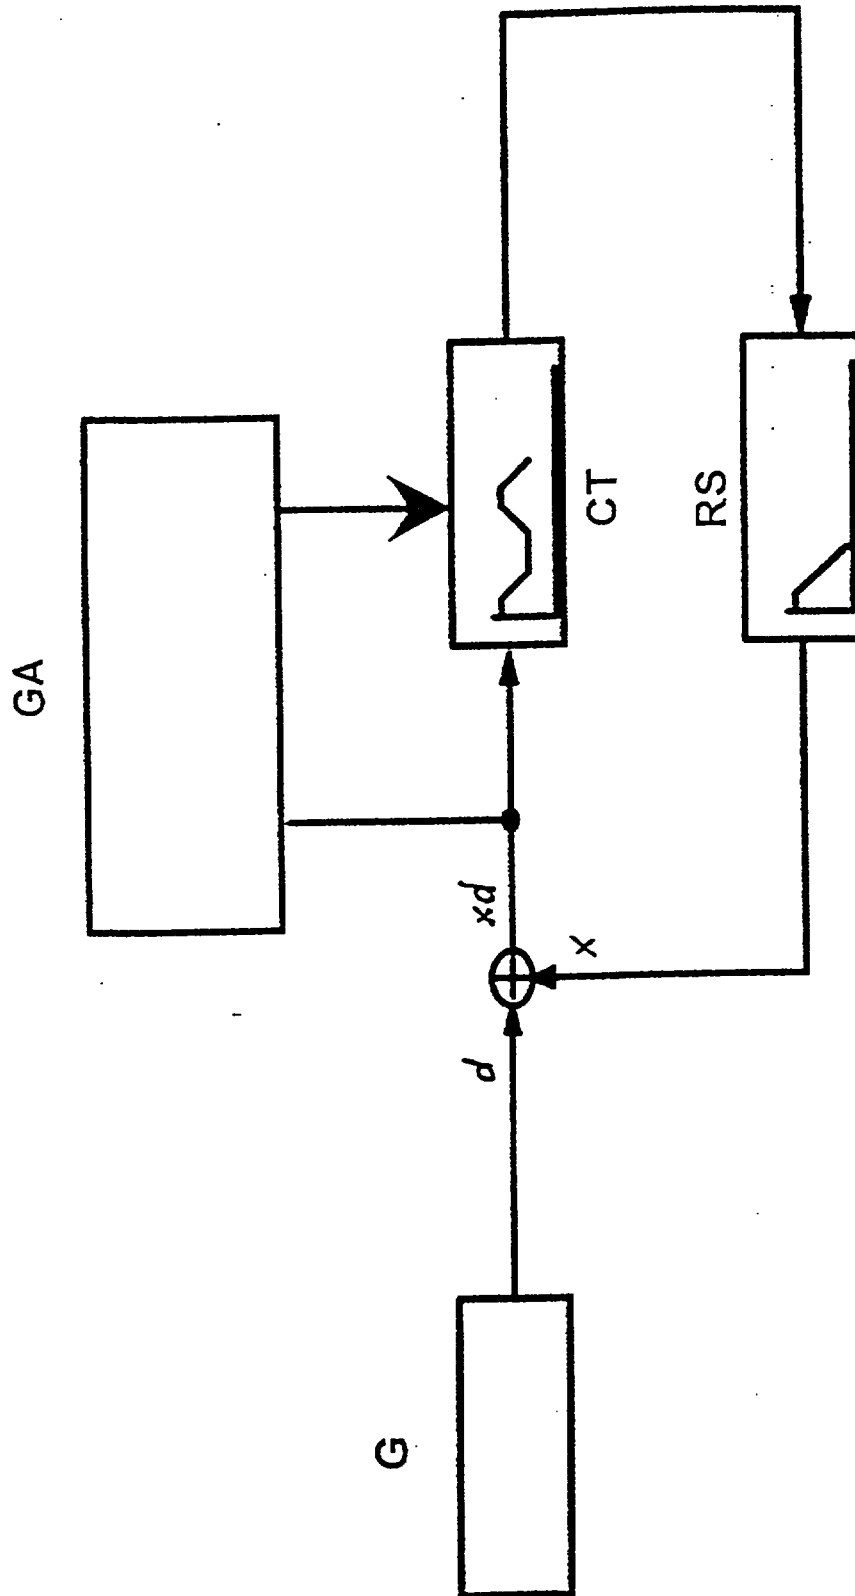


Fig.1

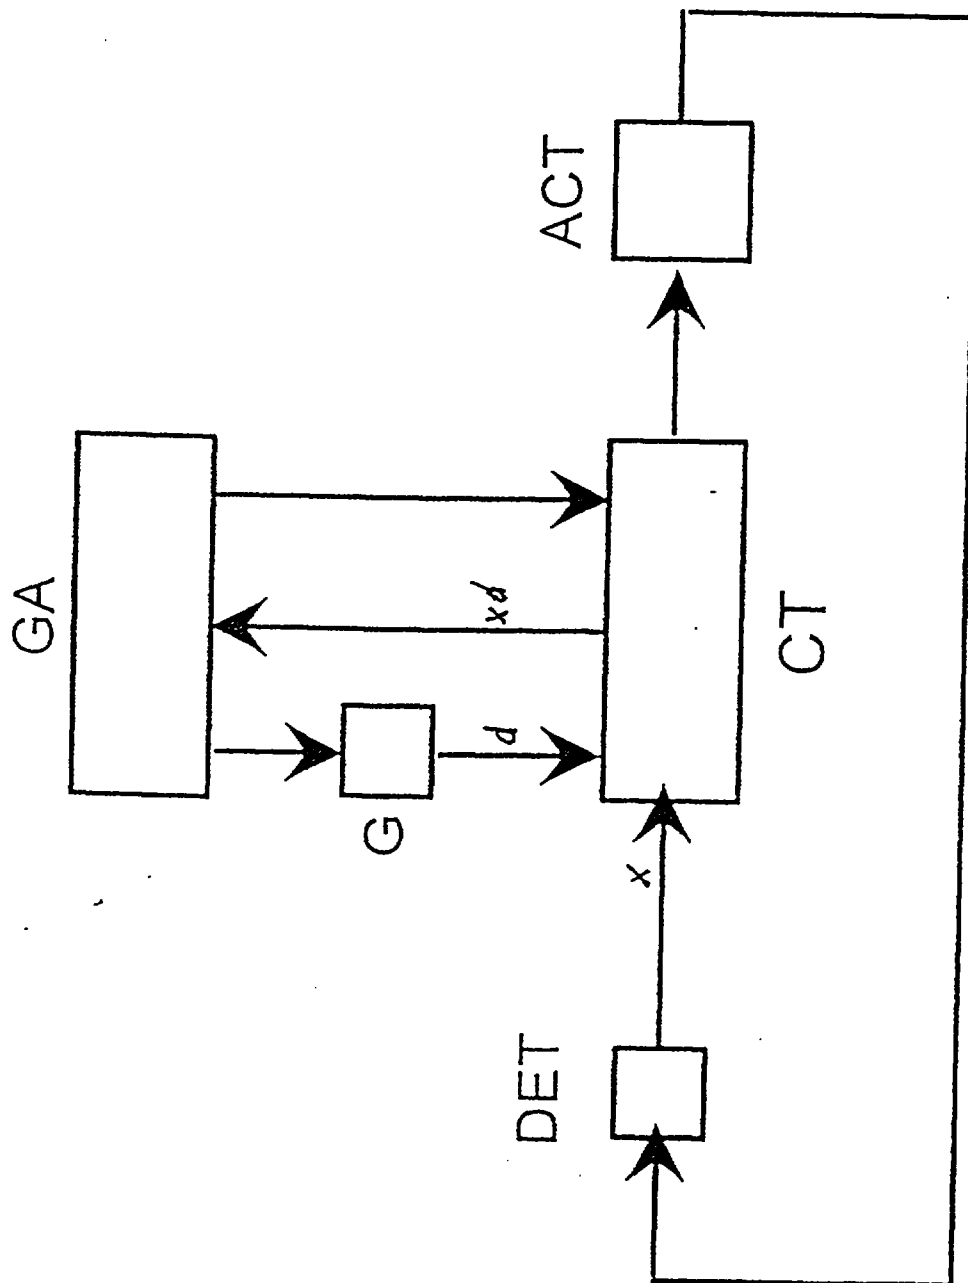


Fig. 2

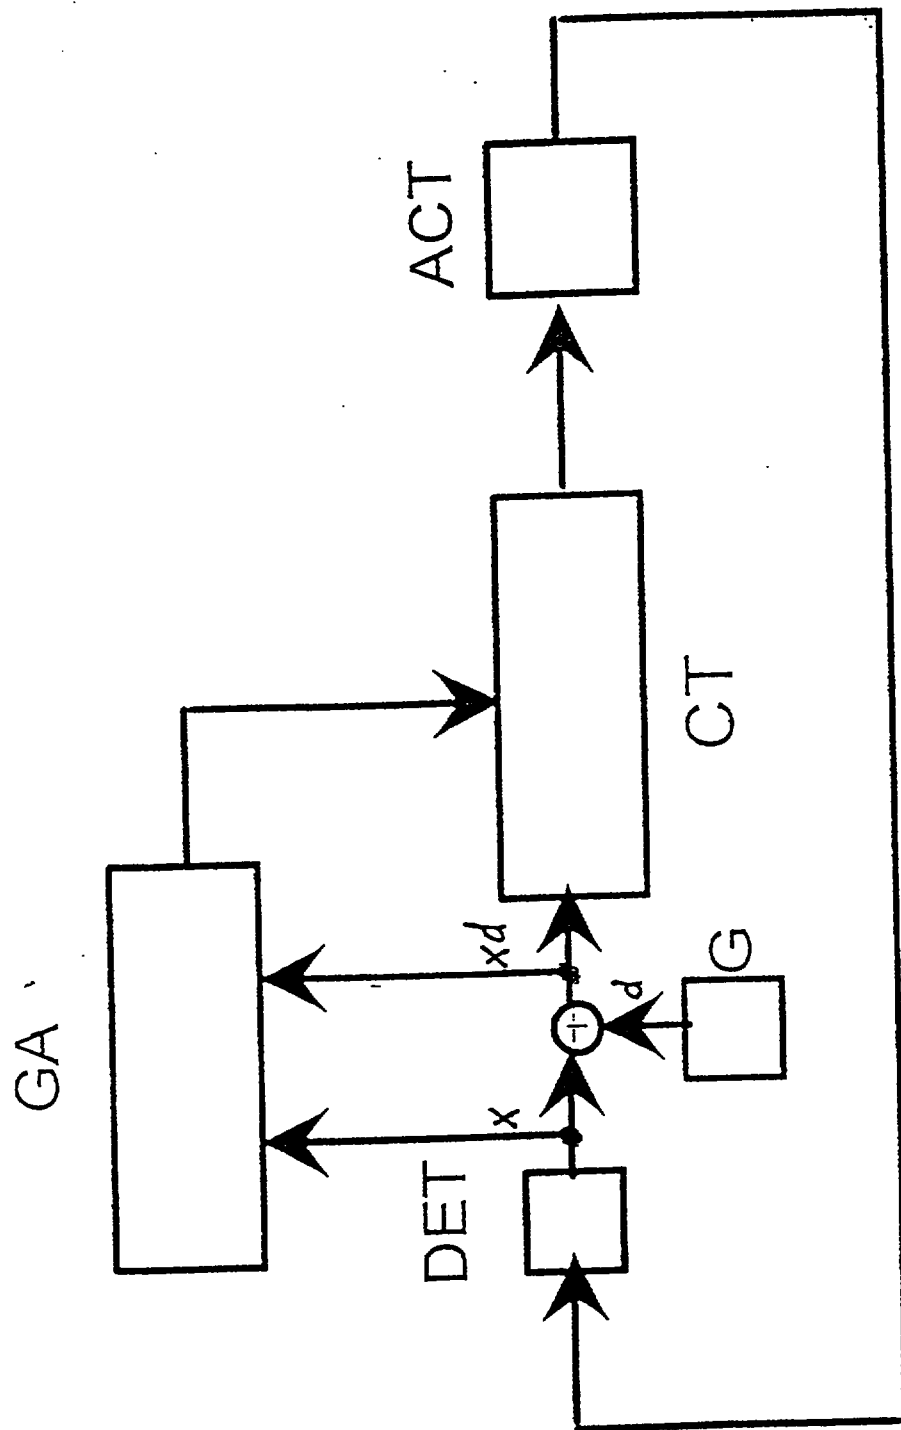


Fig. 3

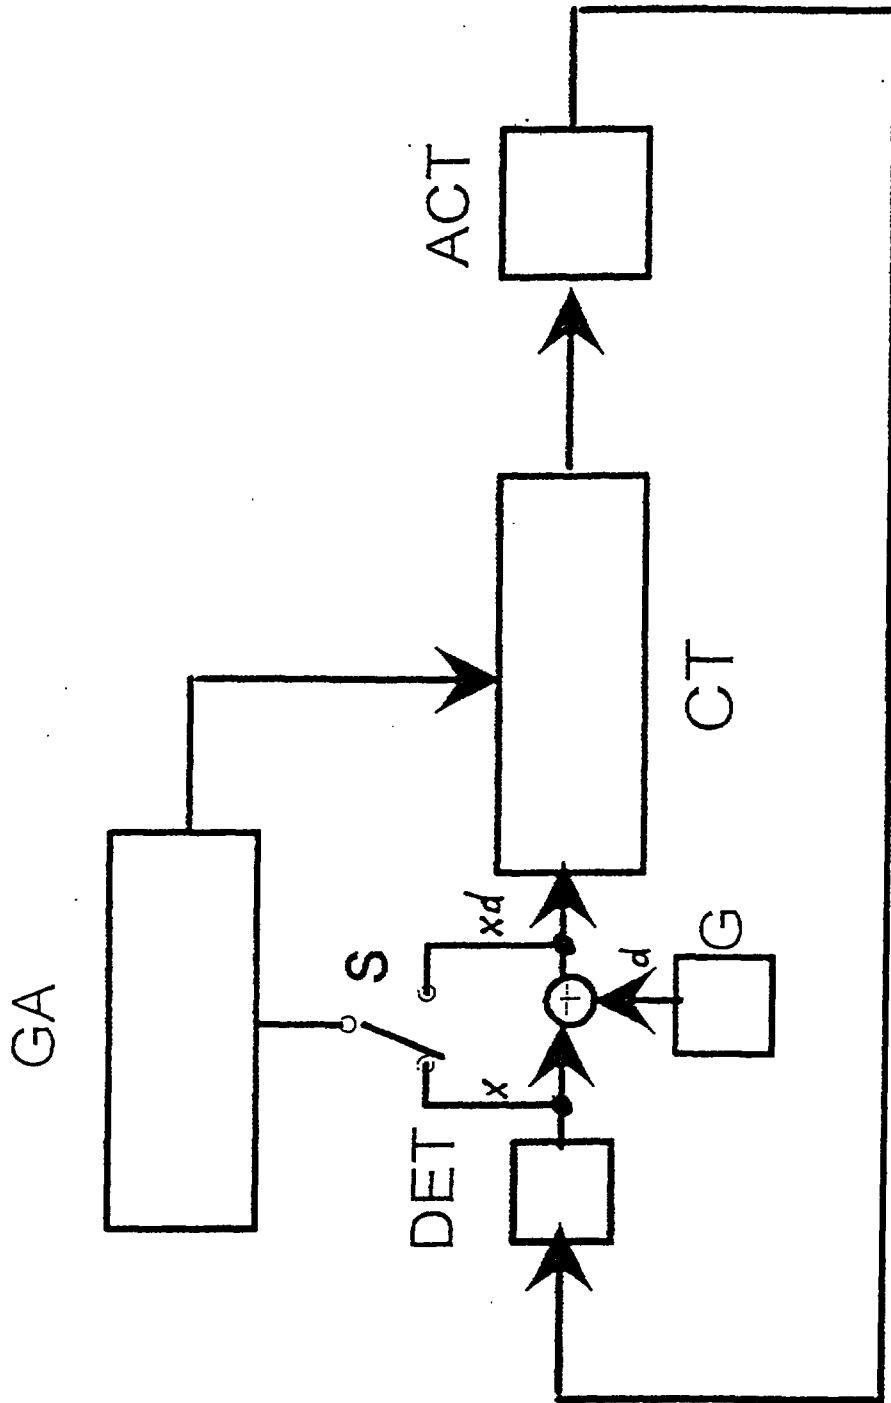
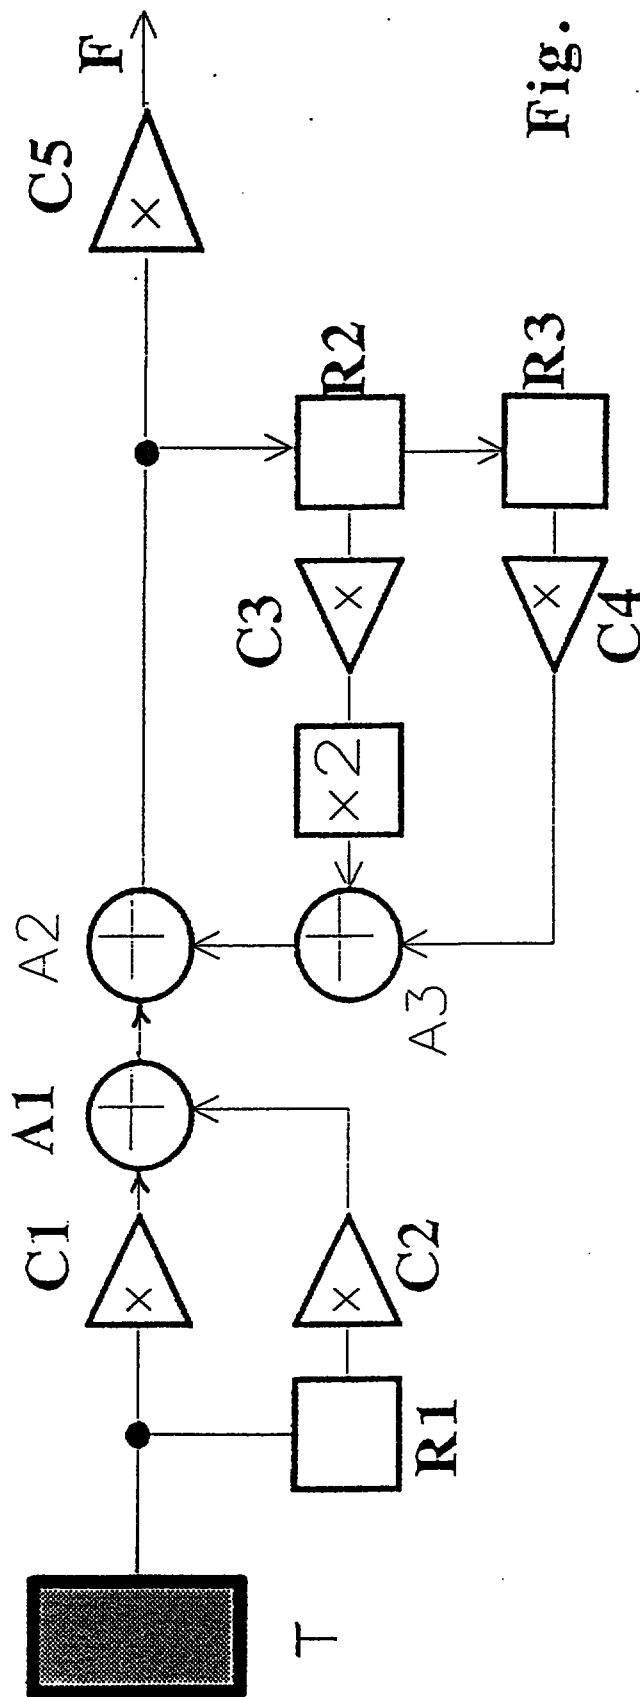


Fig. 5



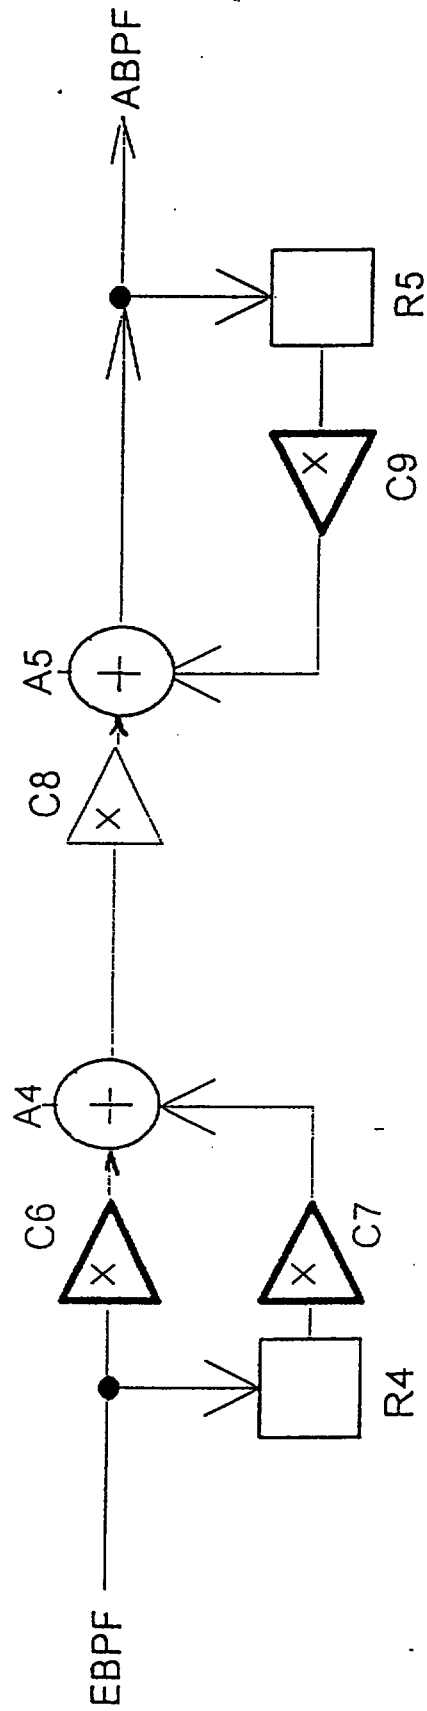


Fig. 7

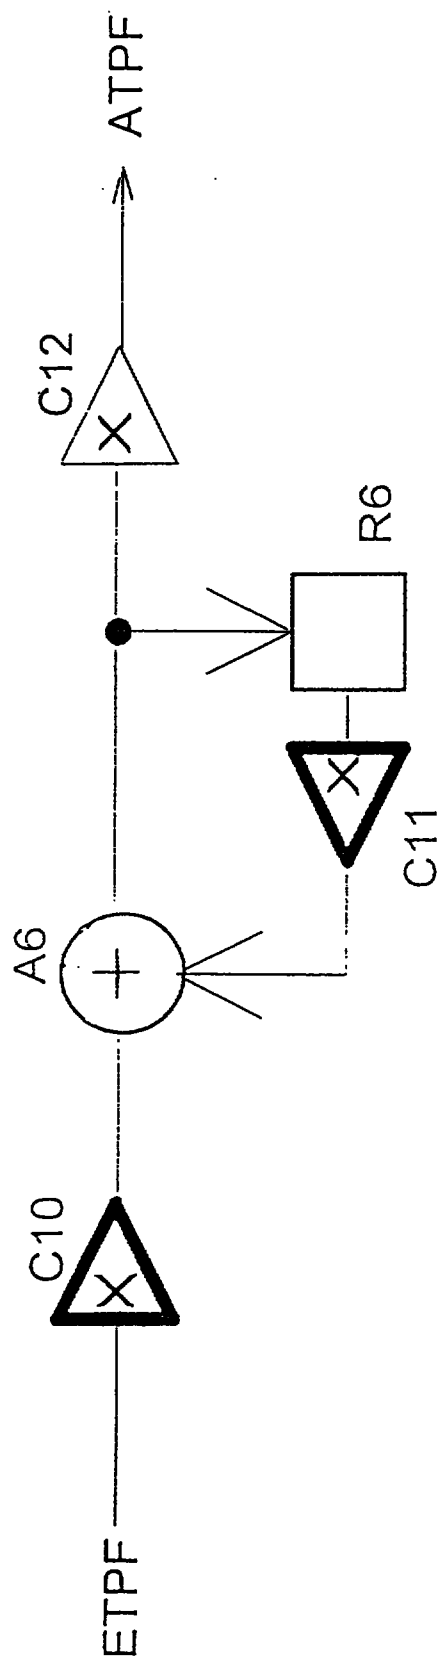


Fig. 8

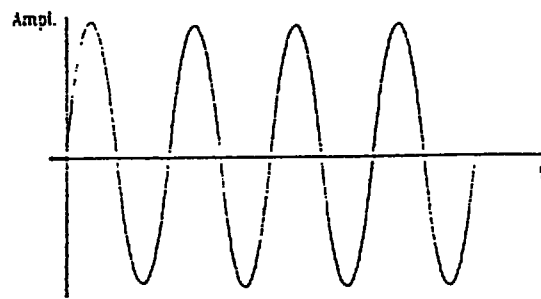


Fig. 9

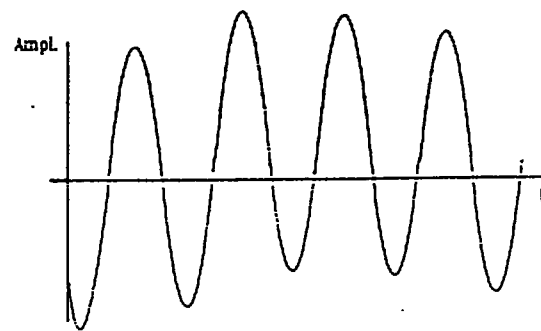


Fig. 10

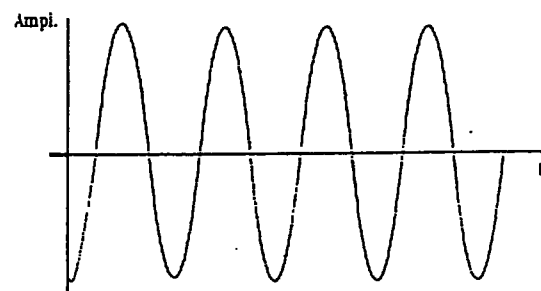


Fig. 11

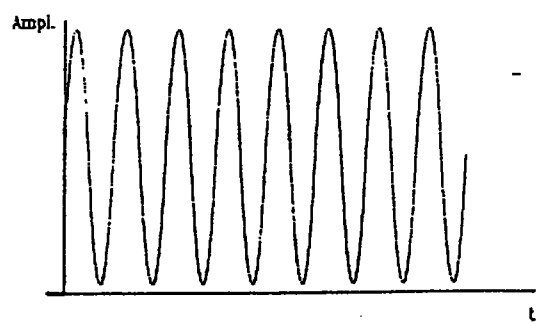


Fig. 12

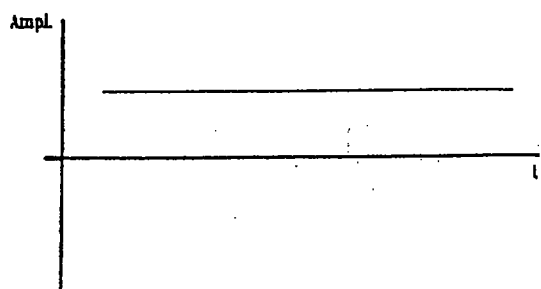


Fig. 13