

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
14 February 2002 (14.02.2002)

PCT

(10) International Publication Number
WO 02/12769 A1

(51) International Patent Classification⁷: **F16L 15/04**,
15/00

(21) International Application Number: PCT/EP01/09169

(22) International Filing Date: 8 August 2001 (08.08.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
MI2000A001864 9 August 2000 (09.08.2000) IT

(71) Applicant (for all designated States except US):
DALMINE S.P.A. [IT/IT]; Piazza Caduti 6 Luglio
1944, 1, I-24044 Dalmine (IT).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **DELLA PINA, Giuseppe** [IT/IT]; Via Buttarò, 26, I-24044 Dalmine (IT). **ROTINI, Giuseppe** [IT/IT]; Via XXV Aprile, 56/A, I-24044 Dalmine (IT). **SIGNORELLI, Angelo** [IT/IT]; Via Portici Manarini, 18E, I-24060 Chiuduno (IT).

(74) Agent: **GERVASI, Gemma**; Notarbartolo & Gervasi S.p.A., Corso di Porta Vittoria, 9, I-20122 Milan (IT).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: SCREW THREADED JOINT FOR CONTINUOUS-PROFILE TUBES

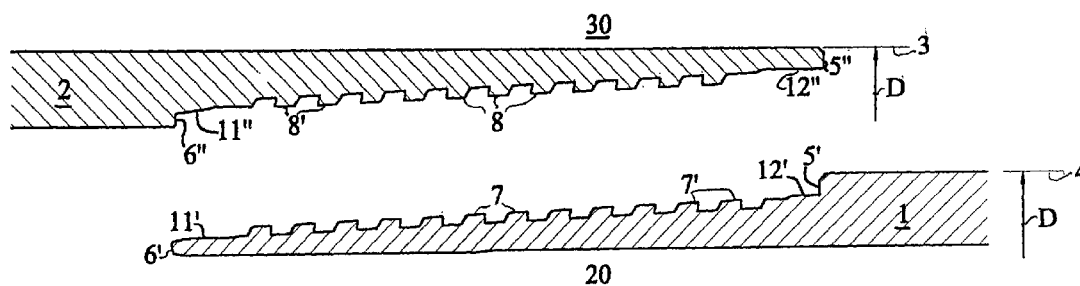

(57) Abstract: A flush-type integral threaded joint with truncated-cone threads, with two sealing surfaces 11', 12', 11'', 12'' set at the end of the threaded portions (7, 8), and with two annular sealing shoulders (5', 6', 5'', 6''). The two threaded portions (7, 8) of the male element (1) and female element (2), respectively, have the same value of conicity, and the two sealing surfaces (11', 12', 11'', 12'') are, in one case, conical or cylindrical, and in the other spherical. The threaded portion of each male and female element may have an end area with a thread that is not perfect.