



(51) International Patent Classification:
H01T 23/00 (2006.01) *B03C 3/41* (2006.01)

(21) International Application Number:
PCT/SG2008/000497

(22) International Filing Date:
23 December 2008 (23.12.2008)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): **OXION PTE. LTD.** [SG/SG]; 7500A Beach Road, #16-322 The Plaza, Singapore 199591 (SG).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **ITANI, Yukihiro** [JP/JP]; 1253-11 Oozashimotomi, Tokorozawa-Shi, Saitama-Pref 359-0001 (JP).

(74) Agent: **KALANI, Ameen**; Henry Goh (S) Pte Ltd, 20 Science Park Road, #03-34/35, Singapore 117674 (SG).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ,

EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- of inventorship (Rule 4.17(iv))

Published:

- with international search report (Art. 21(3))

(54) Title: AIR IONIZER ELECTRODE ASSEMBLY

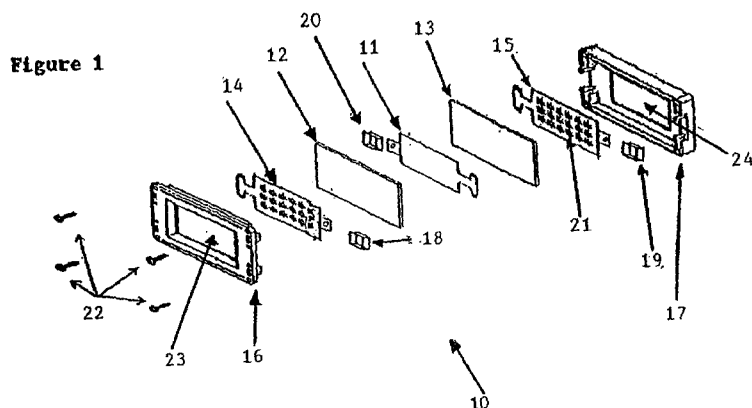

(57) Abstract: An air ionizer electrode assembly (10; 50; 60) comprising an inner electrode (11; 52; 66), at least one outer electrode (14, 15; 54; 61) and a dielectric barrier (12, 13; 53; 64) sandwiched between the inner electrode and the at least one outer electrode. The inner electrode has a continuous overall surface and the at least one outer electrode has a plurality of holes (21; 56; 70) to provide a plurality of ion generating points for generation of negative ions.