



(51) International Patent Classification:
H02K 11/00 (2006.01)

(21) International Application Number:
PCT/IB2008/055011

(22) International Filing Date:
28 November 2008 (28.11.2008)

(25) Filing Language: Italian

(26) Publication Language: English

(30) Priority Data:
BO2007A000791 30 November 2007 (30.11.2007) IT

(71) Applicant (for all designated States except US): **SPAL AUTOMOTIVE S.R.L.** [IT/IT]; Via per Carpi, 26/B, I-42015 Correggio (IT).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **DE FILIPPIS, Pietro** [IT/IT]; Via Cesare Battisti, 20, I-17019 Varazze (IT).

(74) Agent: **BIANCIARDI, Ezio**; BUGNION S.p.A., Via Goito, 18, I-40126 Bologna (IT).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


Published:

— with international search report (Art. 21(3))

[Continued on next page]

(54) Title: A ROTARY ELECTRIC MACHINE AND THE METHOD FOR ASSEMBLING IT.

FIG. 1

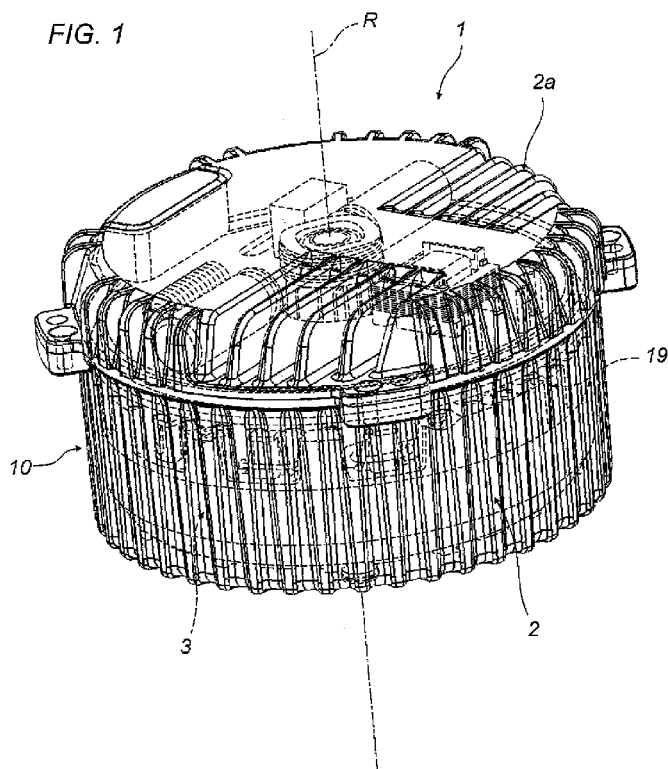

(57) Abstract: An electric machine (1) comprises; a casing; a stator (3) fixed to the casing and including at least one electrical winding (5); a rotor (4) housed in the casing and rotatably connected to the latter; an electronic circuit (8) for powering the winding (5) at least partly housed in the casing; a cover (2a) for closing the casing to form with the latter a sealed enclosure; a terminal strip (9), accessible from outside the sealed enclosure, for controlling and powering the electronic circuit (8); a heat sink, embodied by the cover (2a), for absorbing the heat produced, in particular, by the electronic circuit (8). The machine (1) also comprises elastic elements (12) operating between the stator (3) and the electronic circuit (8) in such a way as to press the electronic circuit (8) against the heat sink.



(88) Date of publication of the international search report:

17 December 2009