



(51) International Patent Classification:

H04N 21/44 (2011.01) *H04N 21/231* (2011.01)
H04N 21/845 (2011.01) *H04N 21/24* (2011.01)
H04N 21/2343 (2011.01) *H04N 21/236* (2011.01)

(21) International Application Number:

PCT/US2015/010559

(22) International Filing Date:

8 January 2015 (08.01.2015)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/925,191 8 January 2014 (08.01.2014) US
14/591,649 7 January 2015 (07.01.2015) US

(71) Applicant: **QUALCOMM INCORPORATED** [US/US];
ATTN: International IP Administration, 5775 Morehouse
Drive, San Diego, California 92121-1714 (US).

(72) Inventors: **CHEN, Ying**; 5775 Morehouse Drive, San
Diego, California 92121-1714 (US). **WANG, Ye-Kui**;

5775 Morehouse Drive, San Diego, California 92121-1714
(US).


(74) Agent: **VREDEVELD, Albert W.**; Shumaker & Sieffert,
P.A., 1625 Radio Drive, Suite 300, Woodbury, Minnesota
55125 (US).

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG,
MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM,
PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC,
SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,
TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU,
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,

[Continued on next page]

(54) Title: CARRIAGE OF HEVC EXTENSION BITSTREAMS AND BUFFER MODEL WITH MPEG-2 SYSTEMS

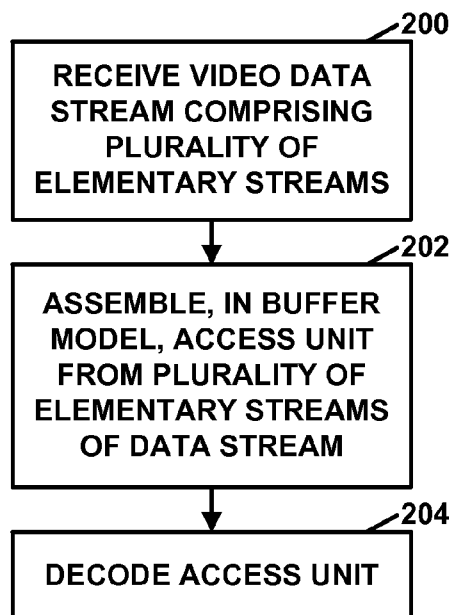

(57) Abstract: A video decoder assembles, in a buf-
fer model, an access unit from a plurality of ele-
mentary streams of a video data stream. The video
data stream may be a transport stream or a program
stream. The same buffer model is used regardless of
whether the elementary streams contain Scalable
High Efficiency Video Coding (SHVC), Multi-View
HEVC (MV-HEVC), or 3D-HEVC bitstreams. Fur-
thermore, the video decoder decodes the access unit.

FIG. 8



DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, **Published:**

LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE,
SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA,
GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

— with international search report (Art. 21(3))