



(51) International Patent Classification:
B01D 57/02 (2006.01) **G01N 33/559** (2006.01)

(21) International Application Number:
PCT/US2010/059770

(22) International Filing Date:
9 December 2010 (09.12.2010)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/285,277 10 December 2009 (10.12.2009) US
12/963,417 8 December 2010 (08.12.2010) US

(71) Applicant (for all designated States except US): **BIO-RAD LABORATORIES, INC.** [US/US]; 1000 Alfred Nobel Drive, Hercules, California 94547 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **LATHAM, Matthew** [US/US]; 1100 Windmill Drive, Dixon, California 95620 (US).

(74) Agents: **HEINES, M. Henry** et al.; Townsend and Townsend and Crew, LLP, Two Embarcadero Center, 8th Floor, San Francisco, California 94111 (US).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,

[Continued on next page]

(54) Title: ELECTROTRANSFER CASSETTE WITH INTEGRATED ELECTRICAL CONTACTS AND LOCKING MECHANISM

FIG. 6A

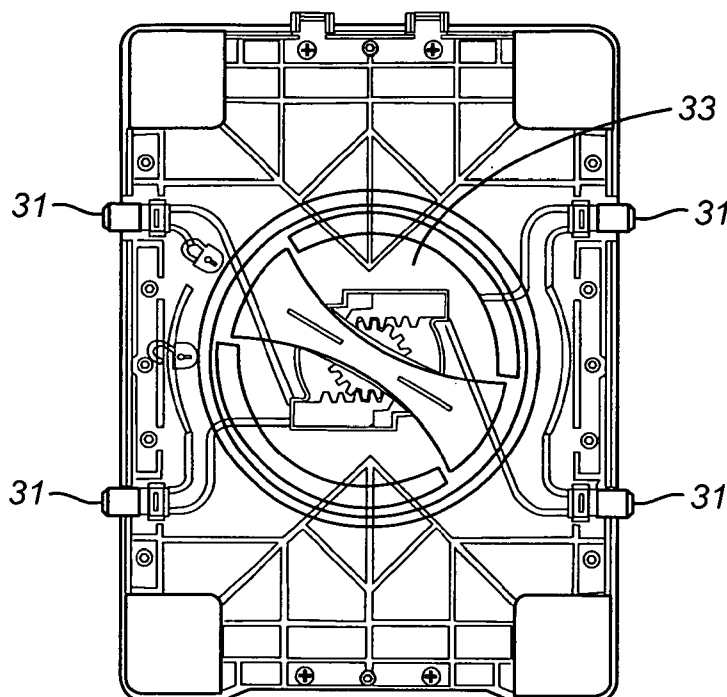

(57) Abstract: An electrotransfer cassette is formed in two parts that are releasably joined by a manually operated locking mechanism. The joined parts have electrical contact areas extending from the electrodes in the two parts of the cassette, the contact areas being exposed on an outer edge of the resulting cassette to form electrical connections to a power supply upon the simple insertion of the cassette into an instrument.

WO 2011/072167 A1



SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, **Published:**
GW, ML, MR, NE, SN, TD, TG).

— *with international search report (Art. 21(3))*